


GNSS observation file monitoring for DAVO


Last RINEX file: DAVO1090.24D.Z
 RINEX version: 3.04
 Marker: DAVO
 Receiver: 5424R488 TRIMBLE NETR9 5.56
 Antenna: 120900 TRM29659.00 NONE

Epochs

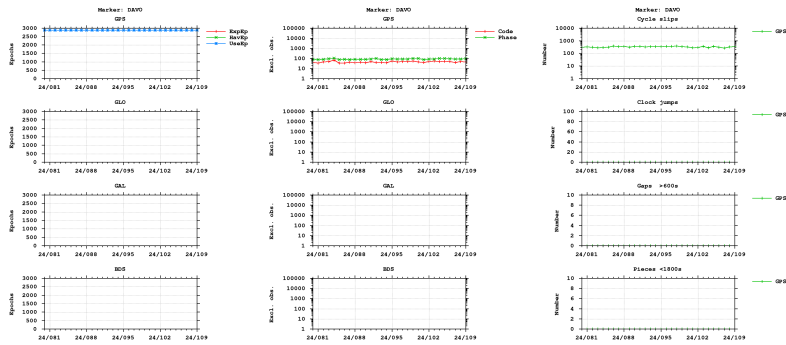



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

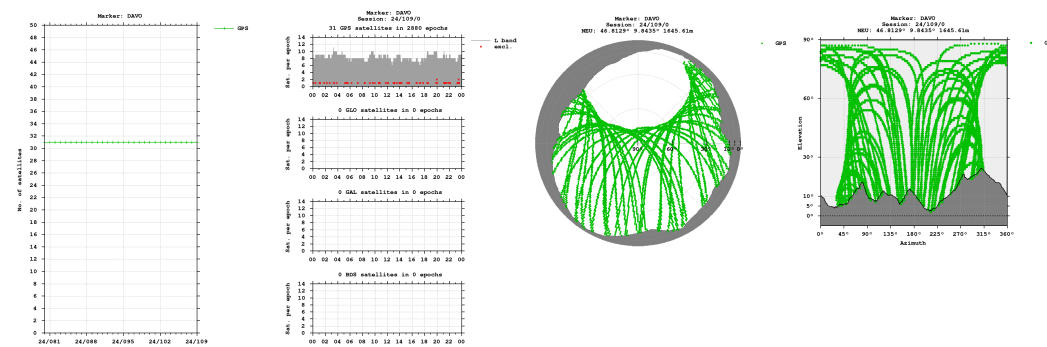


Bands


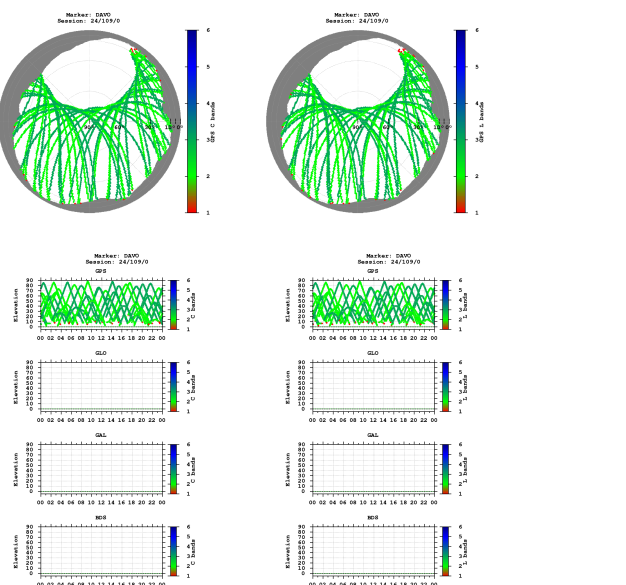


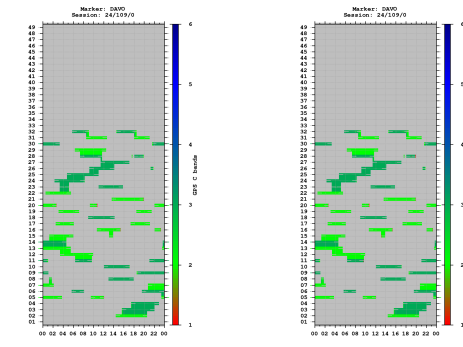


Observations

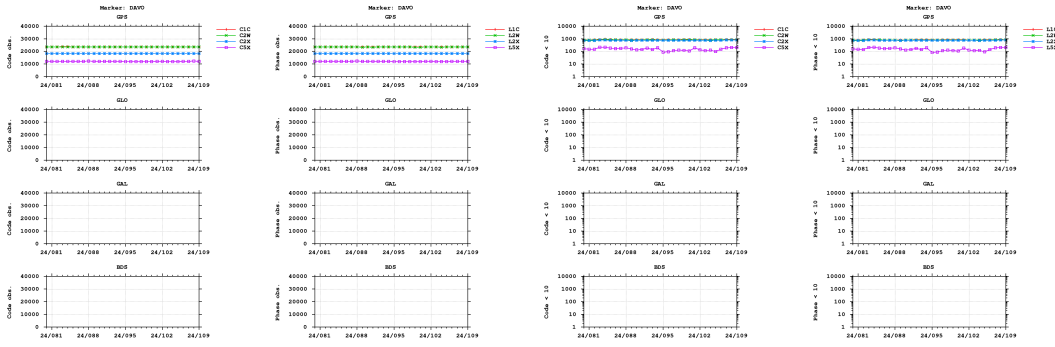


Cycle slips

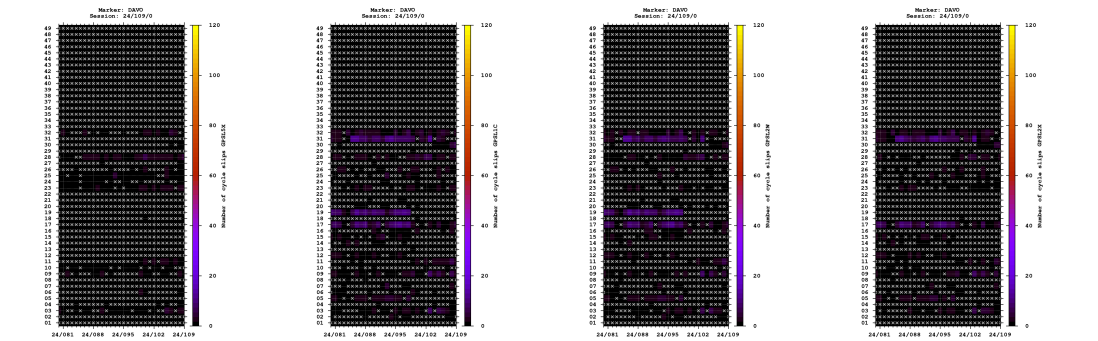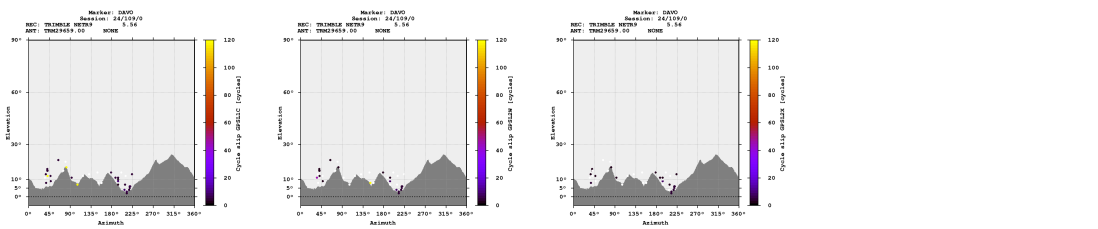


Multipath

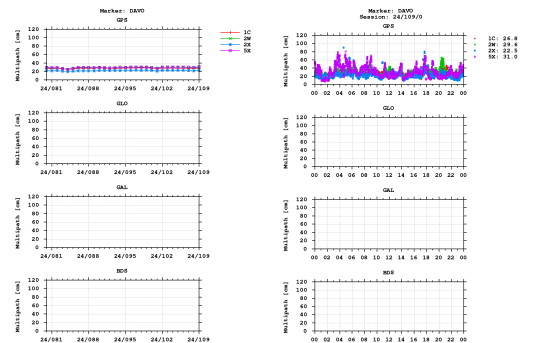

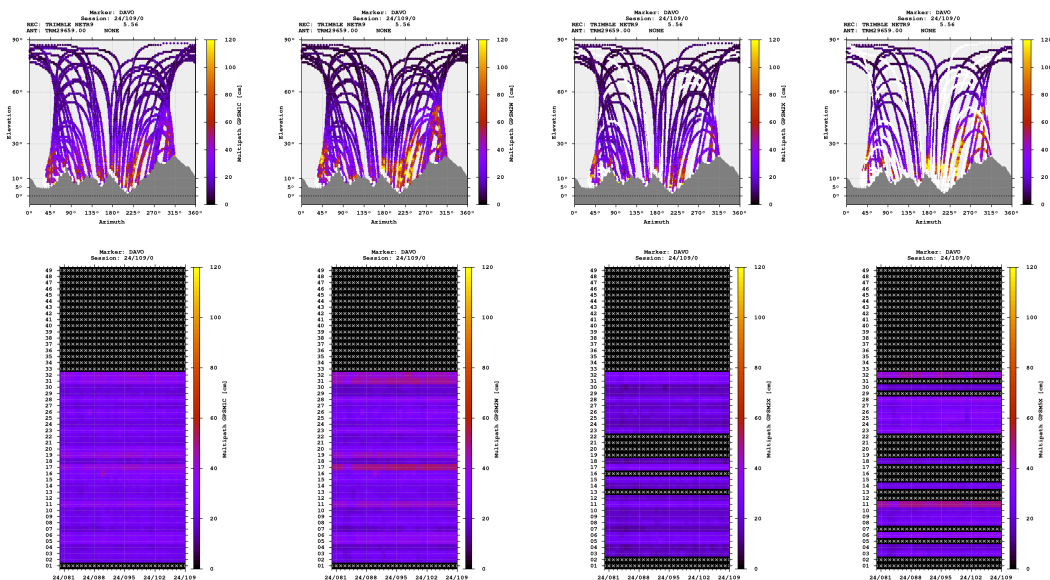


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

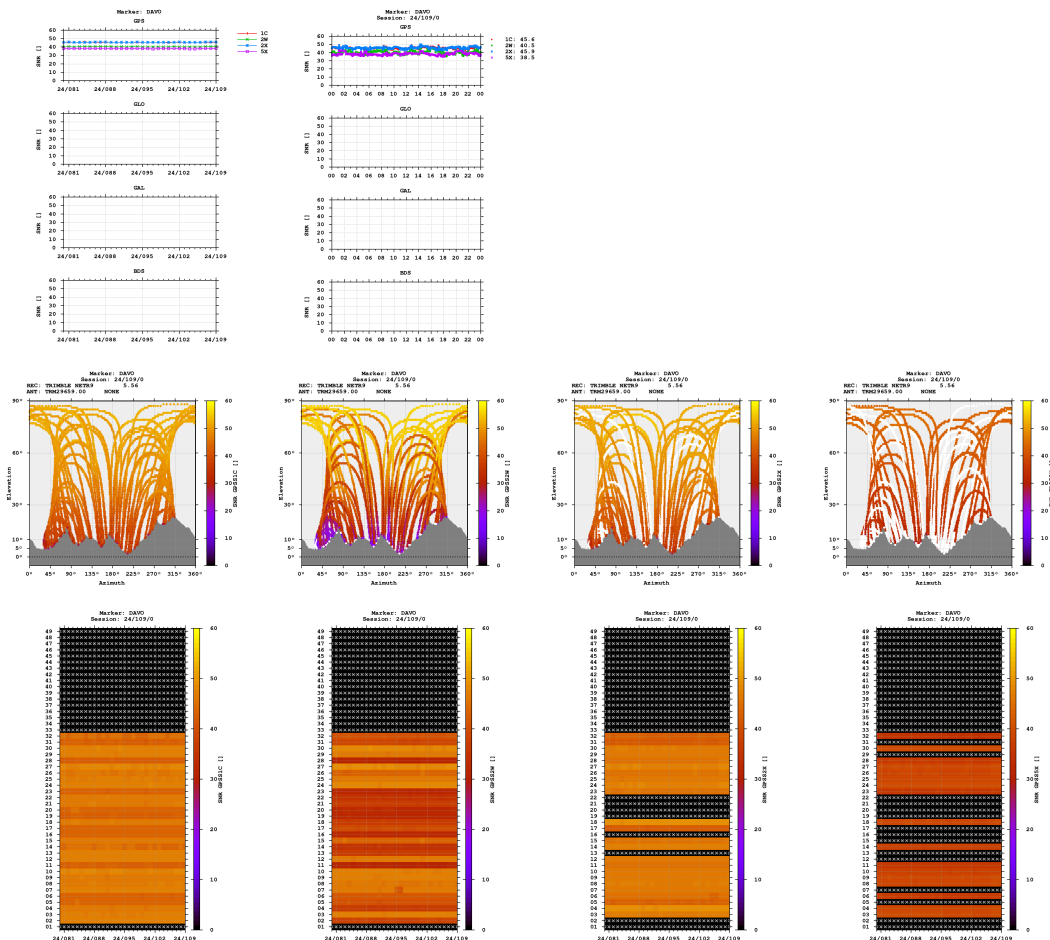

Estimates

2024-04-18 00:00:00 GPS 4309608.3759 747770.5672 4628756.0149 46.812920469 9.843525137 1645.6179

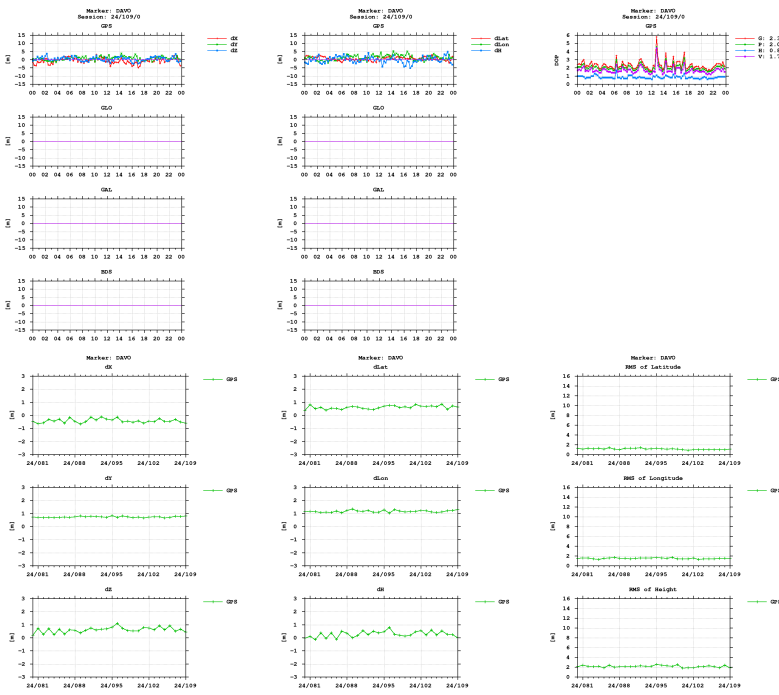

Equipment

2024-03-20 00:00:00 TRIMBLE NETR9 5.56 5424R488 TRIMBLE NE

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)