


GNSS observation file monitoring for DOUR


Last RINEX file: DOUR1100.24D.Z
 RINEX version: 3.04
 Marker: DOUR 13113M001
 Receiver: 3069566 SEPT POLARX5 5.5.0
 Antenna: 09300021 LEIAR25.R3 NONE

Epochs

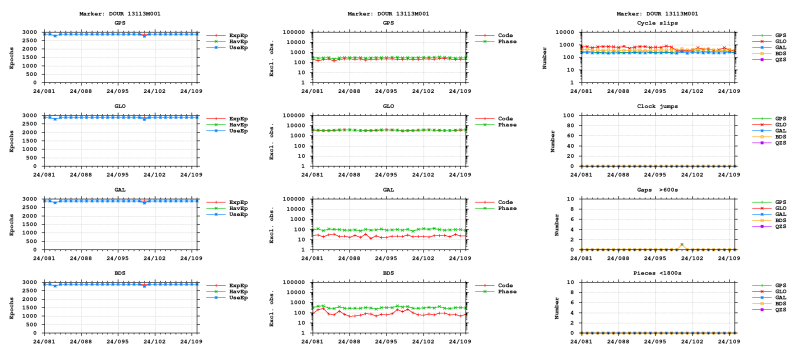








- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

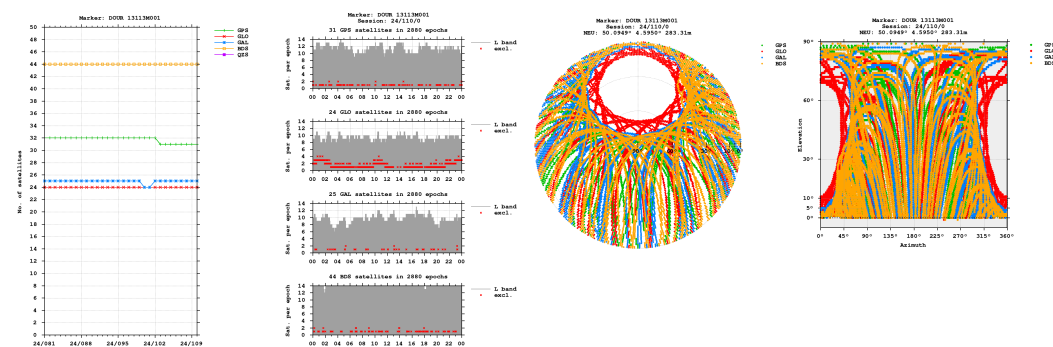


Bands

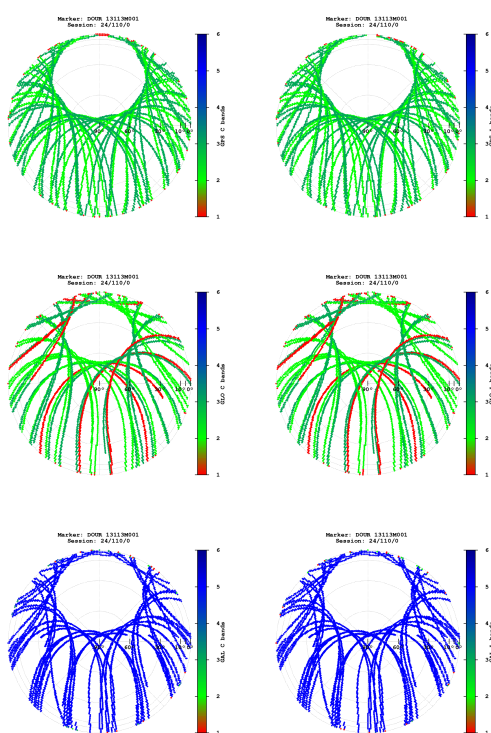


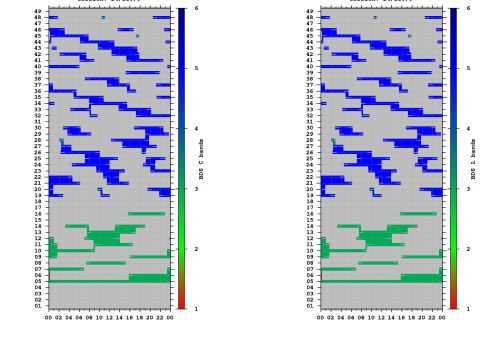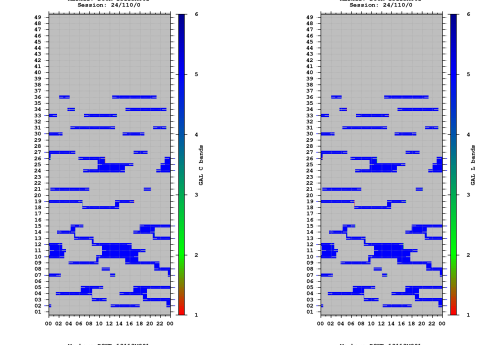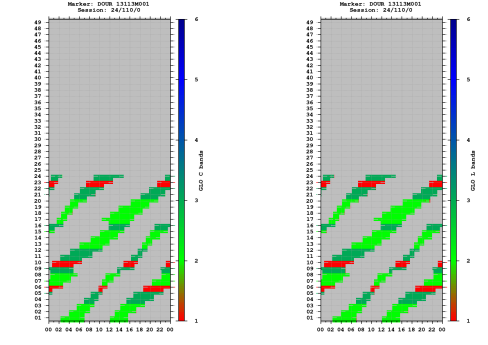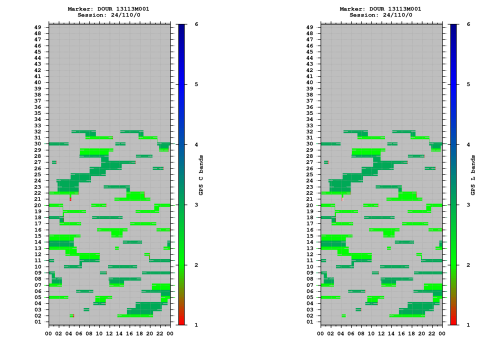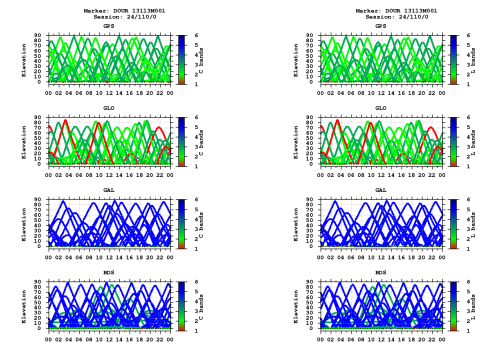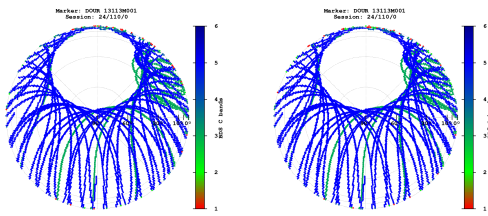


Observations

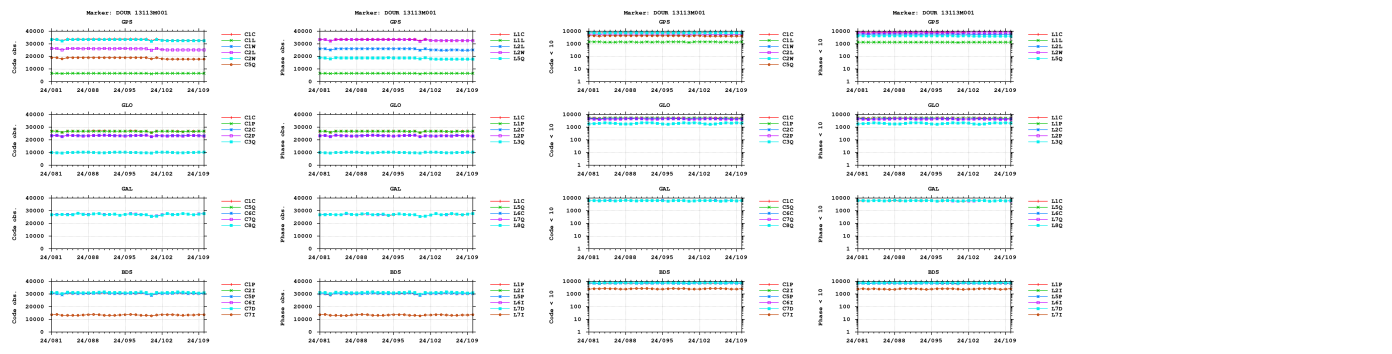



Cycle slips

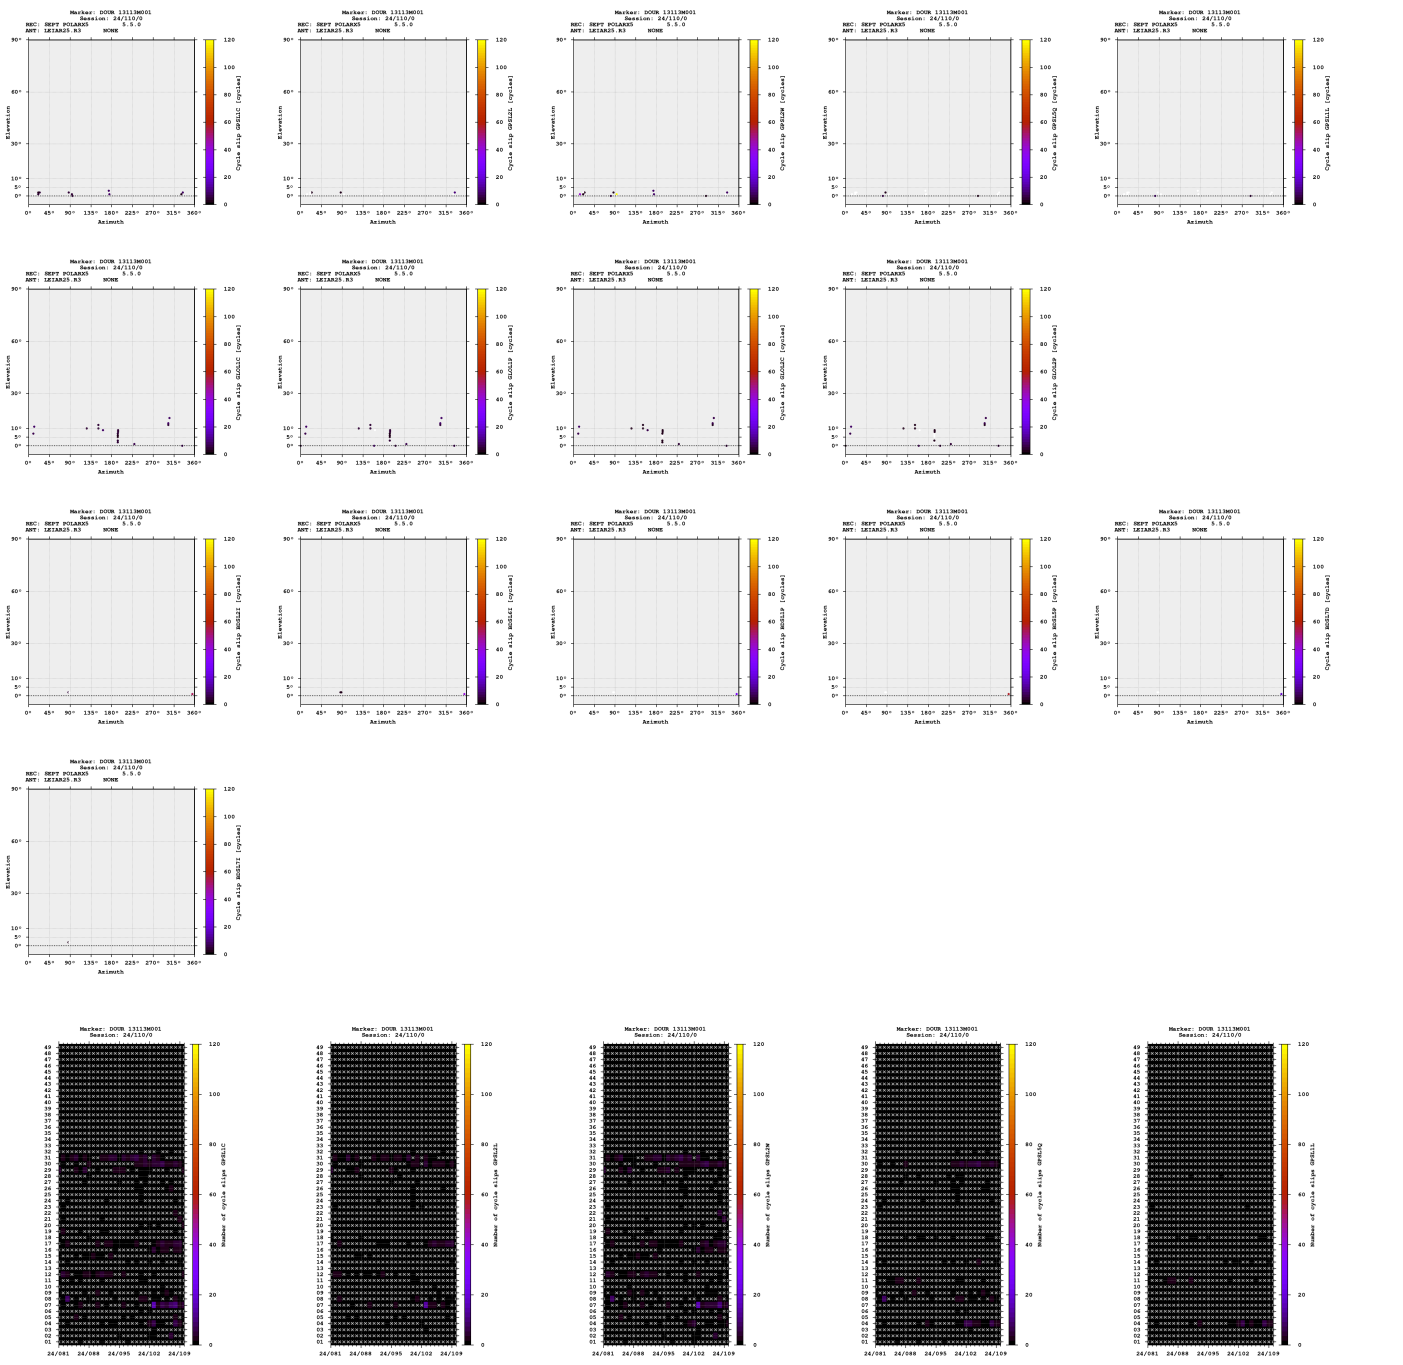


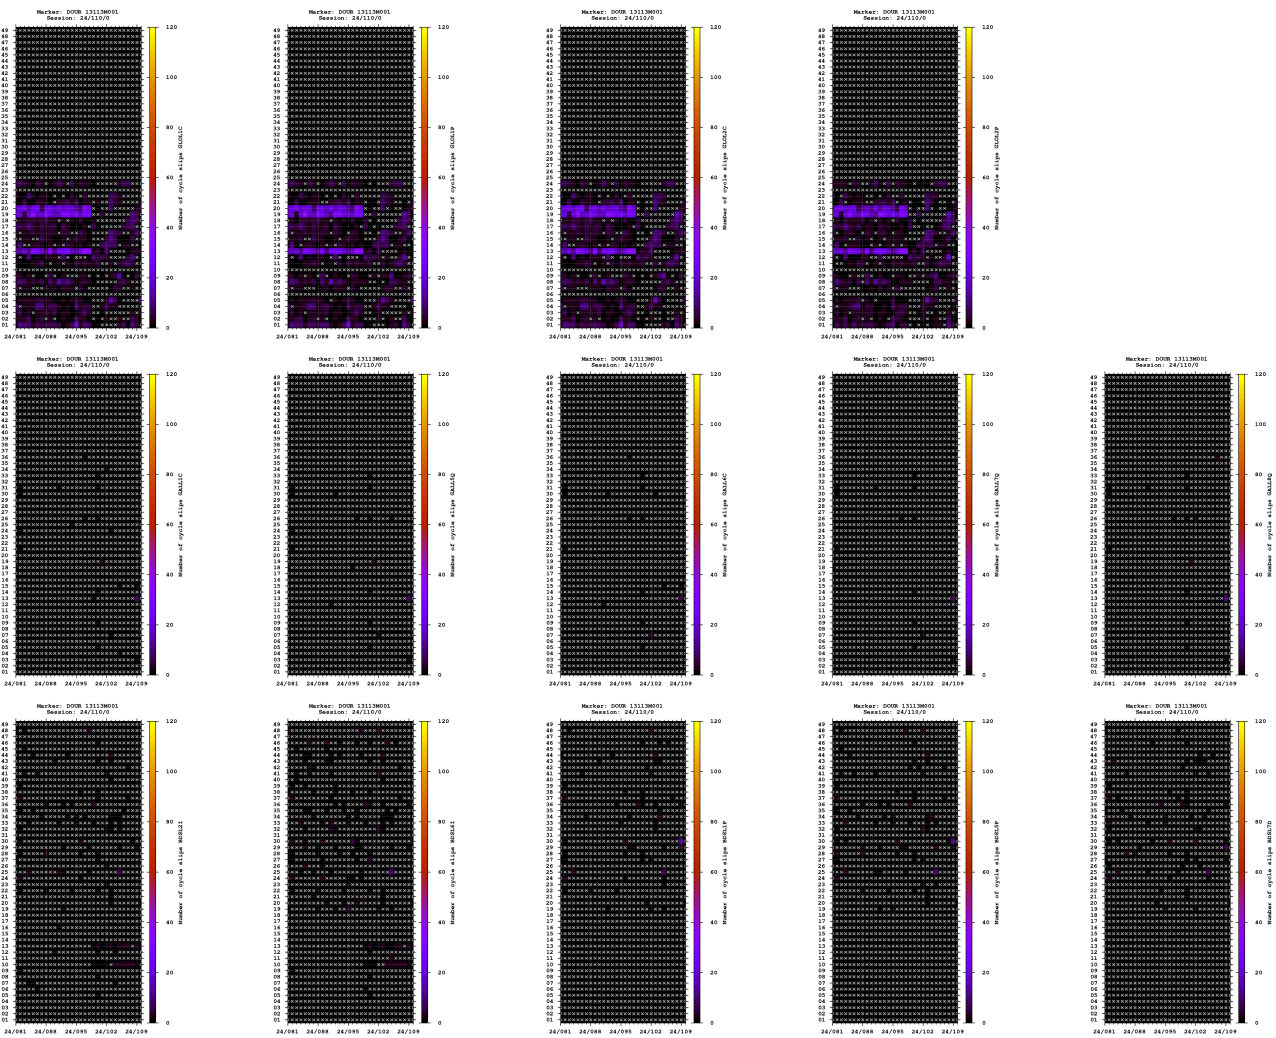

Multipath

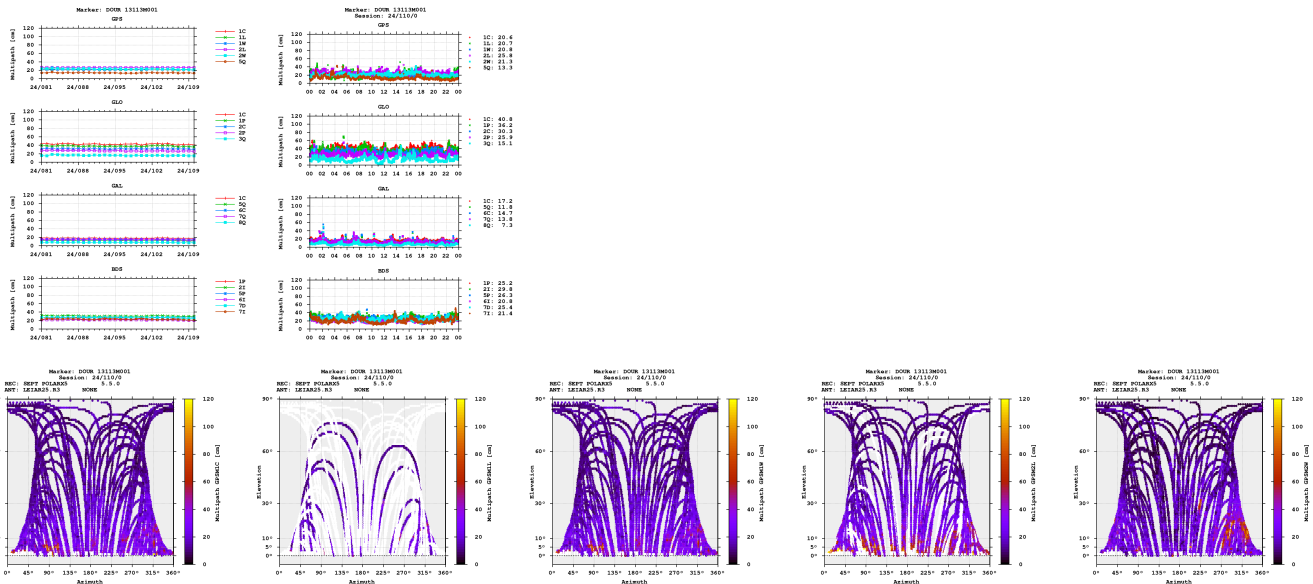


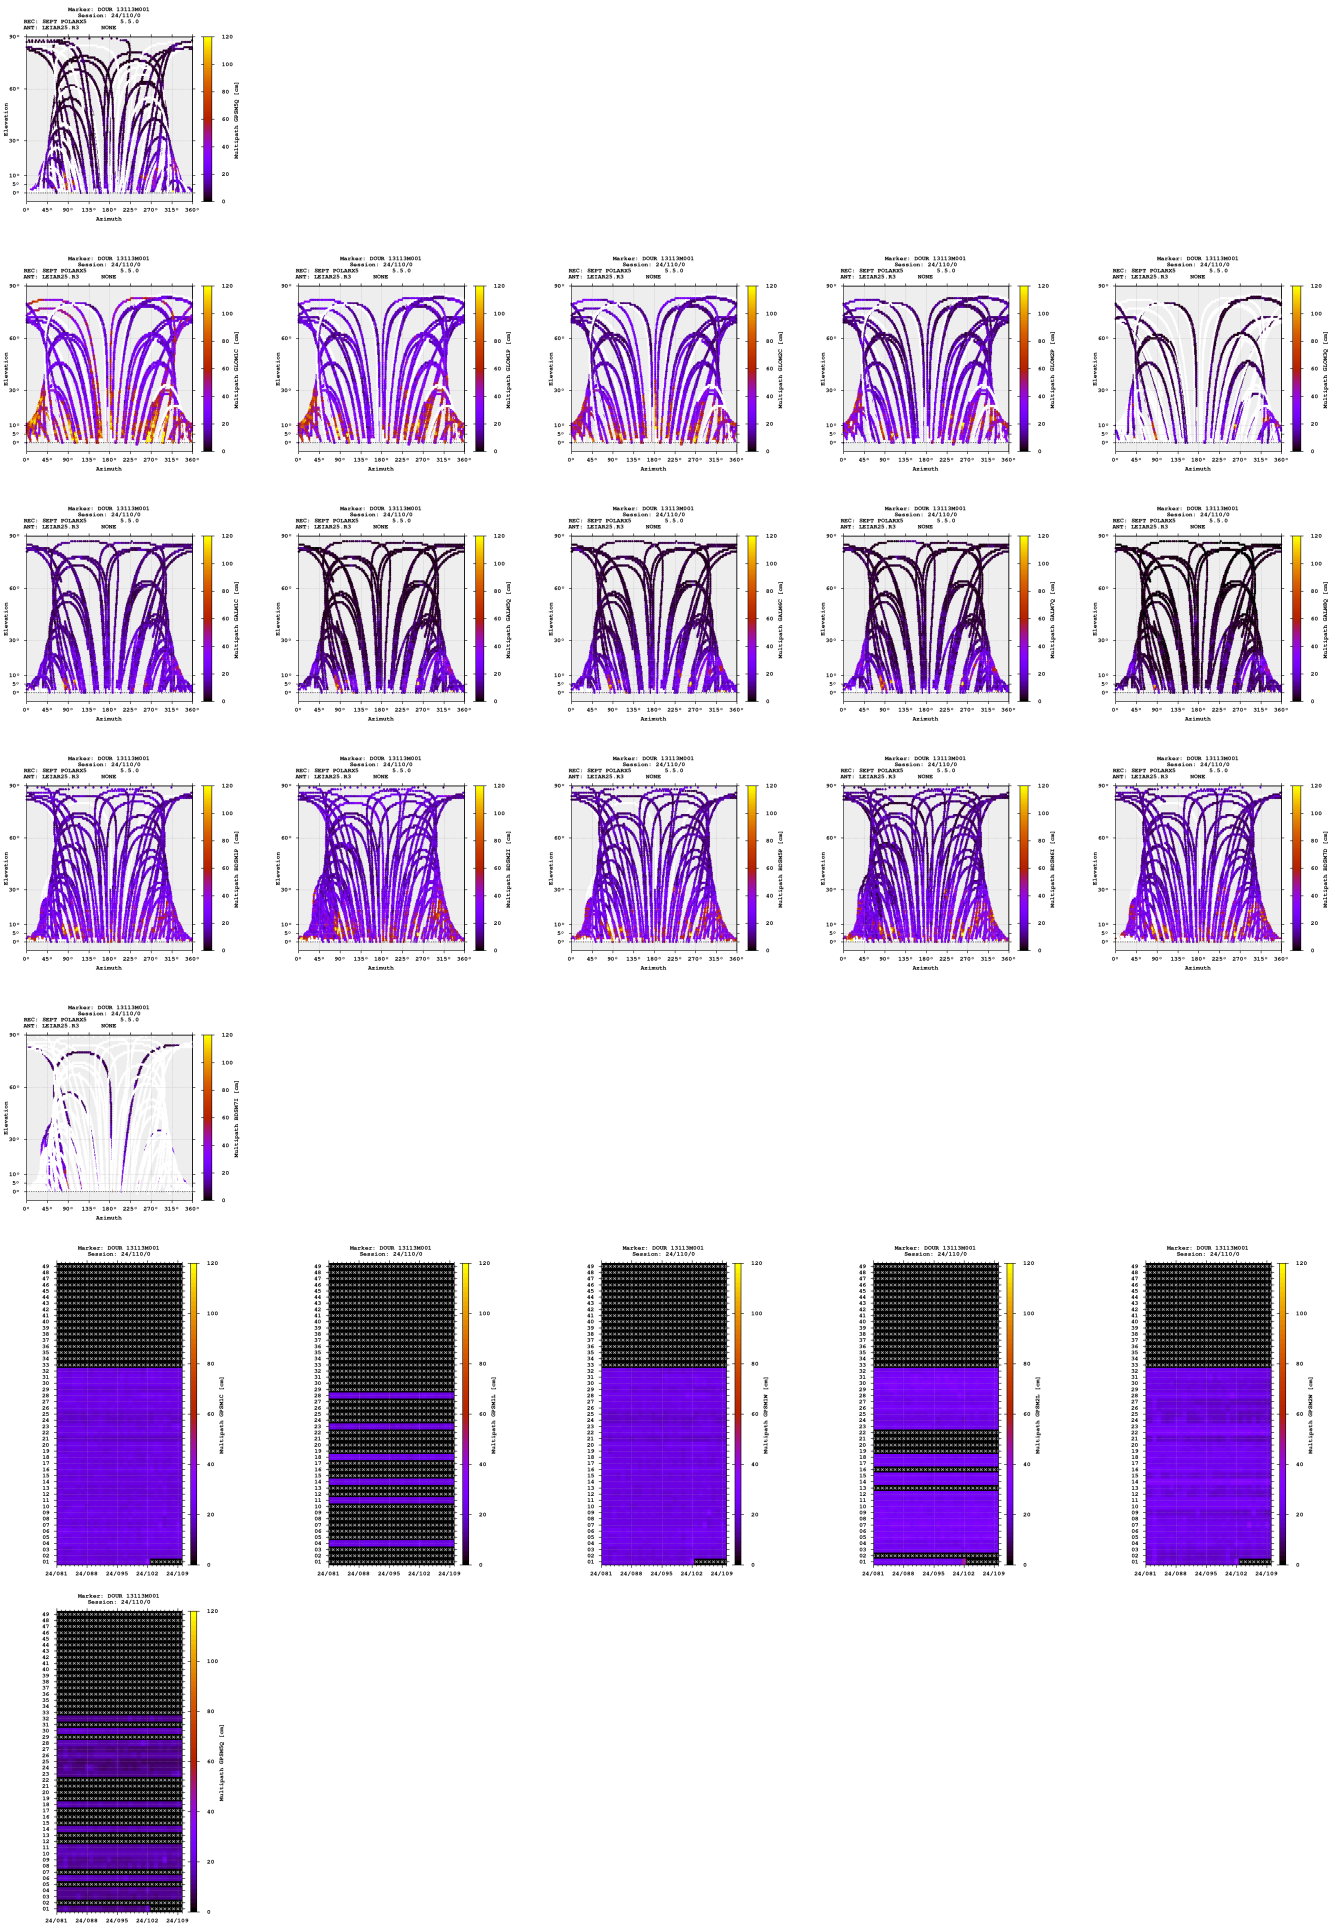


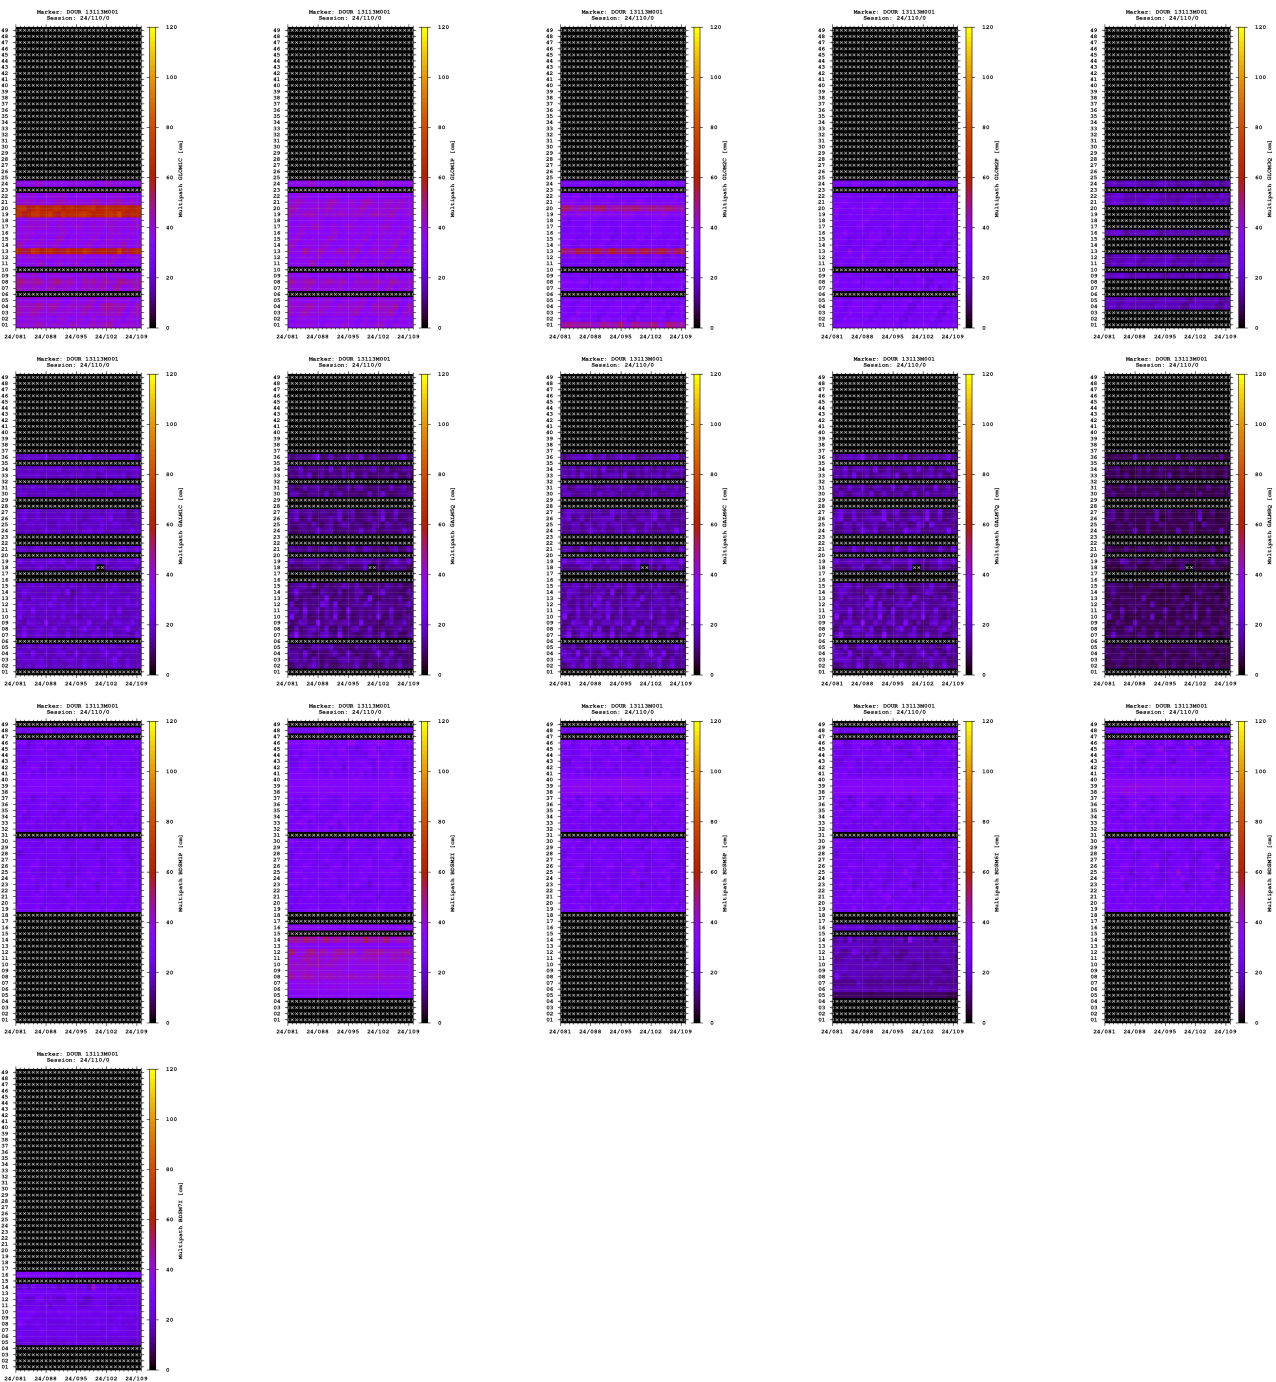


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

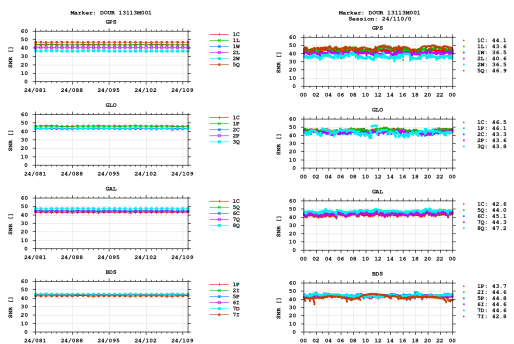


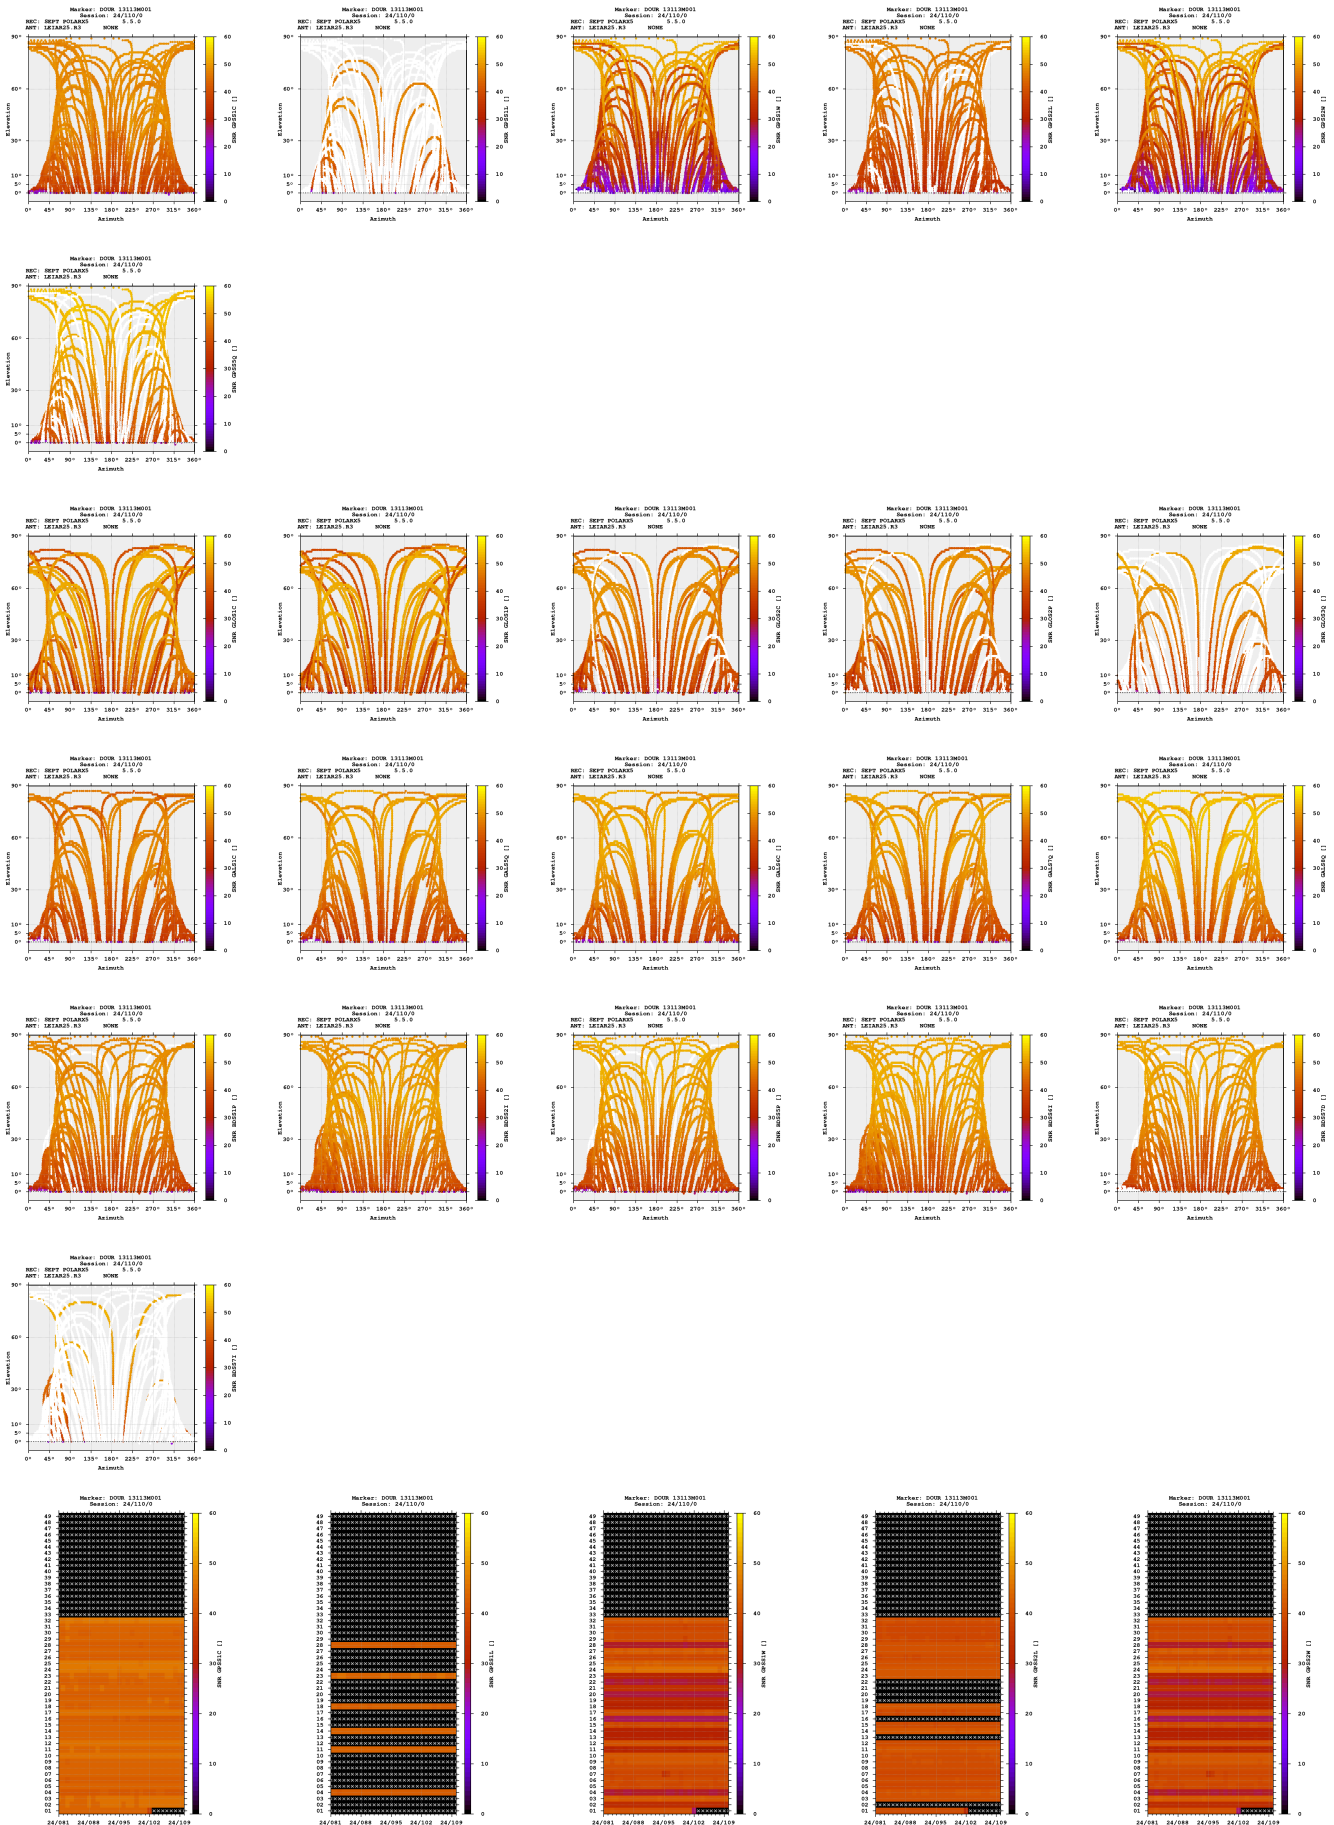

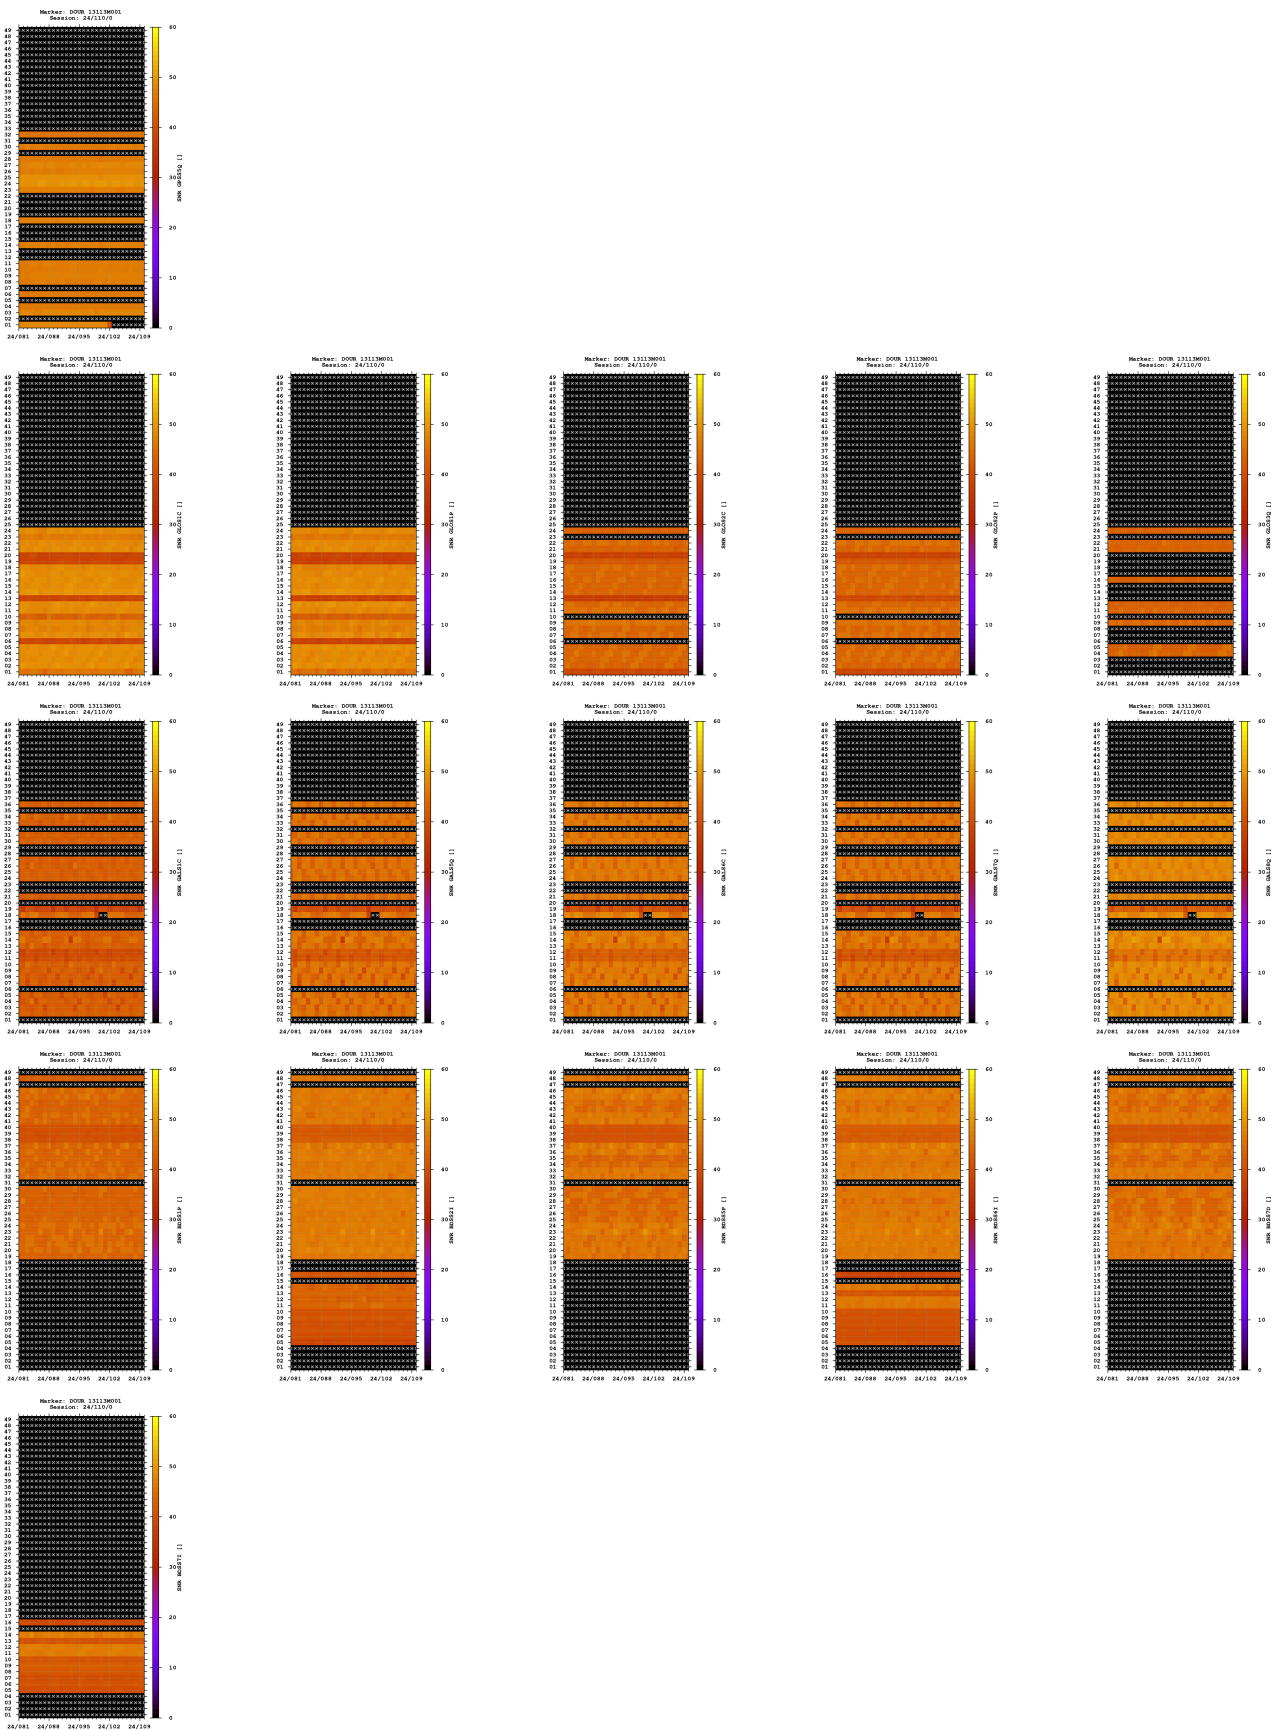

Estimates

2024-04-19 00:00:00	GPS	4086777.8896	328452.4412	4869783.3317	50.094881932	4.594958487	282.9218
2024-04-19 00:00:00	GLO	4086778.8953	328452.3343	4869783.6538	50.094877408	4.594956214	283.9740
2024-04-19 00:00:00	GAL	4086778.2023	328452.4263	4869783.3073	50.094880123	4.594958271	283.2699
2024-04-19 00:00:00	BDS	4086720.9927	328493.4284	4869758.6302	50.095098122	4.595590200	226.3803

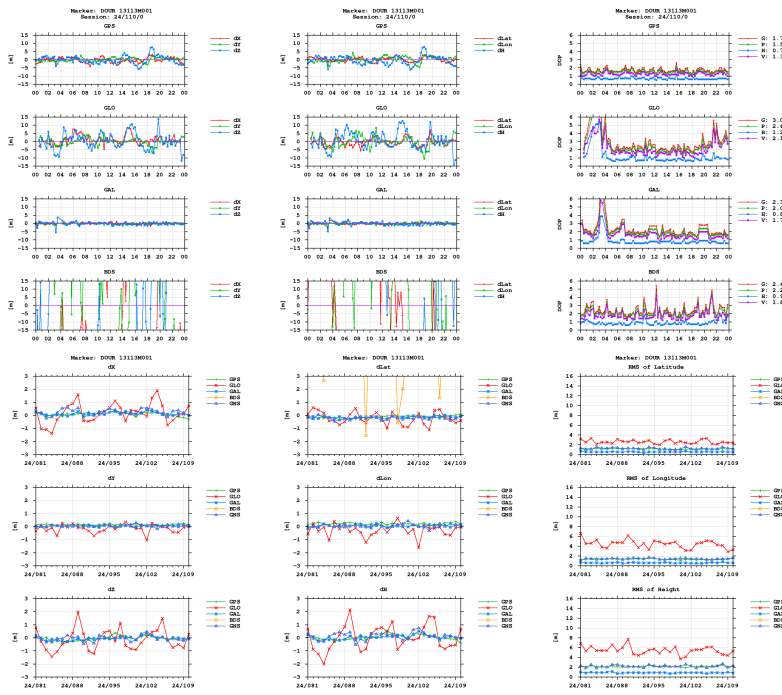

Equipment

2024-03-21 00:00:00 SEPT POLARX5 5.5.0 3069566 SEPT POLAR

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)