


# GNSS observation file monitoring for KIR8


Last RINEX file: KIR81090.24D.Z  
 RINEX version: 3.04  
 Marker: KIR8 10422M002  
 Receiver: 5818R400 TRIMBLE ALLOY 6.15  
 Antenna: 09030016 LEIAR25.R3 LEIT

## Epochs

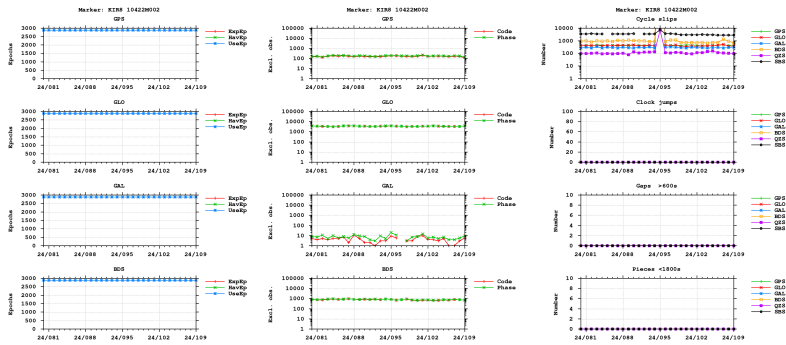



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

## Satellites

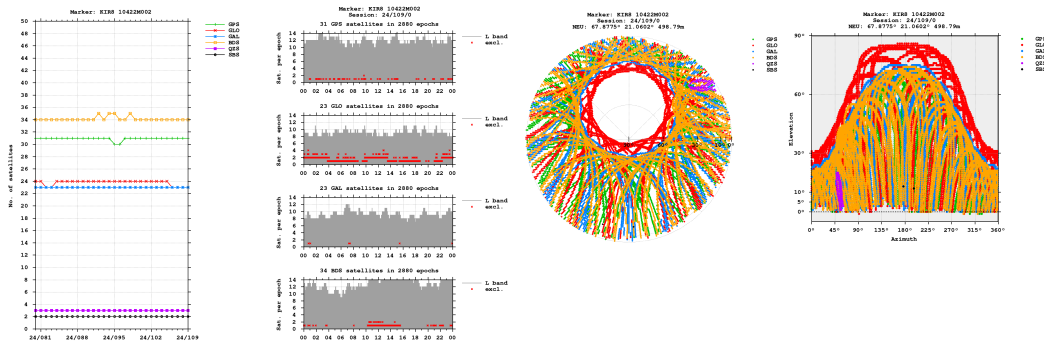


## Bands

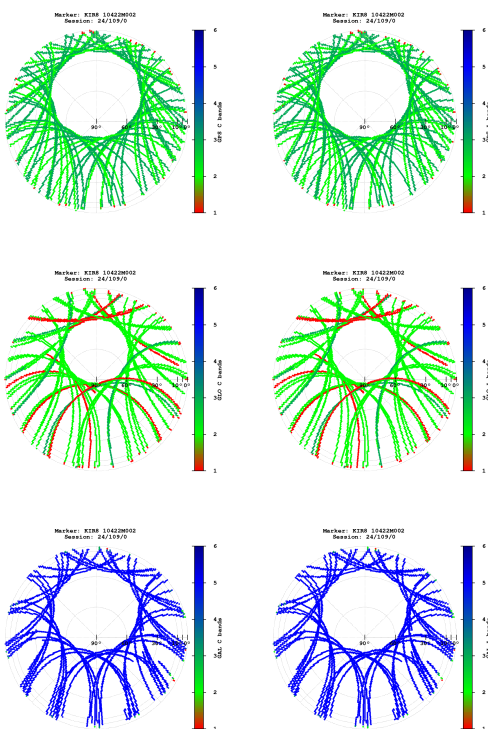


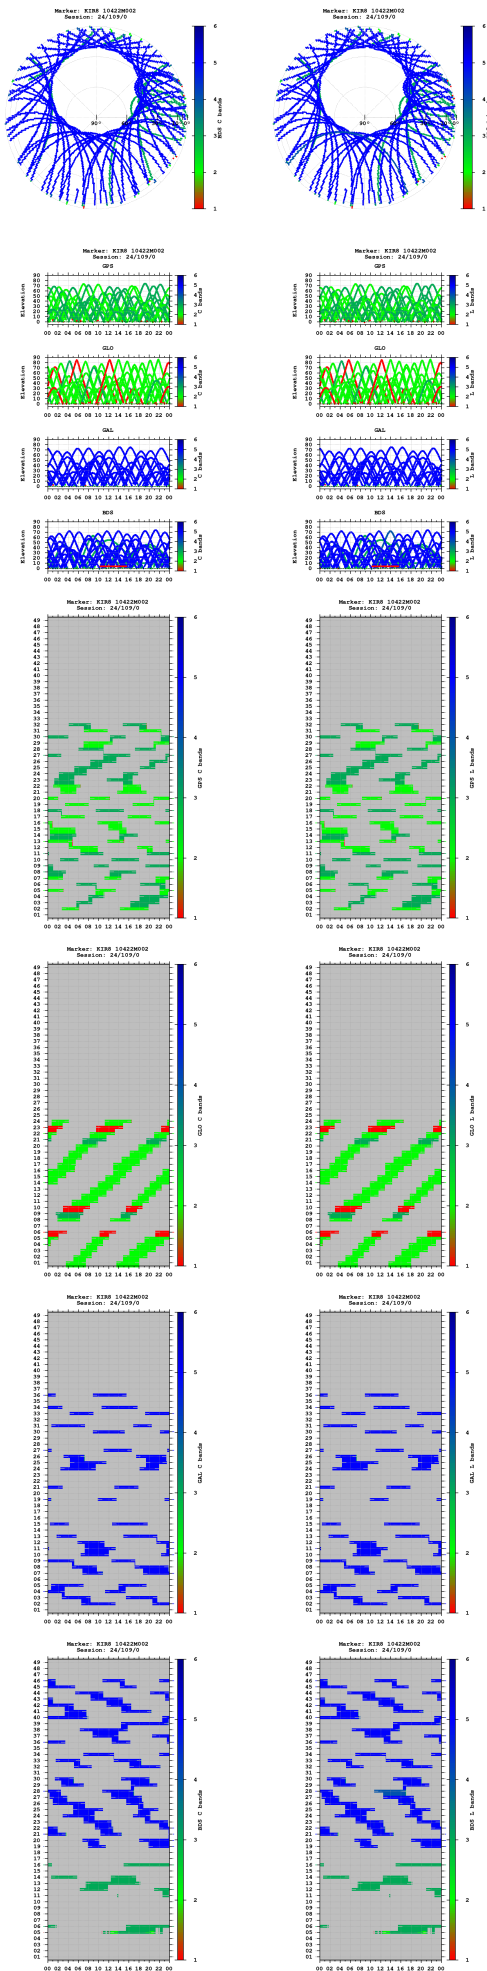


Observations

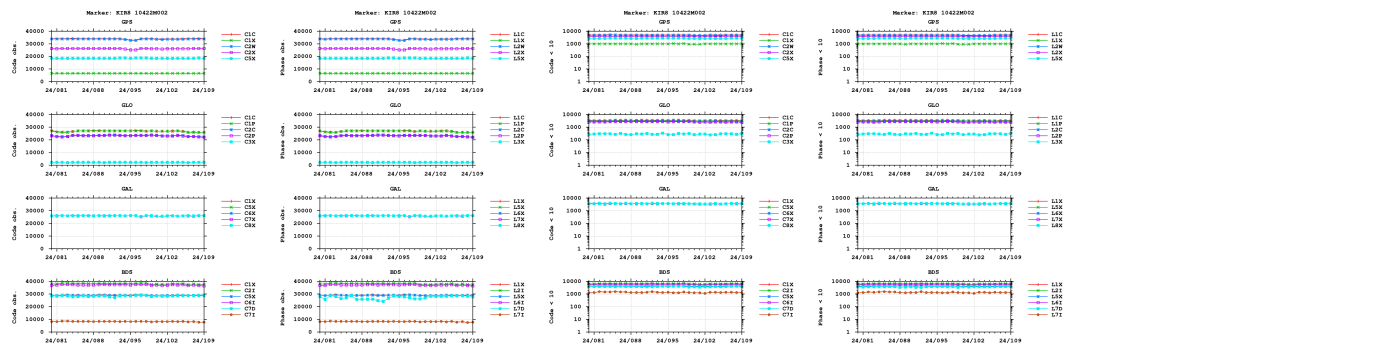




### Cycle slips

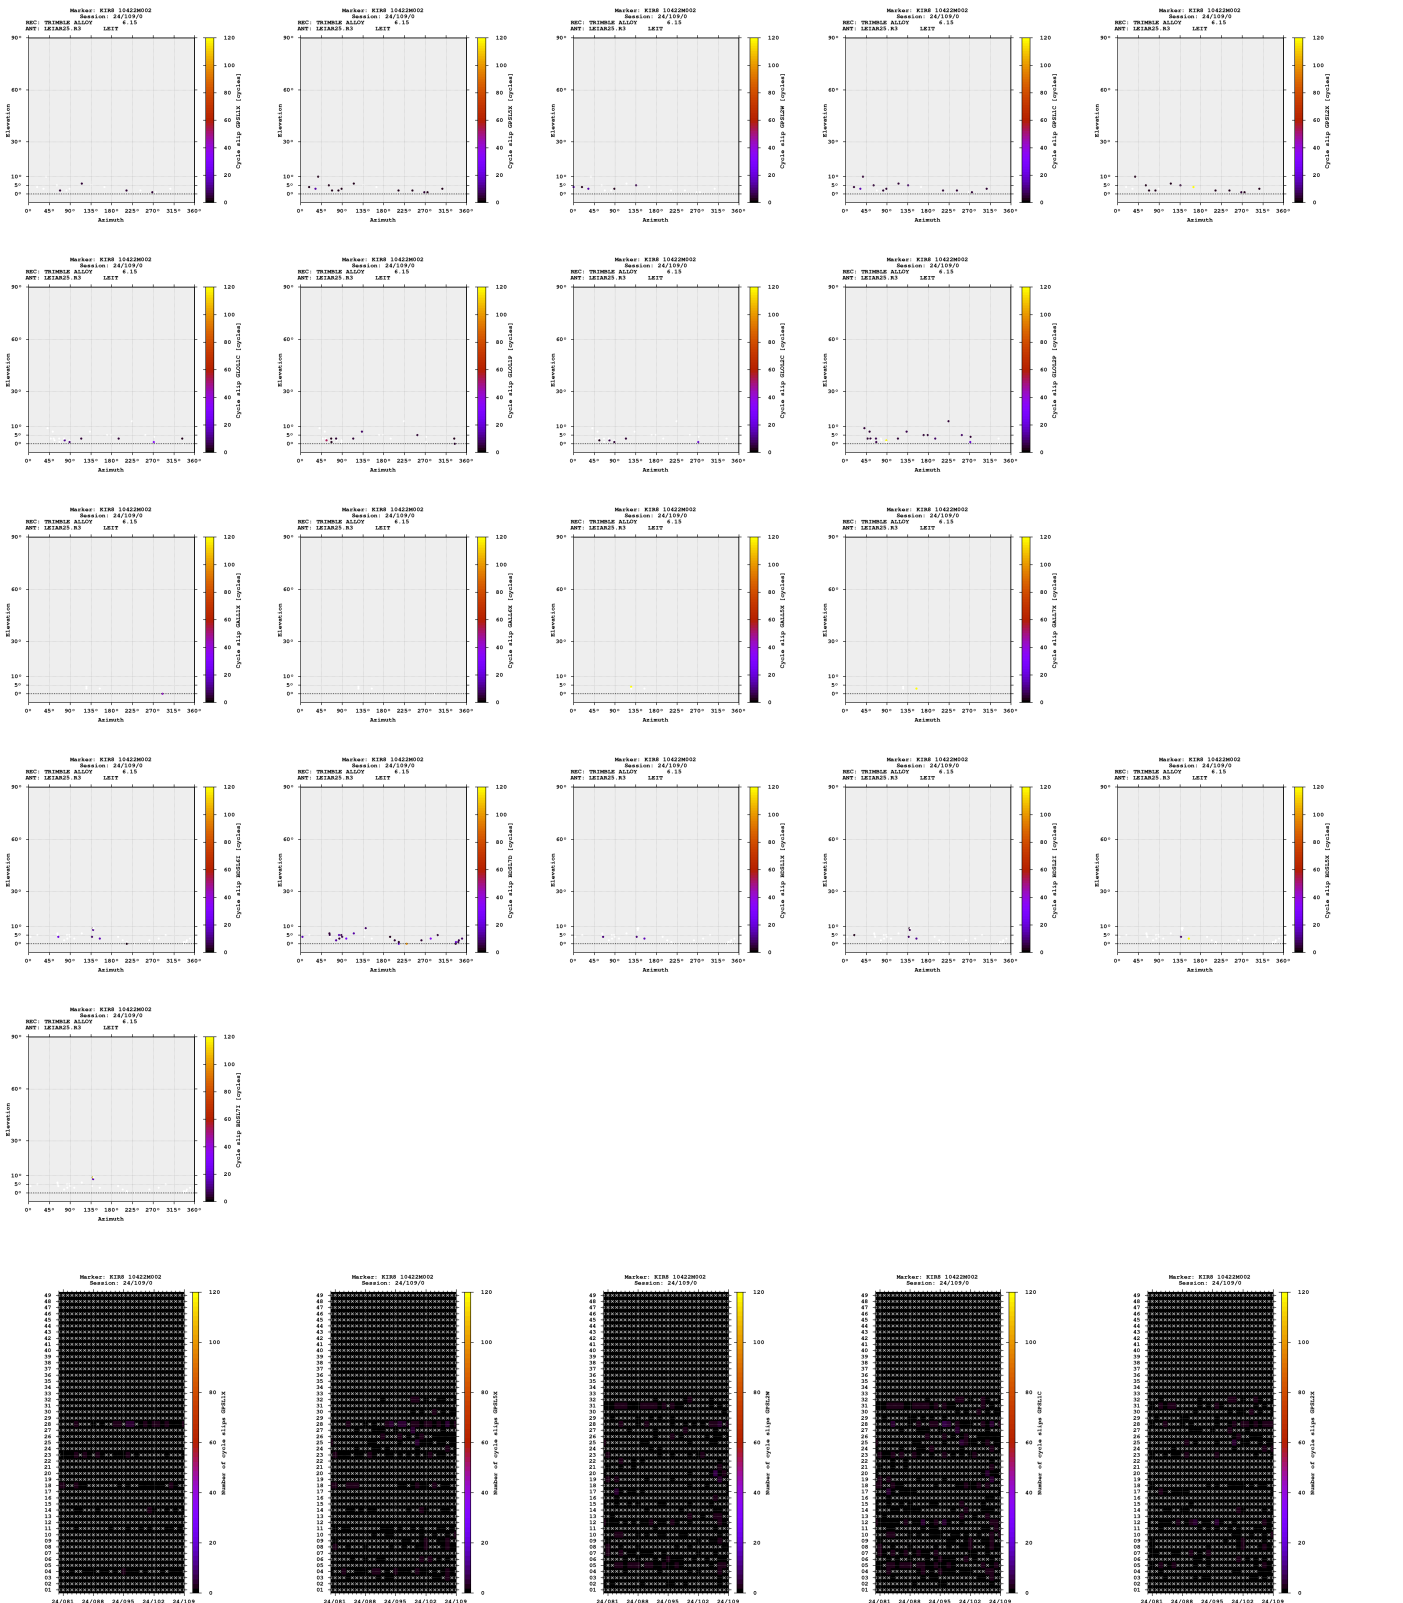

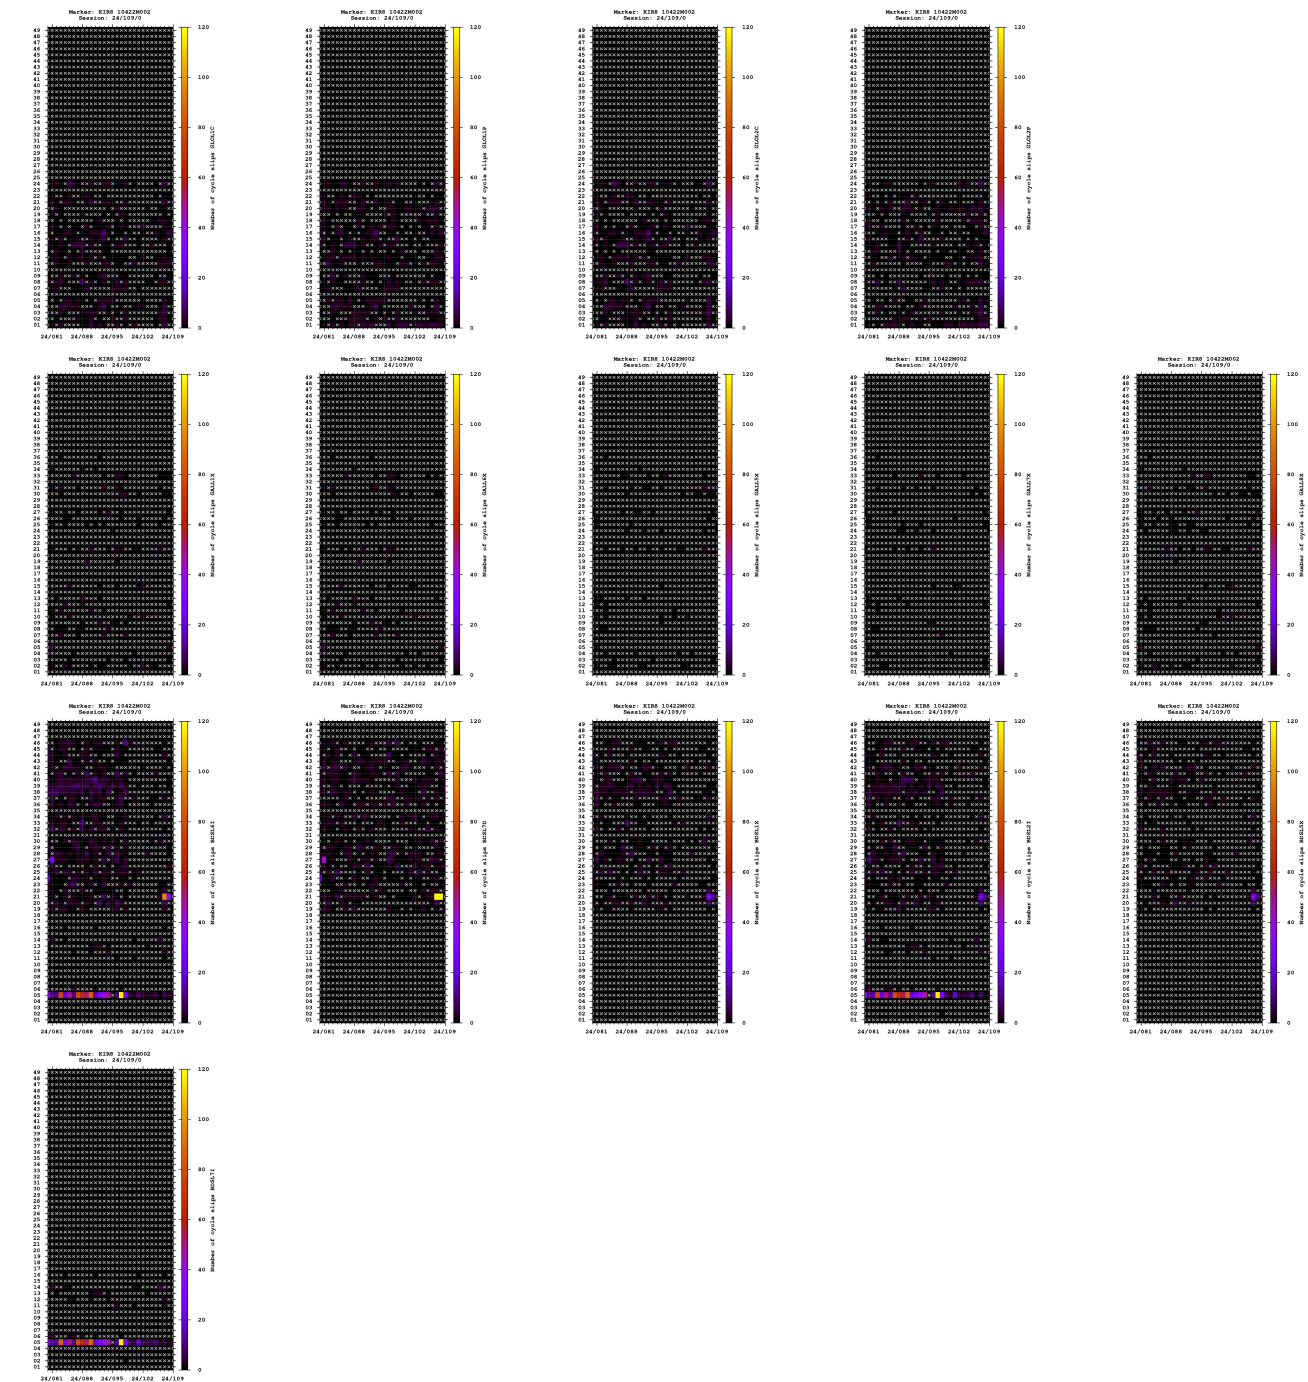


### Multipath

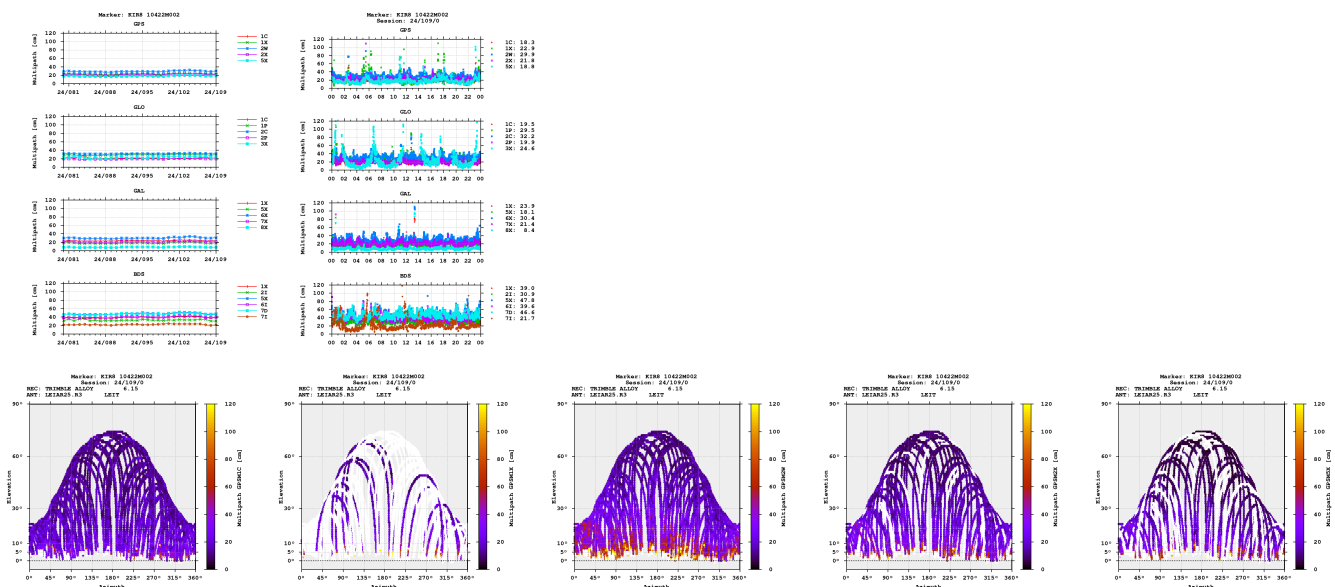

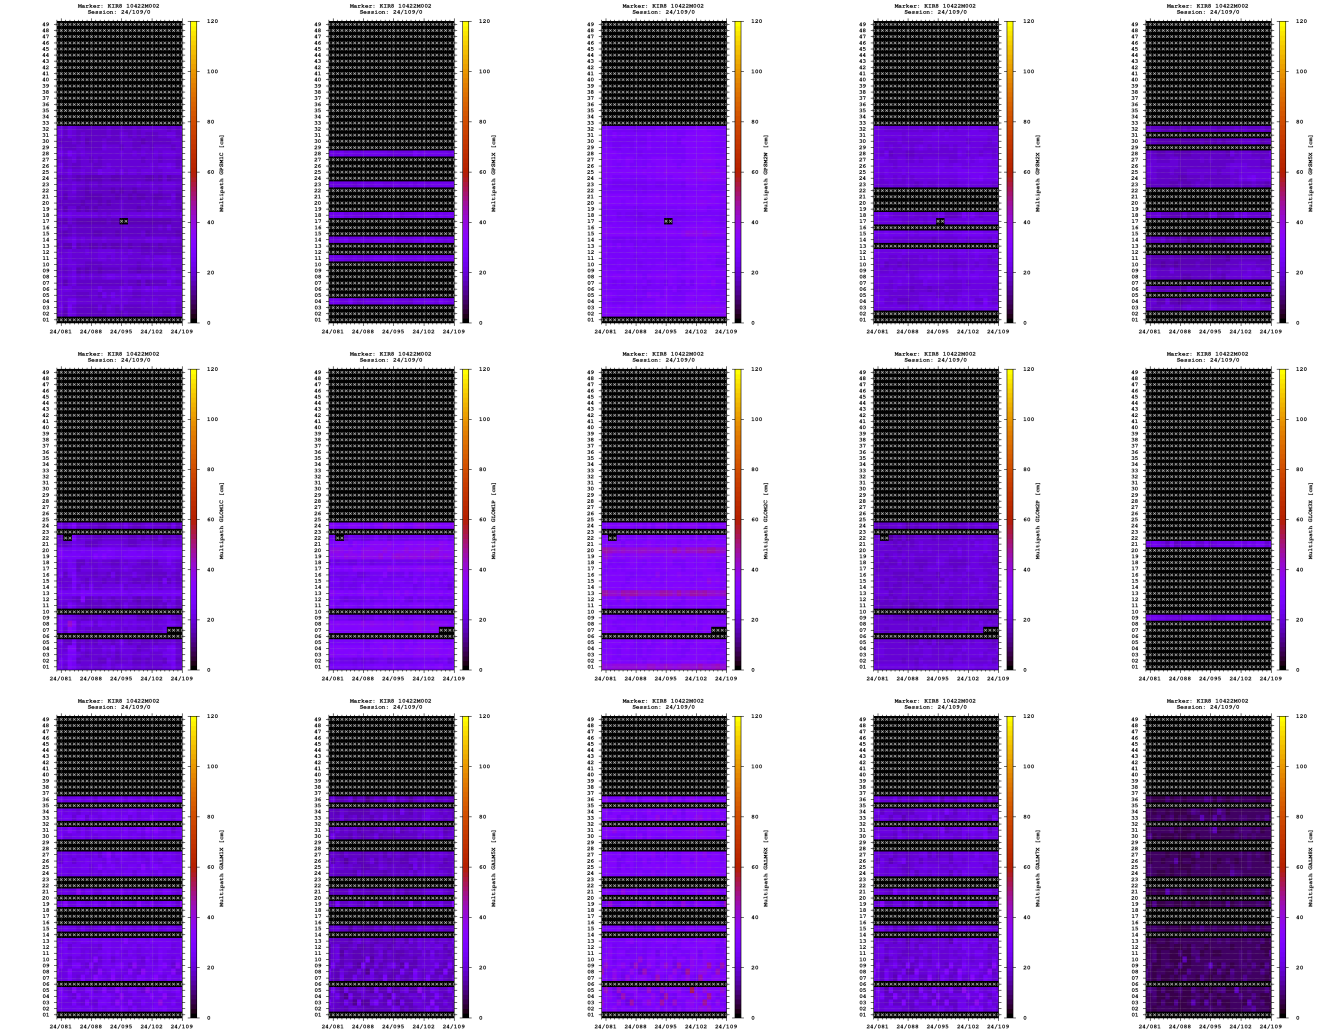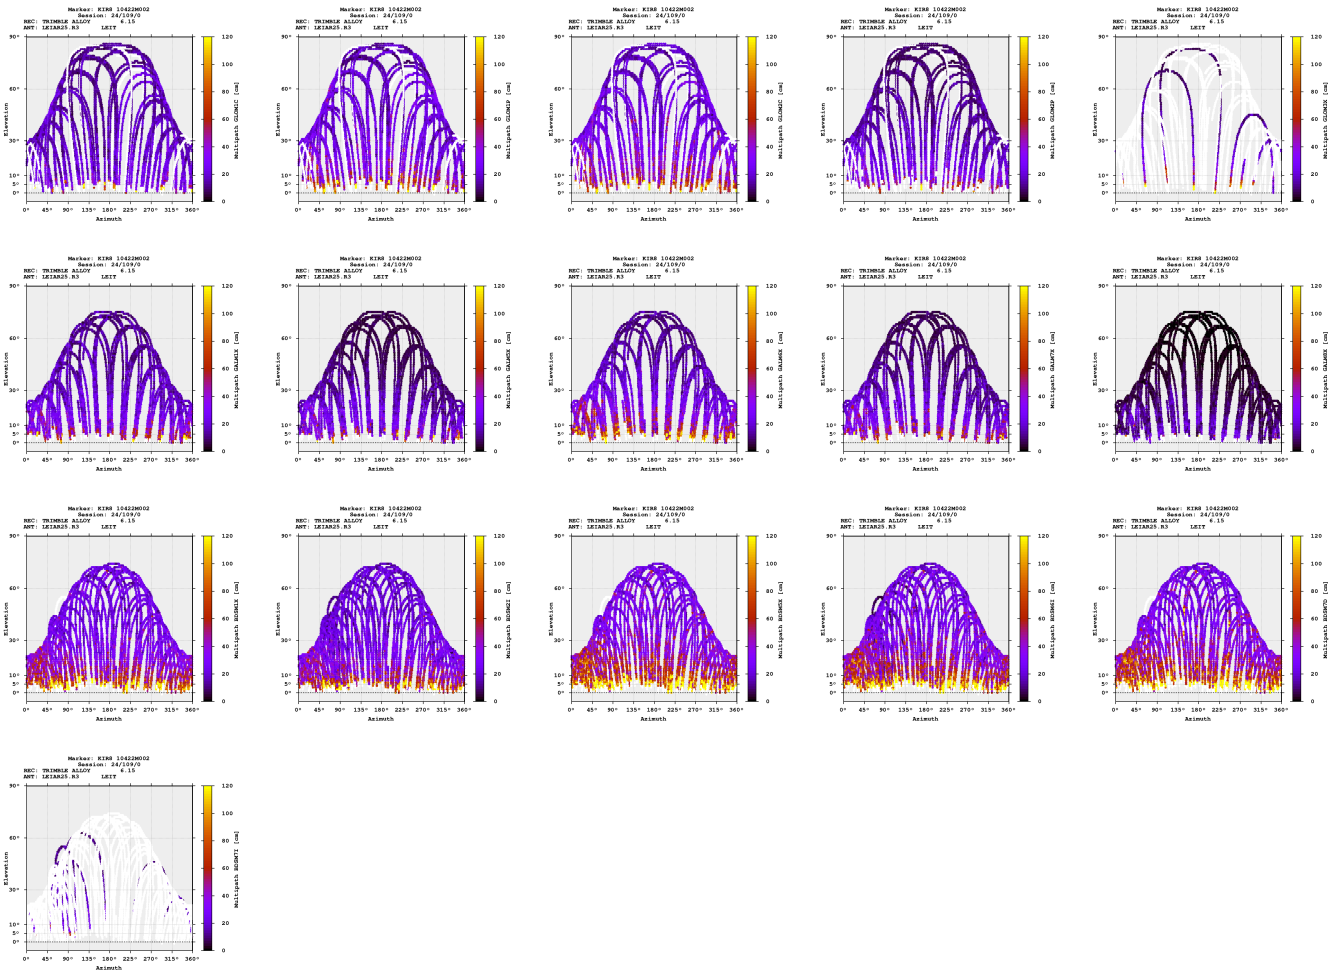





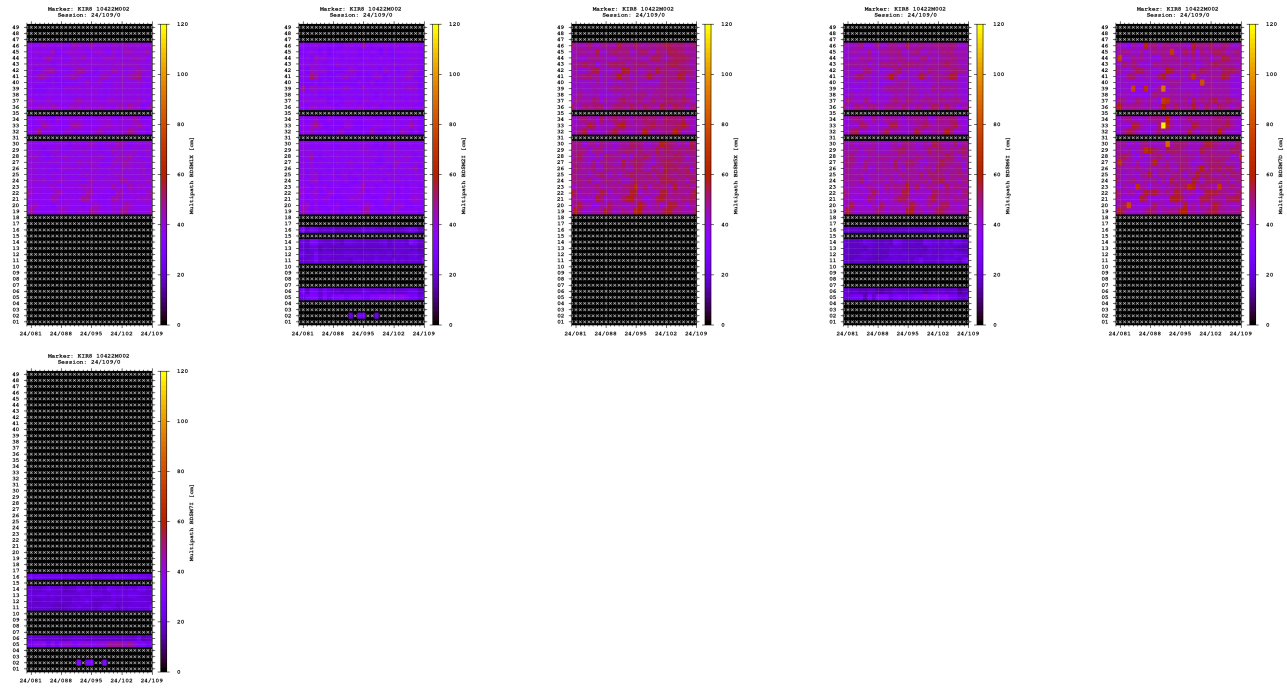


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

### Signal-to-noise ratio

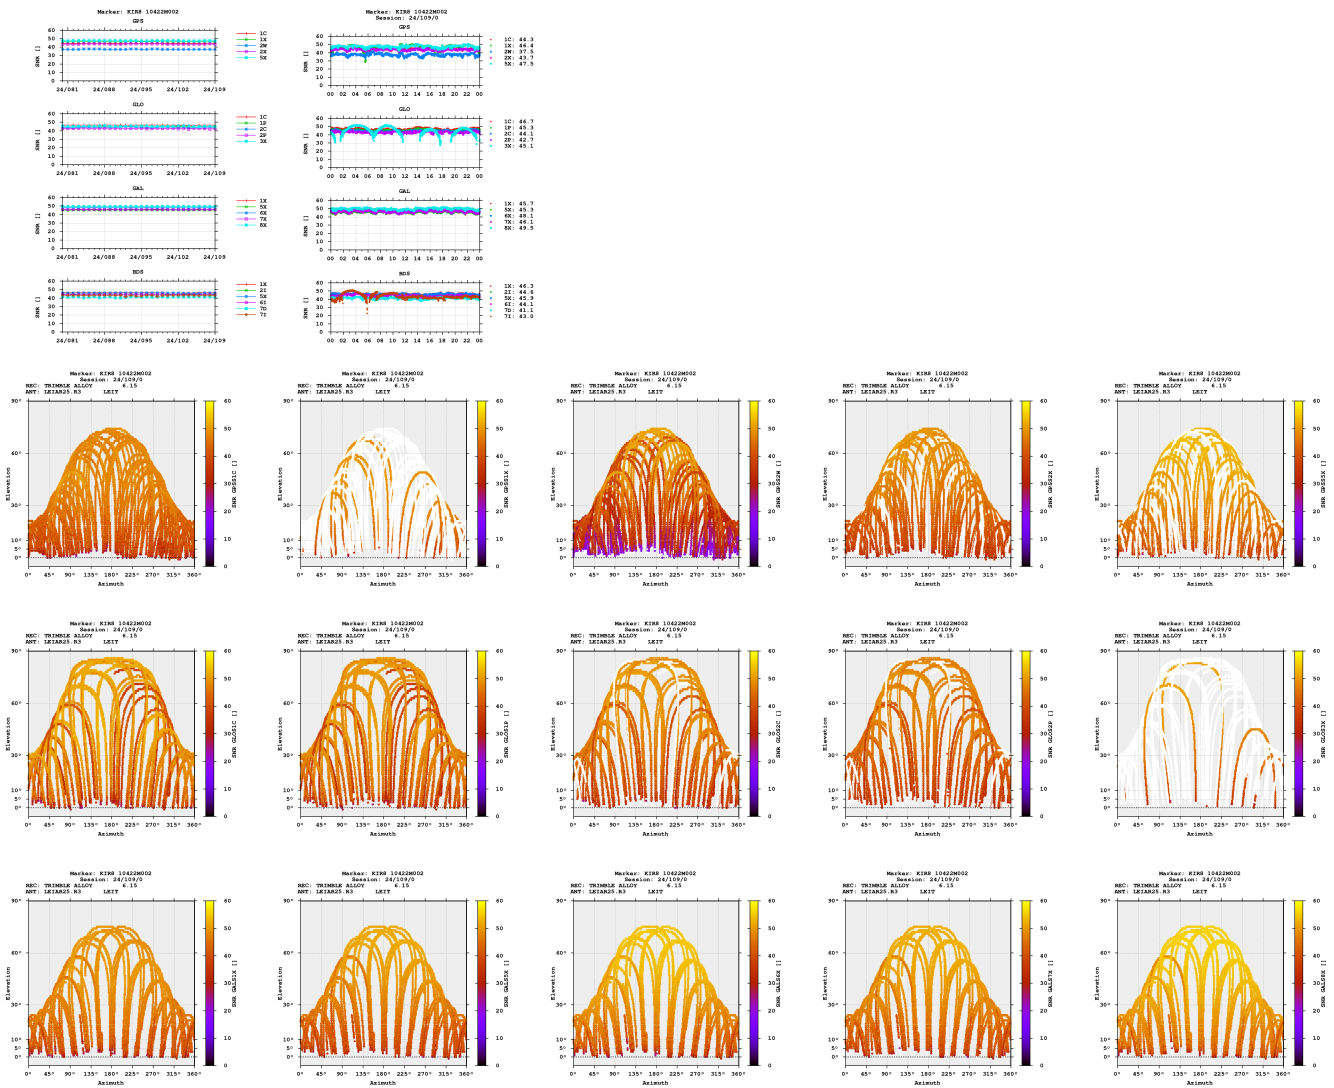


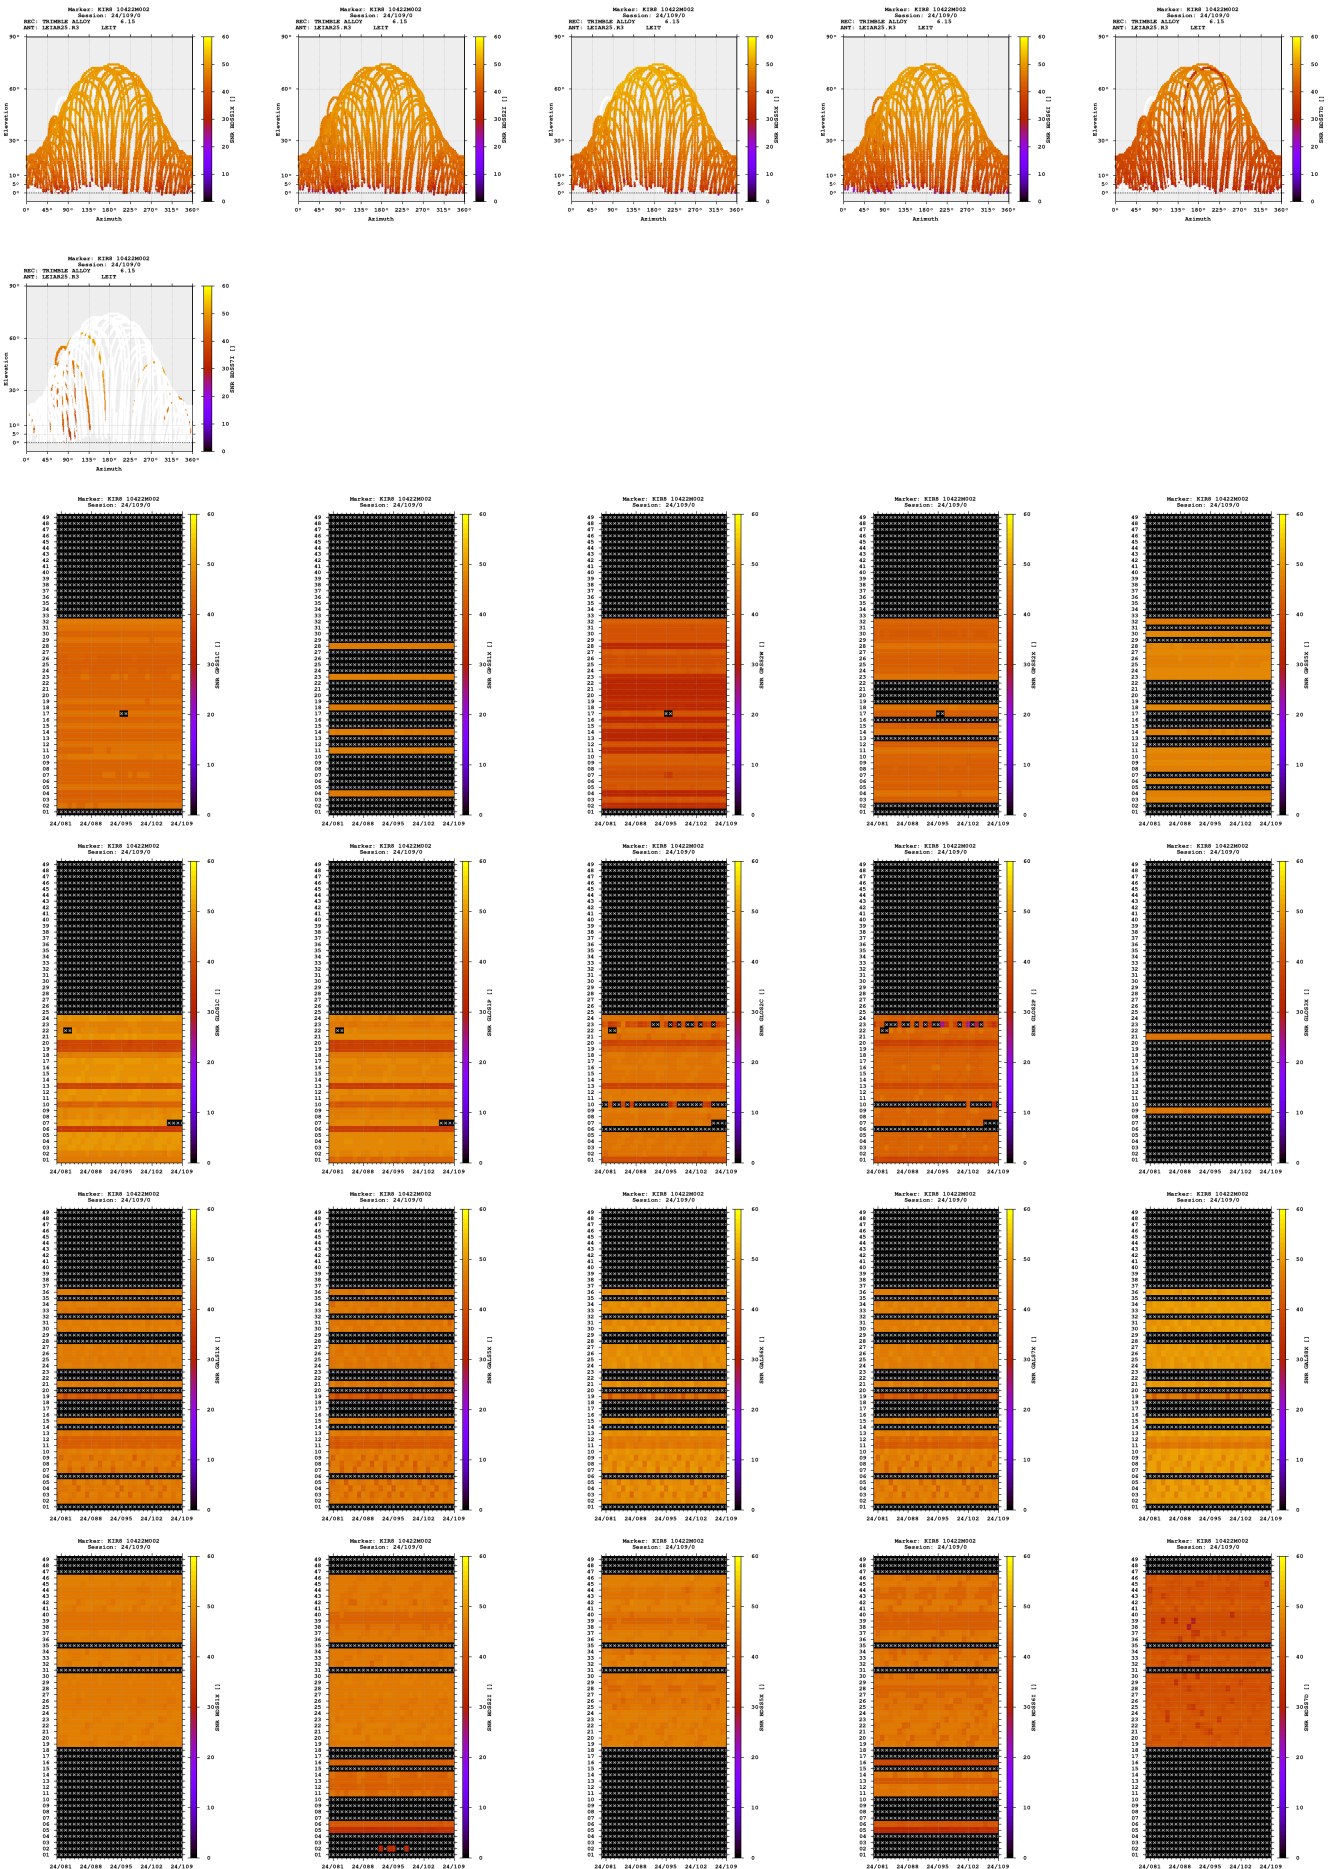



**Estimates**

2024-04-18 00:00:00	GPS	2248126.9287	865685.9655	5886425.1374	67.877546868	21.060192456	498.6685
2024-04-18 00:00:00	GLO	2248126.2758	865685.6537	5886423.0306	67.877545745	21.060191116	496.4452
2024-04-18 00:00:00	GAL	2248126.9309	865685.8059	5886425.1050	67.877547217	21.060188895	498.6177
2024-04-18 00:00:00	BDS	2248130.1809	865673.2417	5886434.5411	67.877596936	21.059870747	508.8876

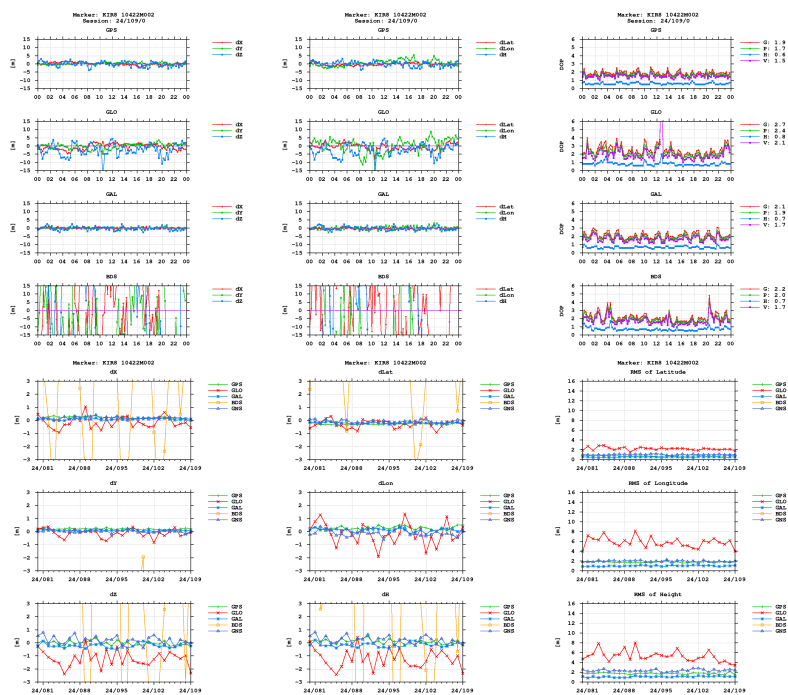

**Equipment**

2024-03-20 00:00:00 TRIMBLE ALLOY 6.15 5818R400 TRIMBLE AL

**Program info**

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)