


GNSS observation file monitoring for M0SE


Last RINEX file: M0SE1080.24D.Z
 RINEX version: 3.04
 Marker: M0SE 12772M001
 Receiver: 1830126 LEICA GR50 4.70/7.813
 Antenna: 725219 LEIAR25.R4 LEIT

Epochs

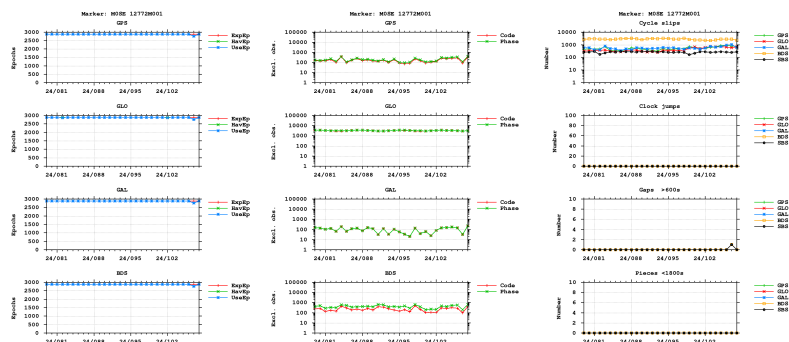



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

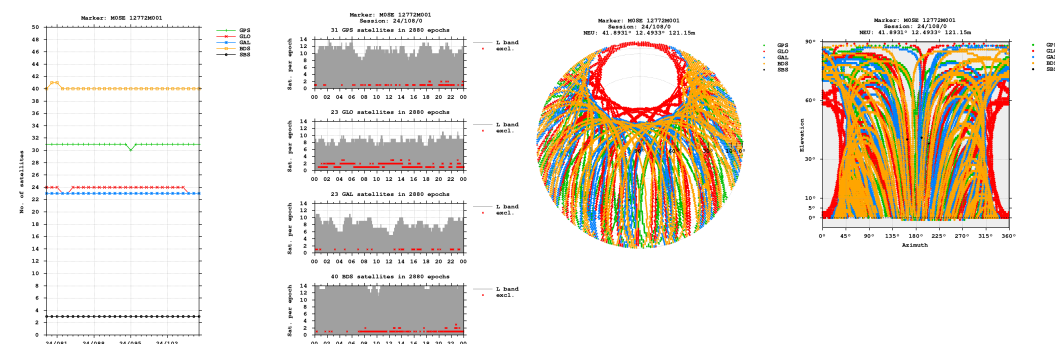


Bands


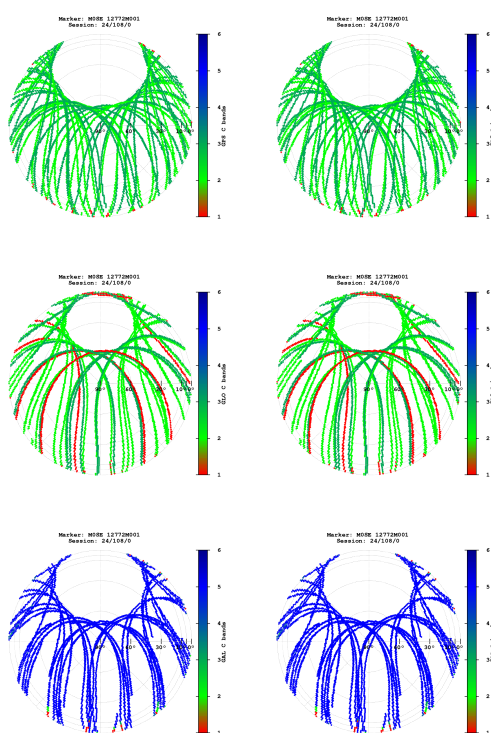


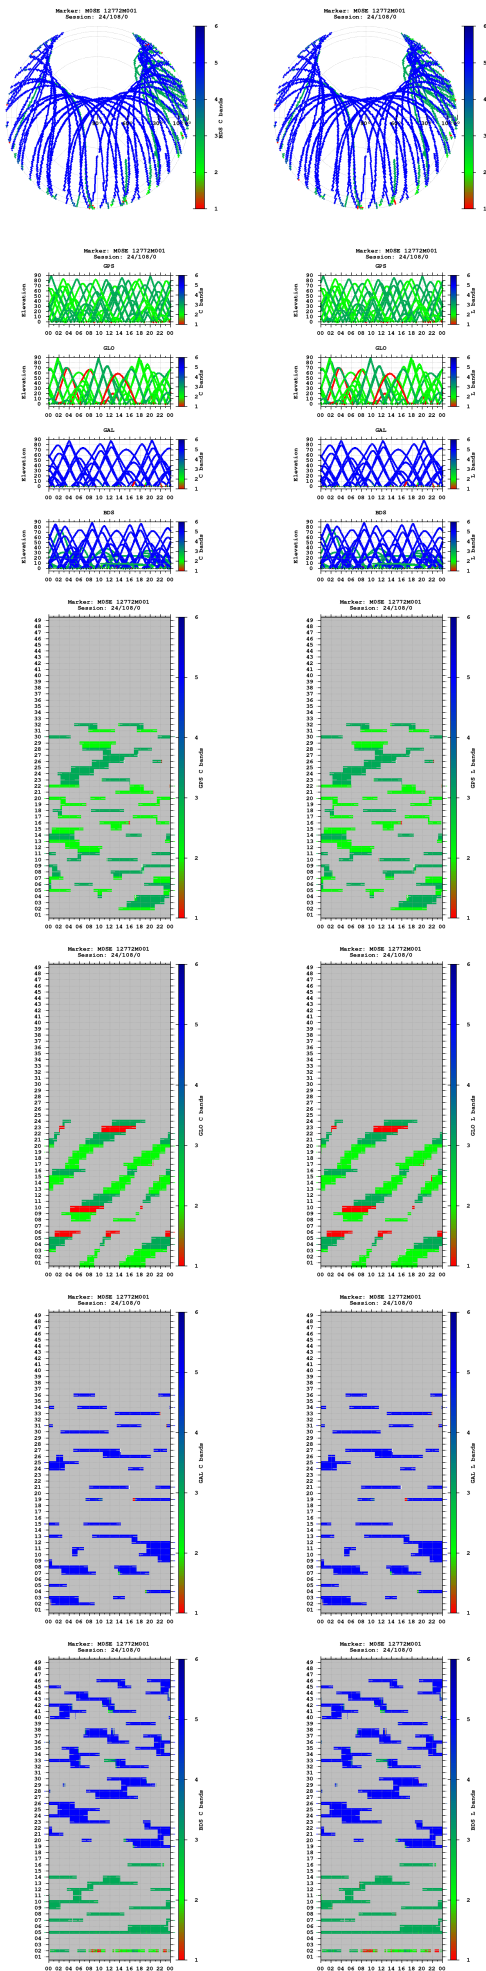


Observations

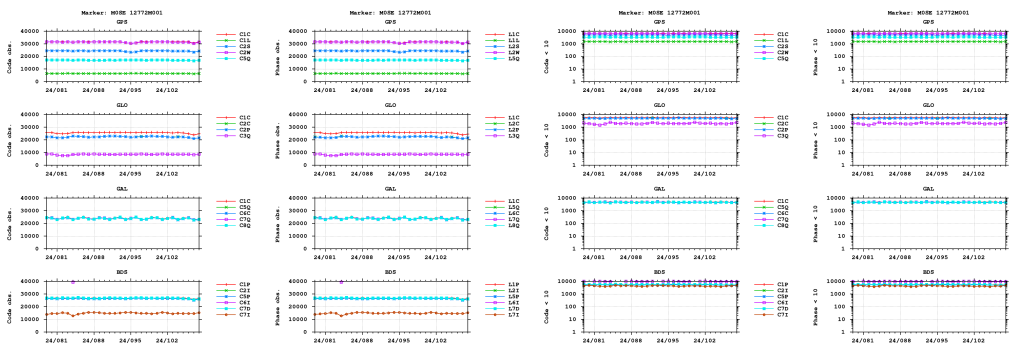




Cycle slips

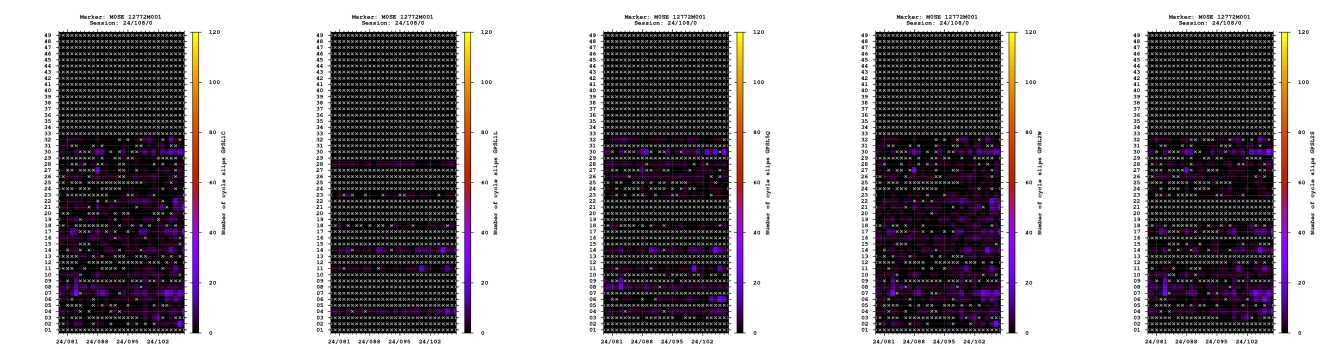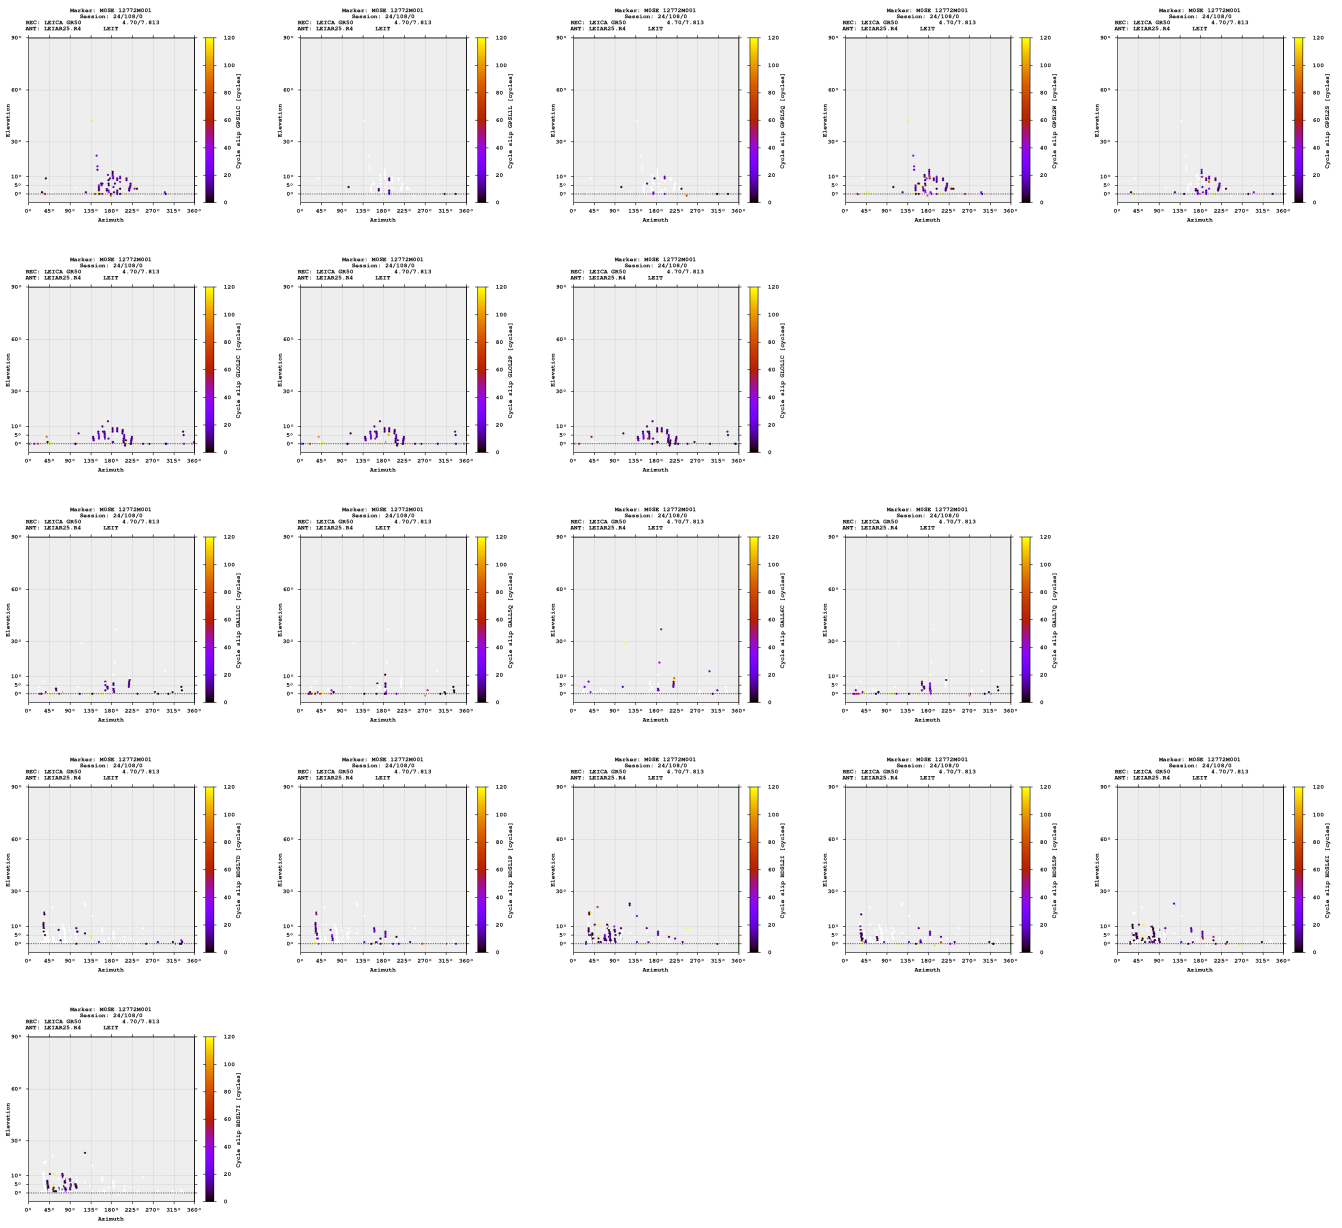


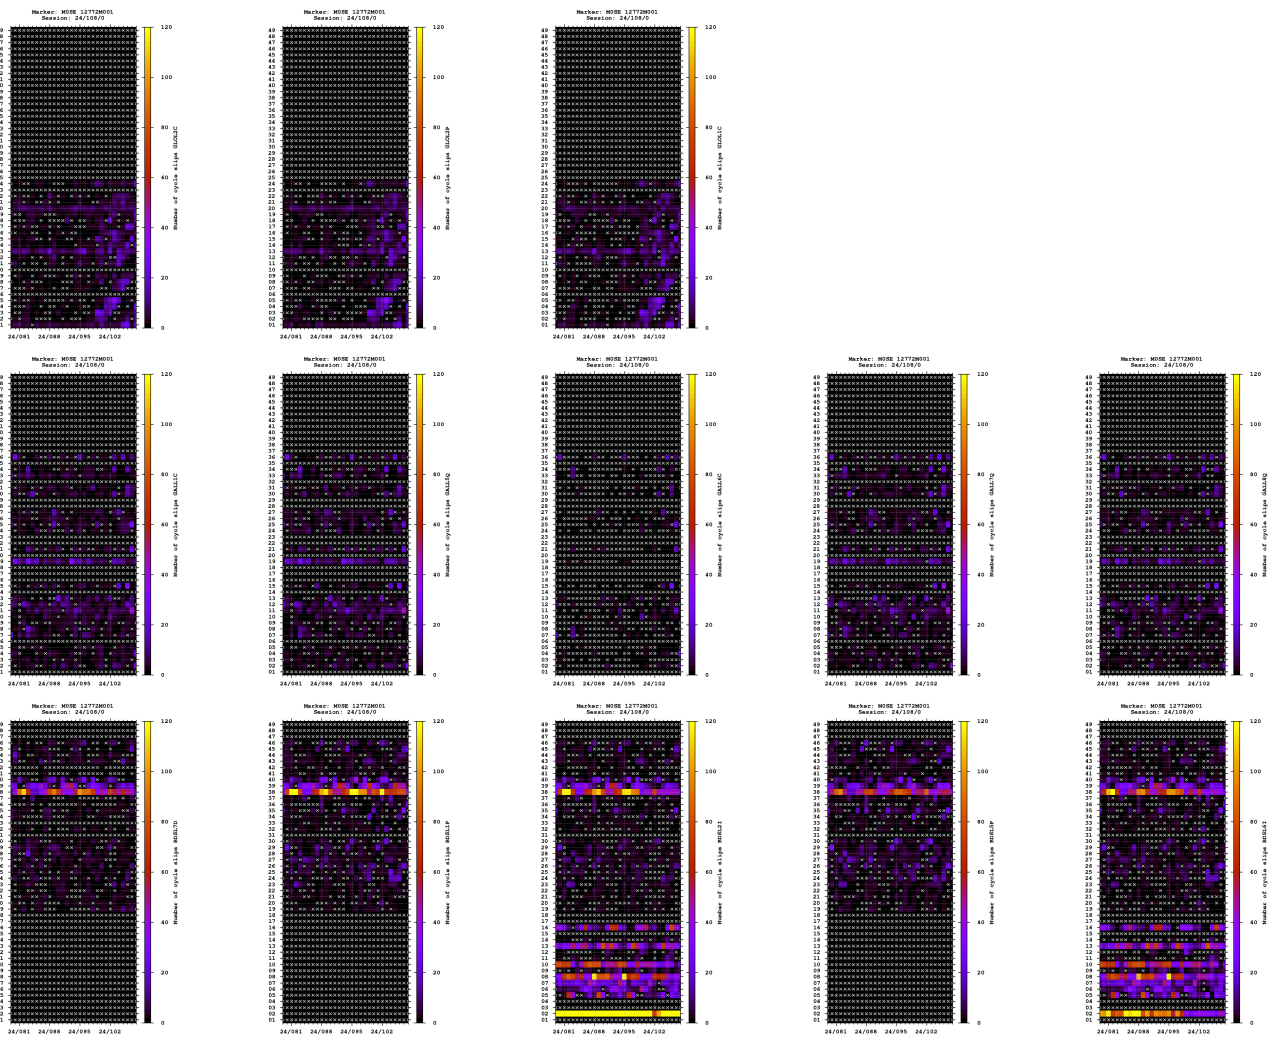

Multipath

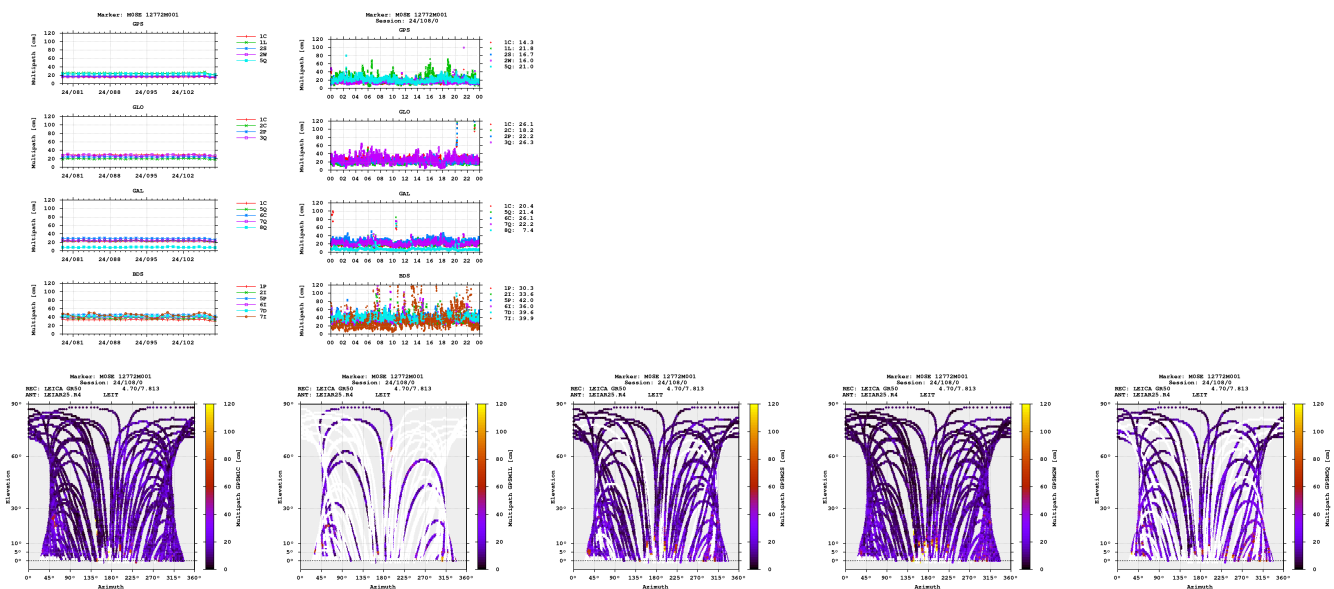





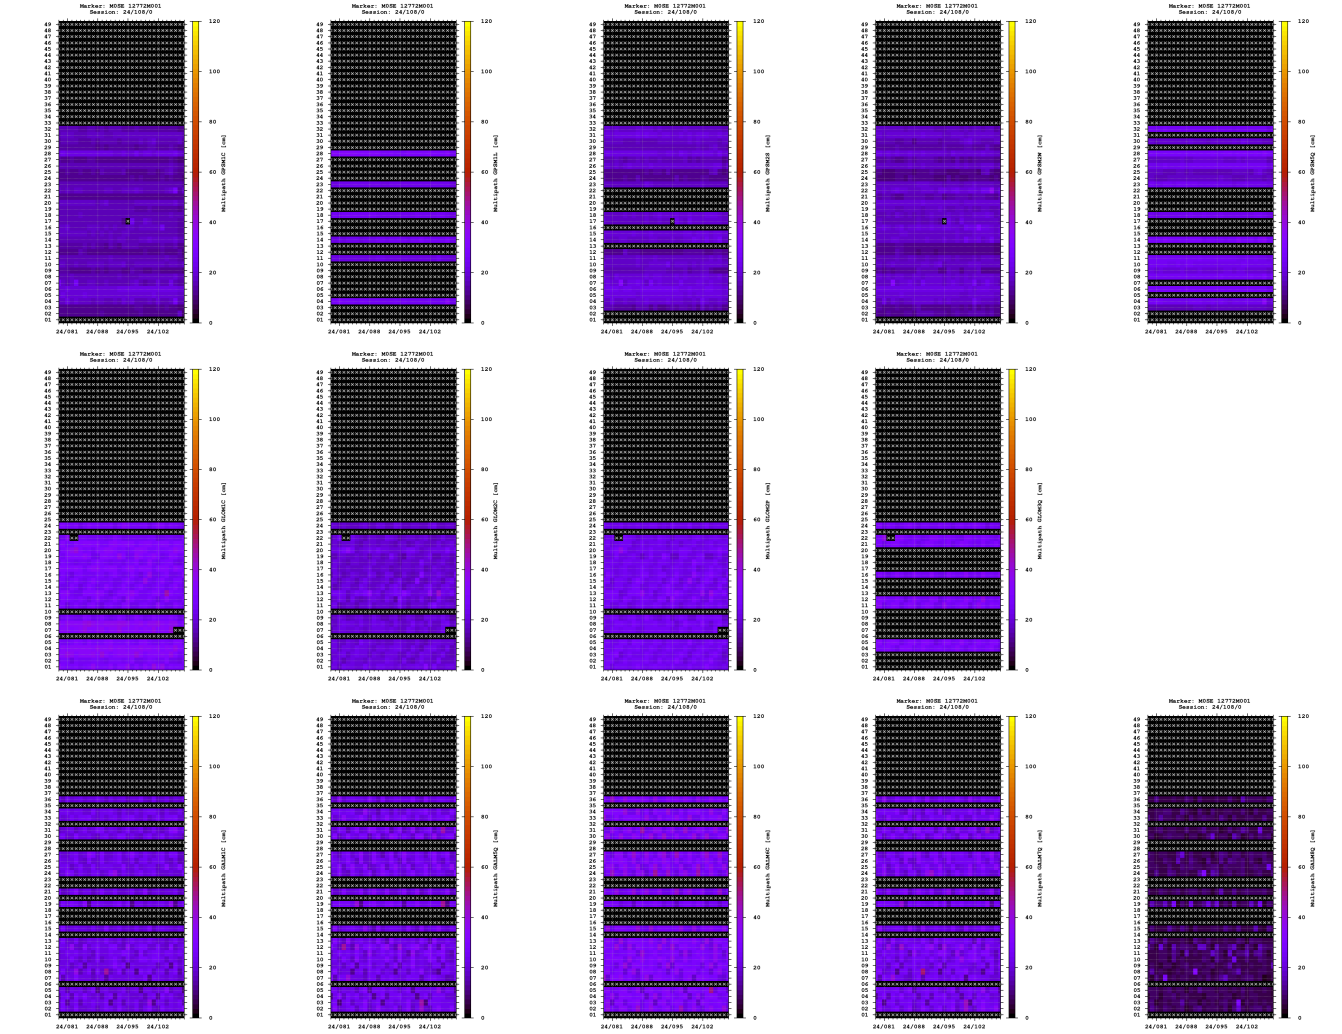
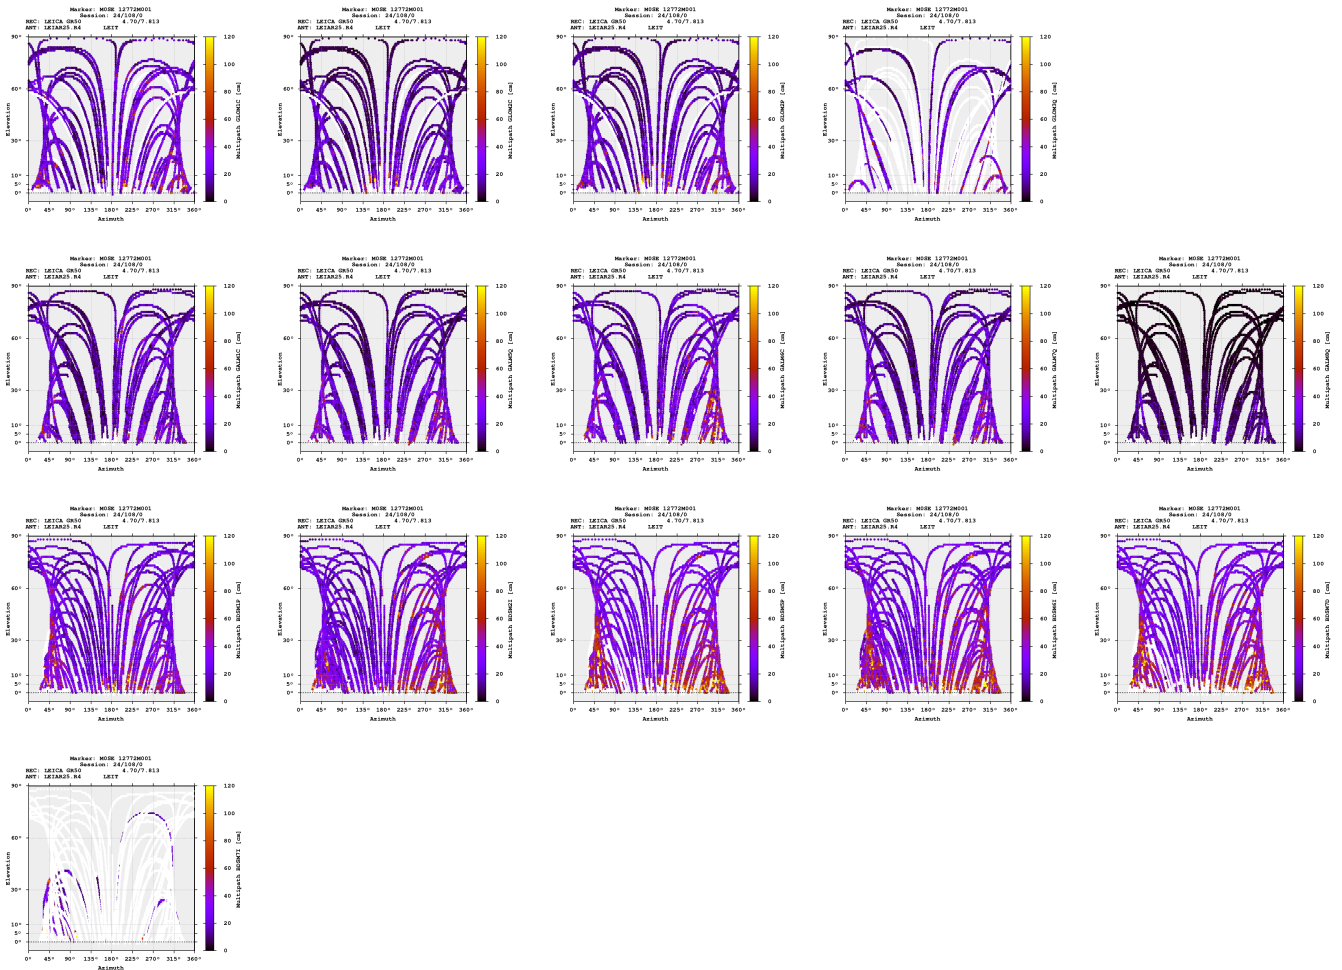


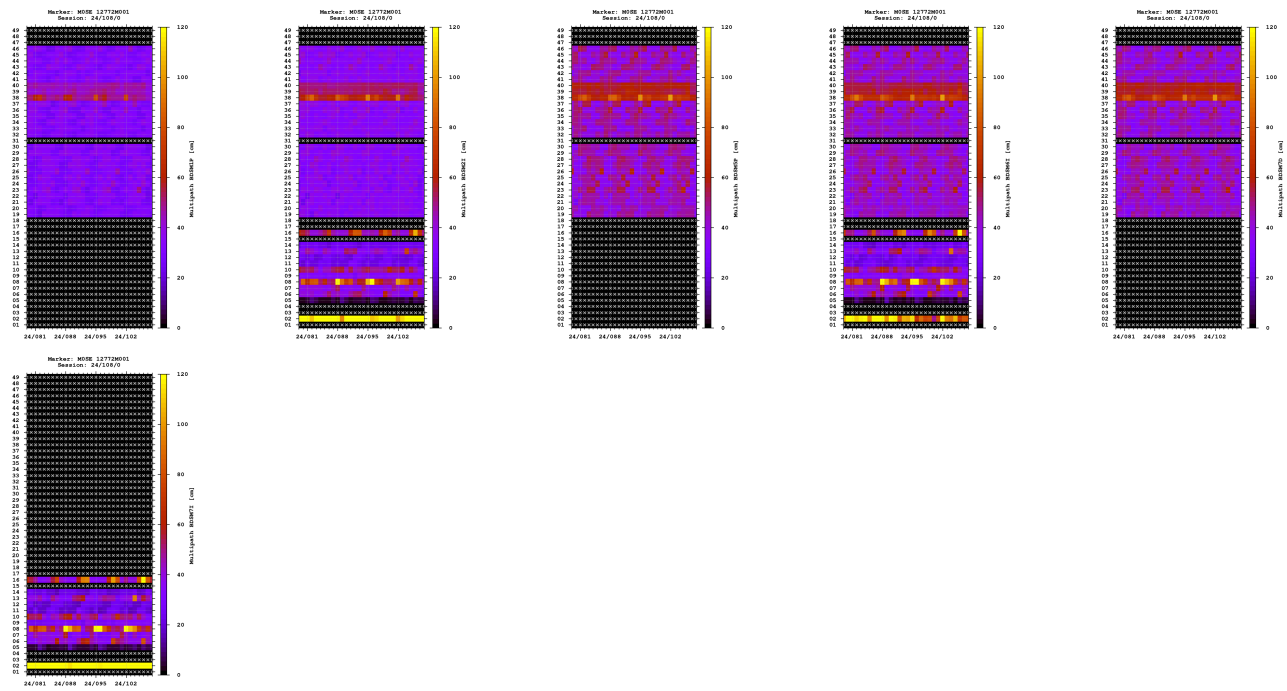


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

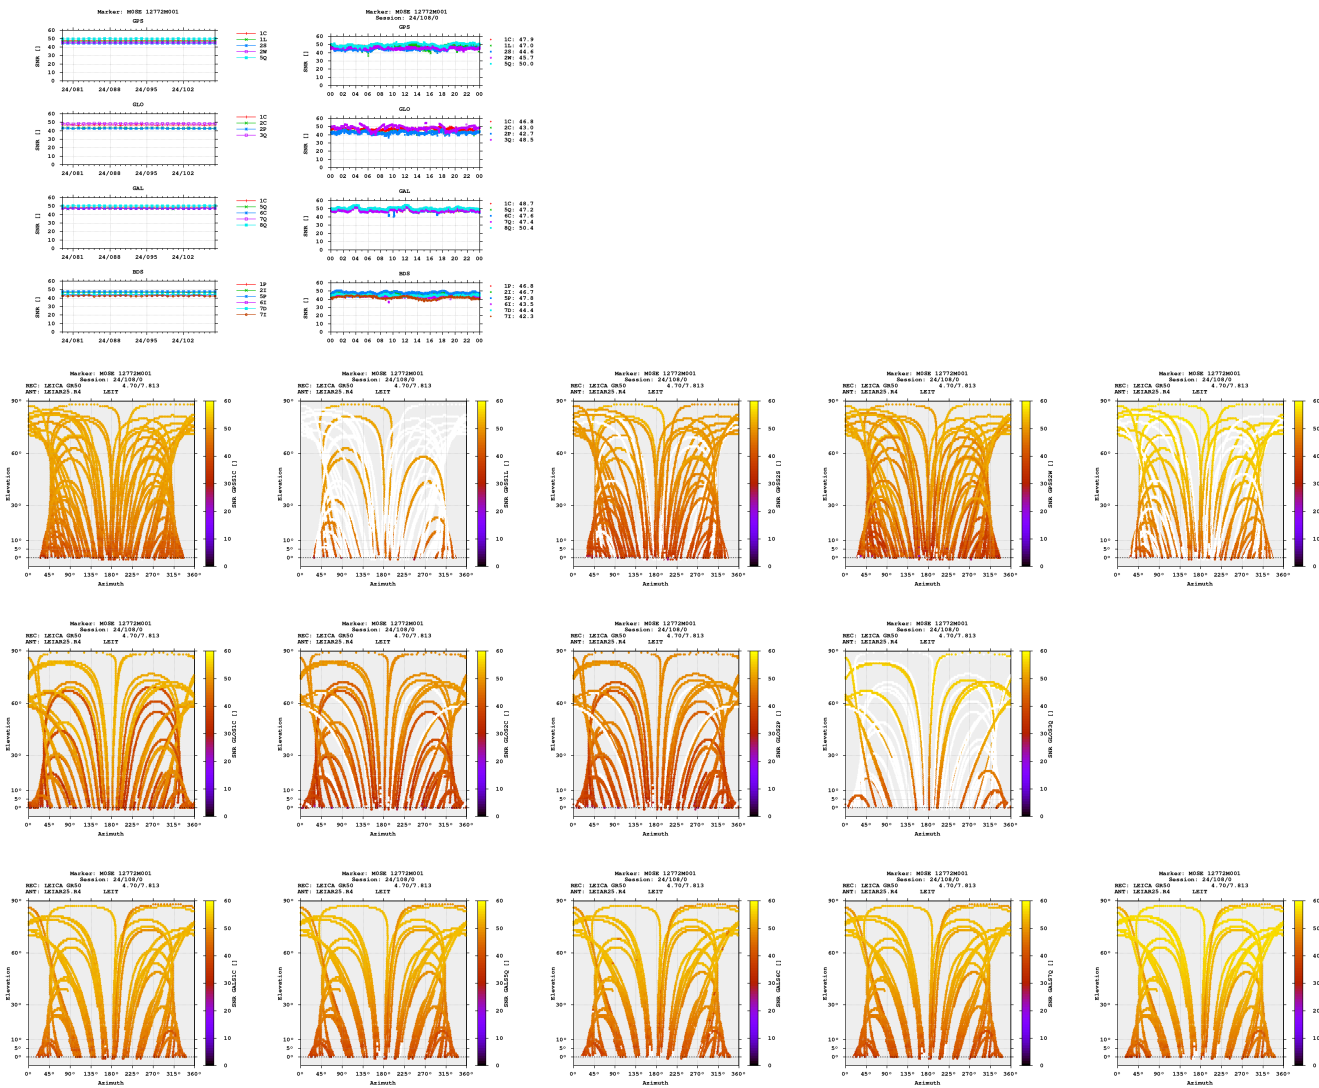


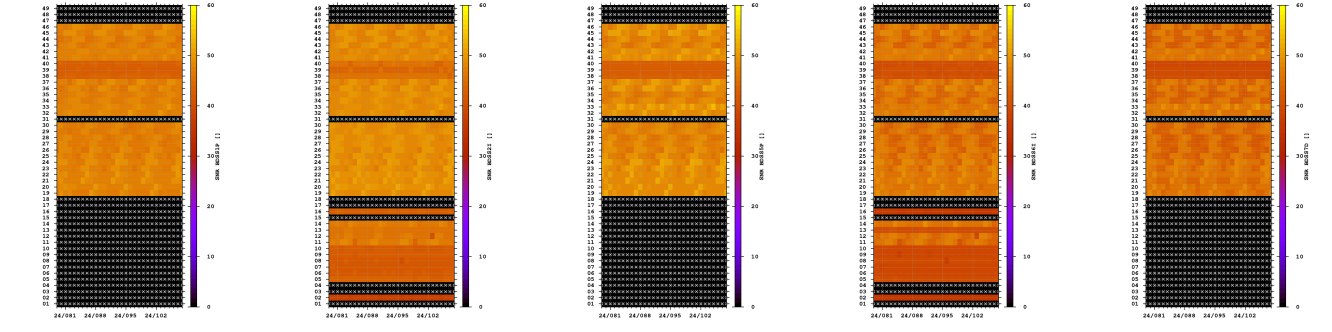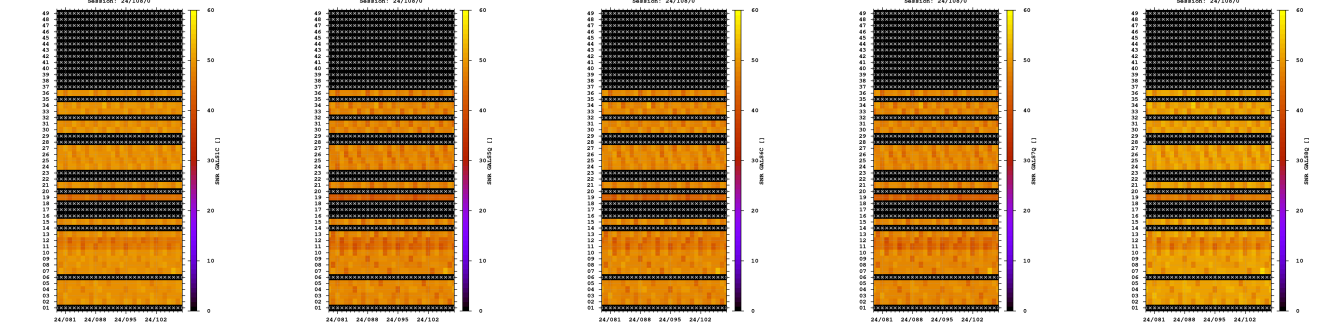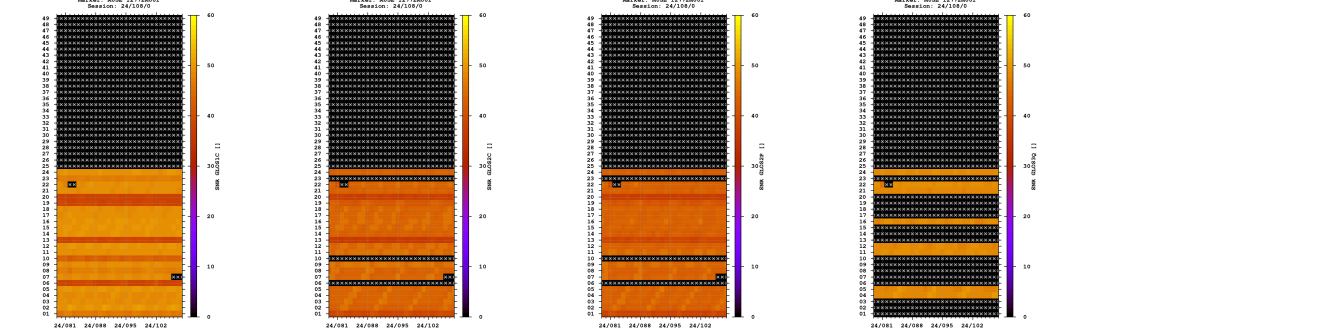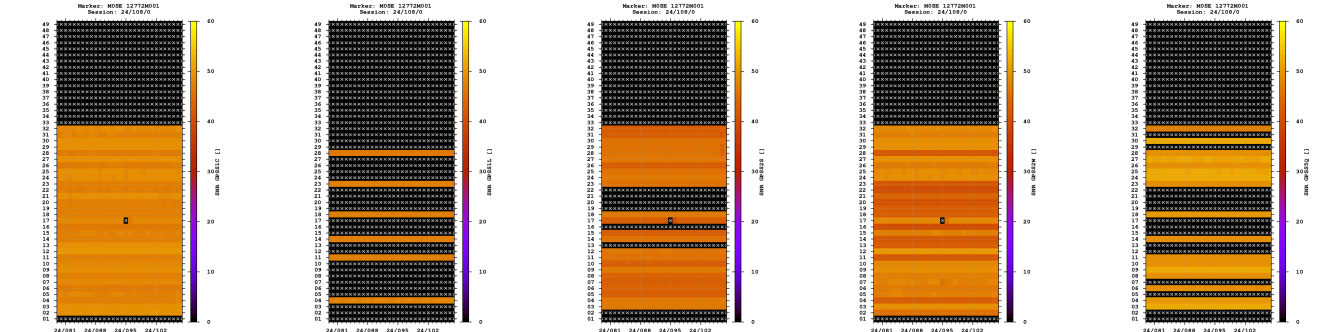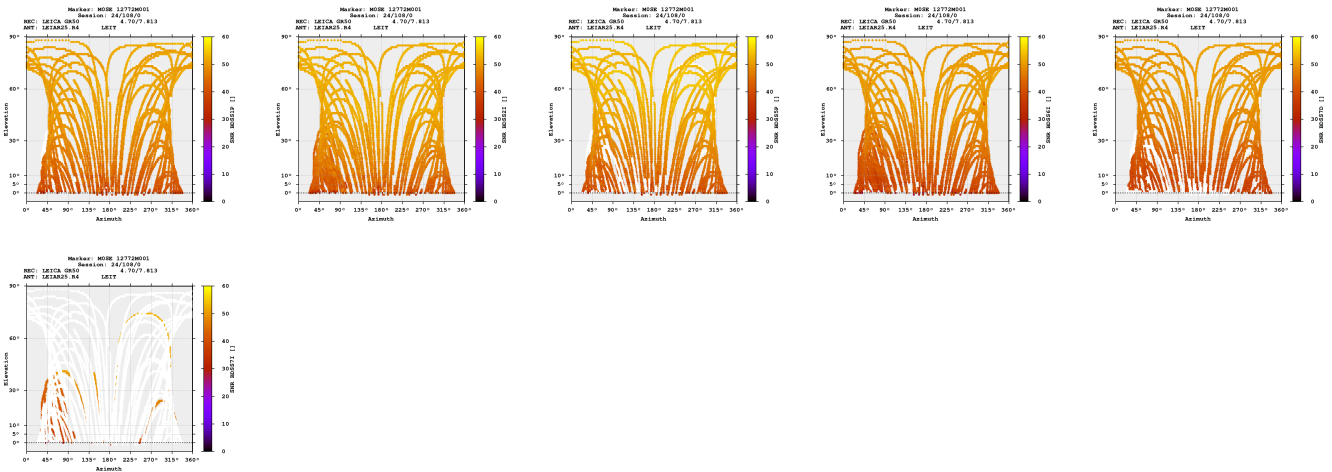



Estimates

2024-04-17 00:00:00	GPS	4642431.6760	1028629.6807	4236854.3971	41.893119008	12.493263477	120.1322
2024-04-17 00:00:00	GLO	4642433.1331	1028628.7829	4236854.7492	41.893113983	12.493249117	121.2818
2024-04-17 00:00:00	GAL	4642432.2865	1028629.8136	4236854.5246	41.893116107	12.493263449	120.6825
2024-04-17 00:00:00	BDS	4642447.9745	1028617.3045	4236851.1252	41.893017512	12.493075395	127.7999

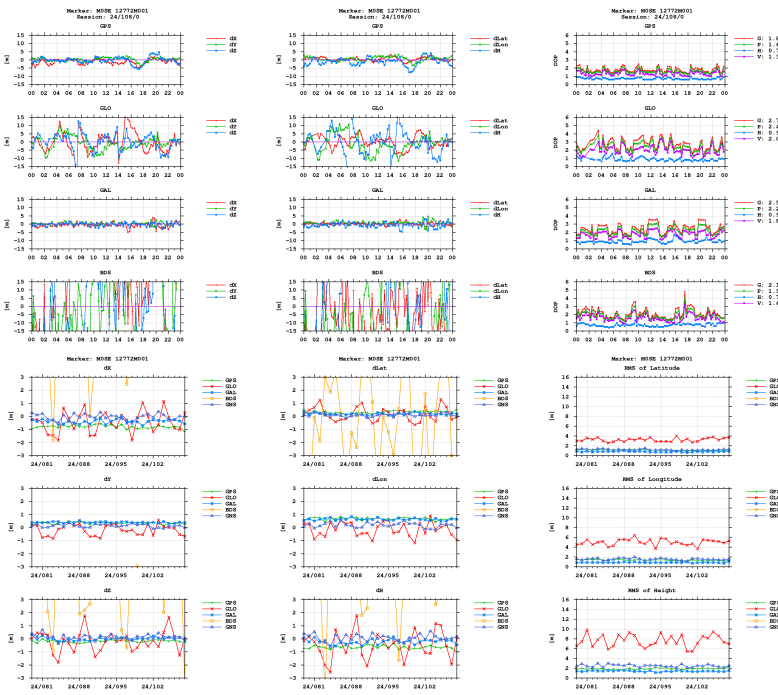

Equipment

2024-03-19 00:00:00 LEICA GR50 4.70/7.813 1830126 LEICA GR50

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)