


GNSS observation file monitoring for MLVL


Last RINEX file: MLVL1090.24D.Z
 RINEX version: 3.04
 Marker: MLVL 10092M001
 Receiver: 2090132 LEICA GR50 4.51
 Antenna: 5411118464 TRM57971.00 NONE

Epochs

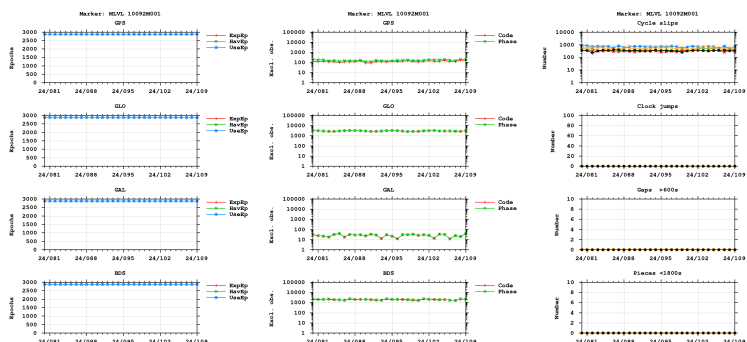



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

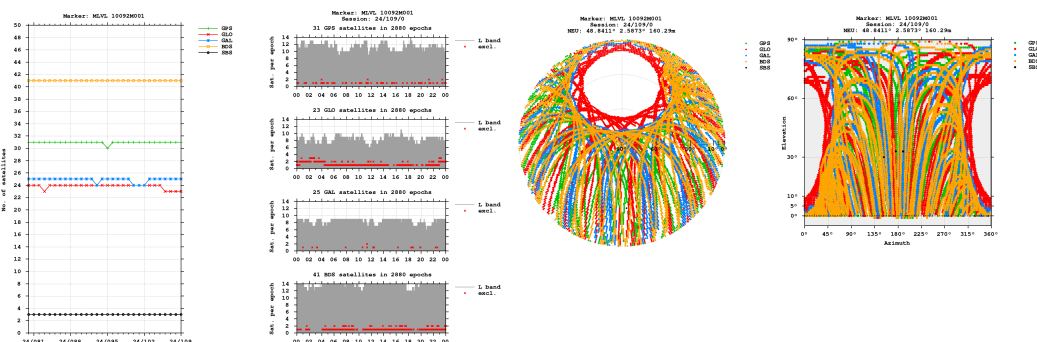


Bands

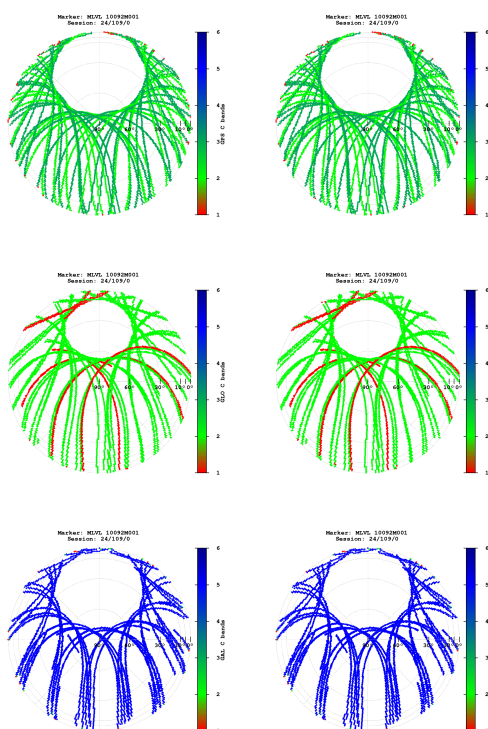


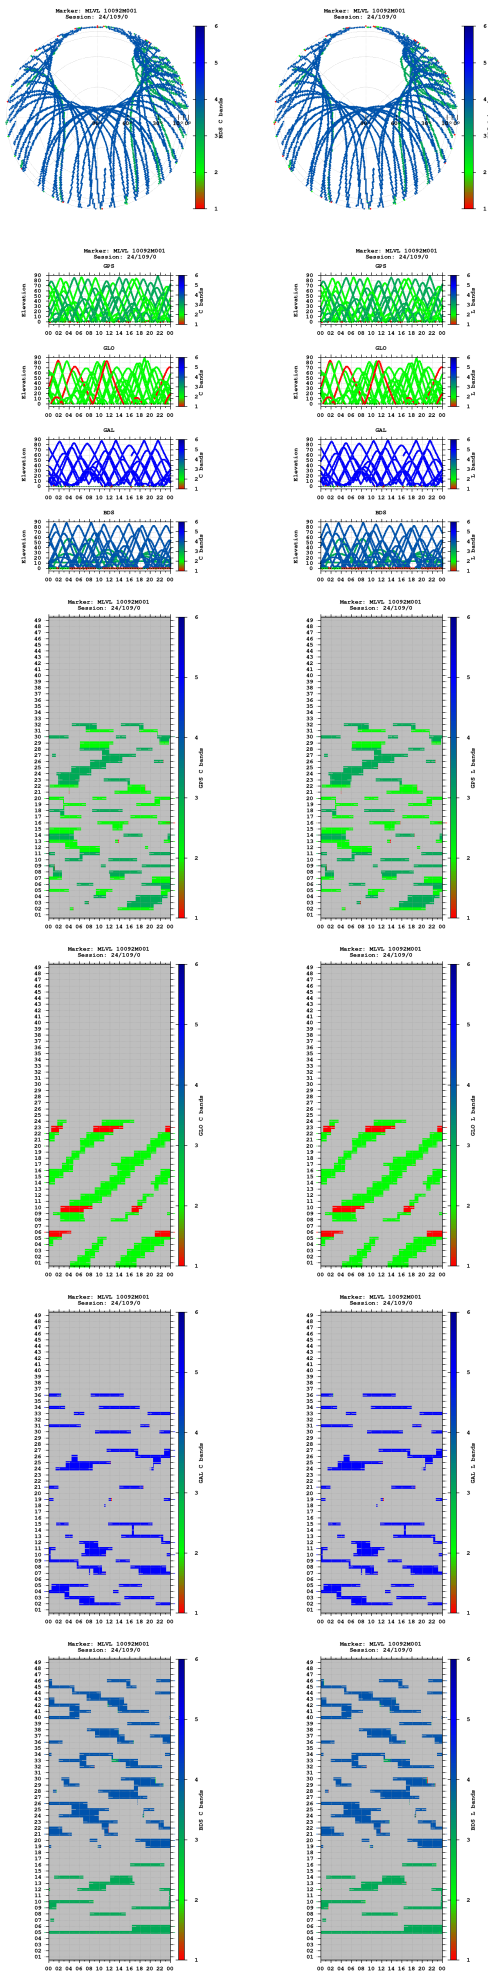


Observations

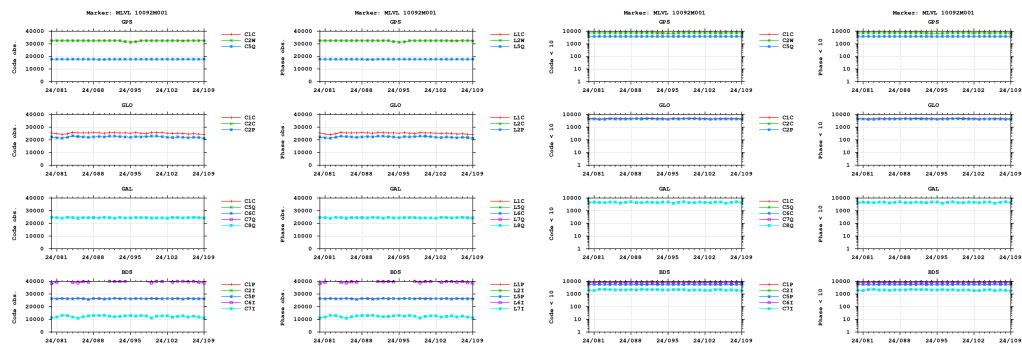



Cycle slips

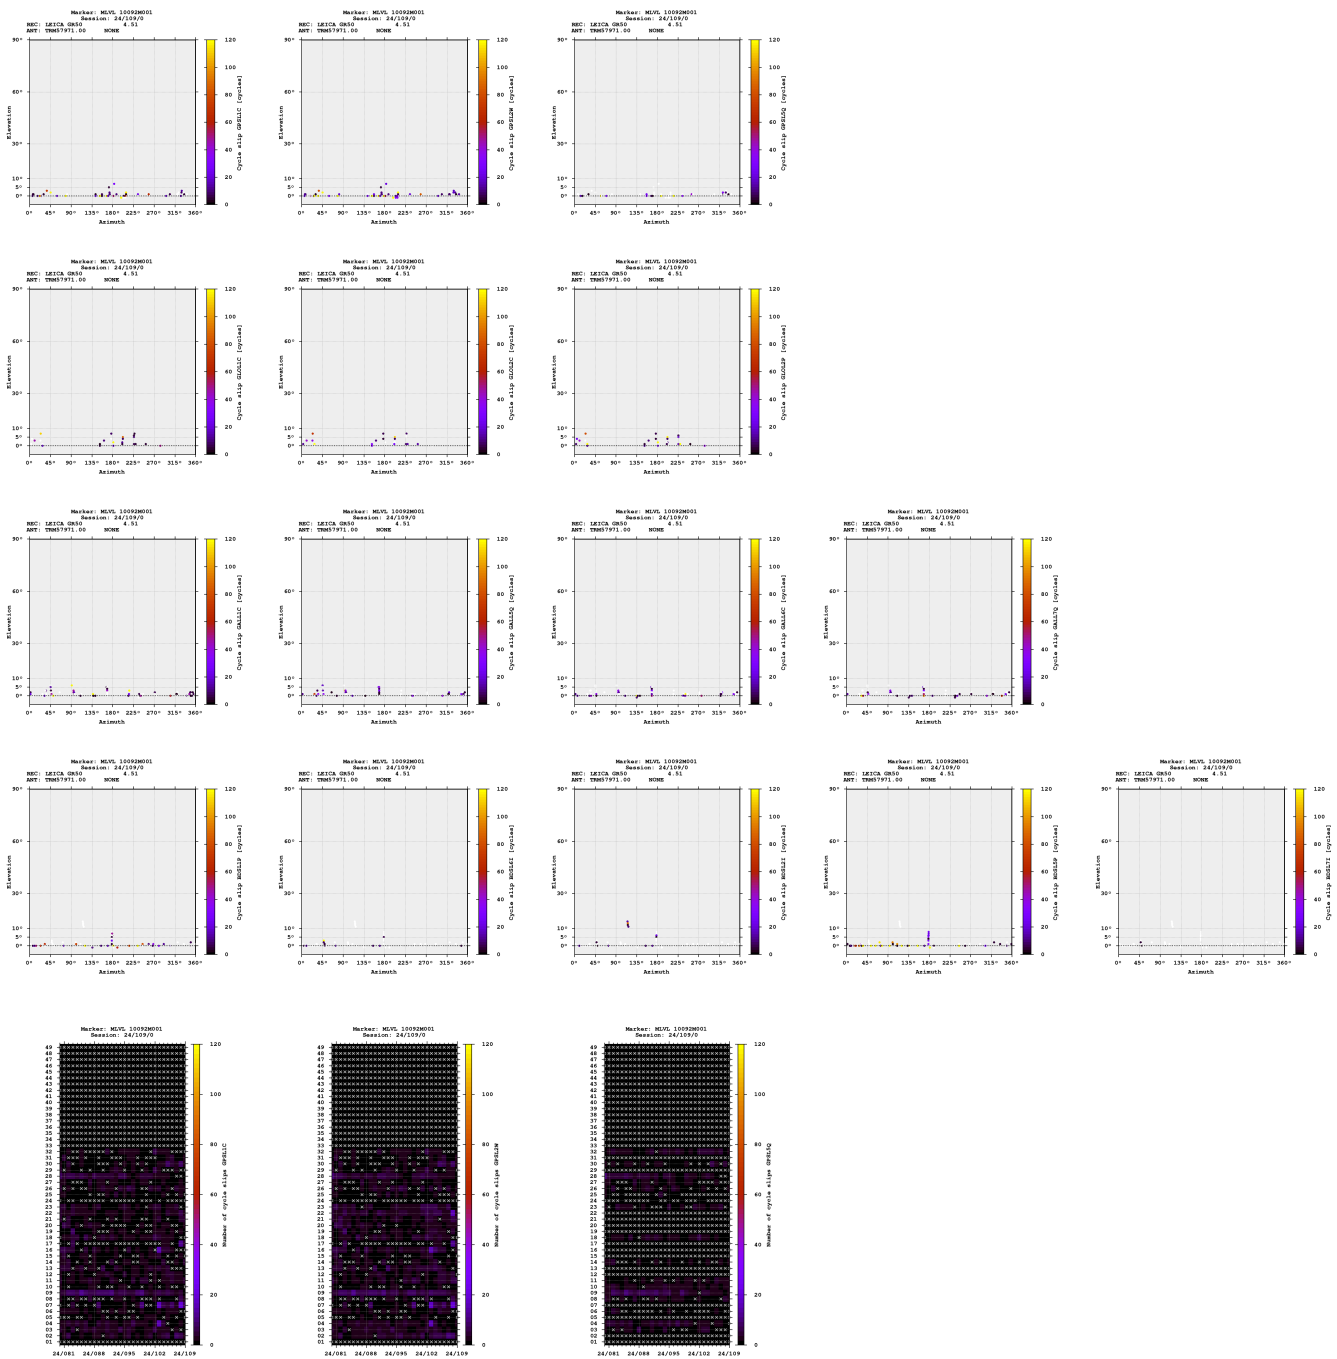

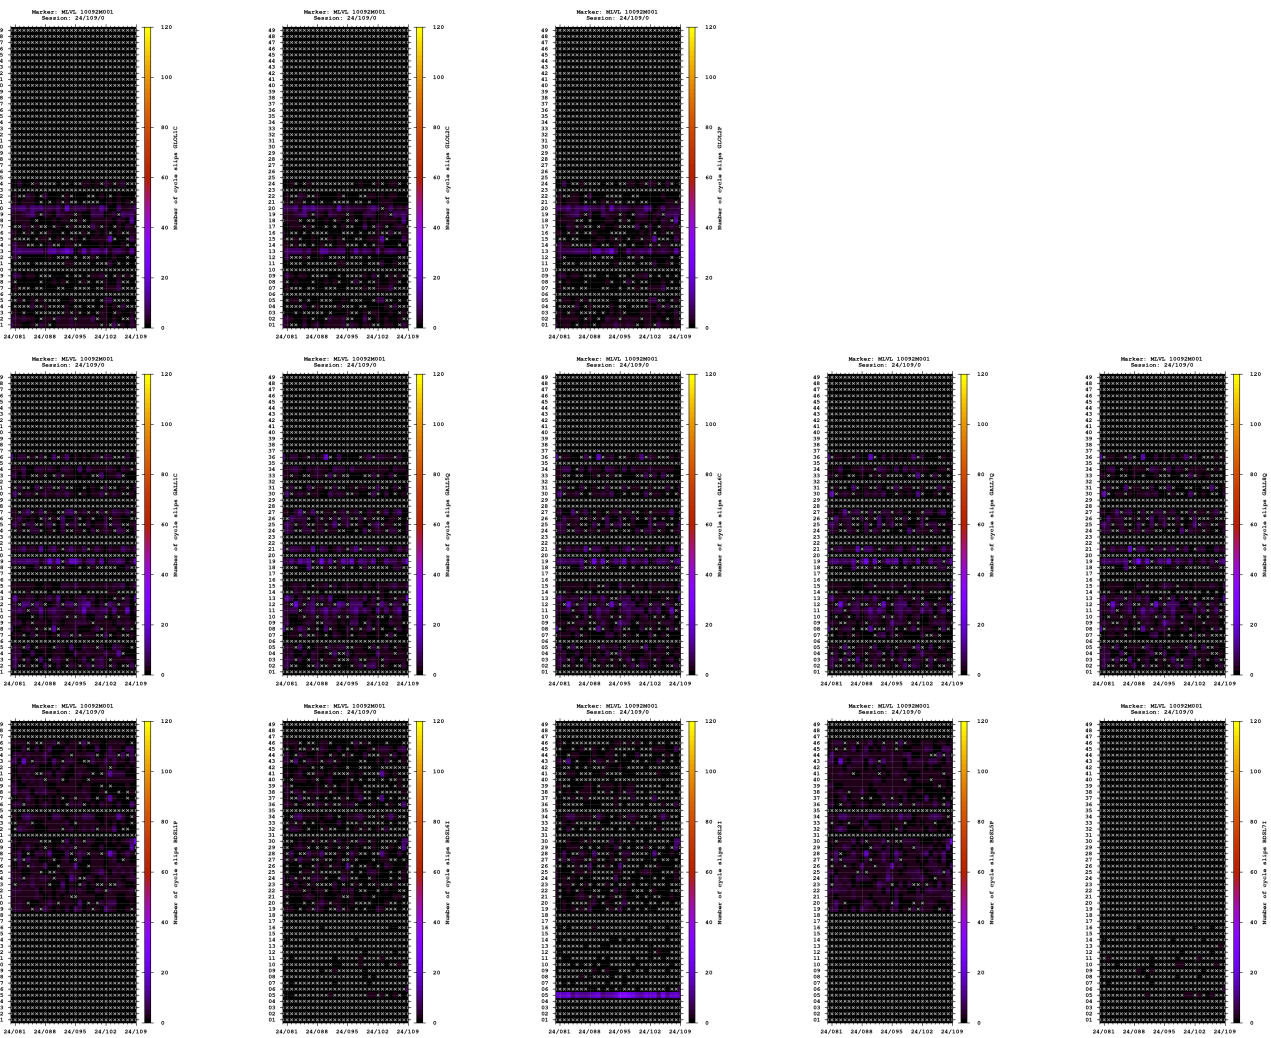


Multipath

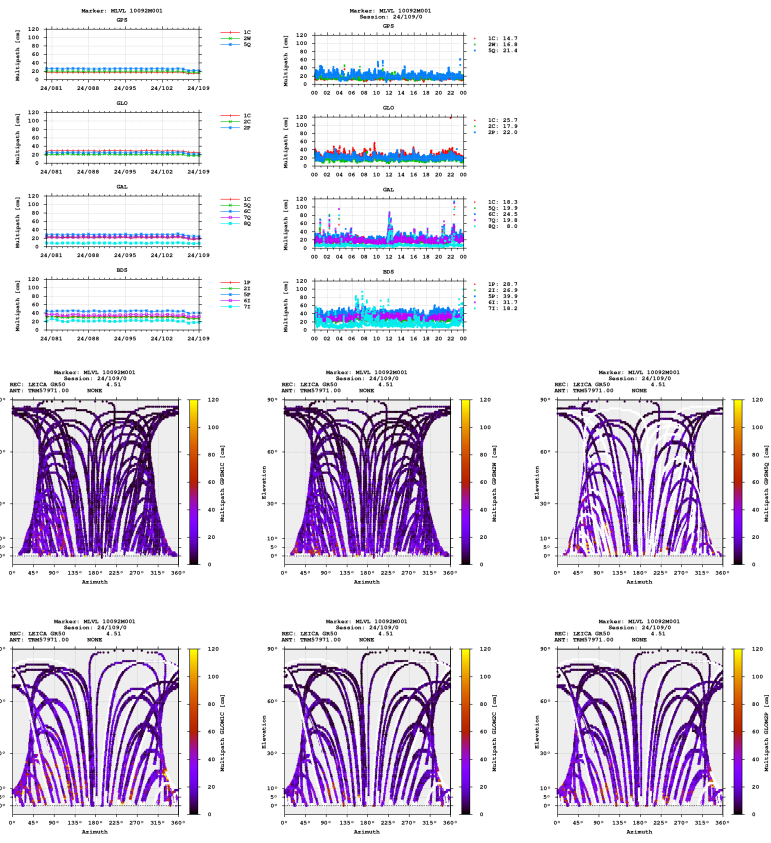


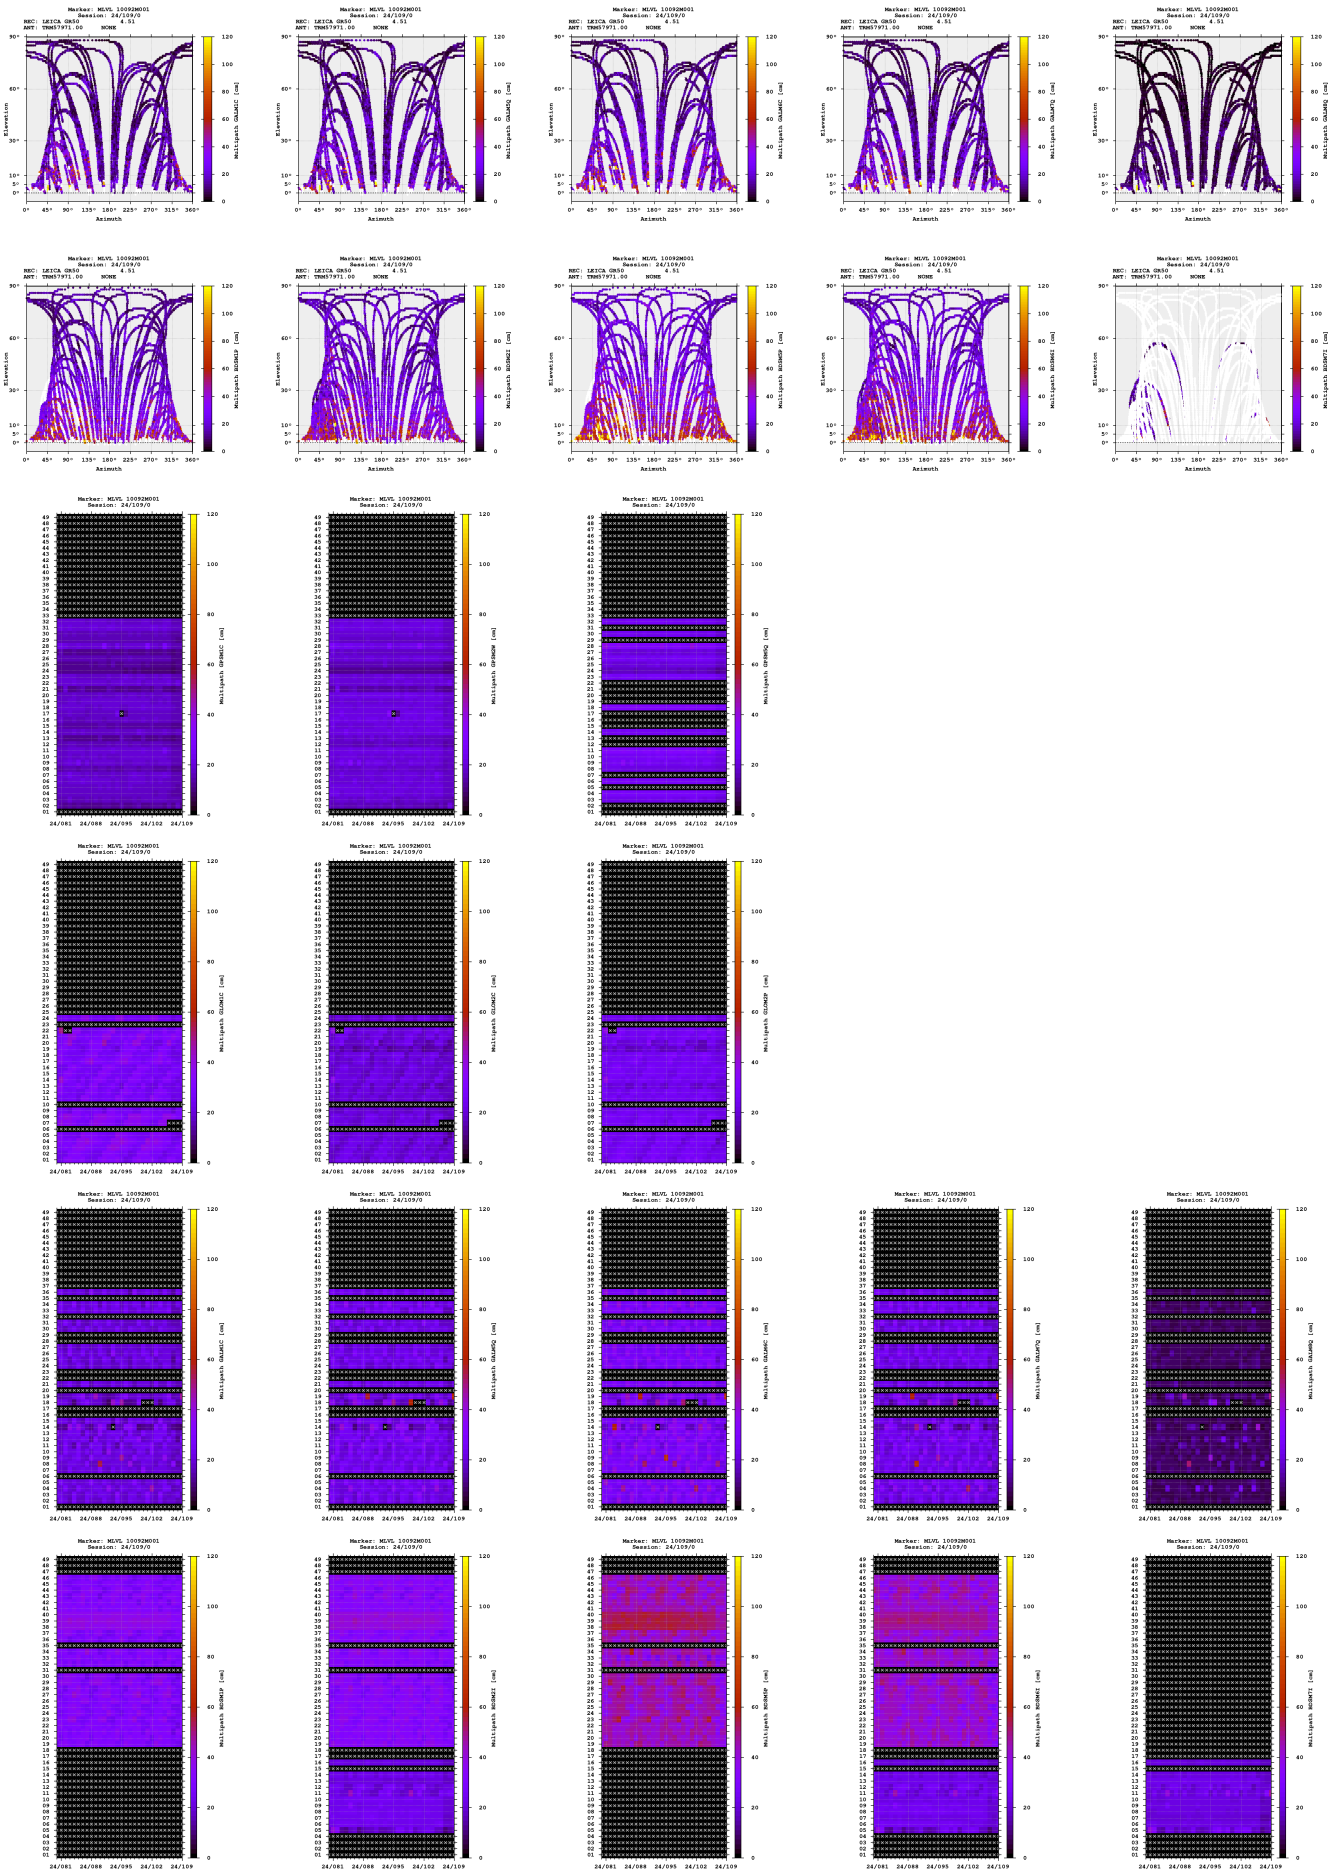

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

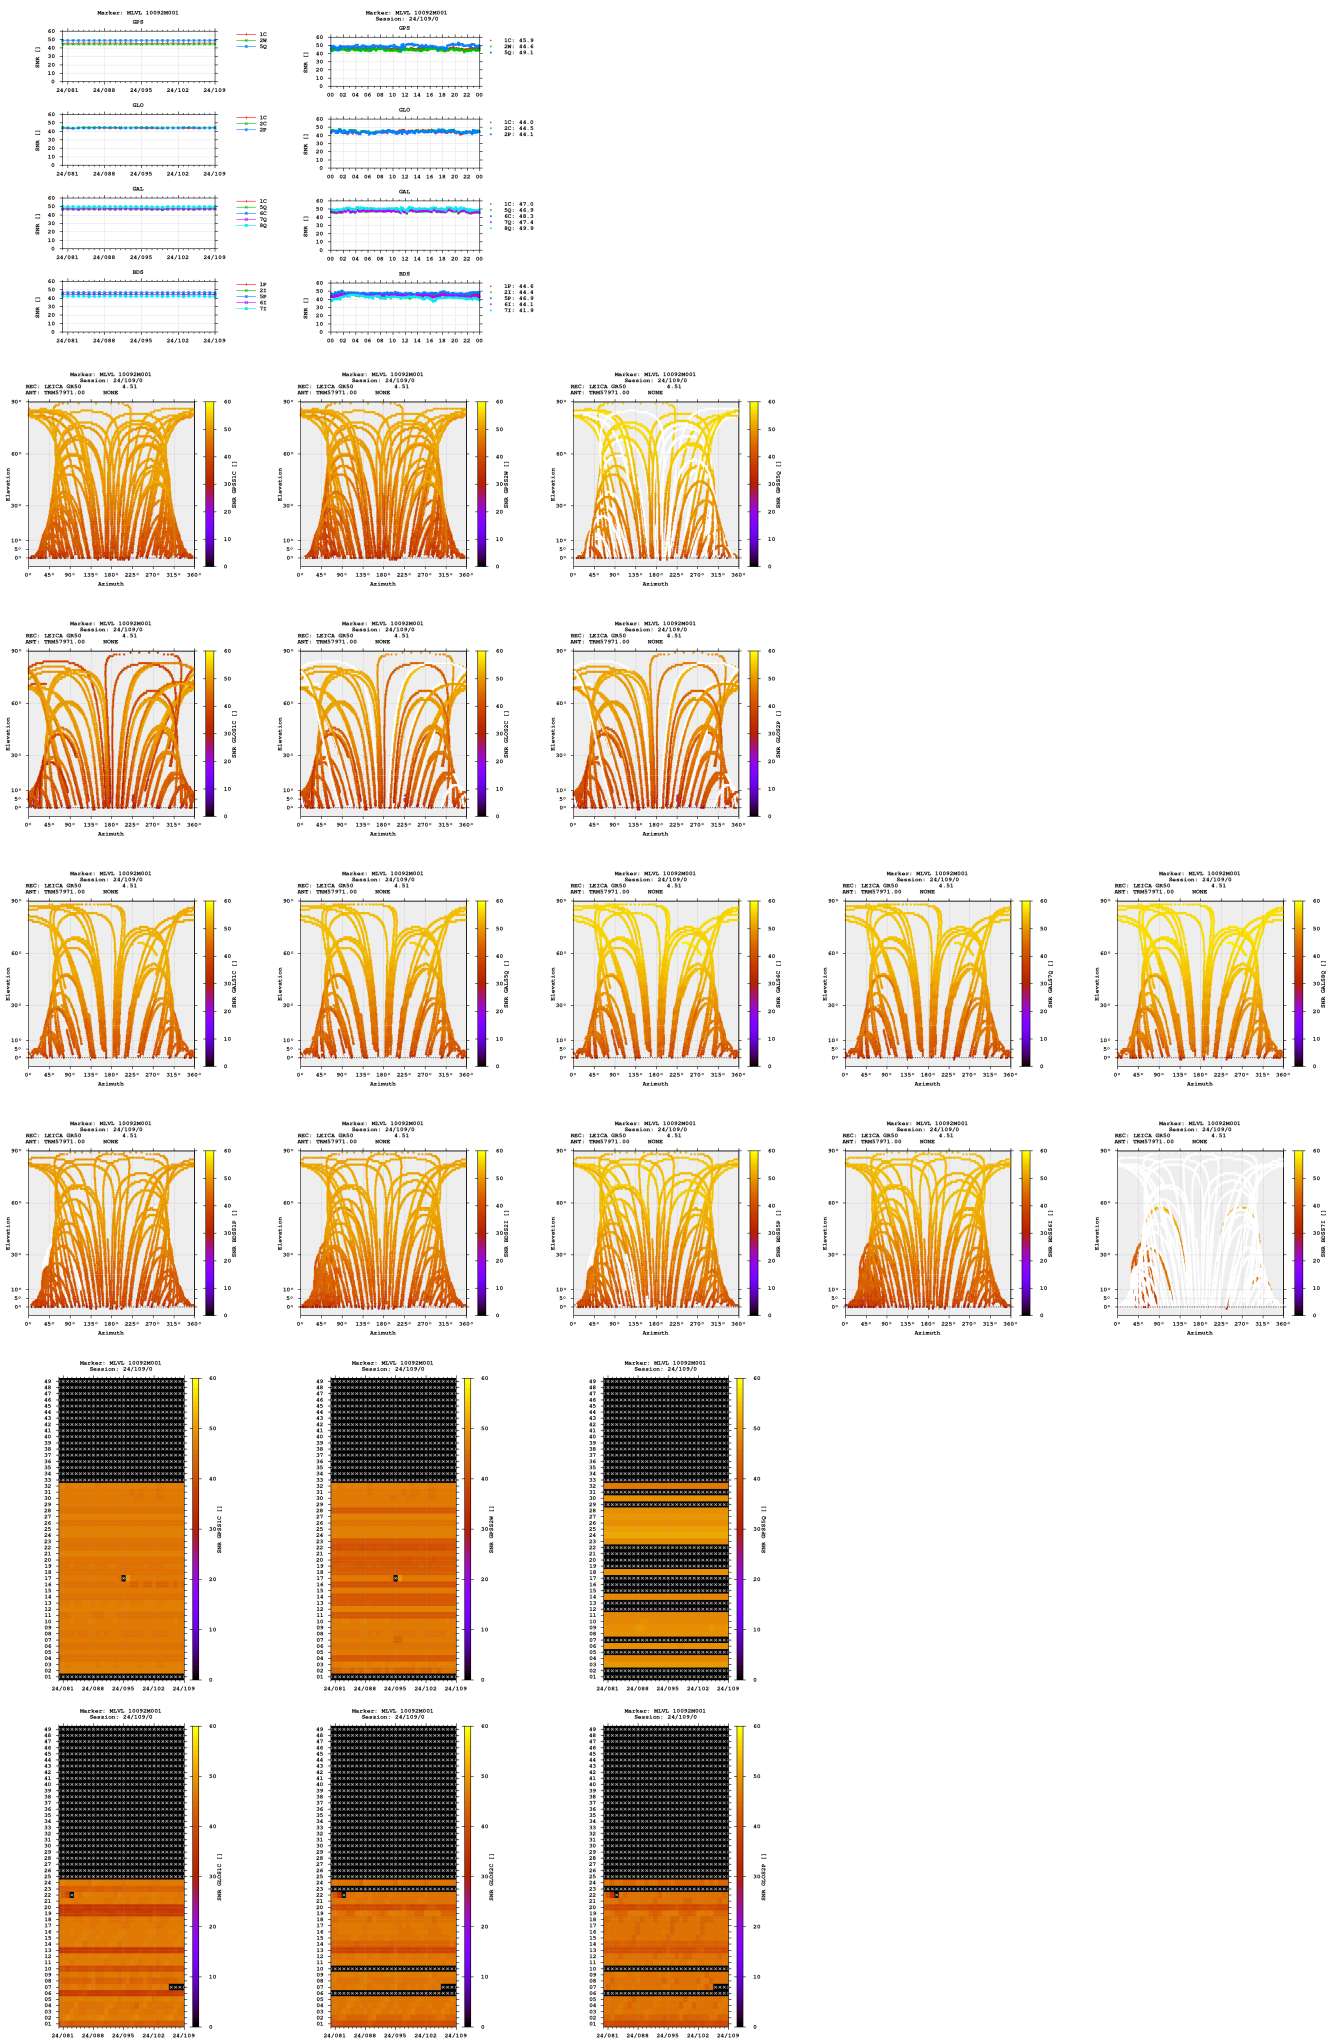

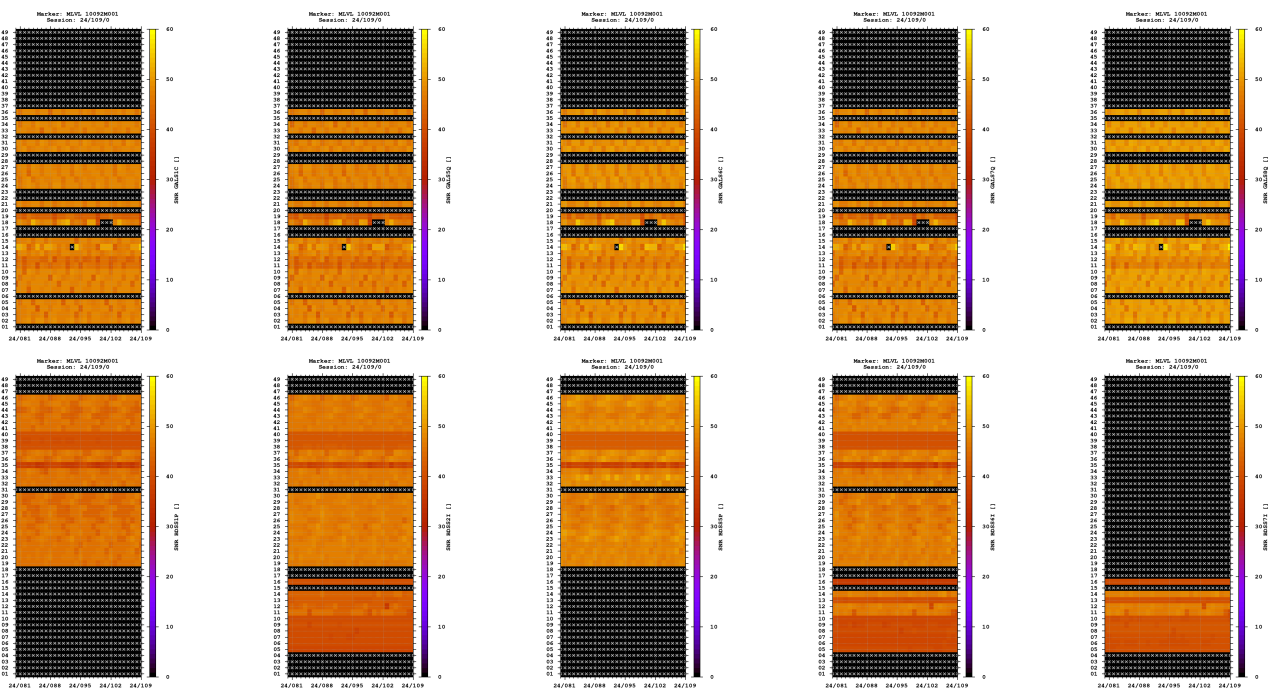

Estimates

2024-04-18 00:00:00	GPS	4201576.1281	189860.4514	4779064.4826	48.841061493	2.587316534	159.7046
2024-04-18 00:00:00	GLO	4201576.9826	189860.0388	4779064.7787	48.841057593	2.587310393	160.4771
2024-04-18 00:00:00	GAL	4201576.7672	189860.3486	4779064.8771	48.841059537	2.587314741	160.4187
2024-04-18 00:00:00	BDS	4201628.0427	189825.9538	4779097.7310	48.840917699	2.586815136	217.8451

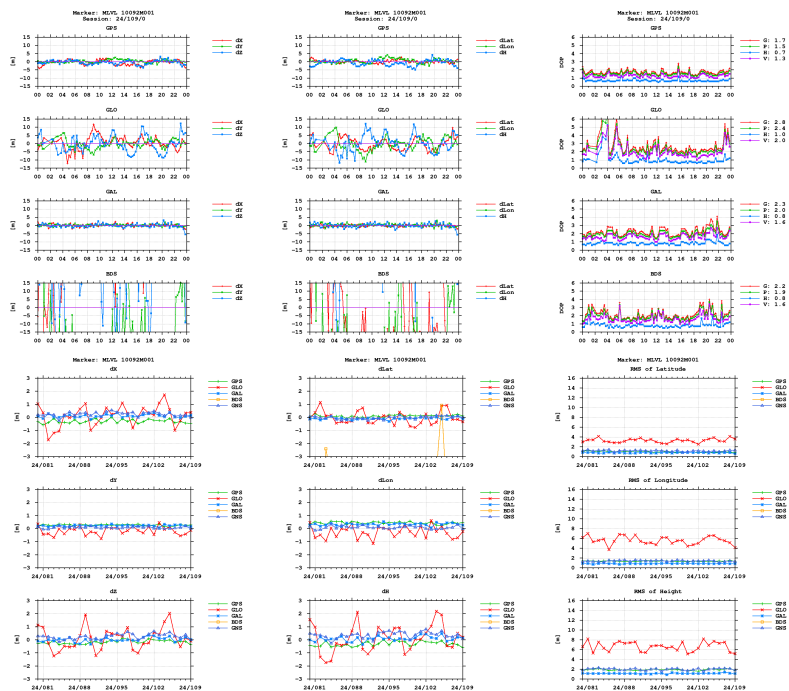

Equipment

2024-03-20 00:00:00 LEICA GR50 4.51 2090132 LEICA GR50

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)