


GNSS observation file monitoring for PAYE


Last RINEX file: PAYE1100.24D.Z
 RINEX version: 3.04
 Marker: PAYE
 Receiver: 5428R490 TRIMBLE NETR9 5.56
 Antenna: 5406354938 TRM59800.00 NONE

Epochs

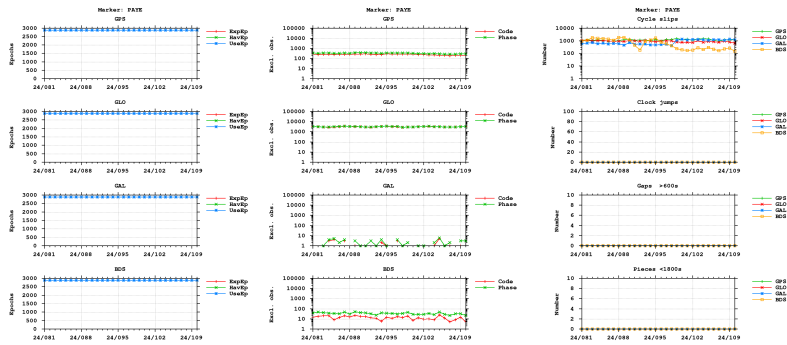








- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

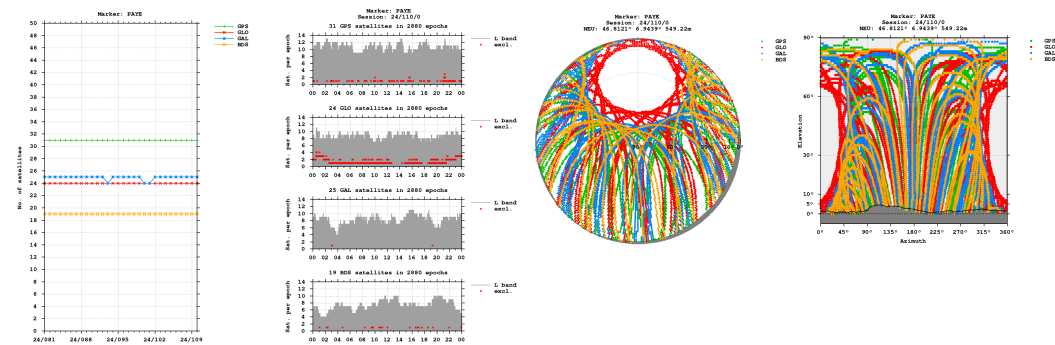


Bands

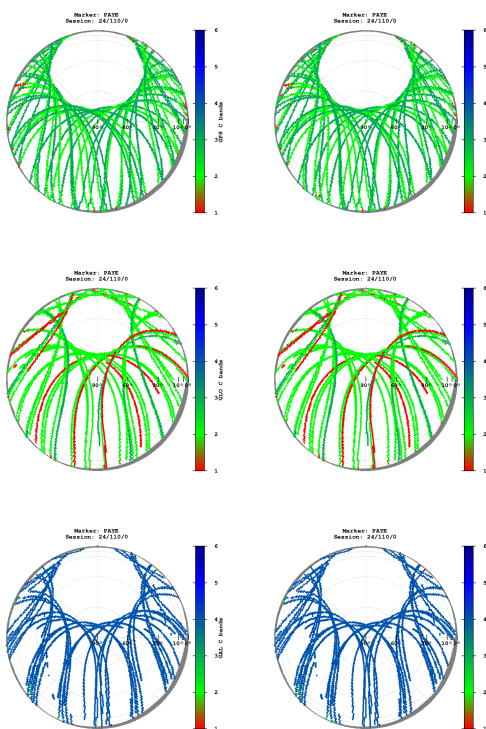


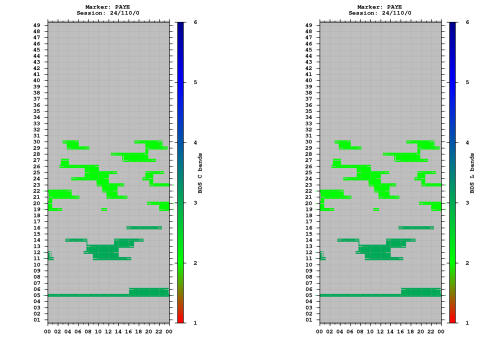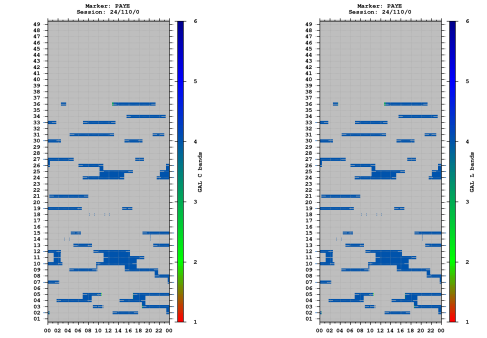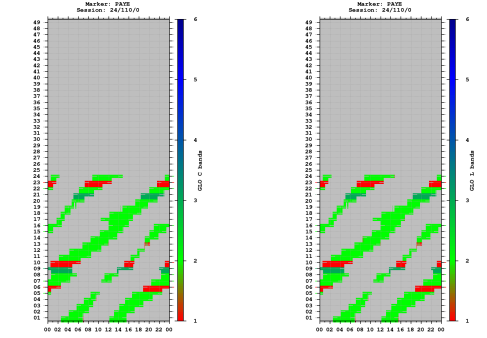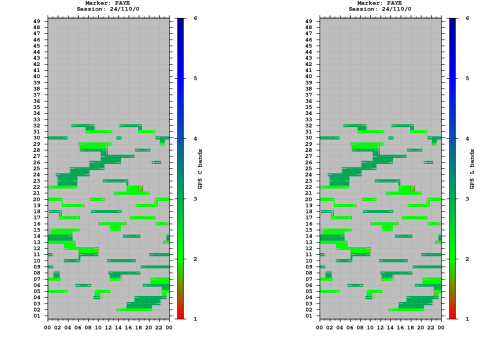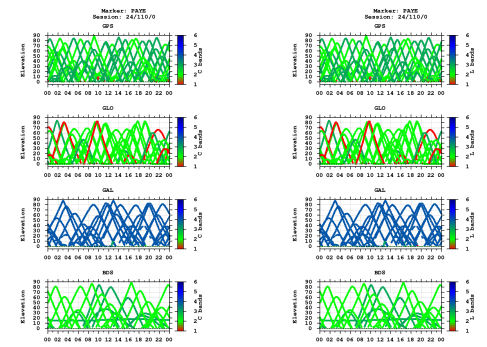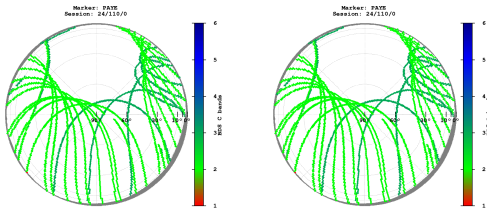


Observations

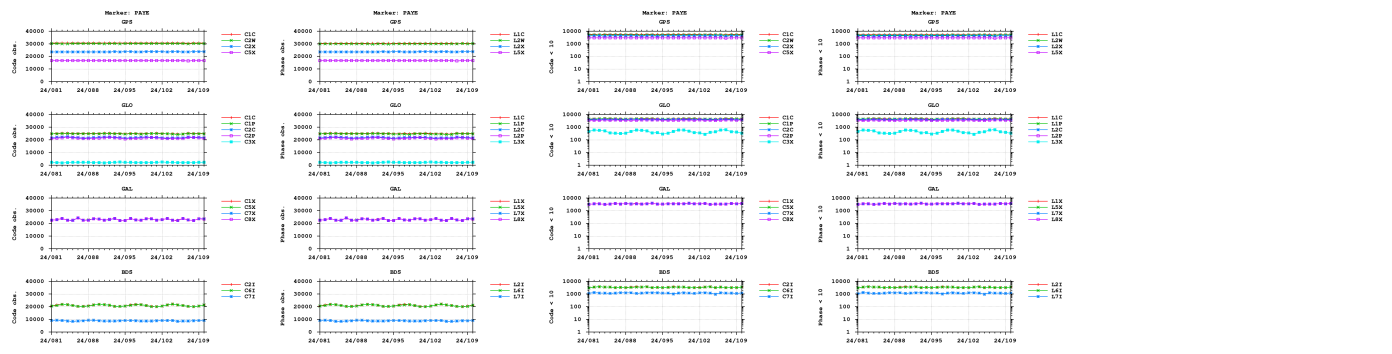



Cycle slips

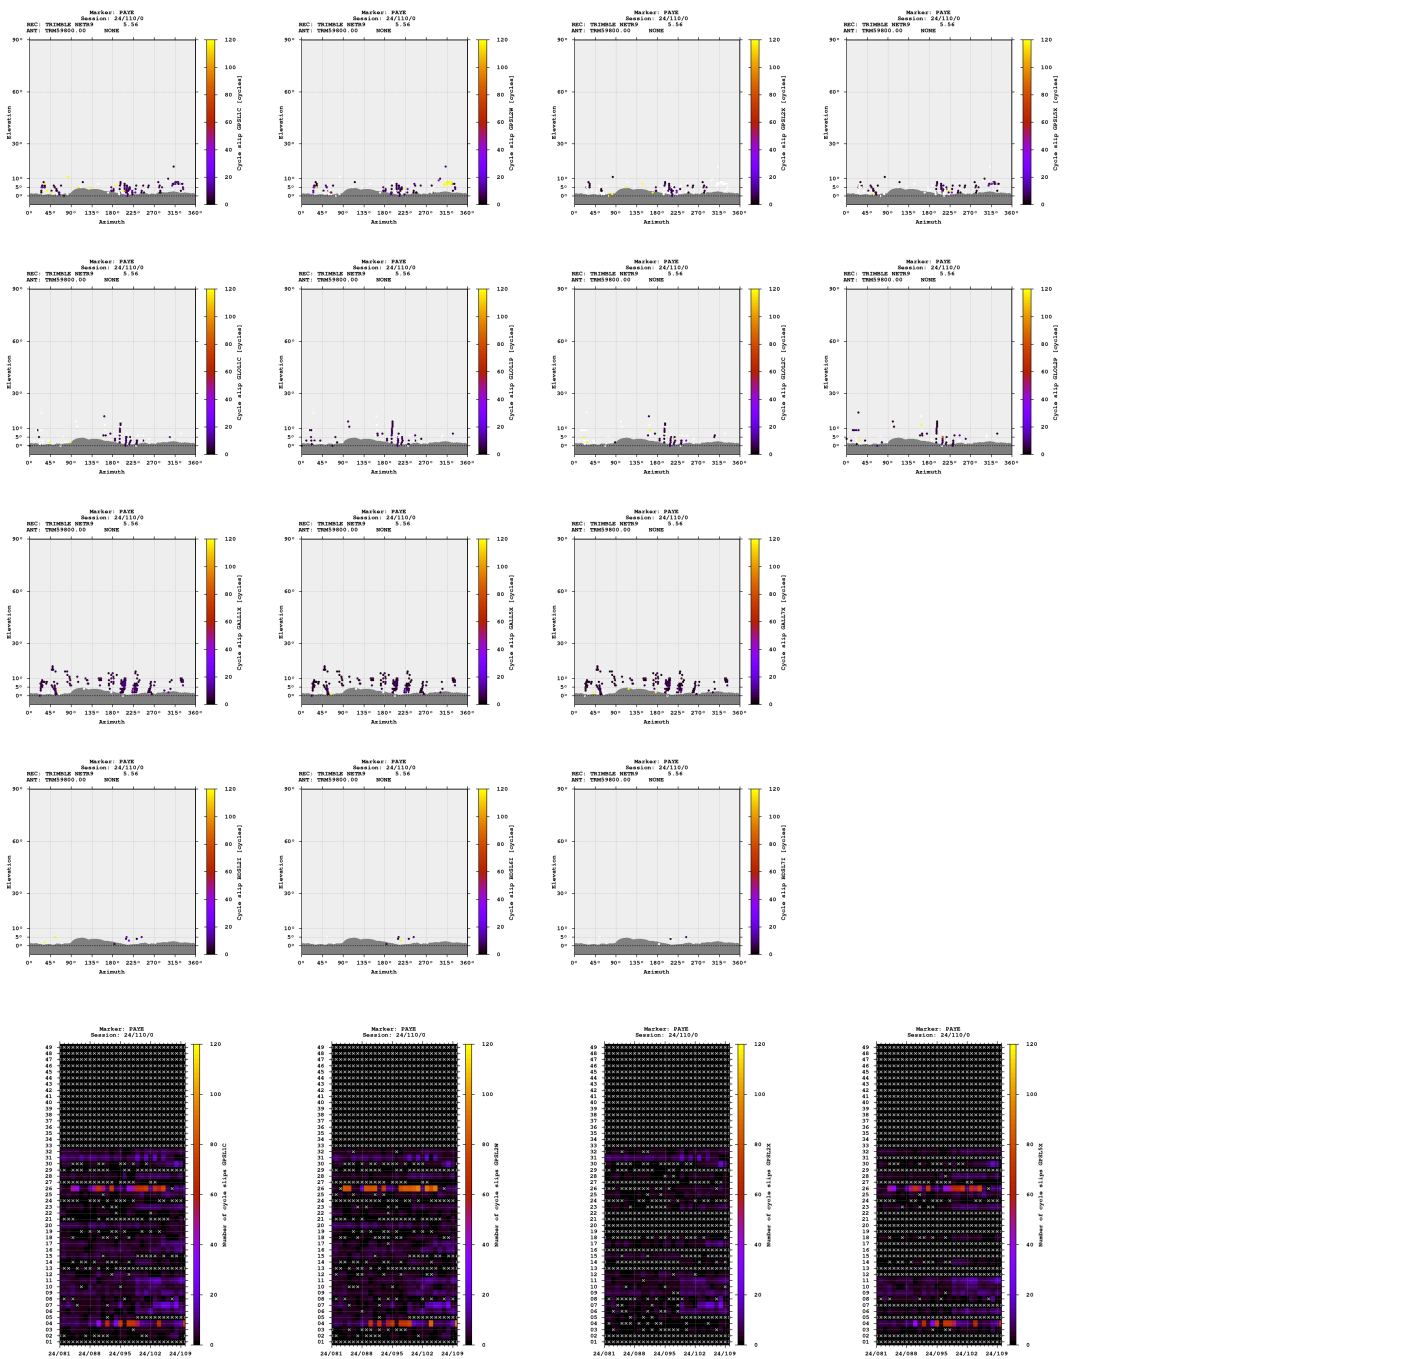

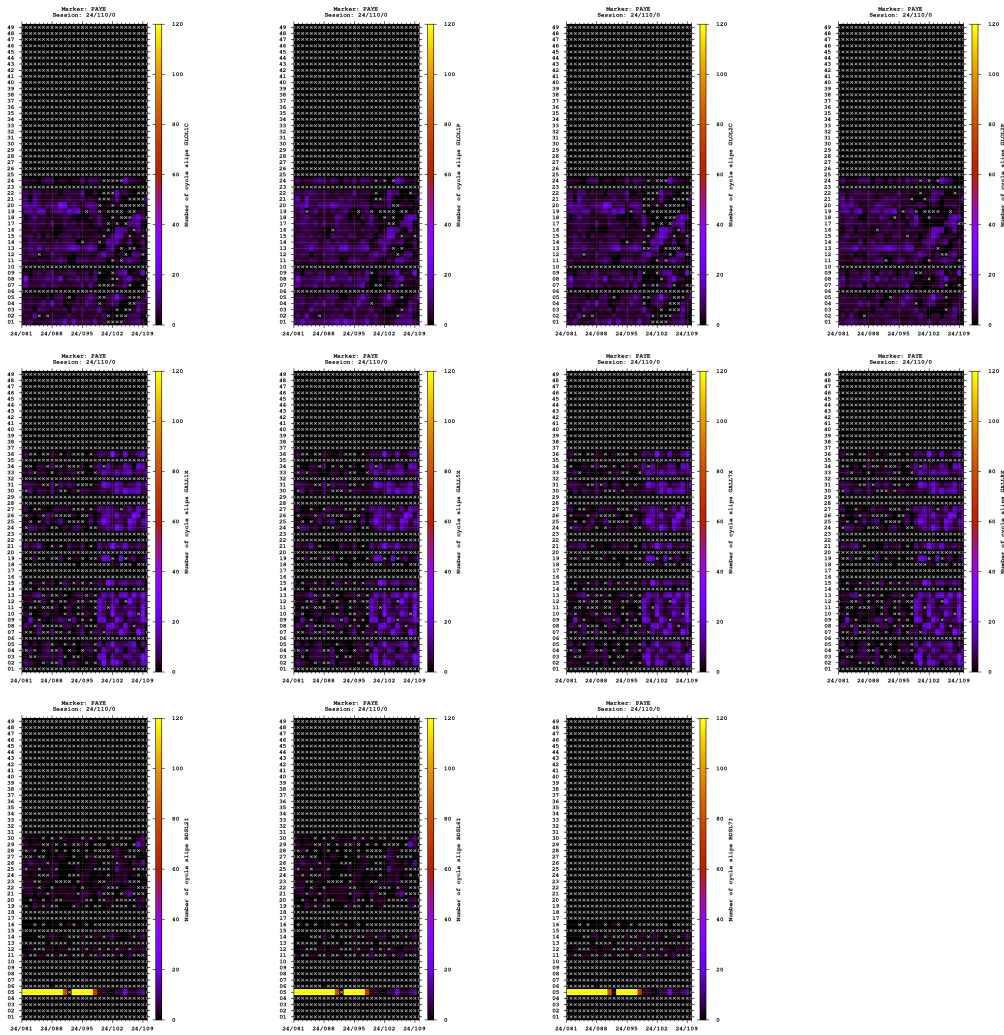


Multipath

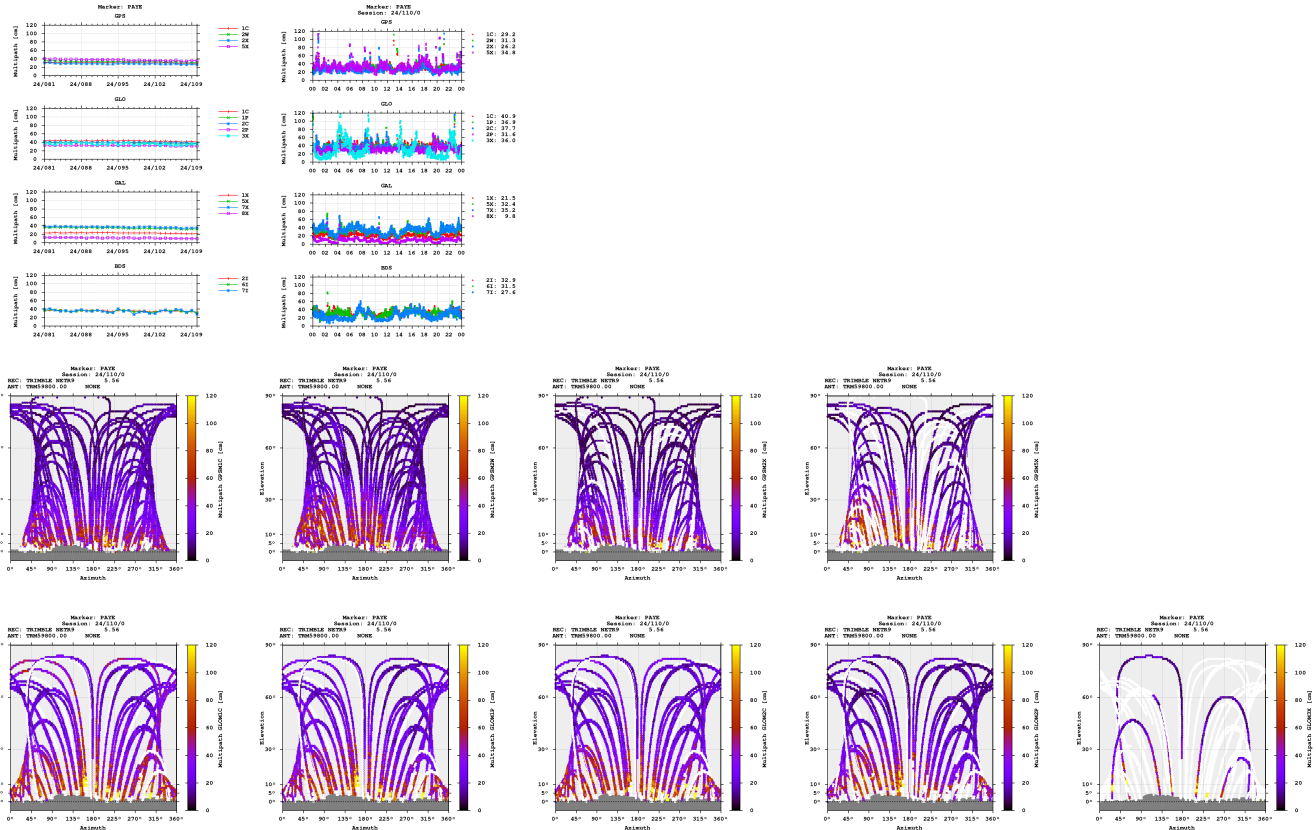


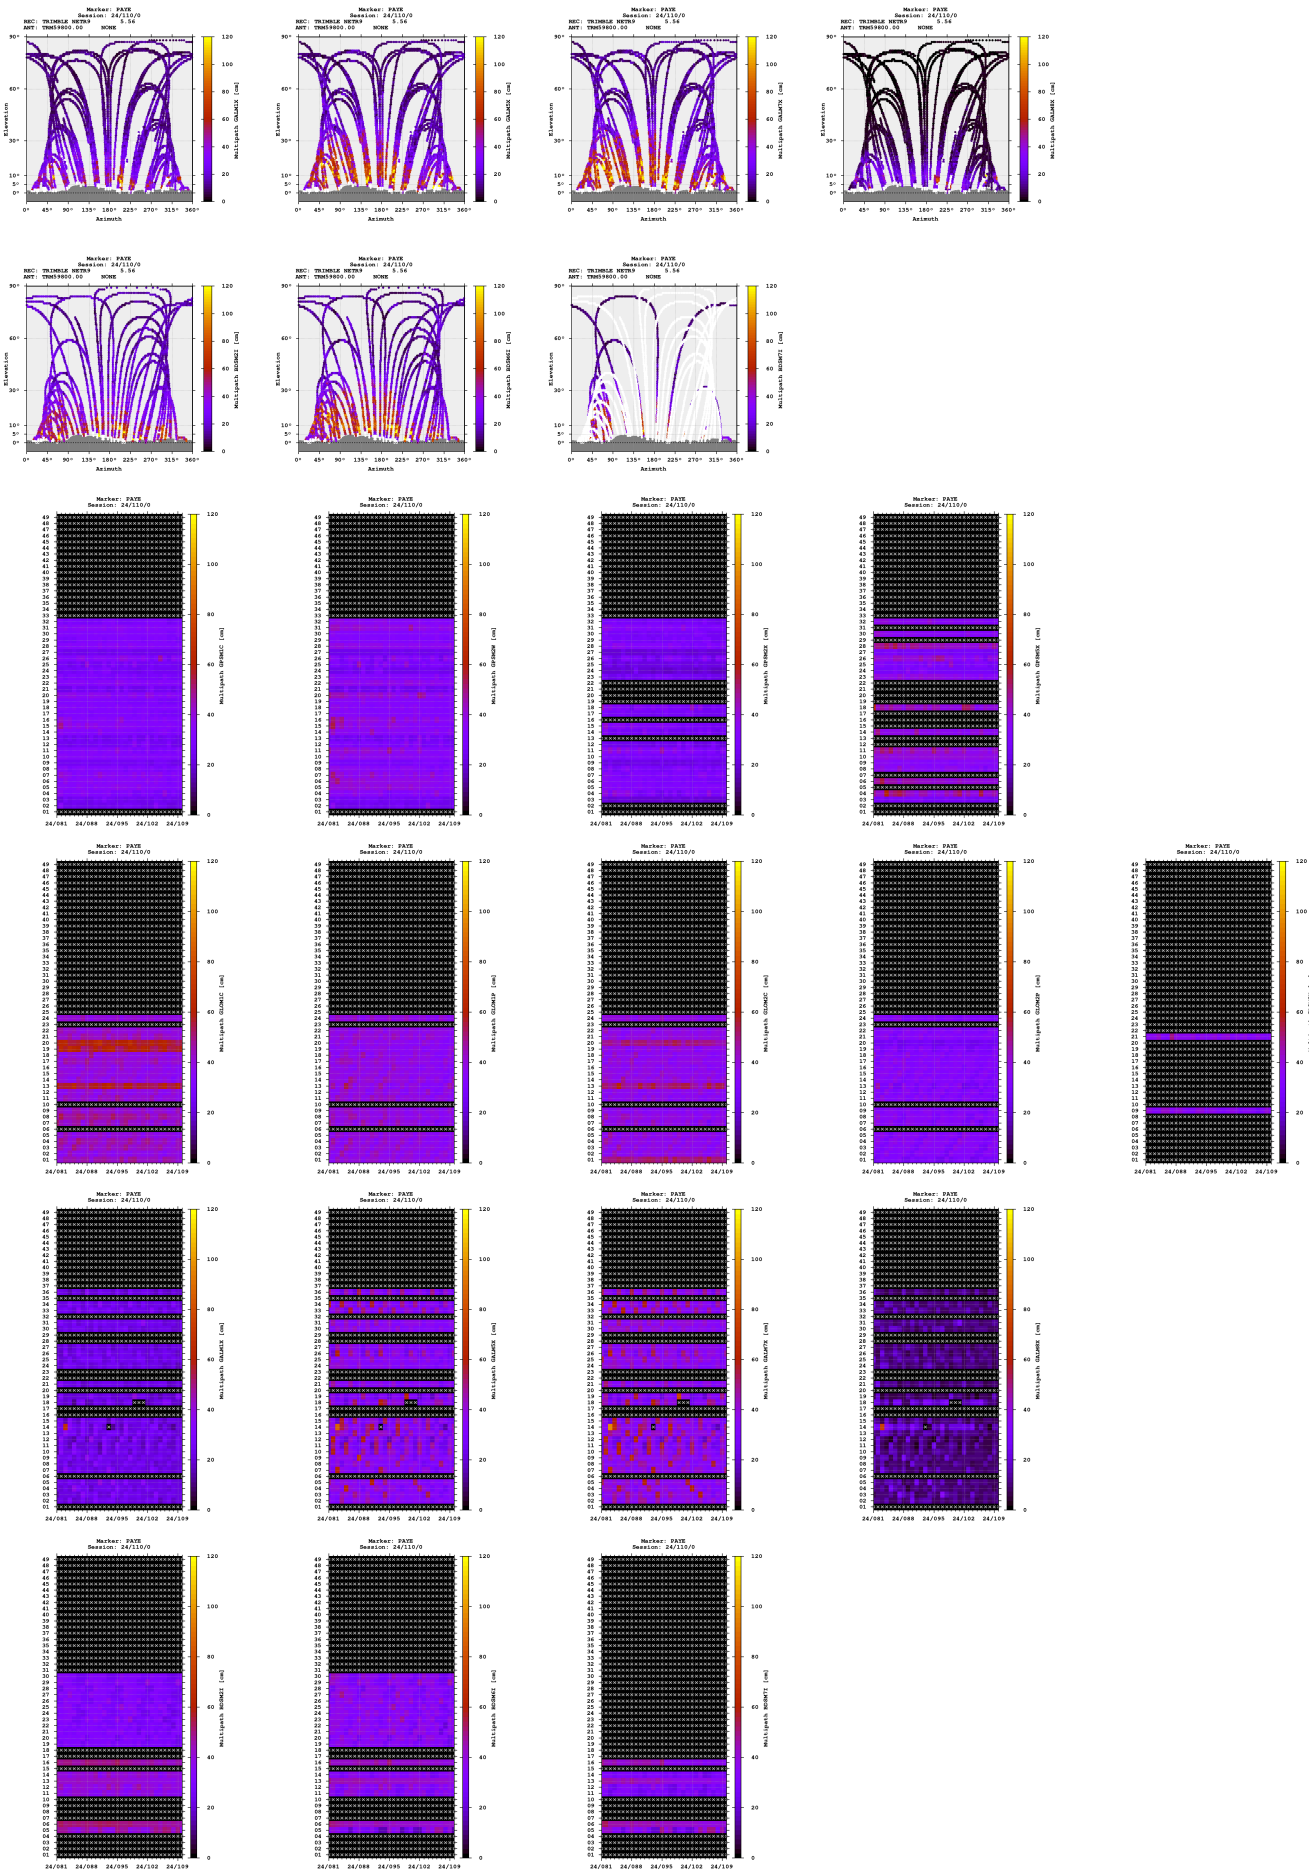

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

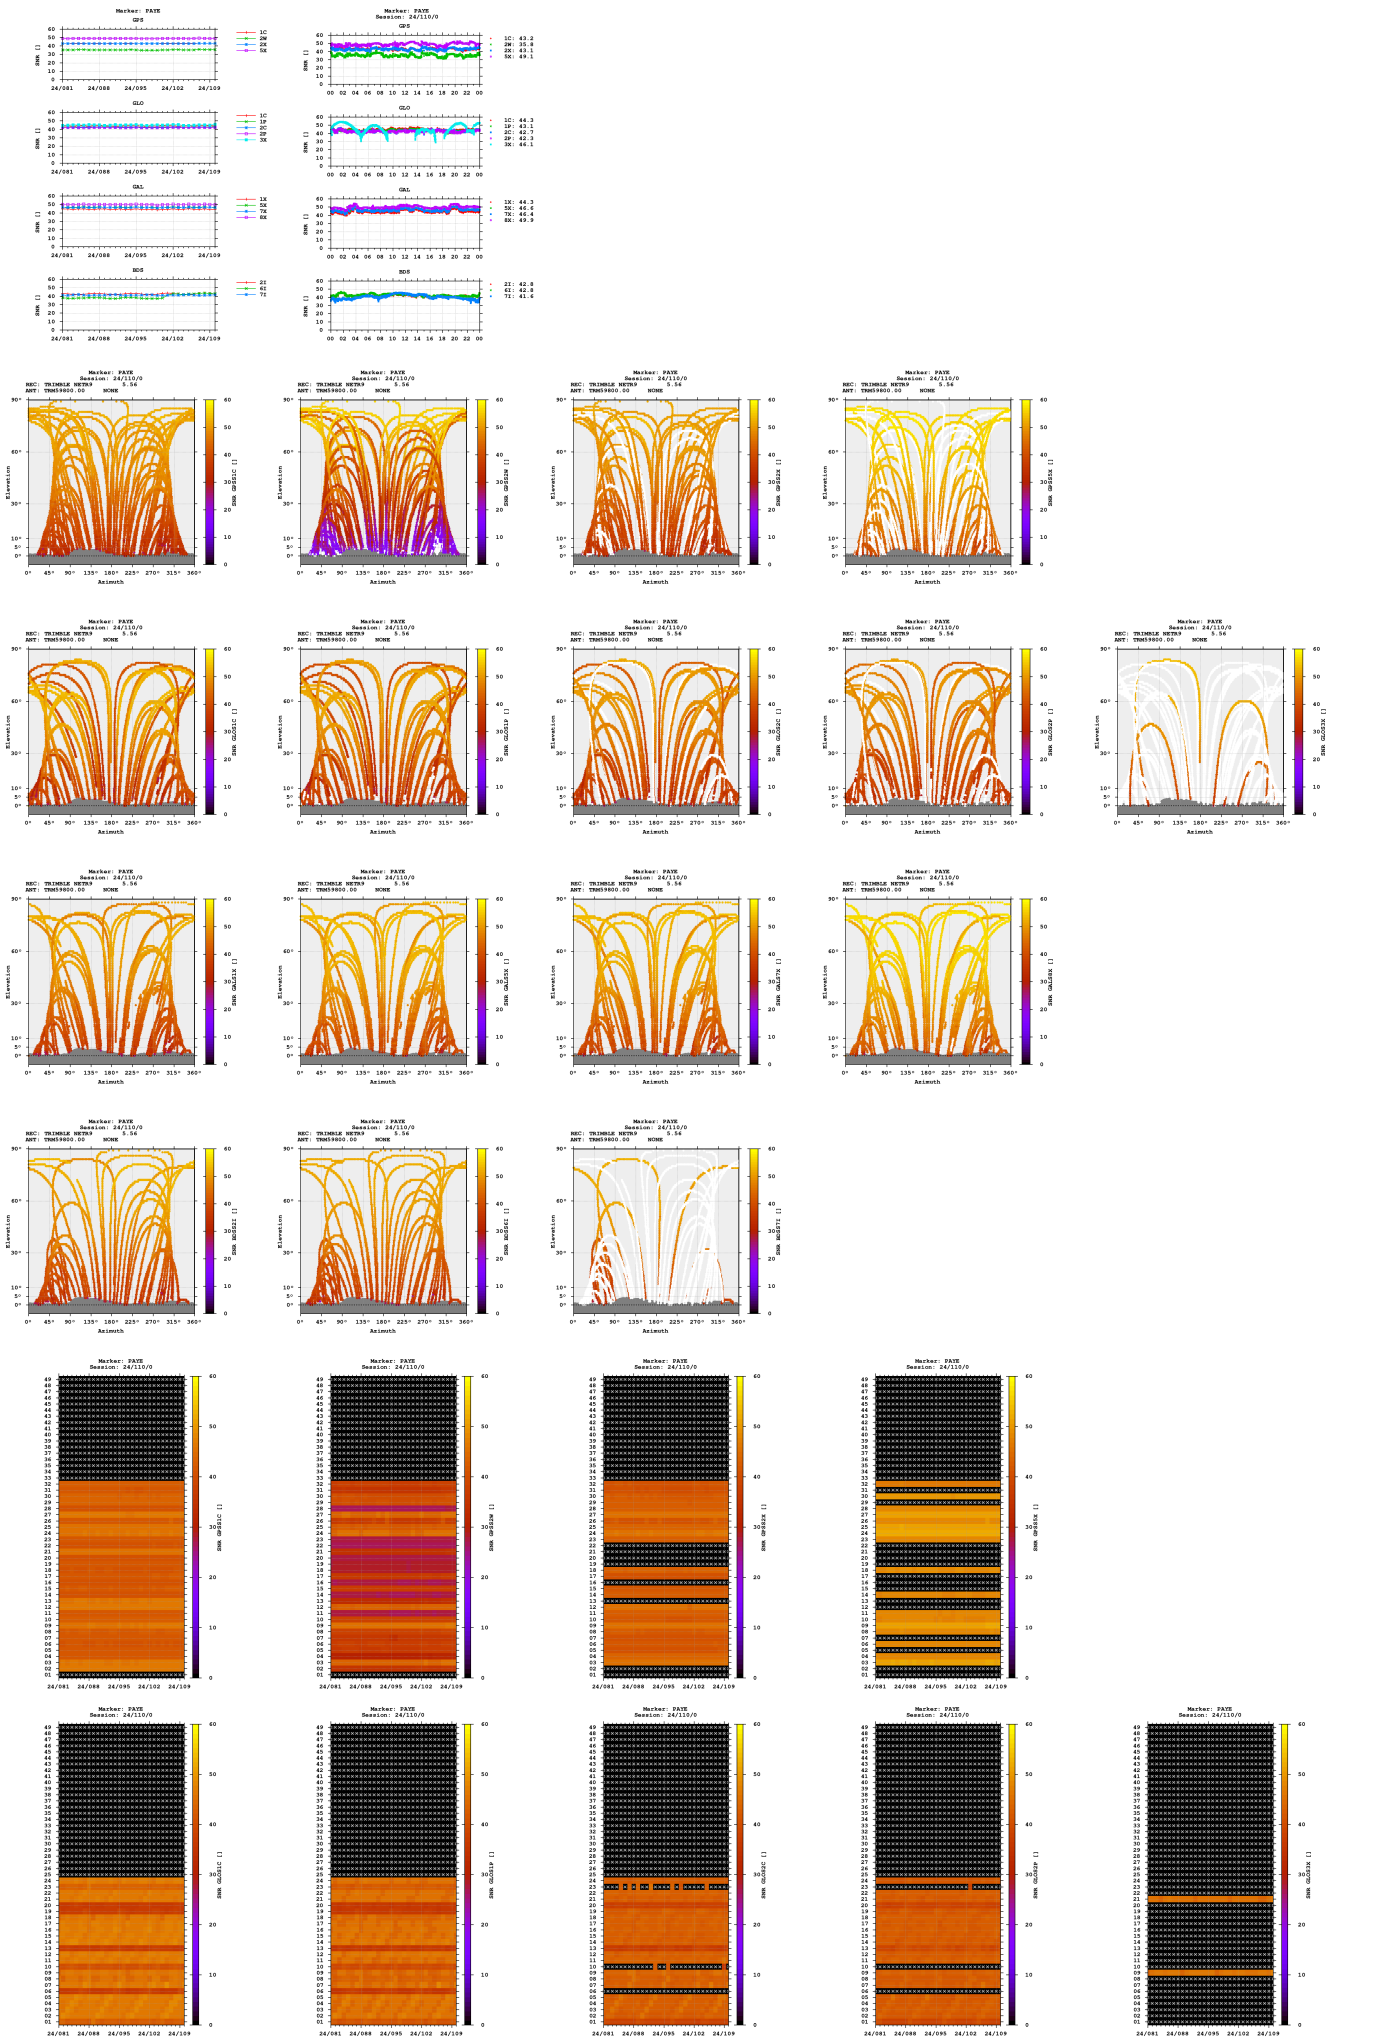

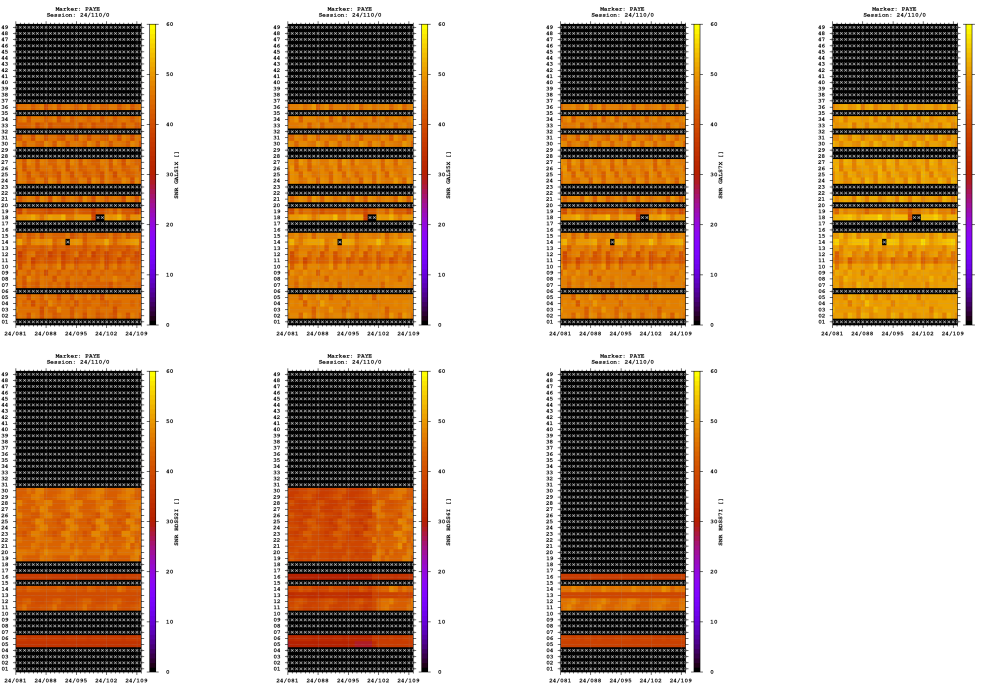

Estimates

2024-04-19 00:00:00	GPS	4341234.4670	528726.0543	4627897.5012	46.812147001	6.943947905	548.8726
2024-04-19 00:00:00	GLO	4341235.4994	528725.6074	4627897.8945	46.812143056	6.943940459	549.8238
2024-04-19 00:00:00	GAL	4341234.7920	528725.9591	4627897.4289	46.812144512	6.943946233	548.9829
2024-04-19 00:00:00	BDS	4341234.0061	528724.8567	4627896.3512	46.812144710	6.943936138	549.1086

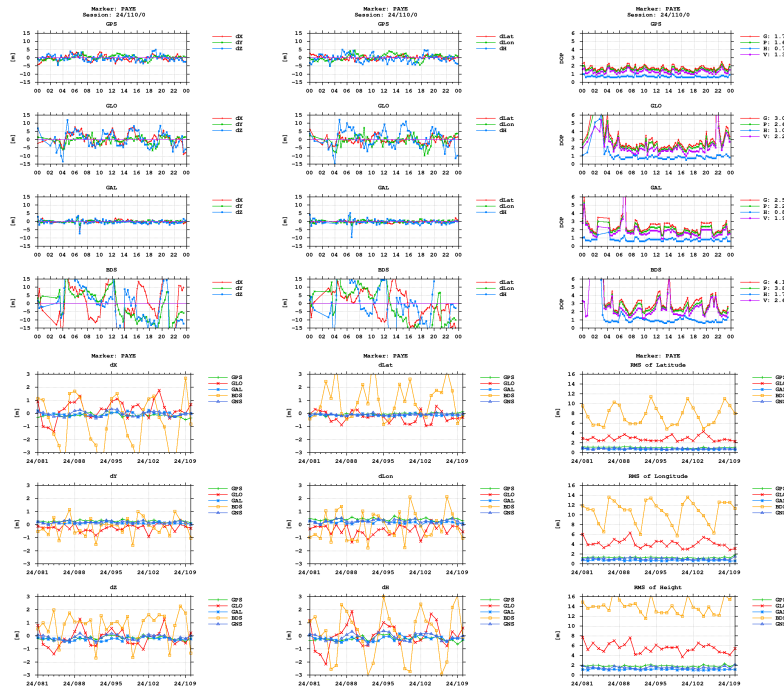

Equipment

2024-03-21 00:00:00 TRIMBLE NETR9 5.56 5428R490 TRIMBLE NE

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)