

GNSS observation file monitoring for PTBB

Last RINEX file: PTBB3440.20D.Z


RINEX version: 2.11

Marker: PTBB 14234M001

Receiver: 3034575 SEPT POLARX5TR 5.3.2


Antenna: 726333 LEIAR25.R4 LEIT

Epochs

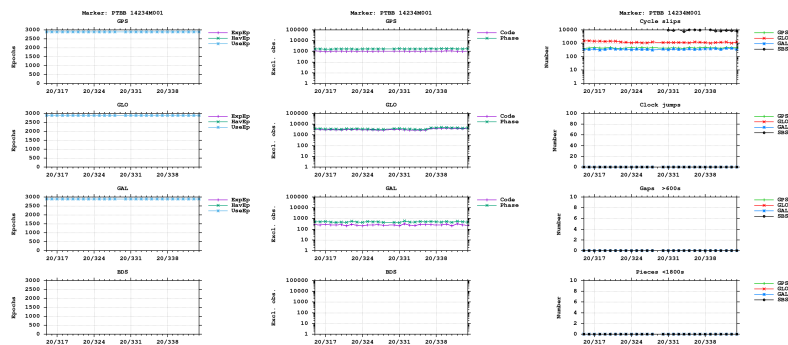




- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

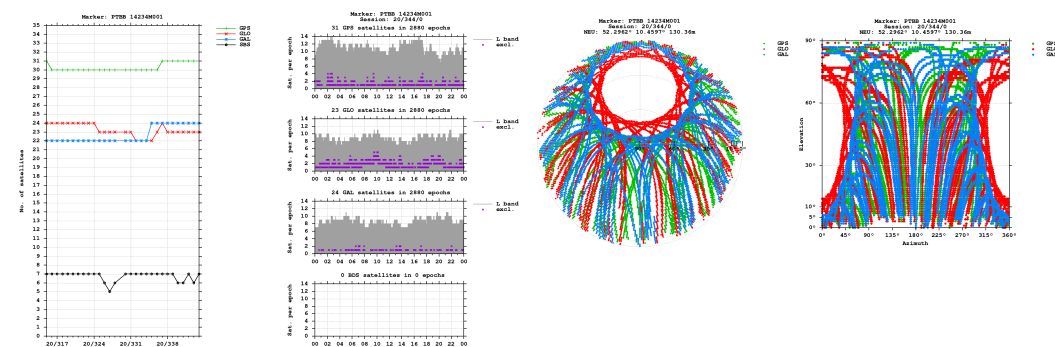


Bands

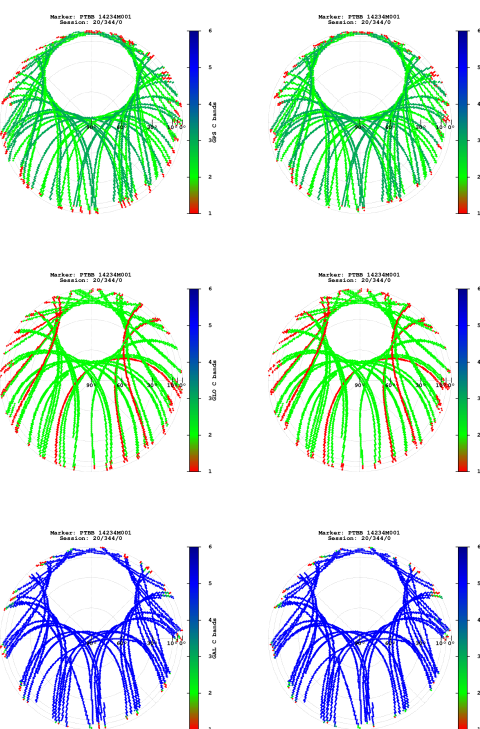


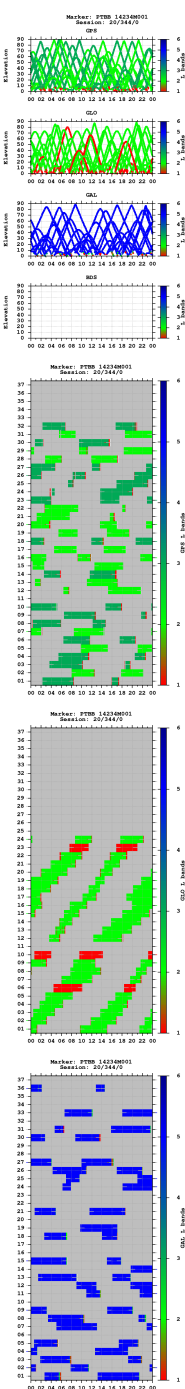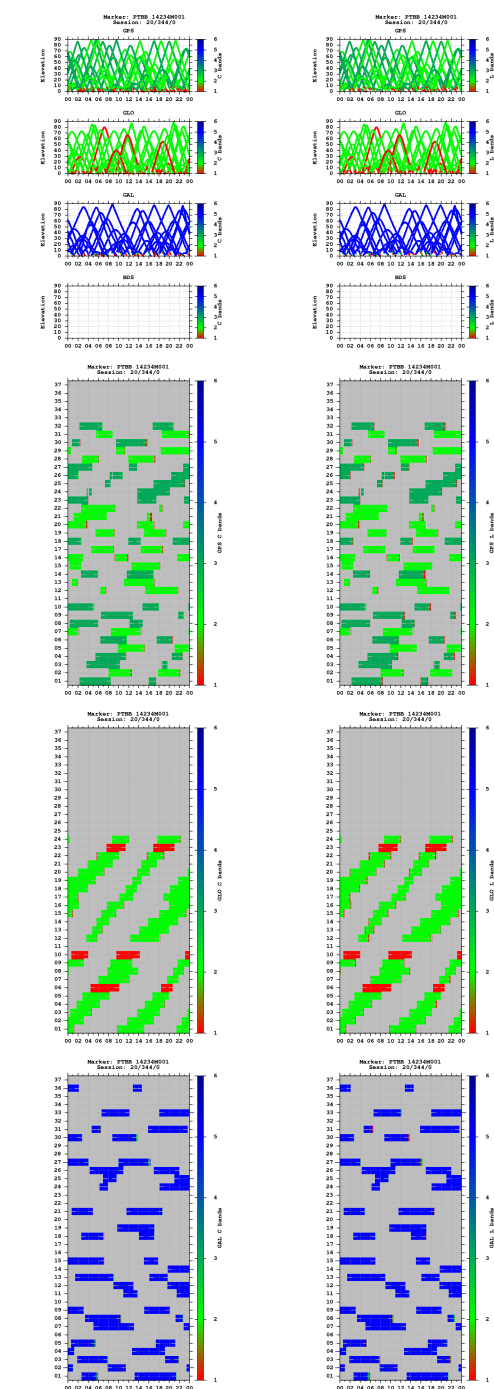


Observations

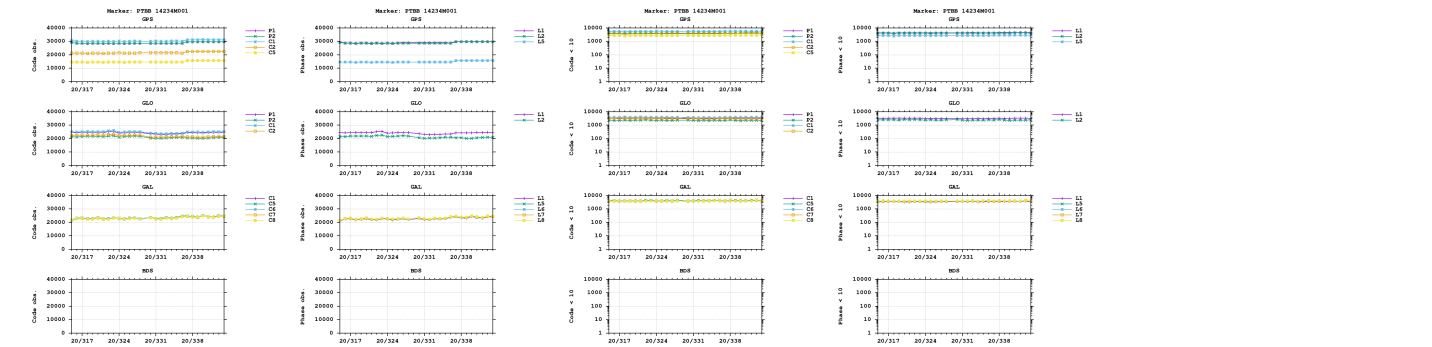


Multipath

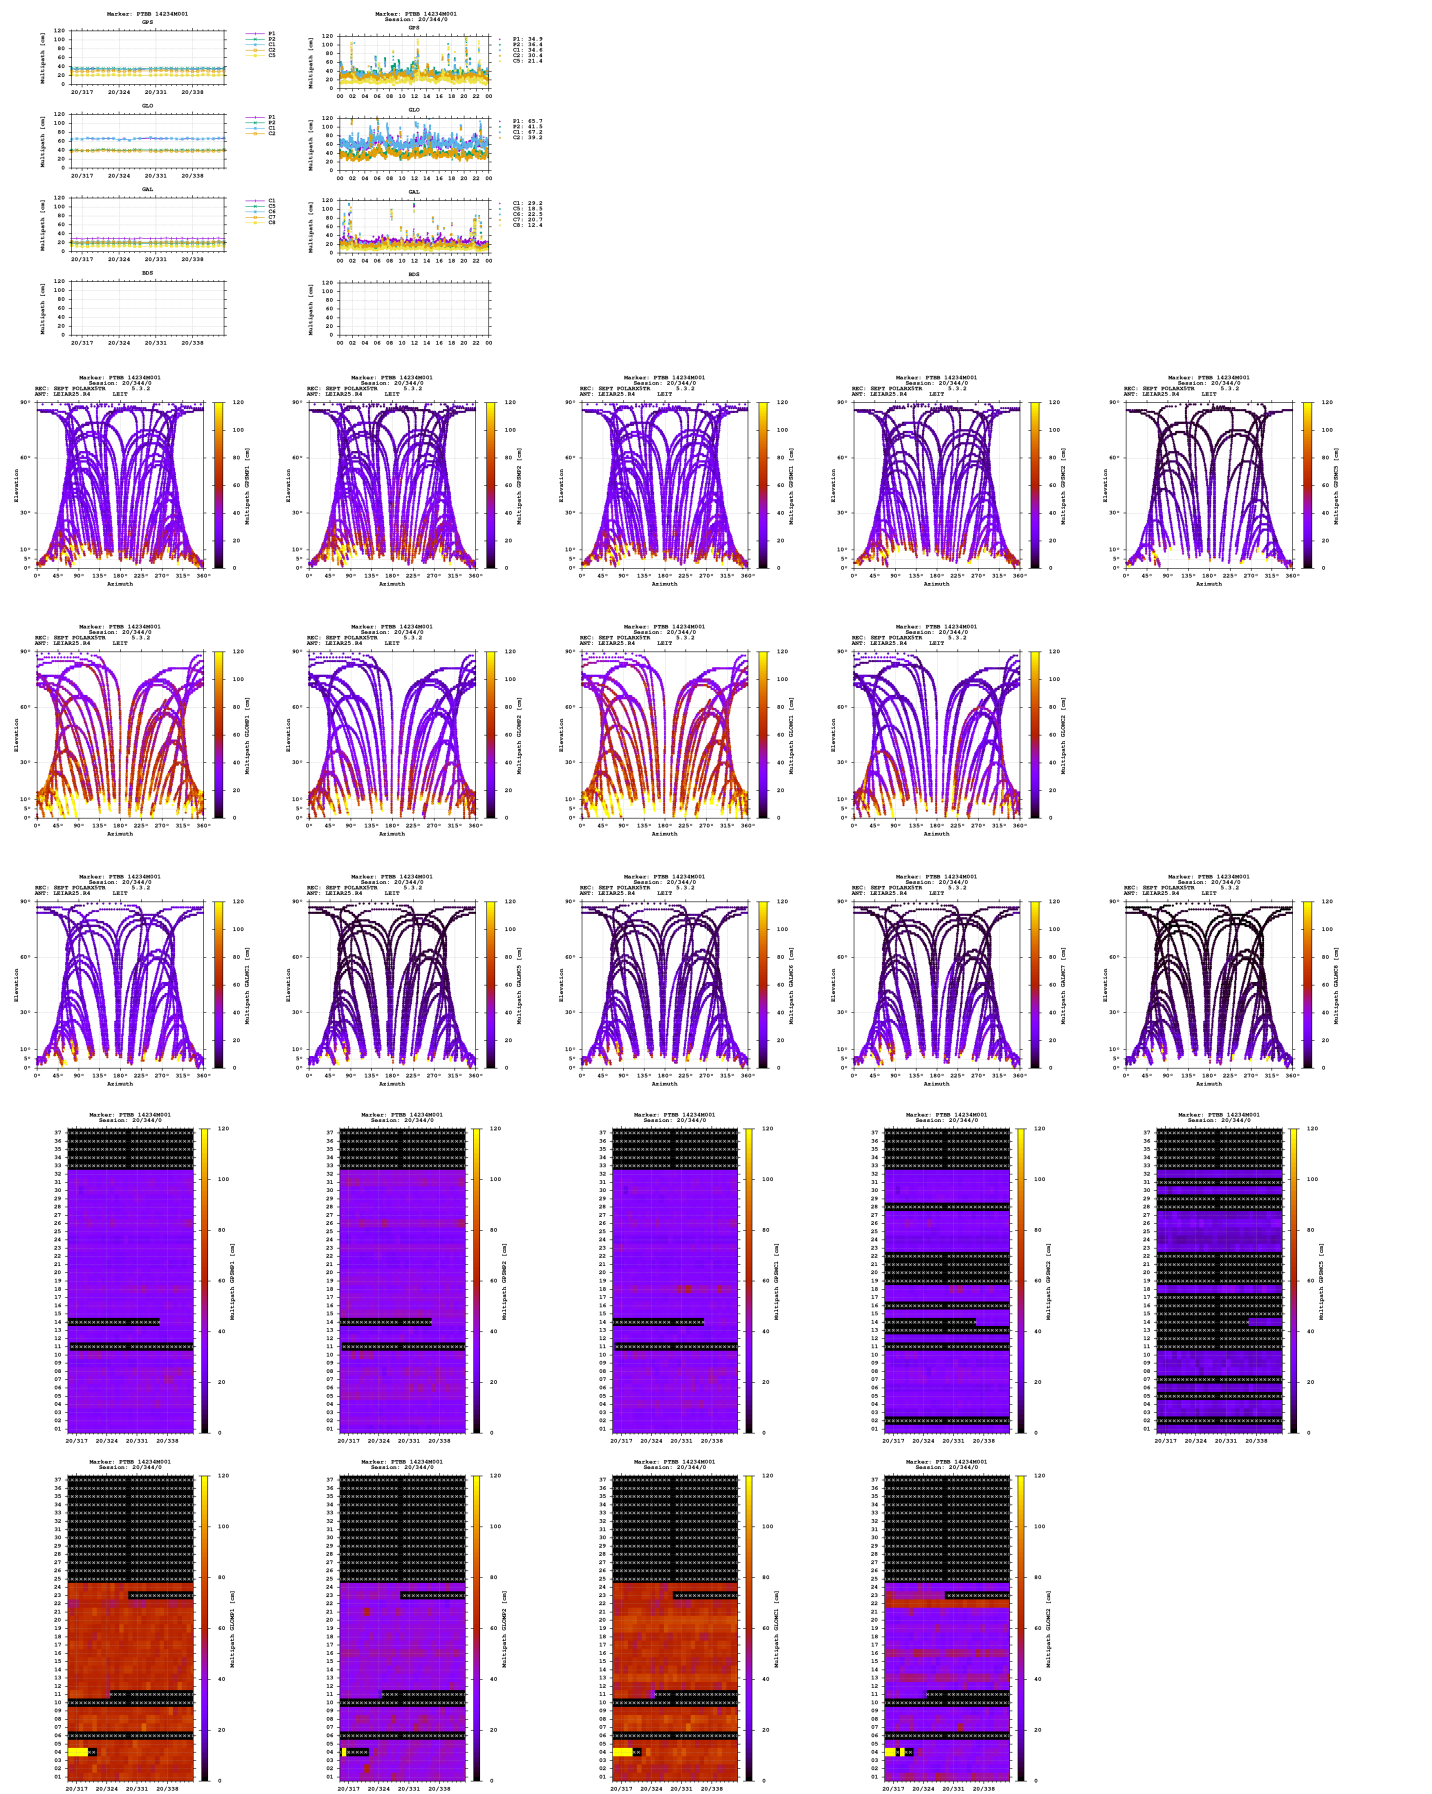


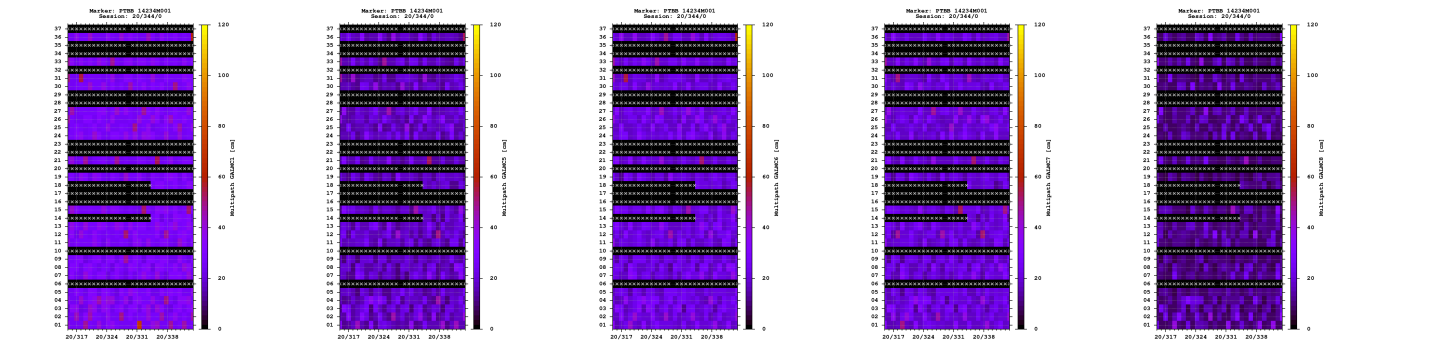

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

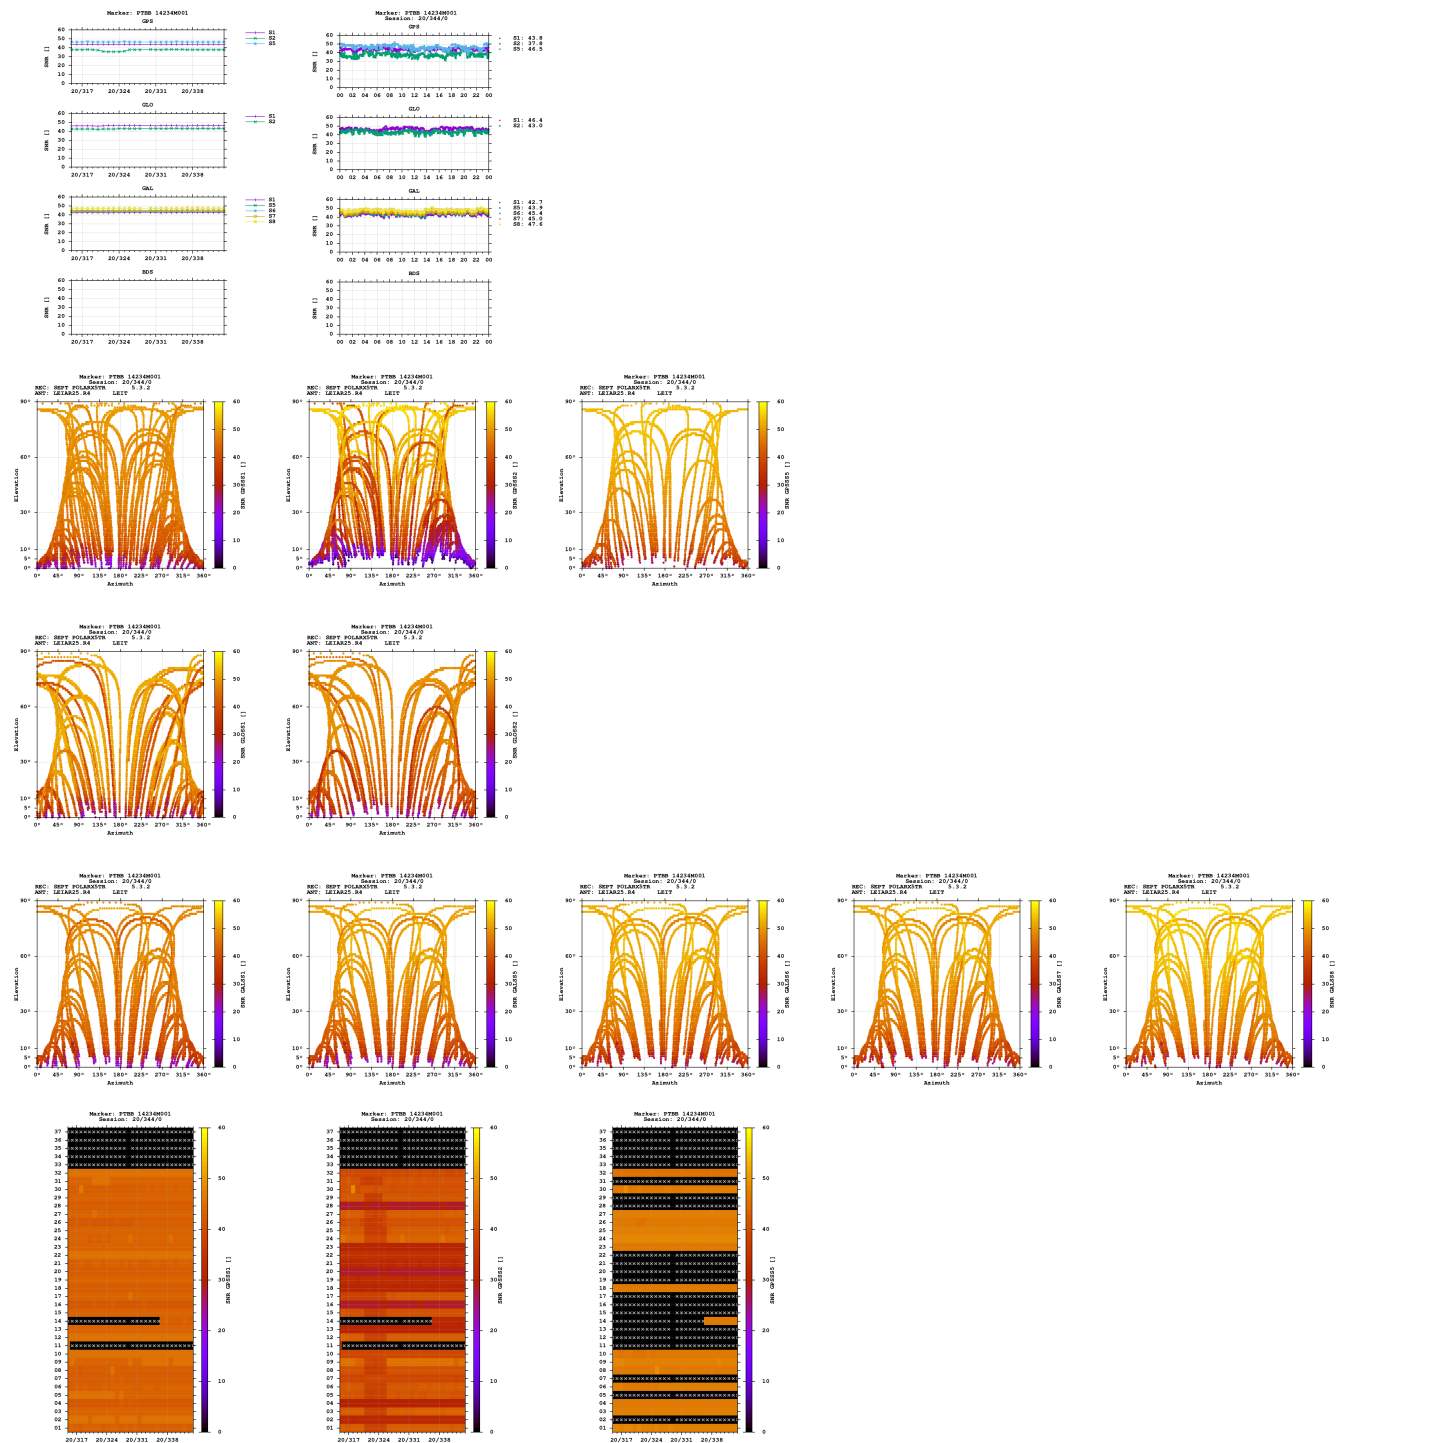

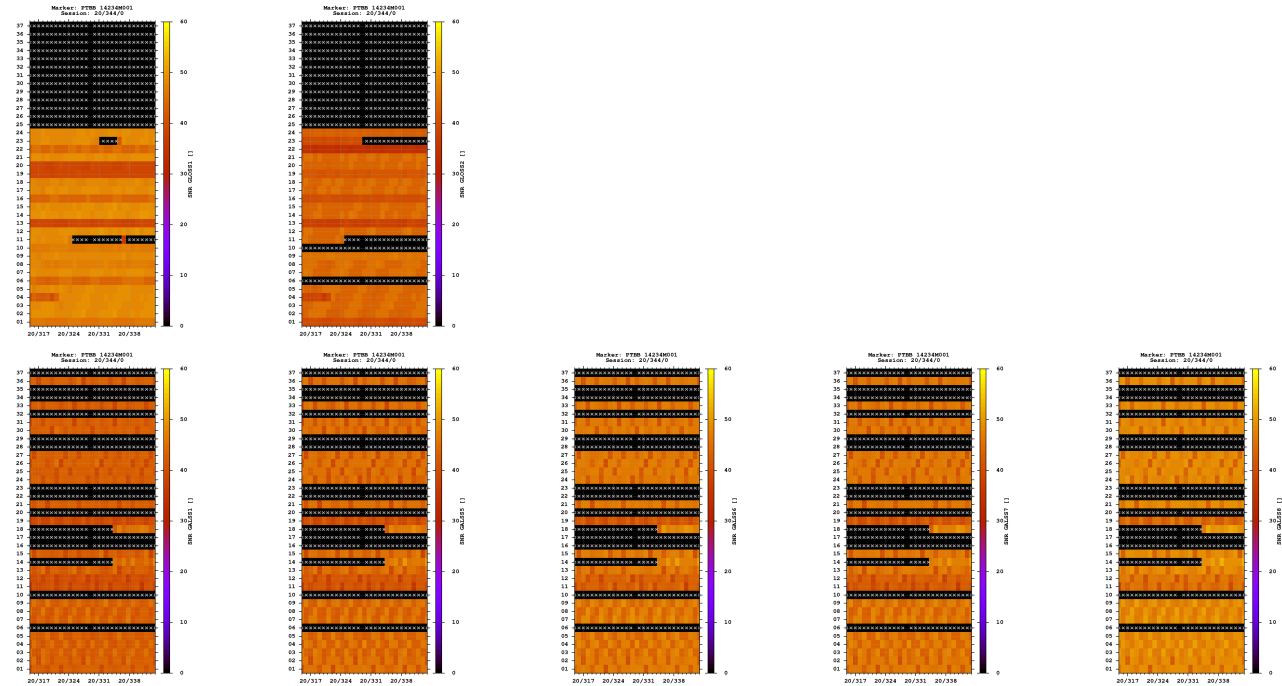


Estimates

2020-12-09 00:00:00	GPS	3844059.8584	709661.5319	5023129.7498	52.296190770	10.459749286	130.1890
2020-12-09 00:00:00	GLO	3844061.2552	709661.4901	5023130.3569	52.296184508	10.459745395	131.6765
2020-12-09 00:00:00	GAL	3844059.7207	709661.5882	5023129.6230	52.296191121	10.459751004	130.3461

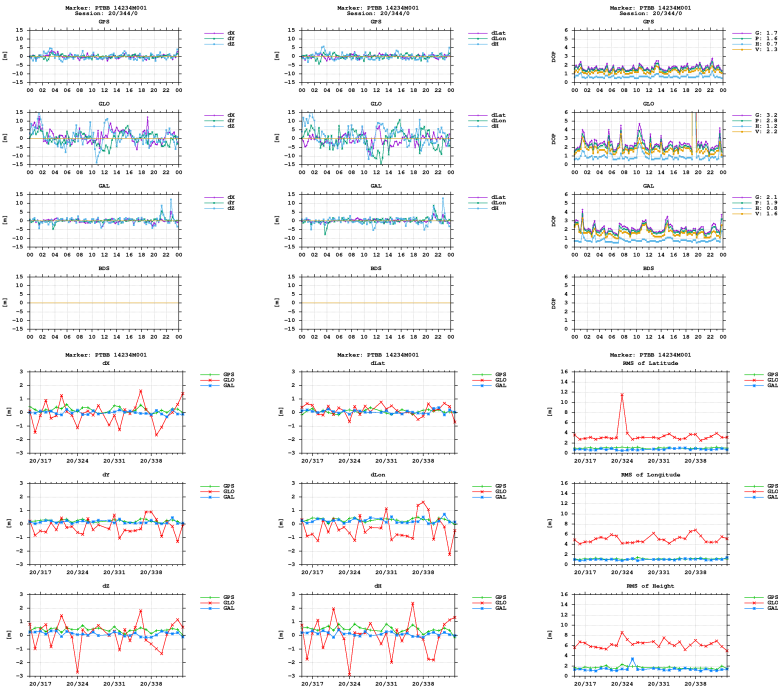

BNC



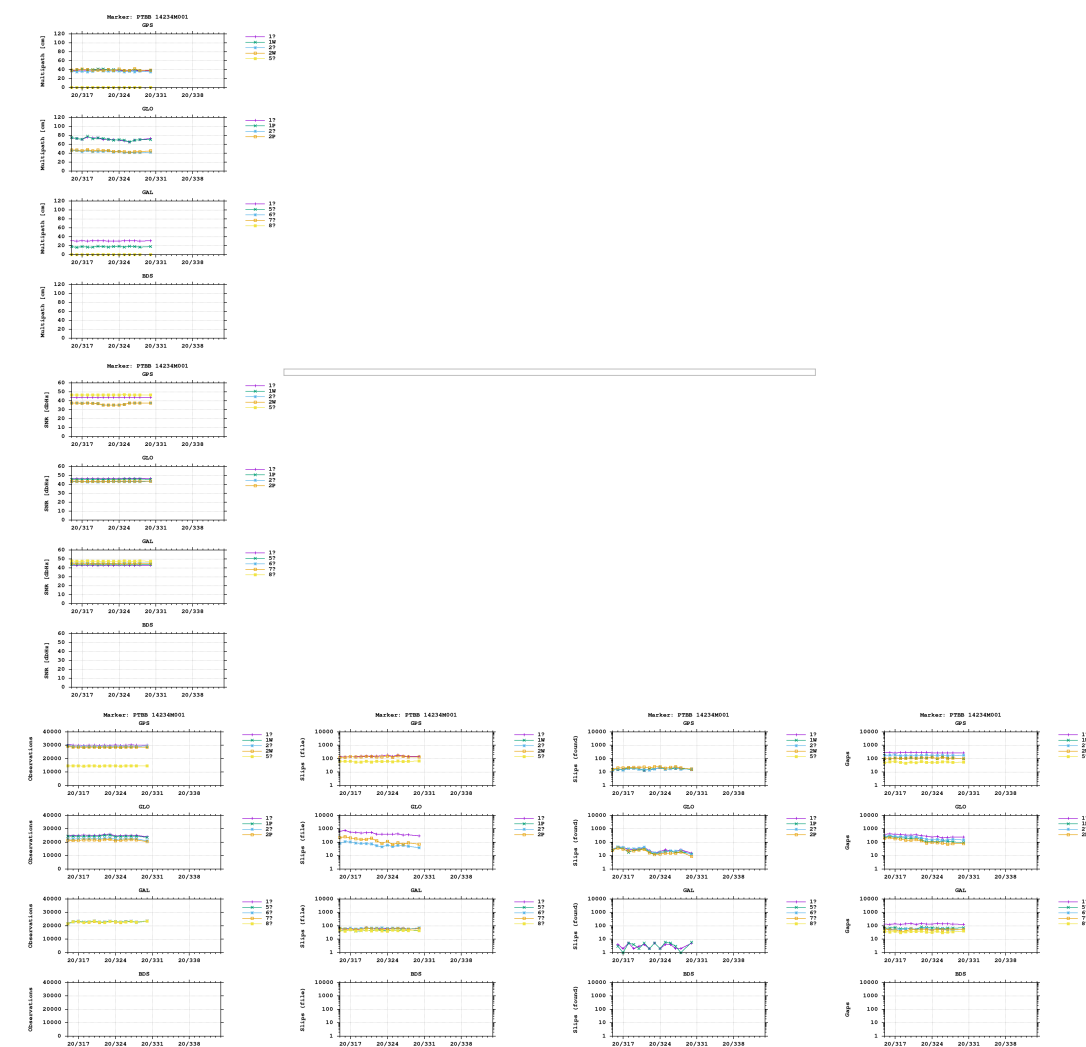

Equipment

2020-11-09 00:00:00 SEPT POLARX5TR 5.3.2 3034575 LEIAR25.R4 LEIT 726333

Program info

G-Nut/Anubis [2.2.4] compiled: Jun 12 2020 11:18:36 (\$Rev: 2554 \$)
BNC 2.13.0 (checkout 9163)