

GNSS observation file monitoring for SCHA

Last RINEX file: SCHA2330.25D.Z


RINEX version: 3.04

Marker: SCHA

Receiver: 1873104 LEICA GR50 4.83/7.905

Antenna: 5421355011 TRM59800.00 NONE


Epochs

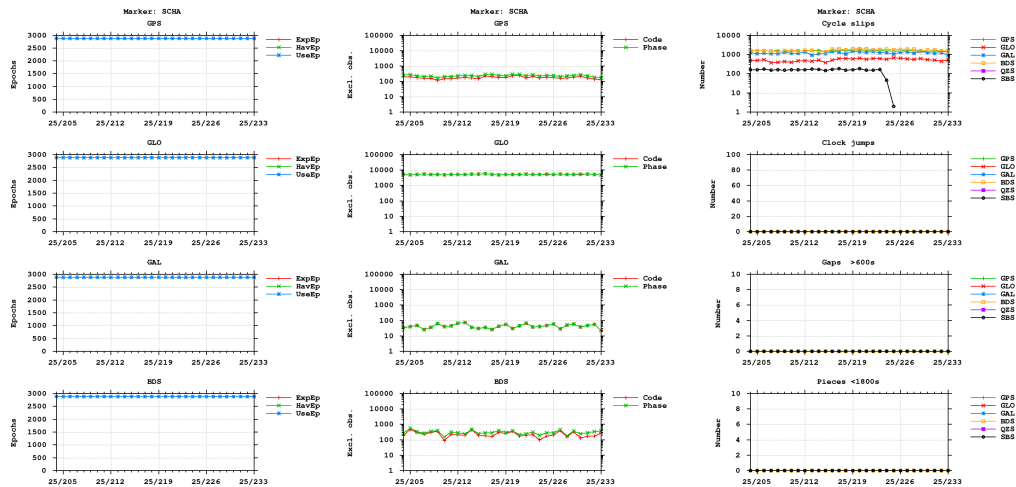


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.













- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

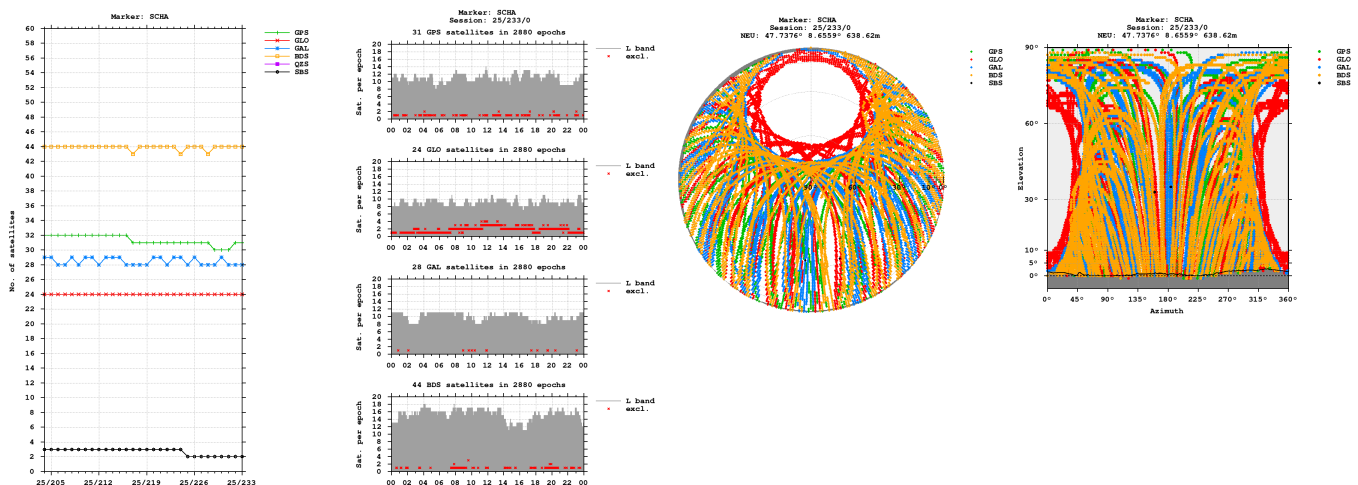


Bands

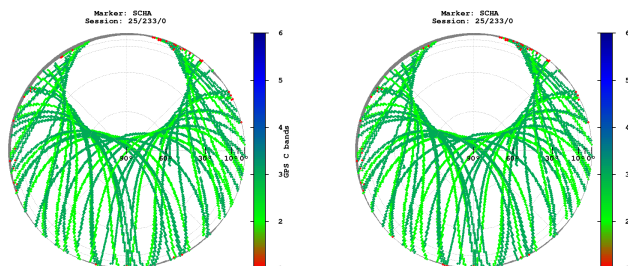


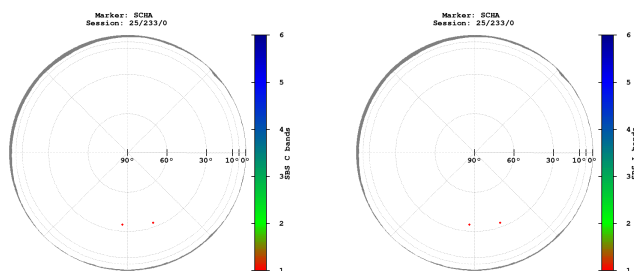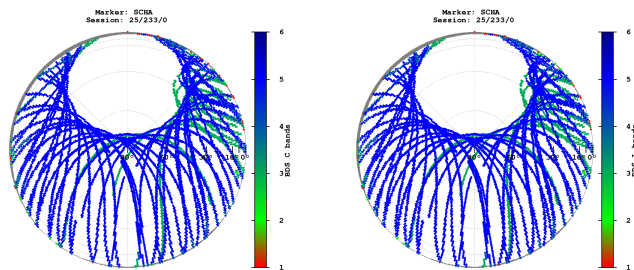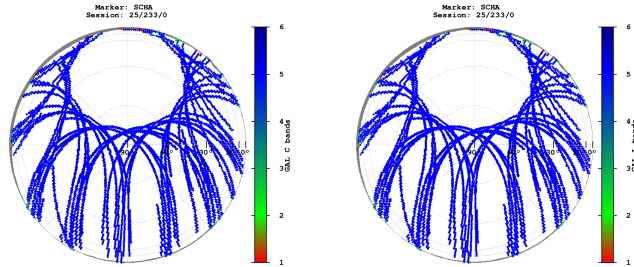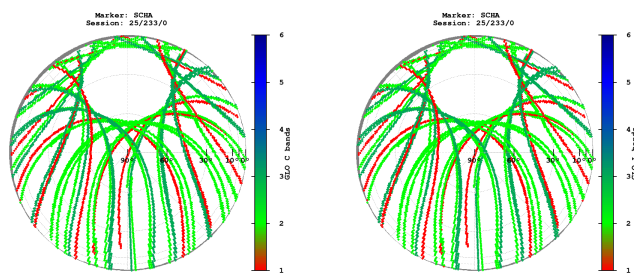

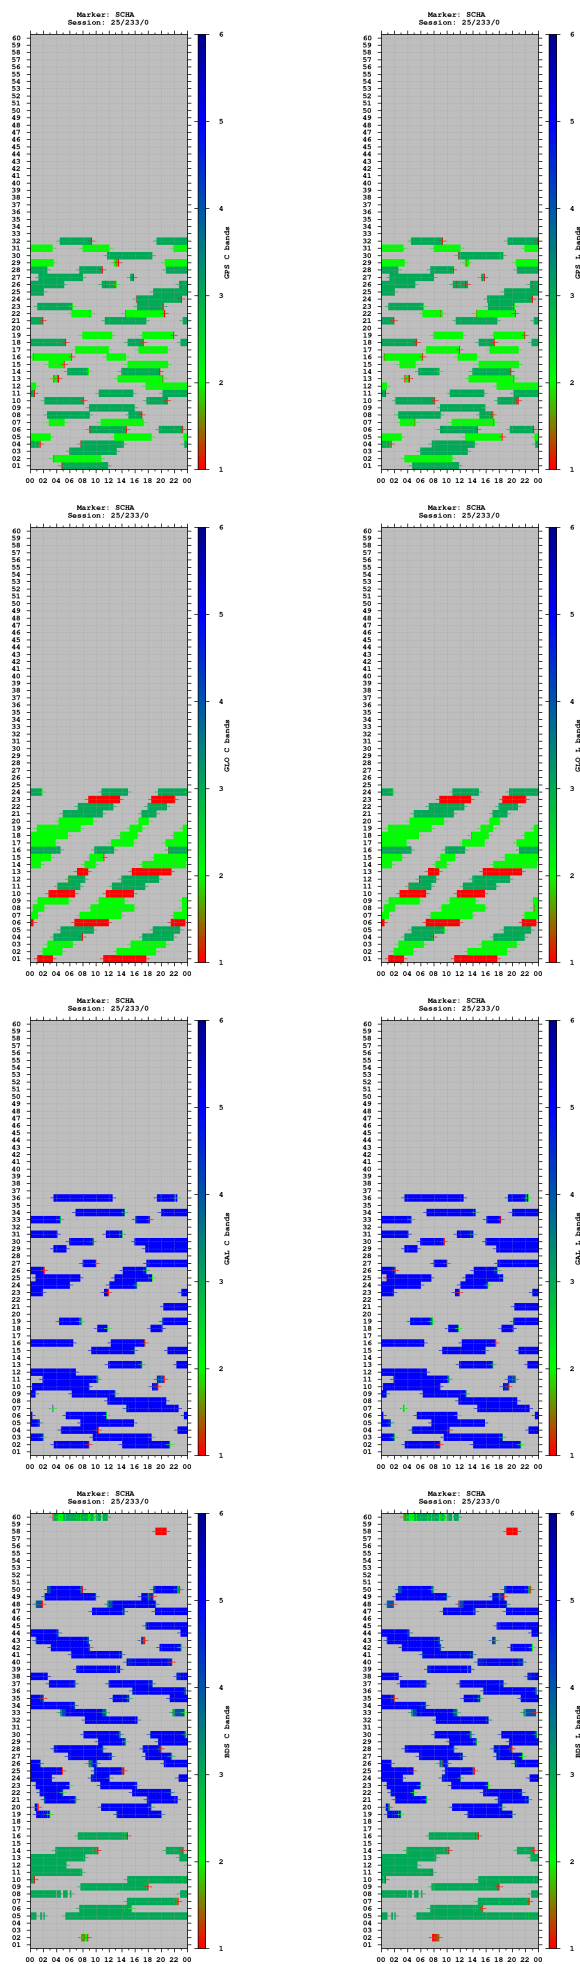


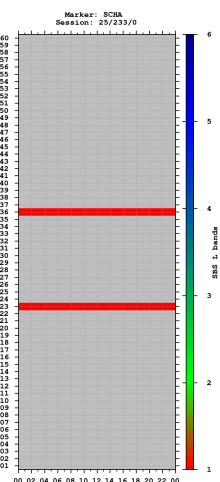


Observations

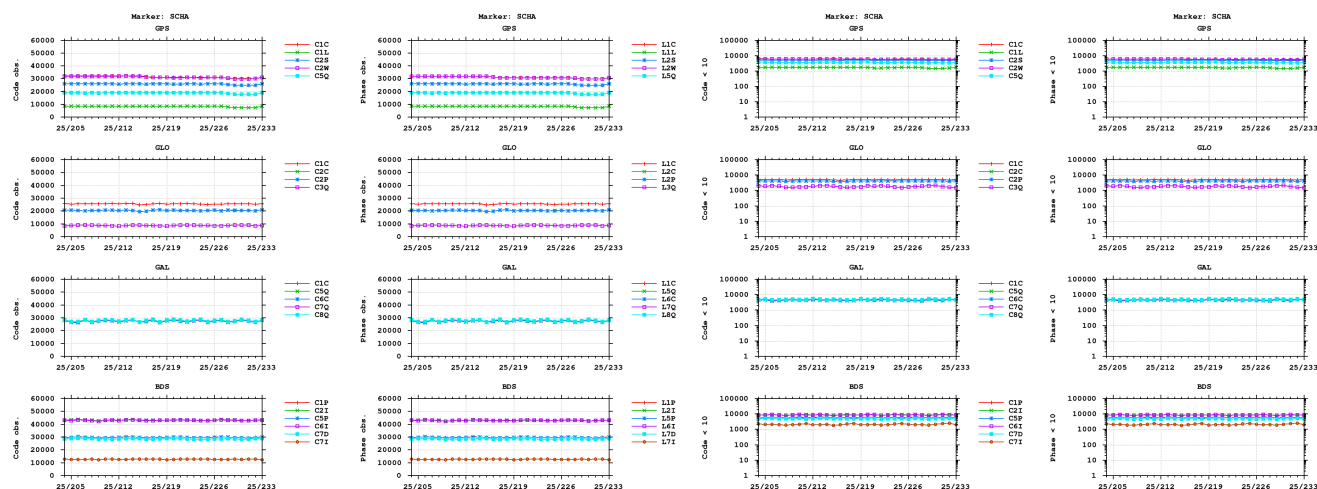


Cycle slips

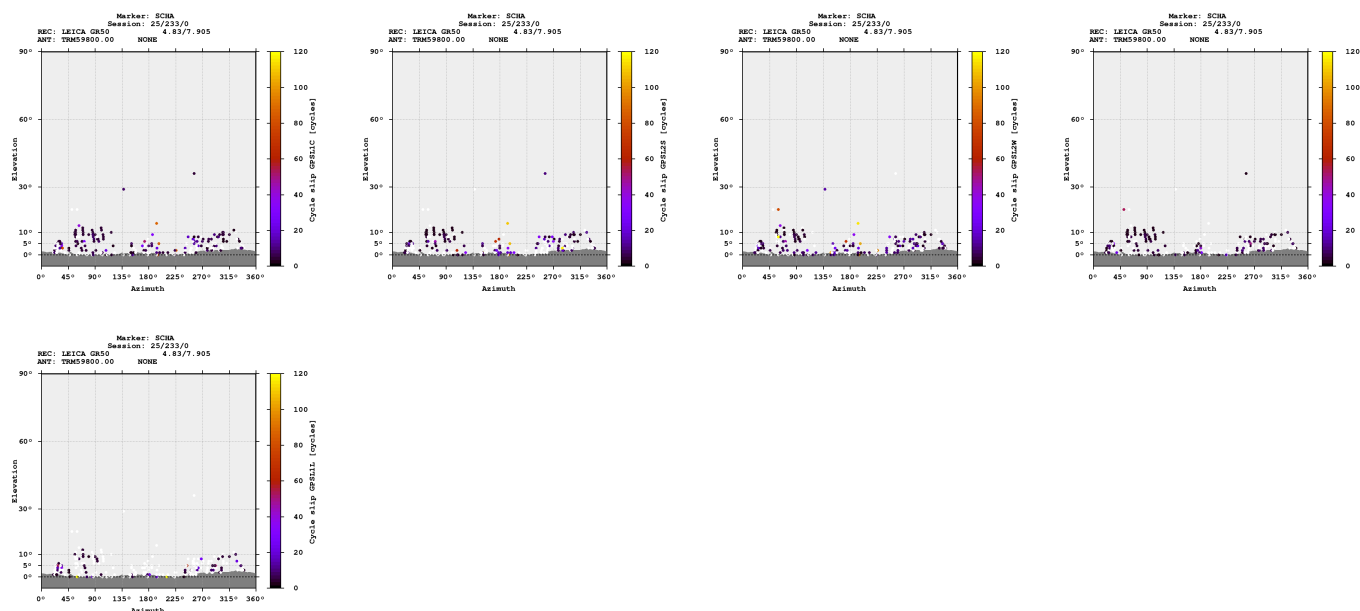




















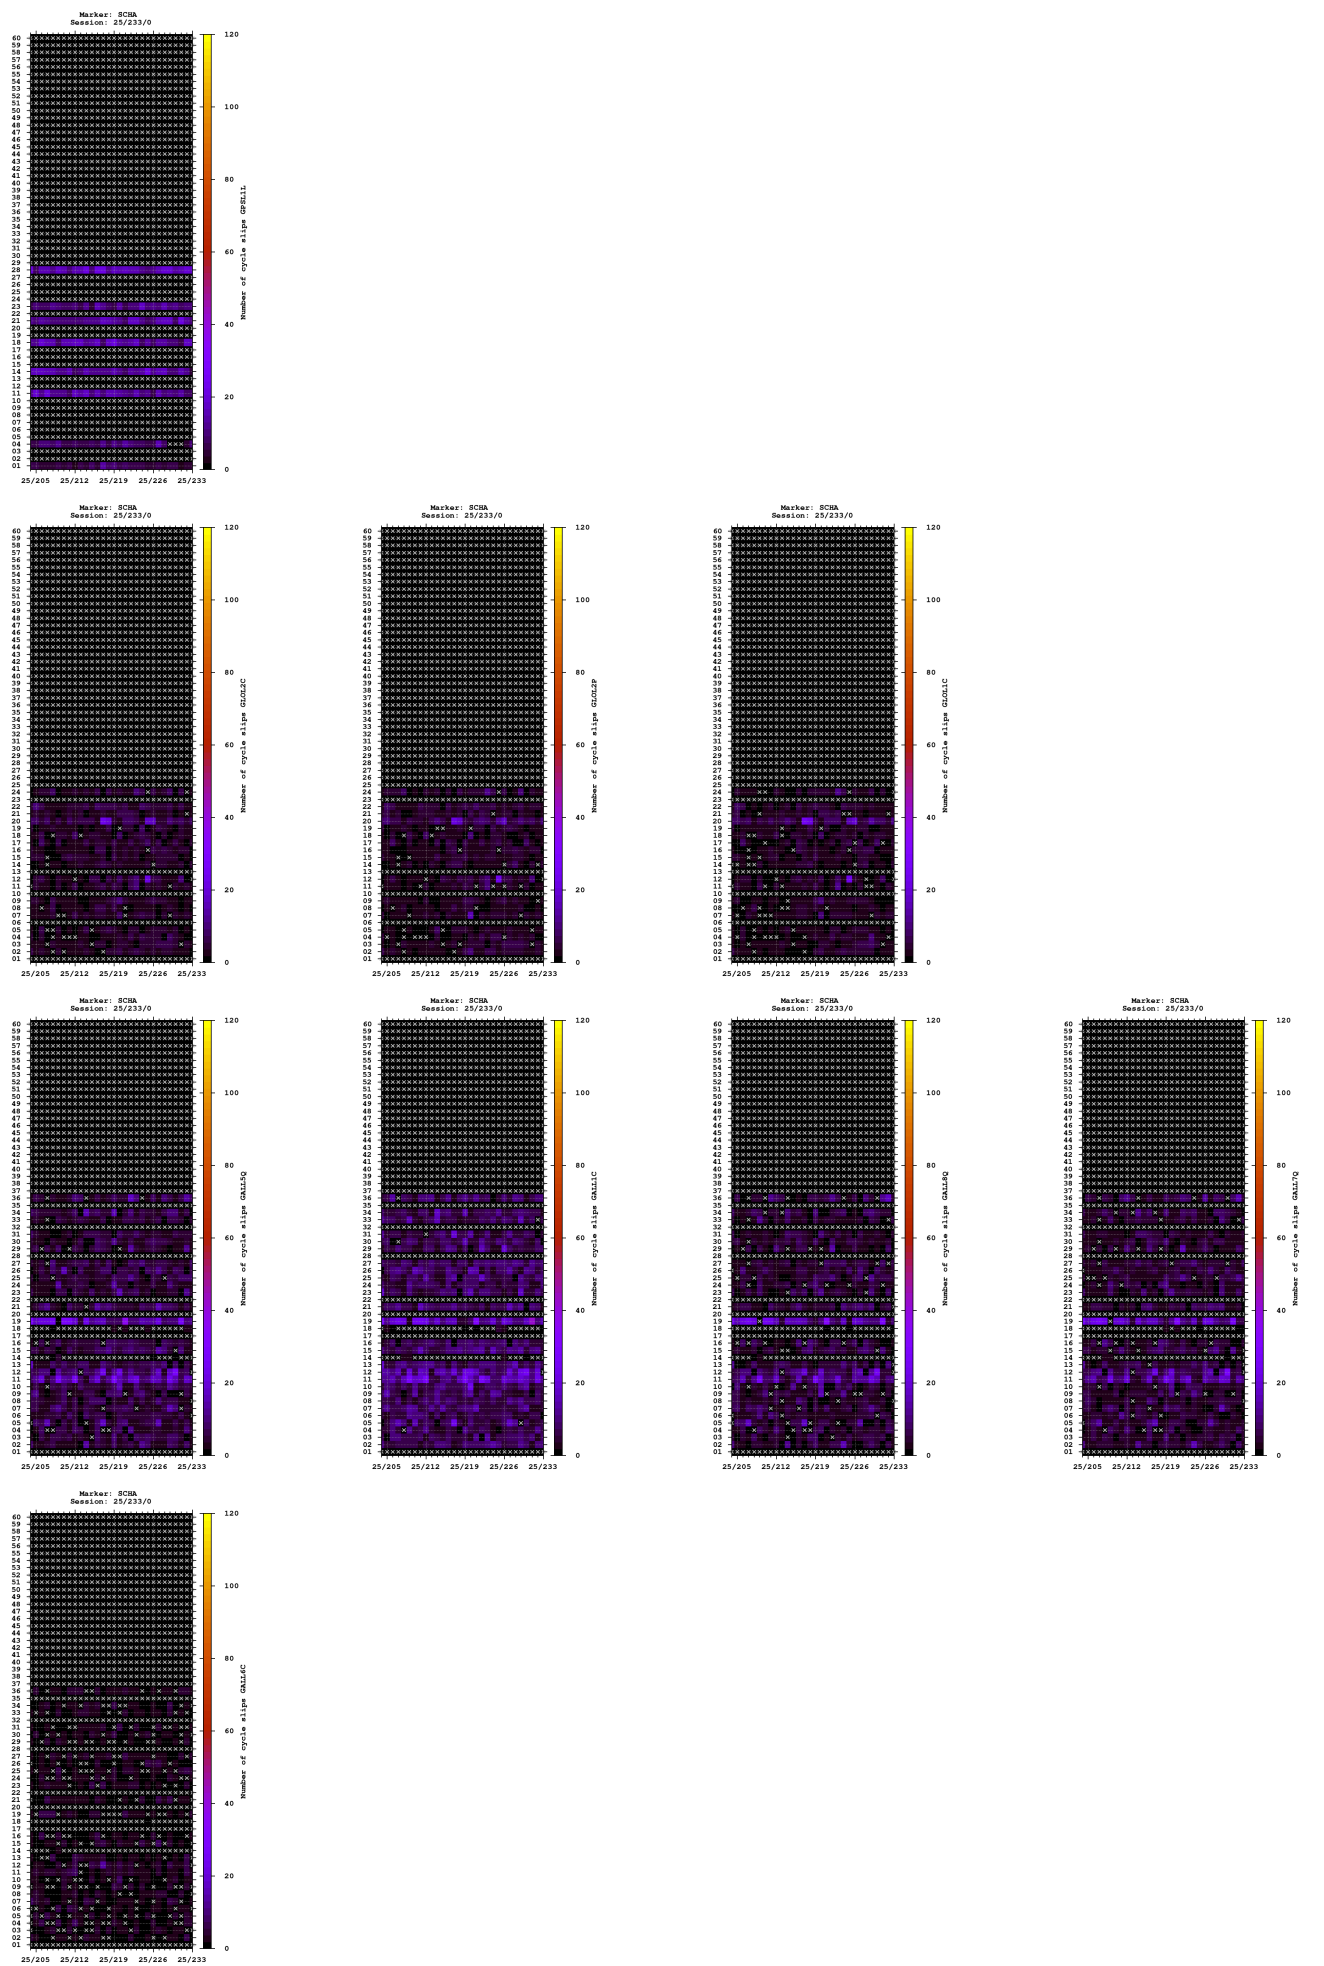


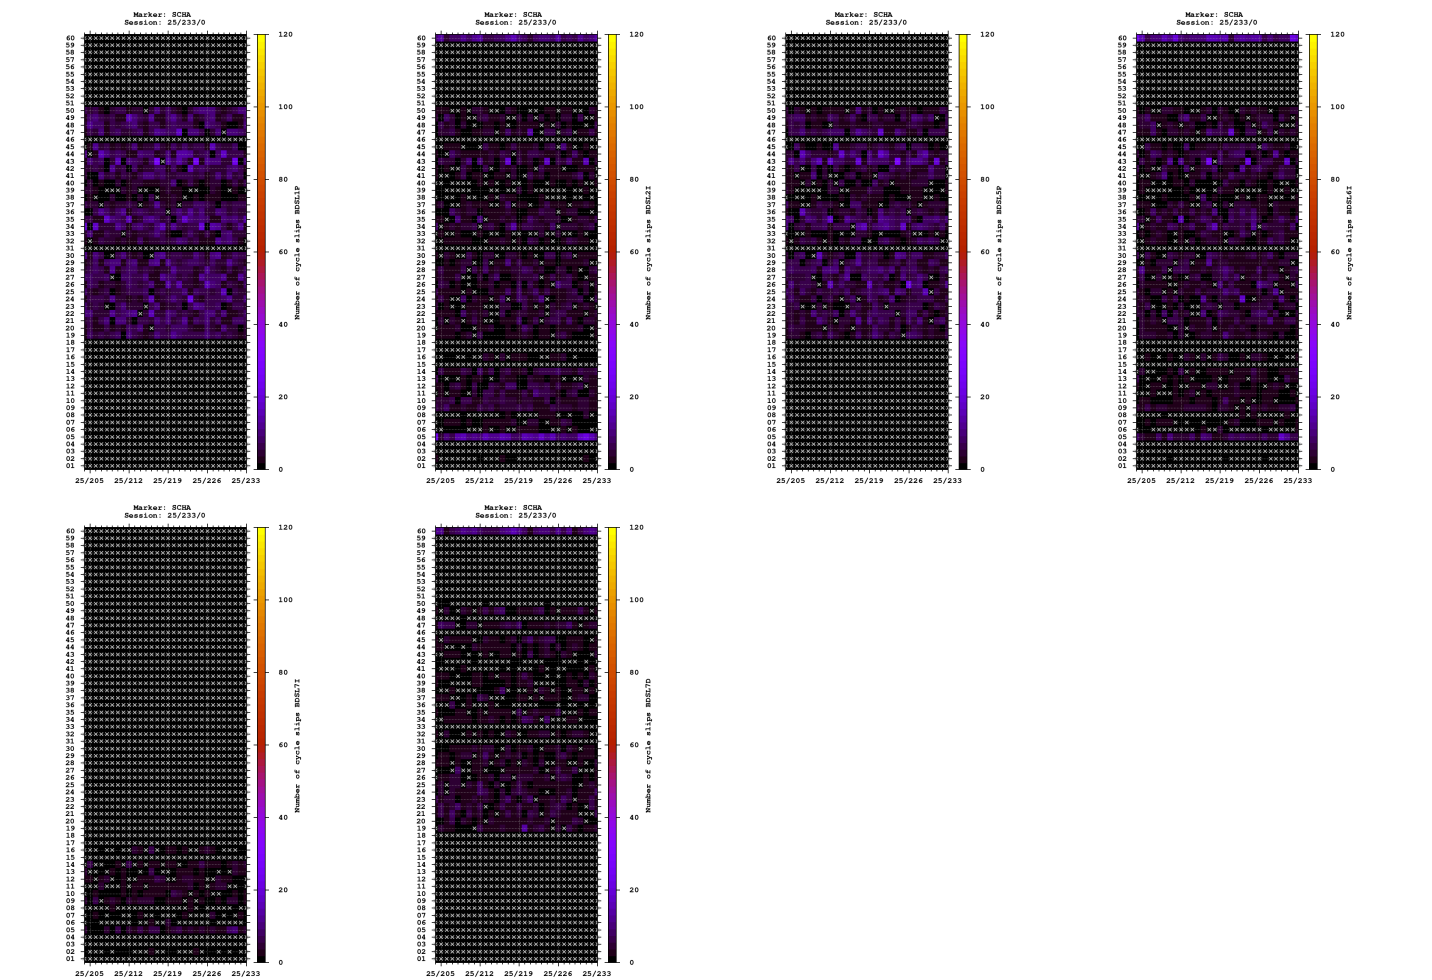


Multipath

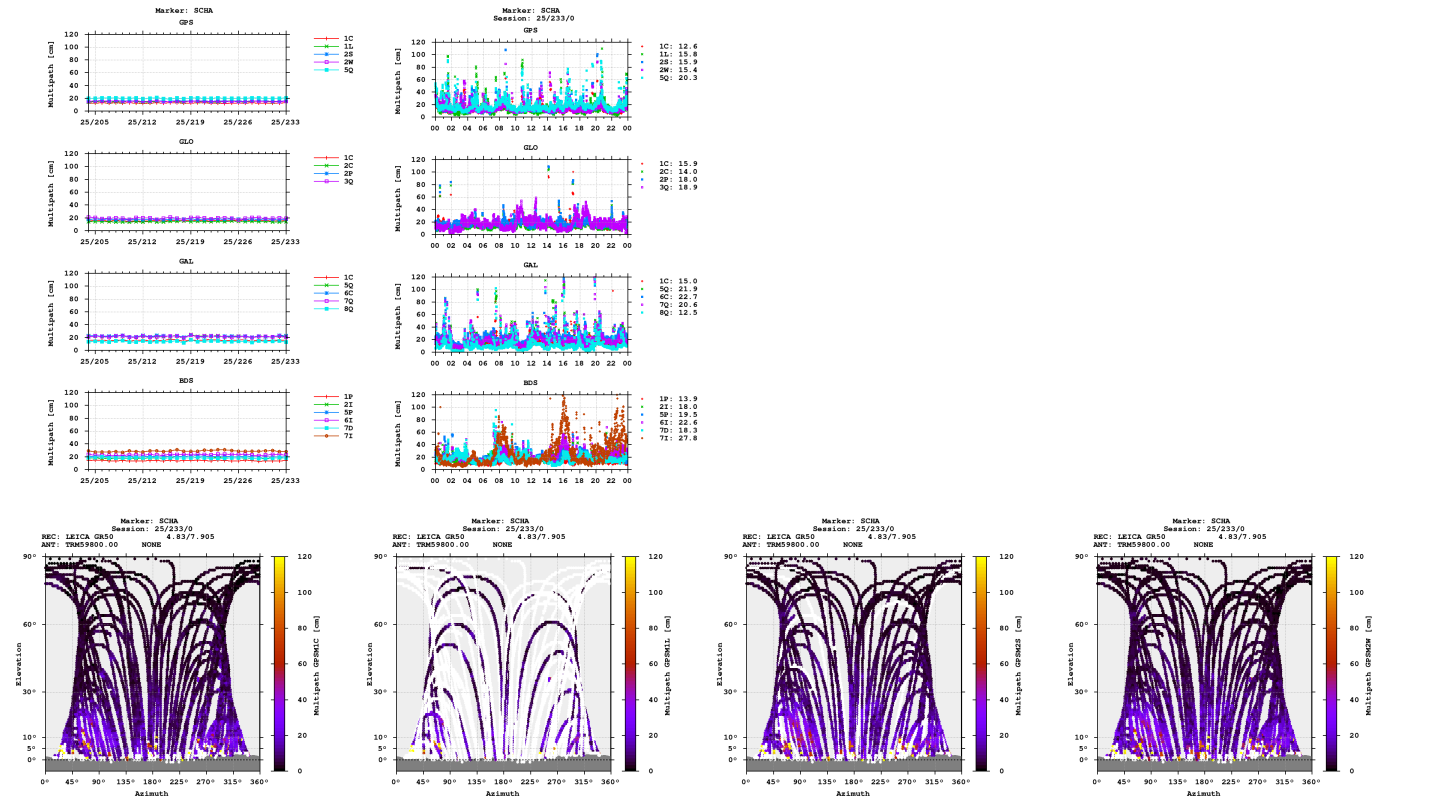




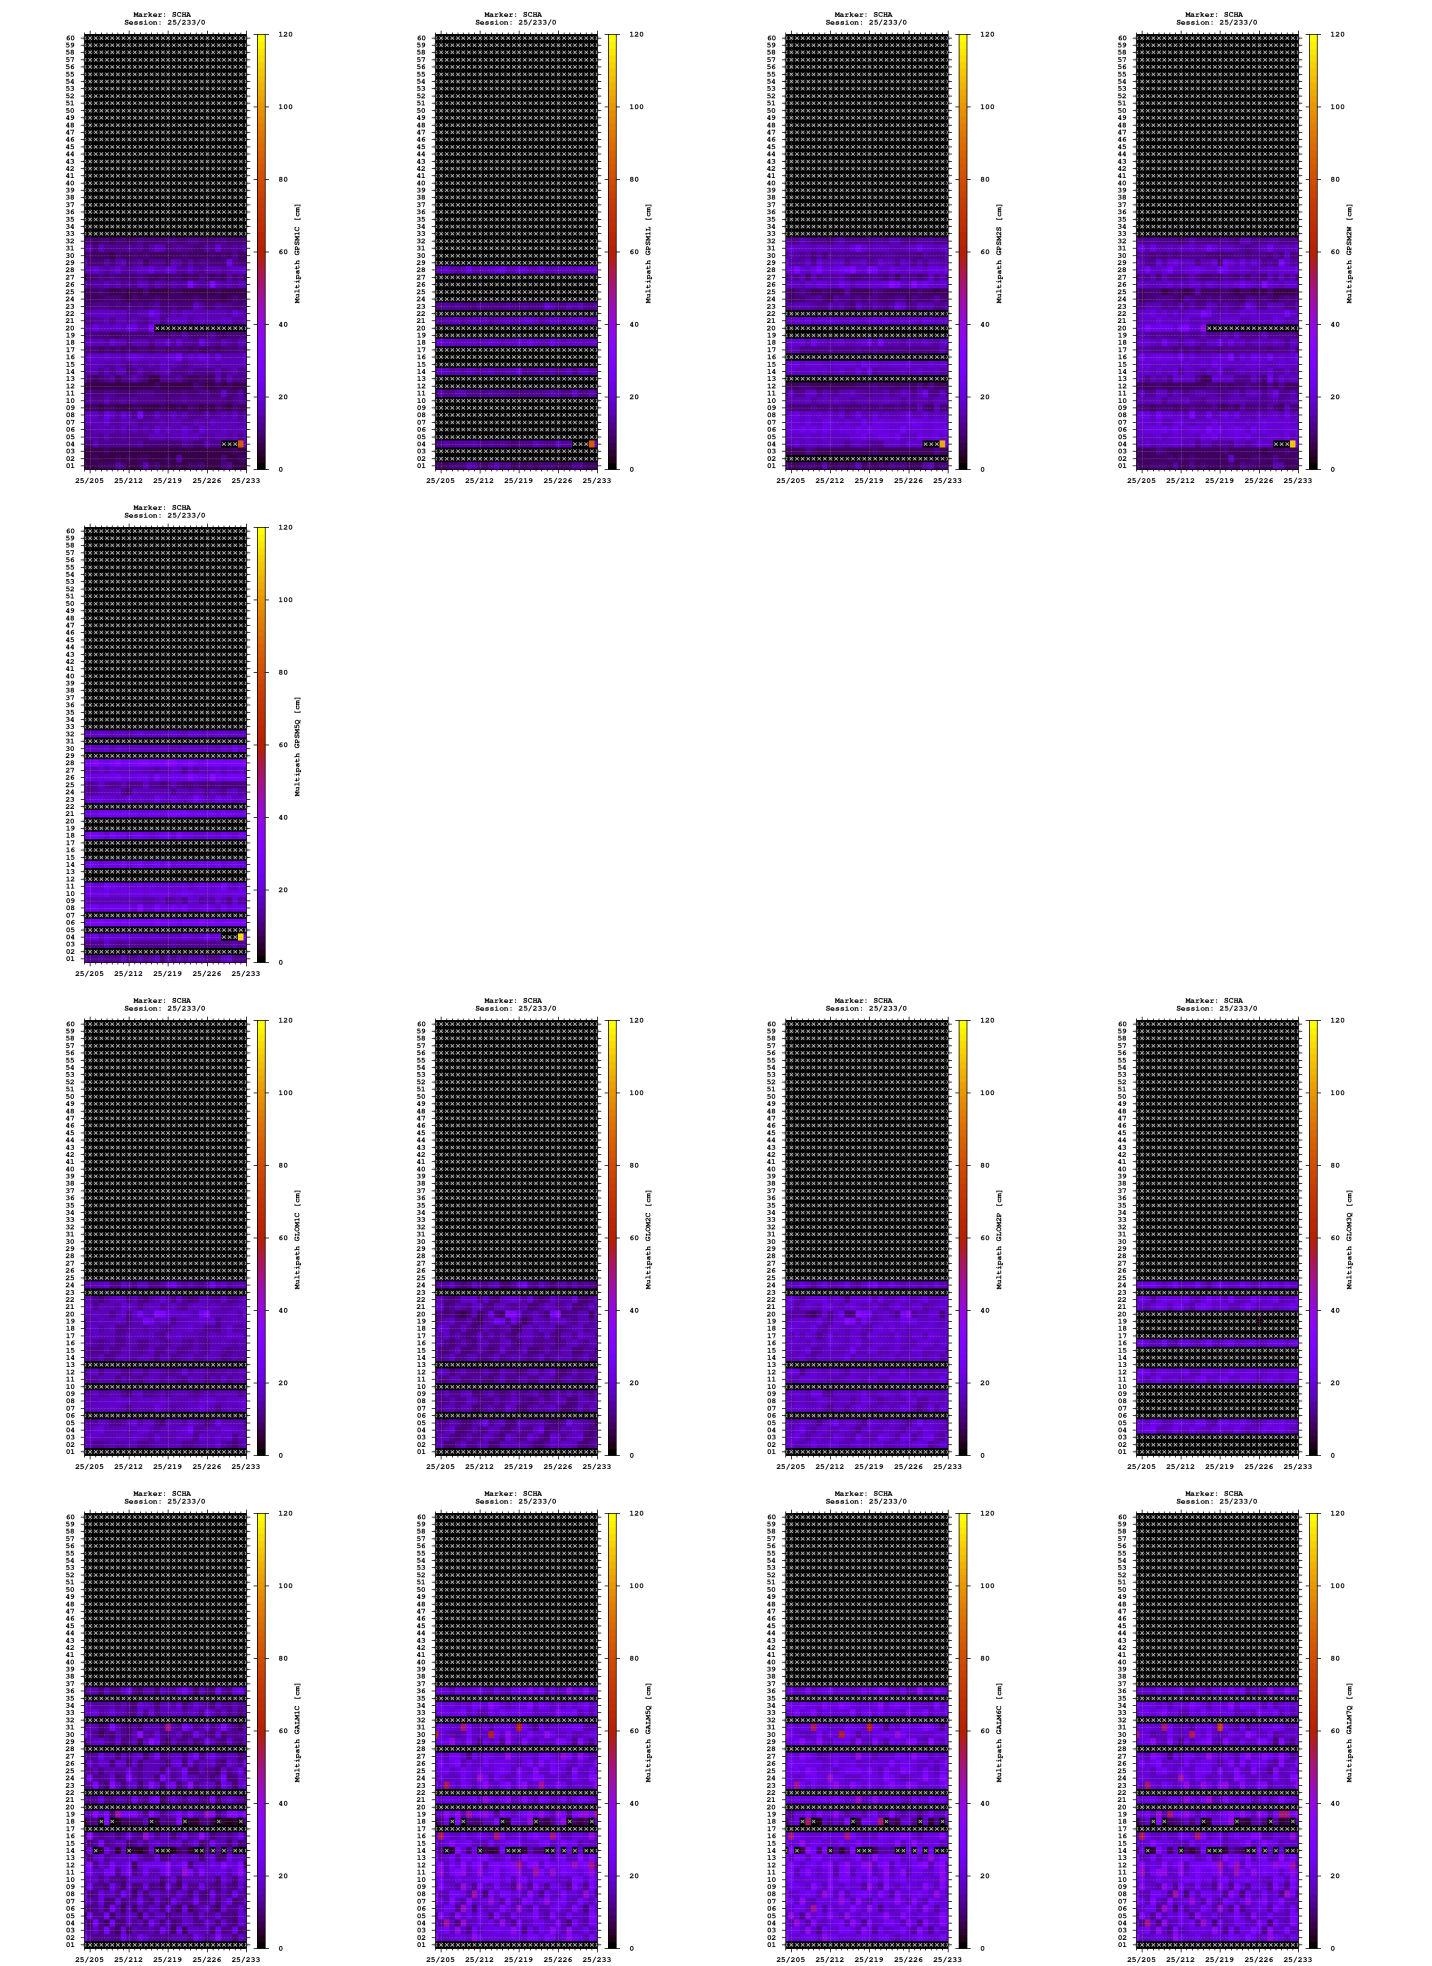


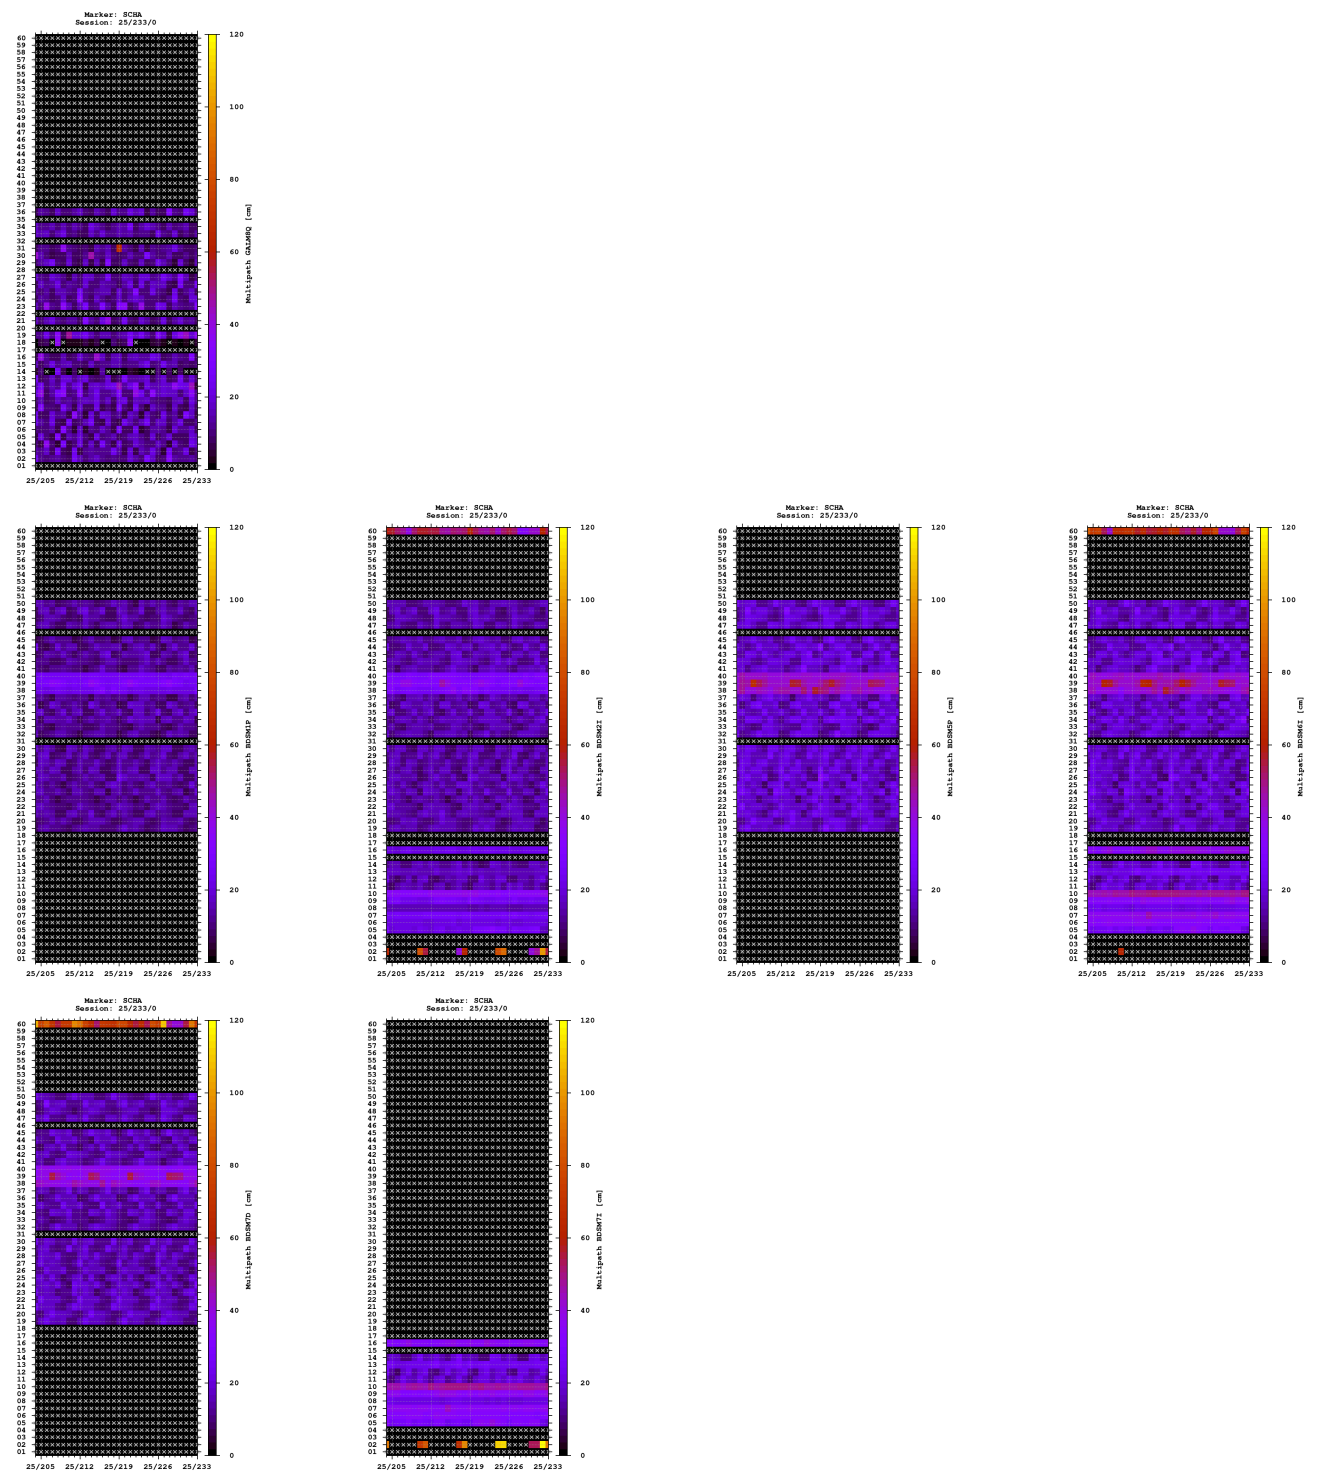



- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

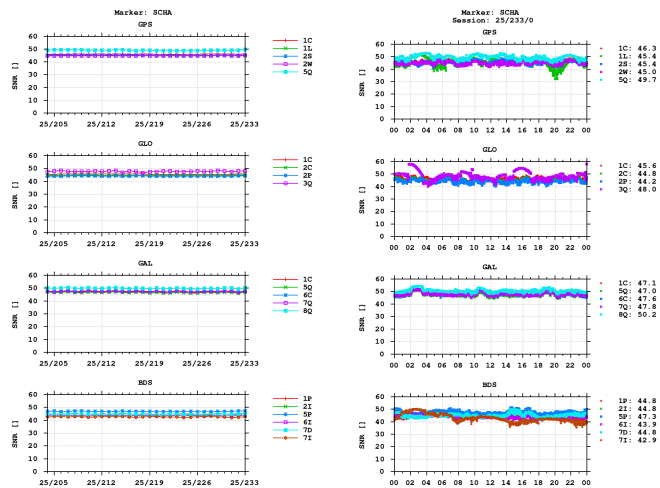

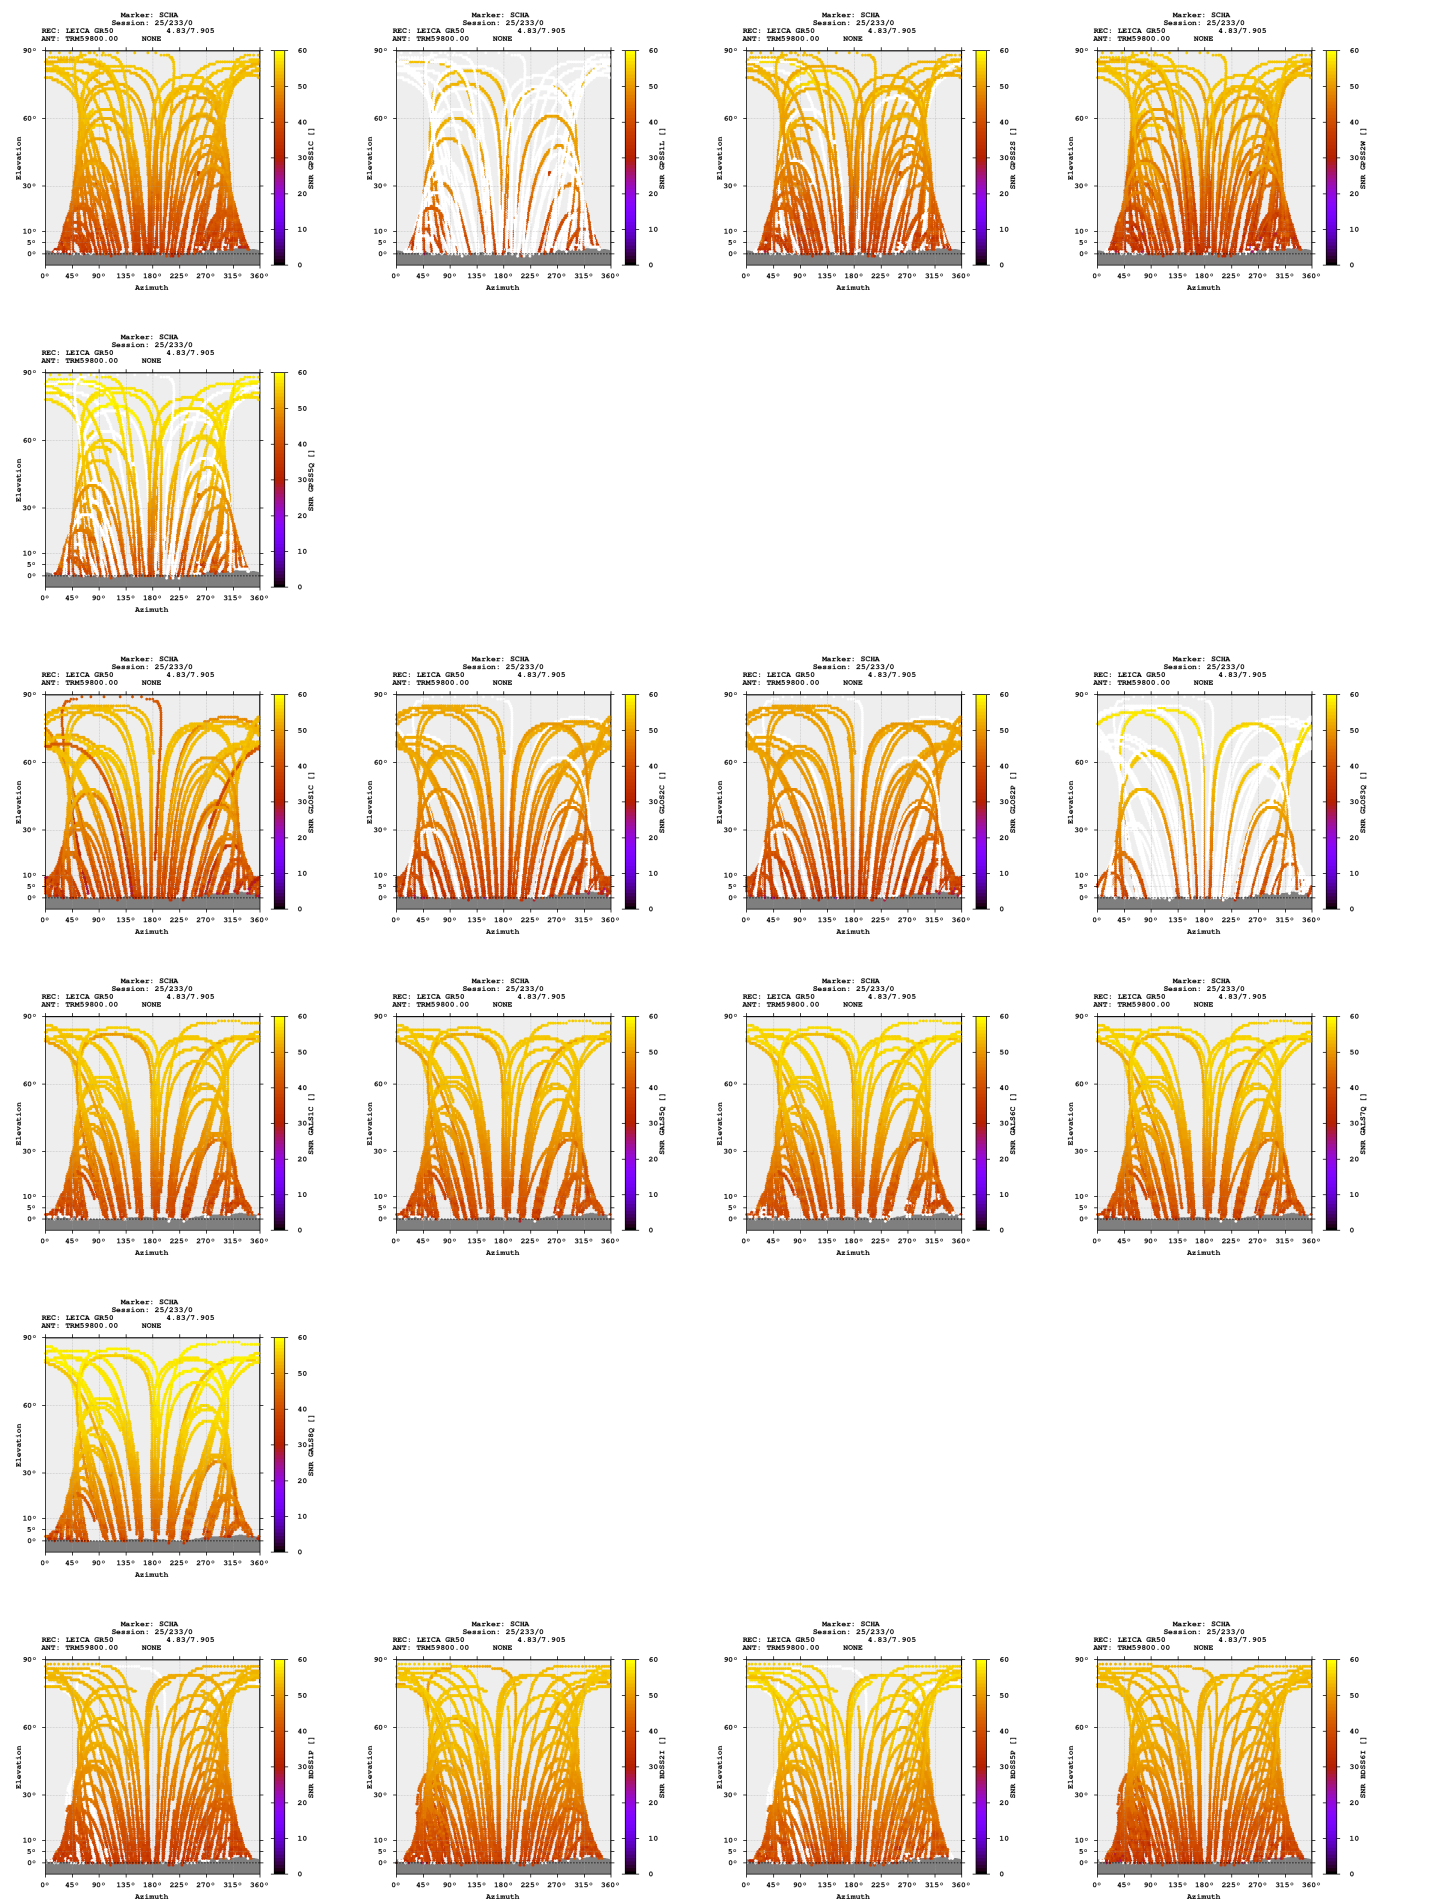

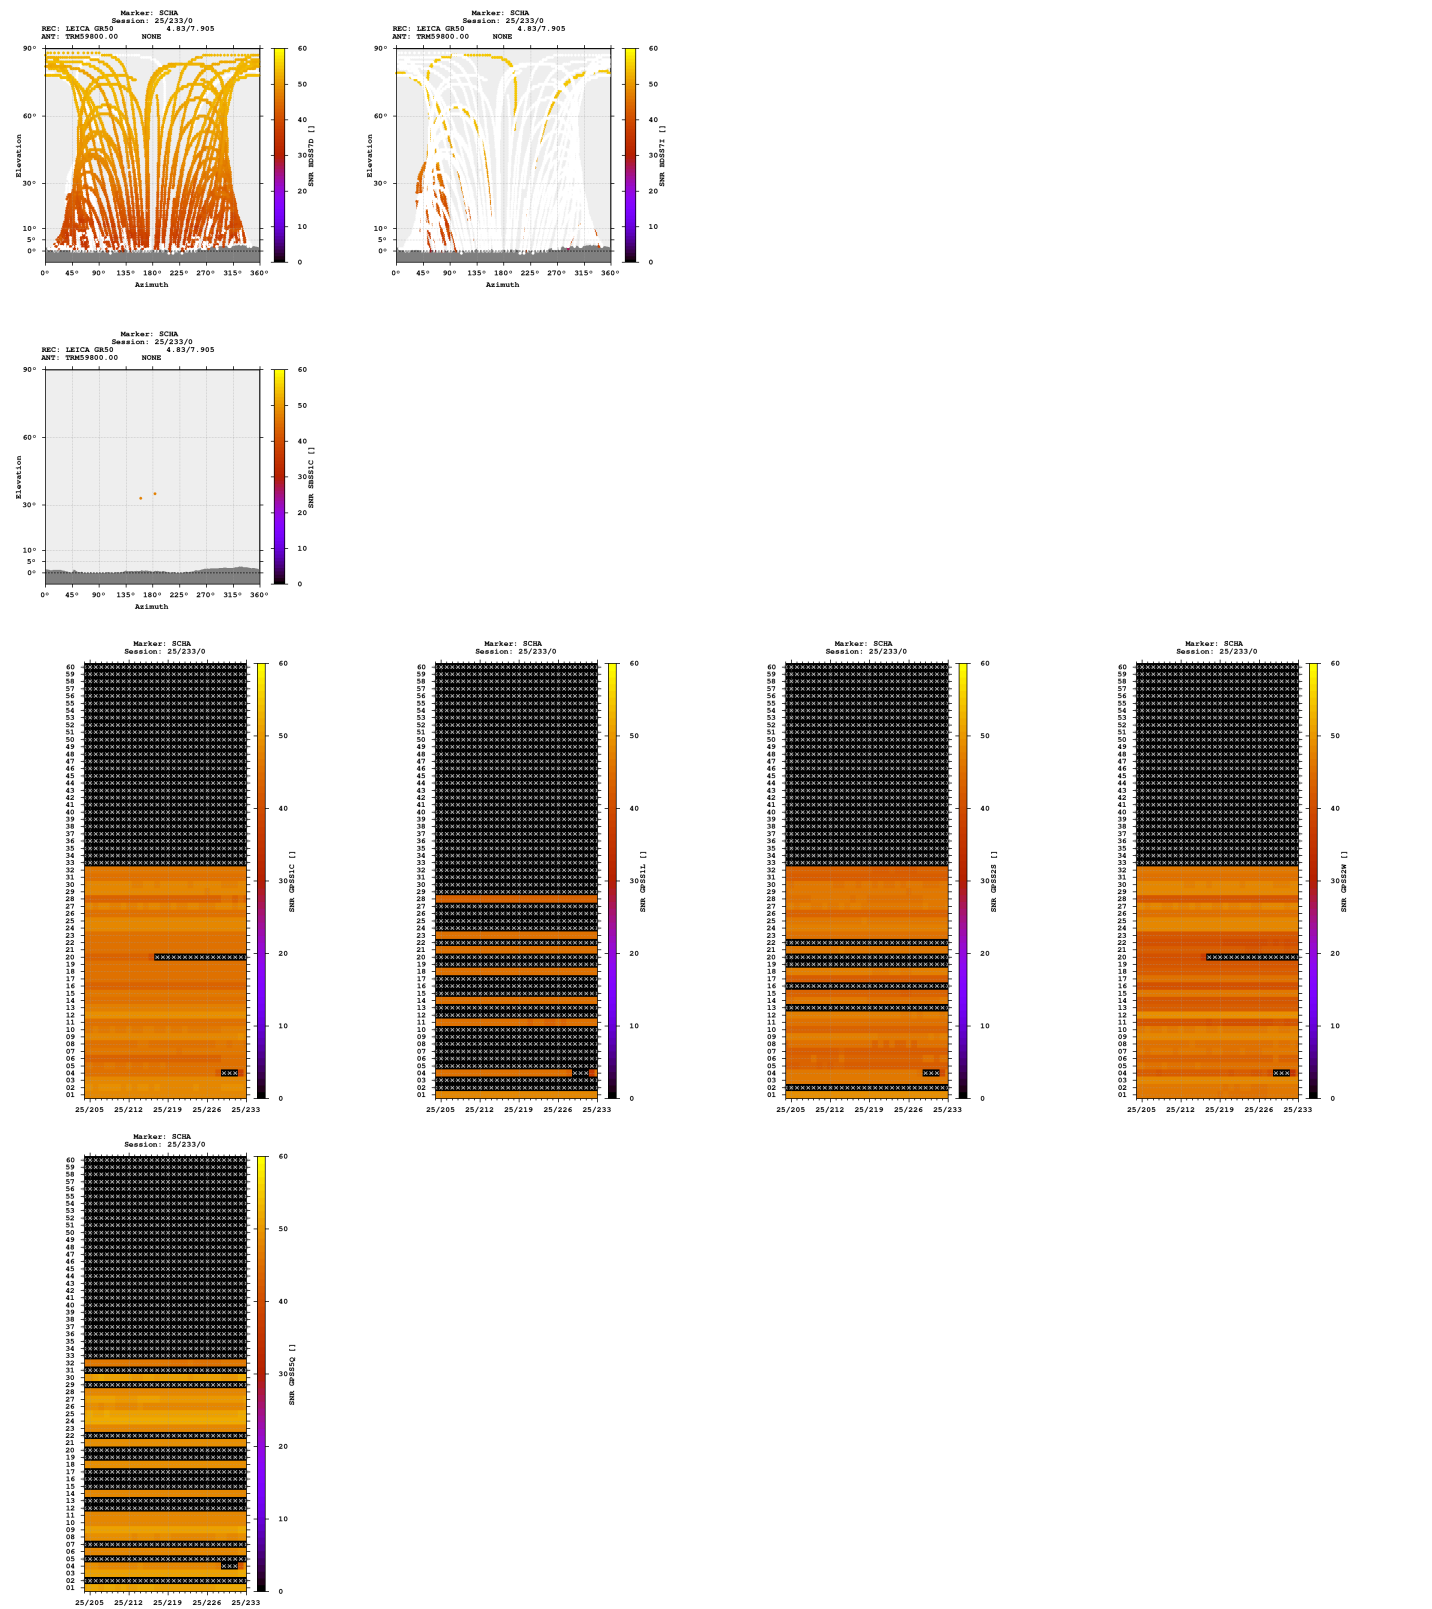


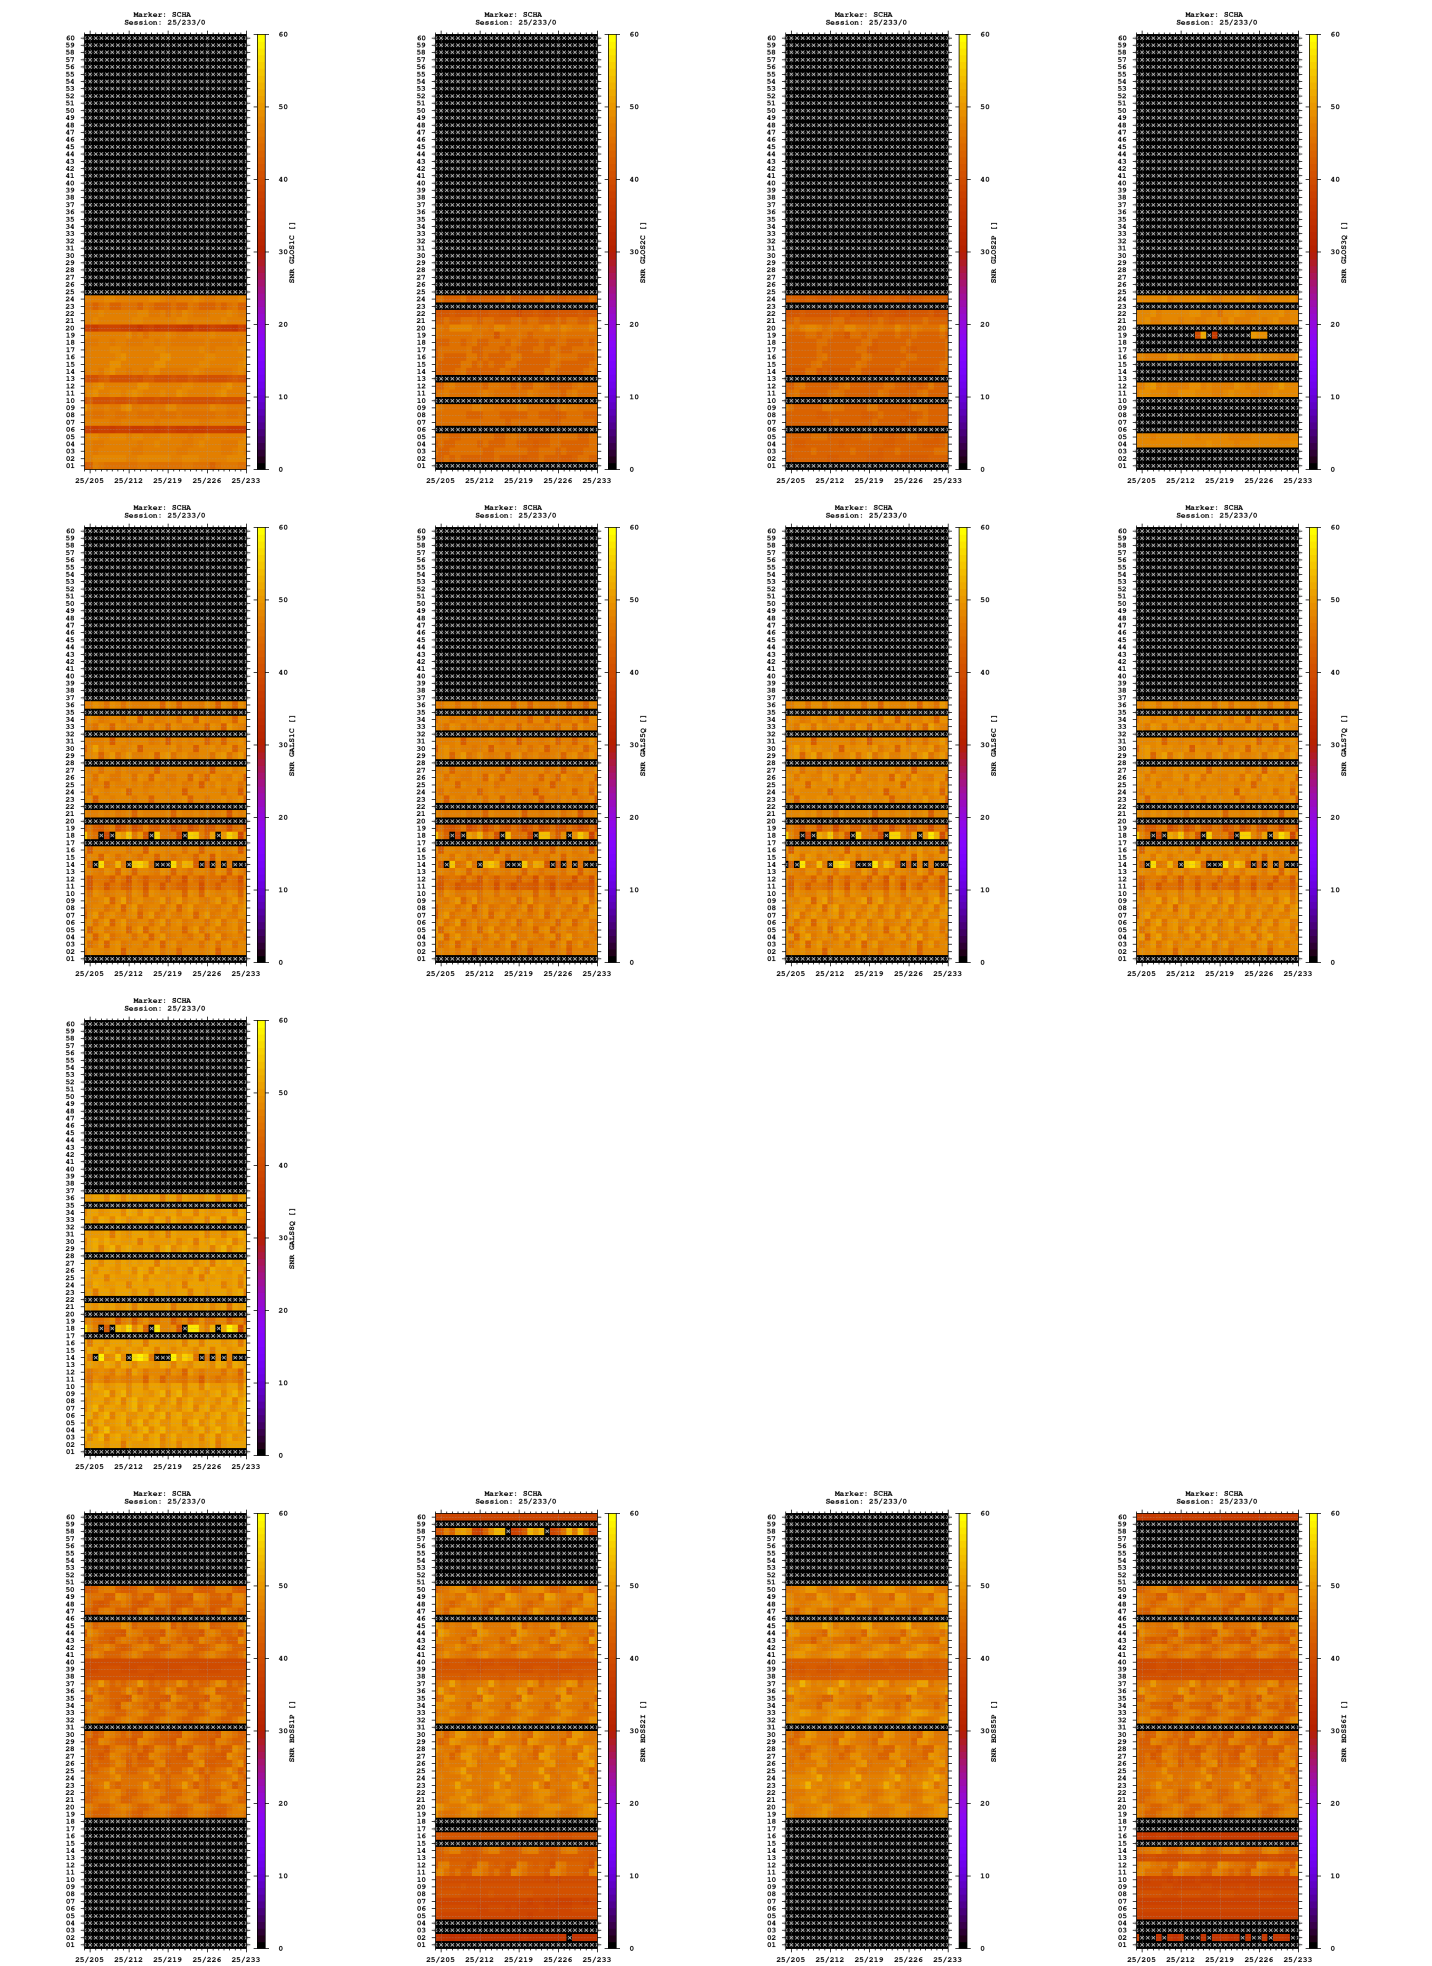


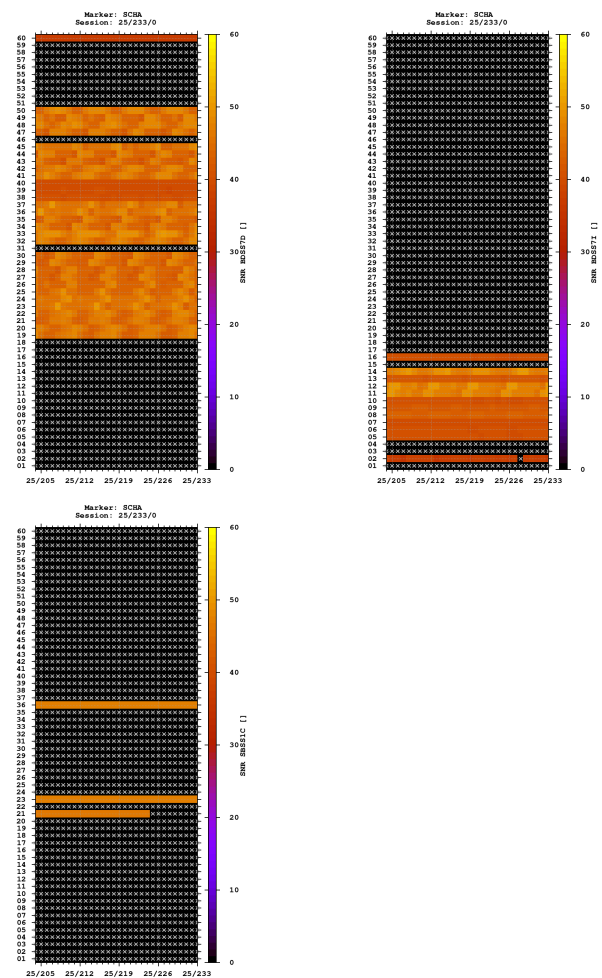

Estimates

2025-08-21 00:00:00	GPS	4248835.4666	646812.9767	4697774.8660	47.737571141	8.655850667	638.5969
2025-08-21 00:00:00	GLO	4248835.6798	646813.1300	4697774.5124	47.737567727	8.655853507	638.7885
2025-08-21 00:00:00	GAL	4248835.7097	646813.1458	4697775.0270	47.737570312	8.655852493	638.9194
2025-08-21 00:00:00	BDS	4248835.6502	646813.1559	4697775.1943	47.737571739	8.655852660	638.9800

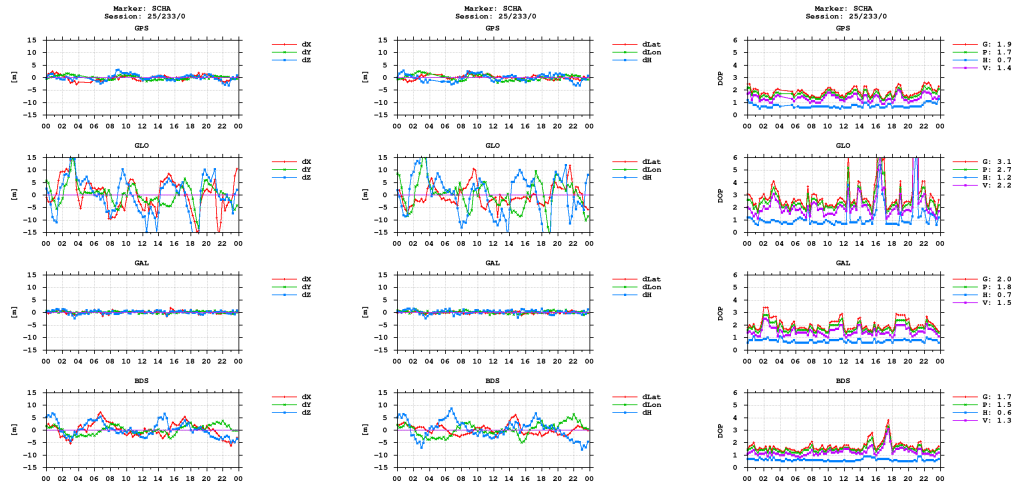

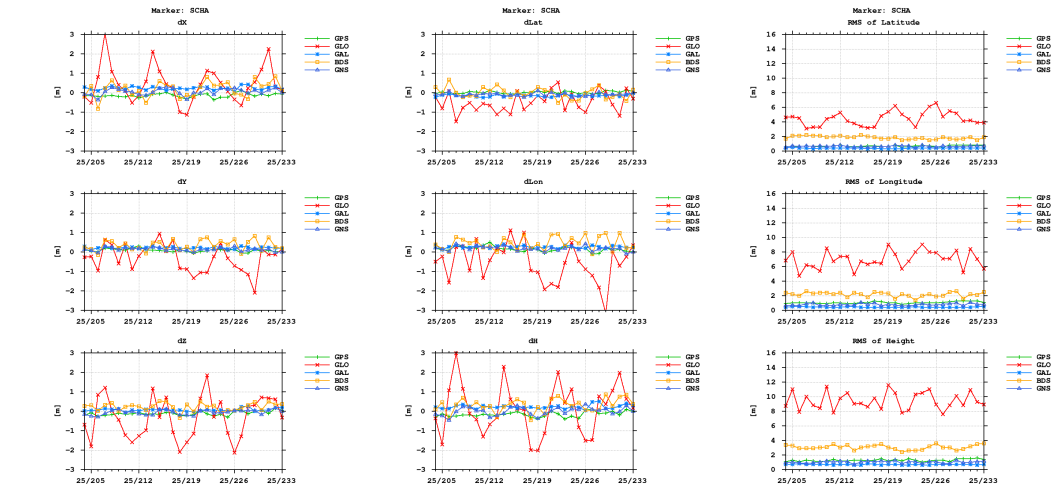

Equipment

2025-07-23 00:00:00 LEICA GR50 4.83/7.905 1873104 LEICA GR50

Program info

G-Nut/Anubis Free [3.10] Mar 19 2025 09:09:21 (Rev: 4538)