


GNSS observation file monitoring for TORI


Last RINEX file: TORI1100.24D.Z
 RINEX version: 3.04
 Marker: TORI 12724M002
 Receiver: 1706862 LEICA GR30 4.80/7.900
 Antenna: 09330025 LEIAR25.R3 NONE

Epochs

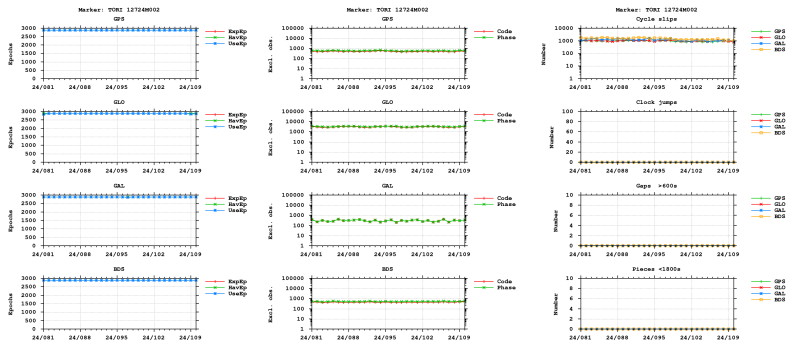



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

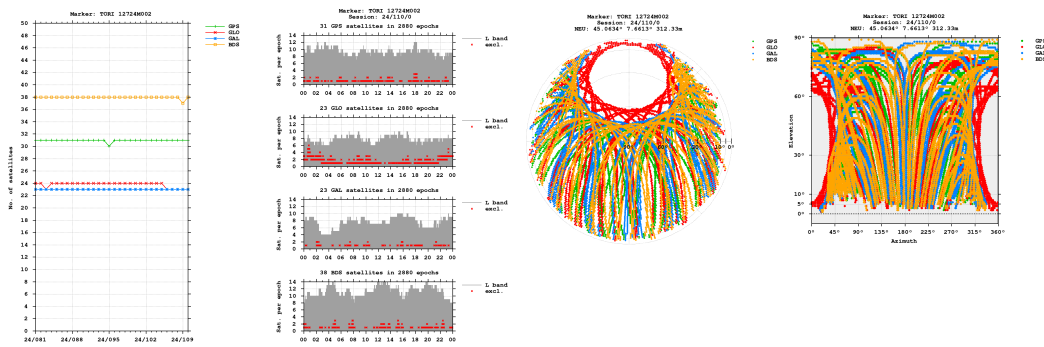


Bands

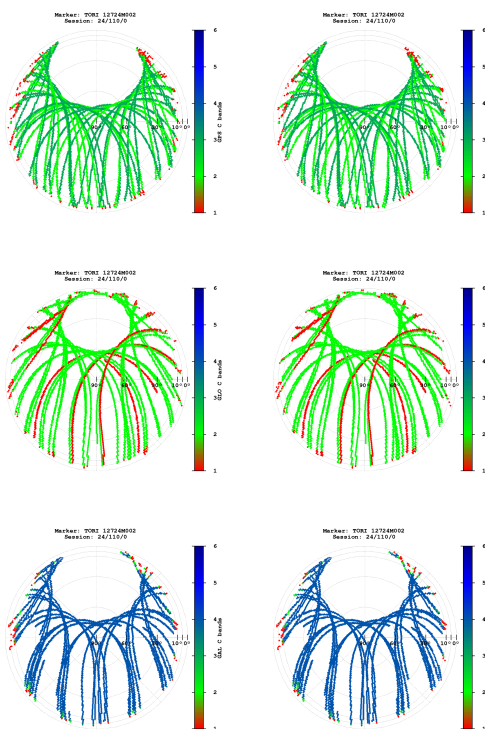


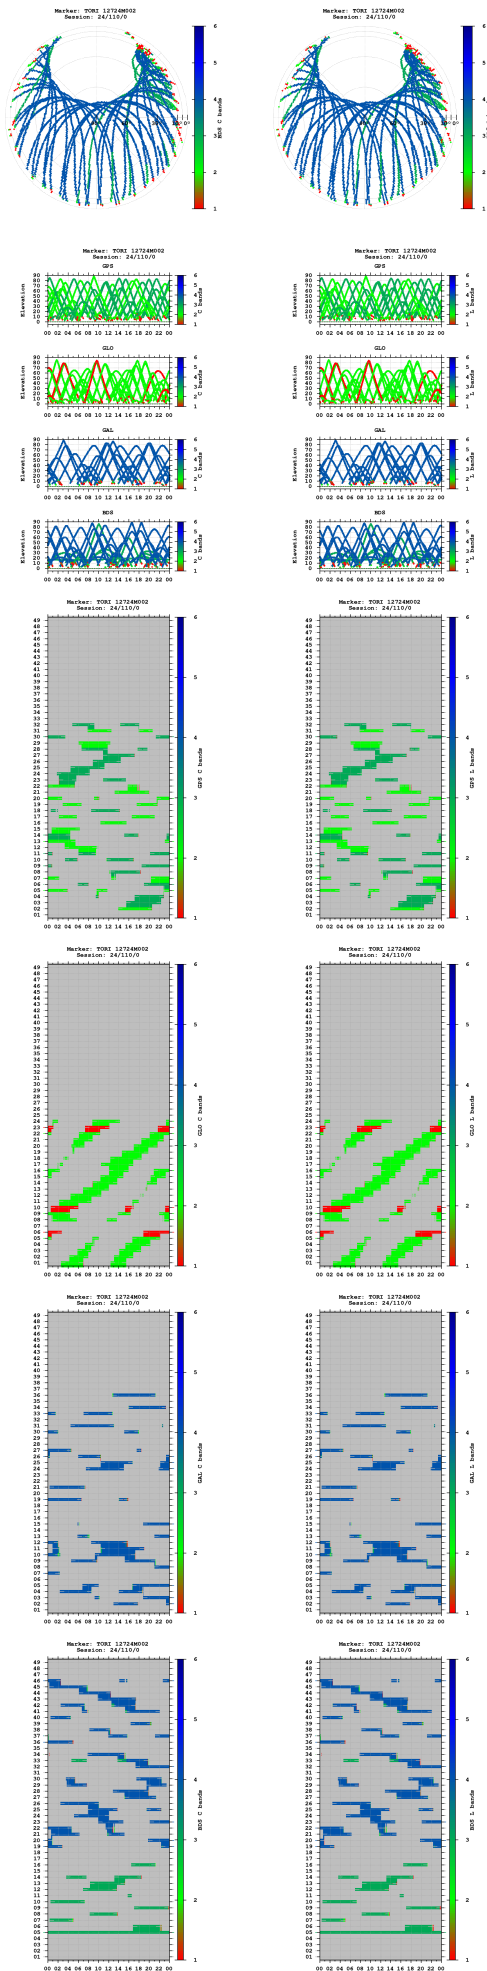


Observations

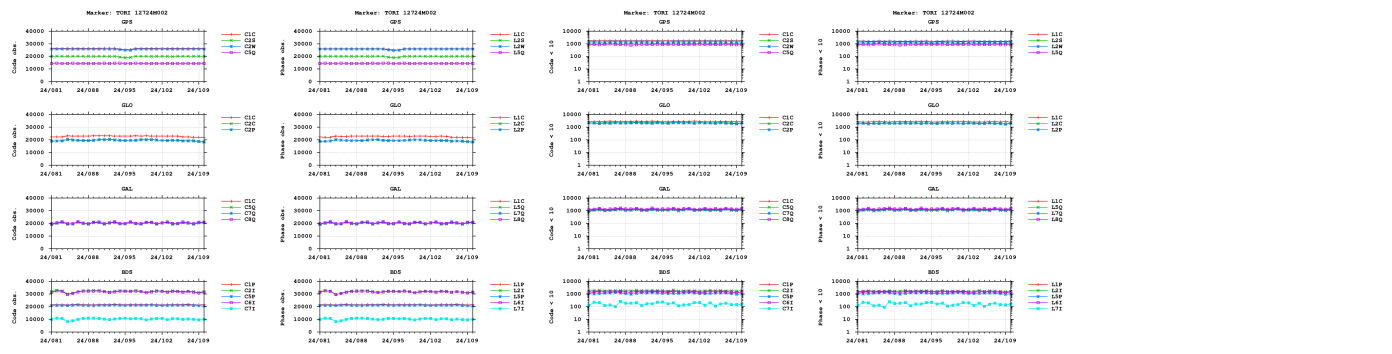



Cycle slips

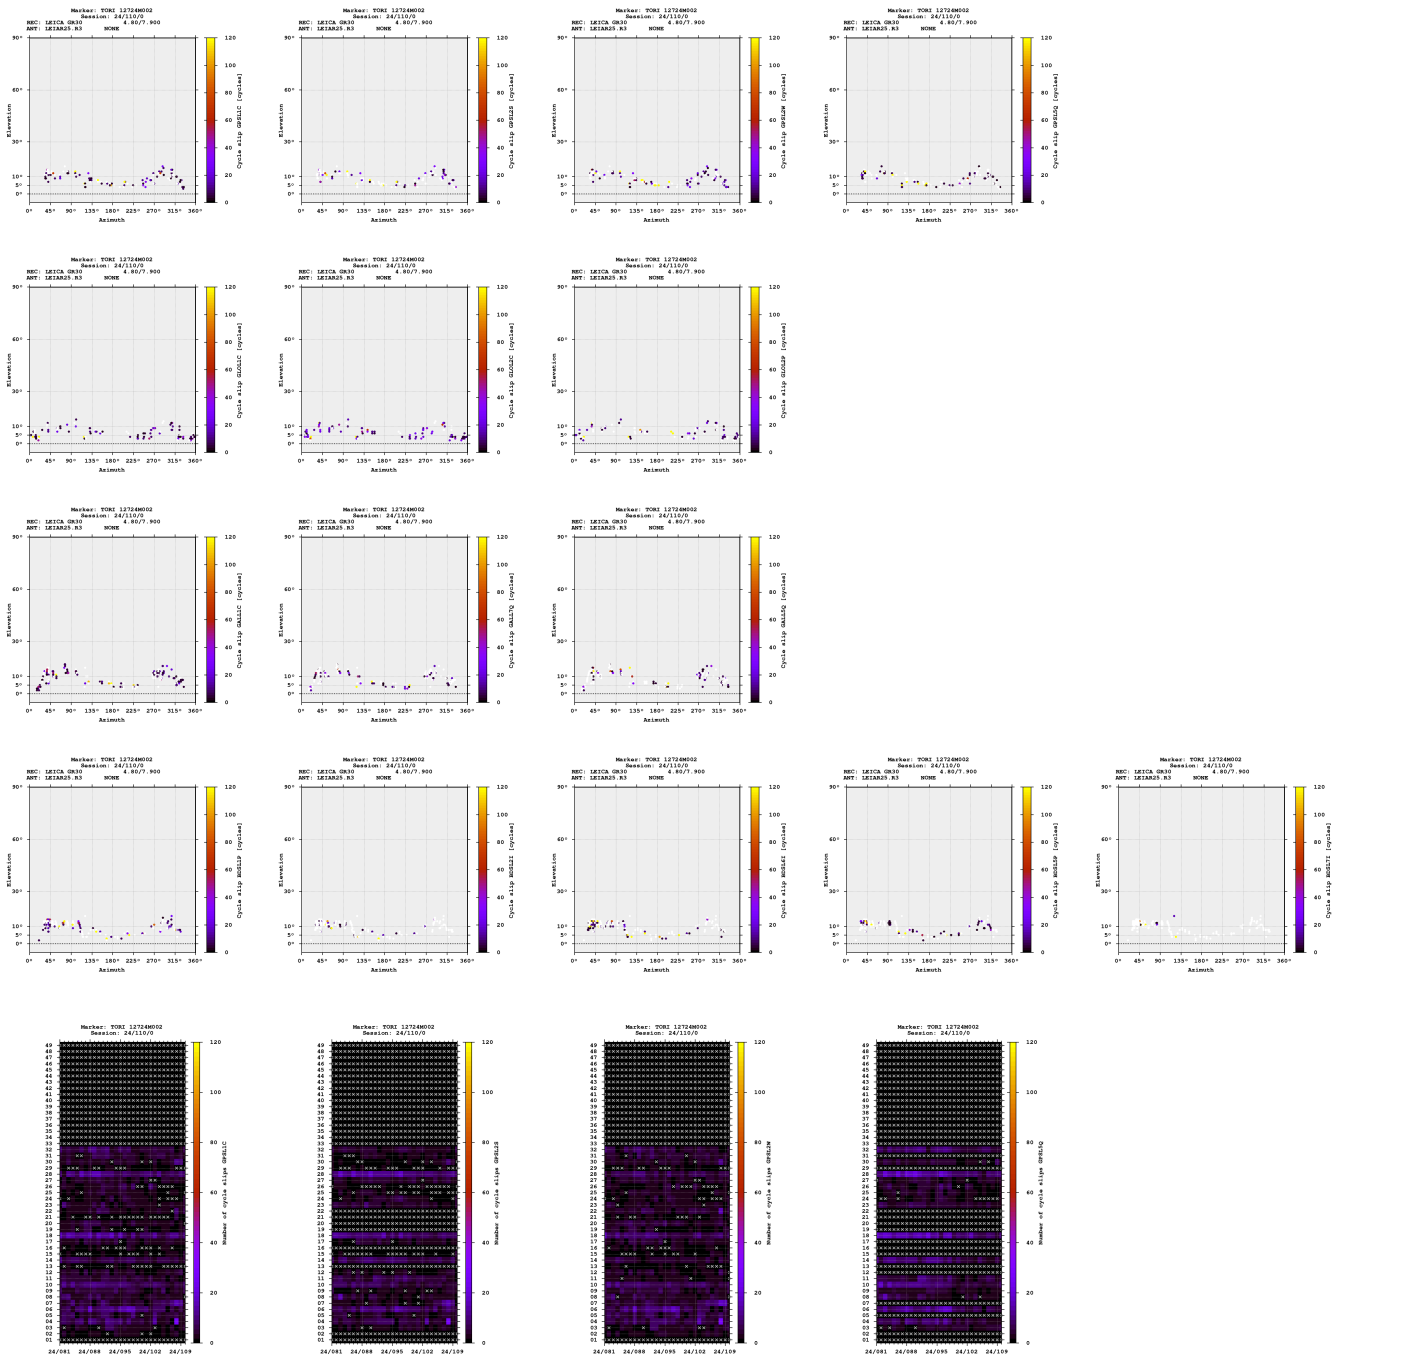

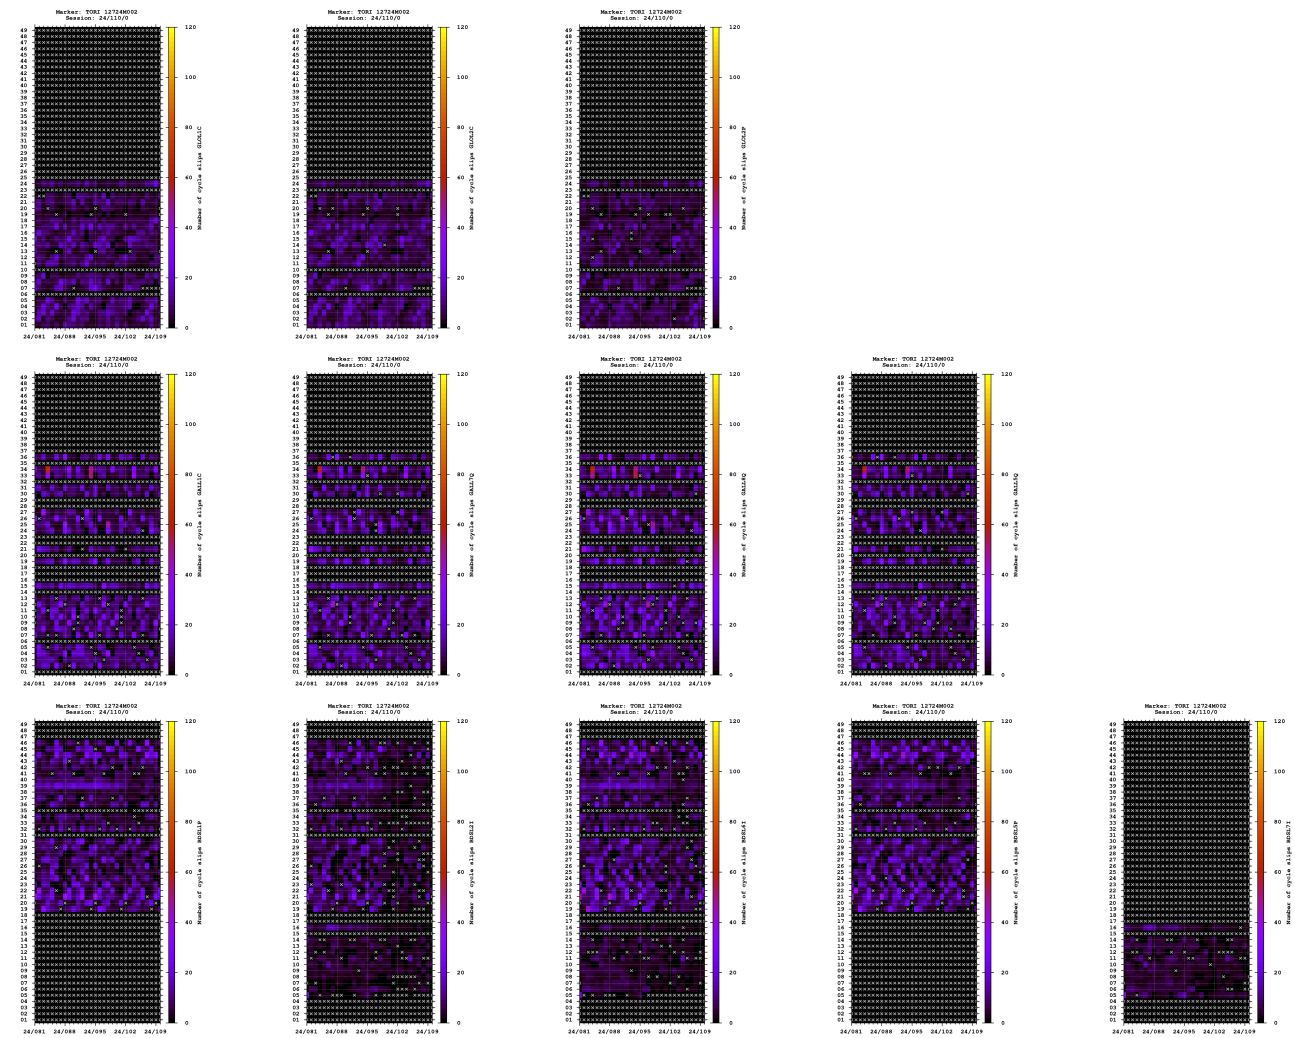


Multipath

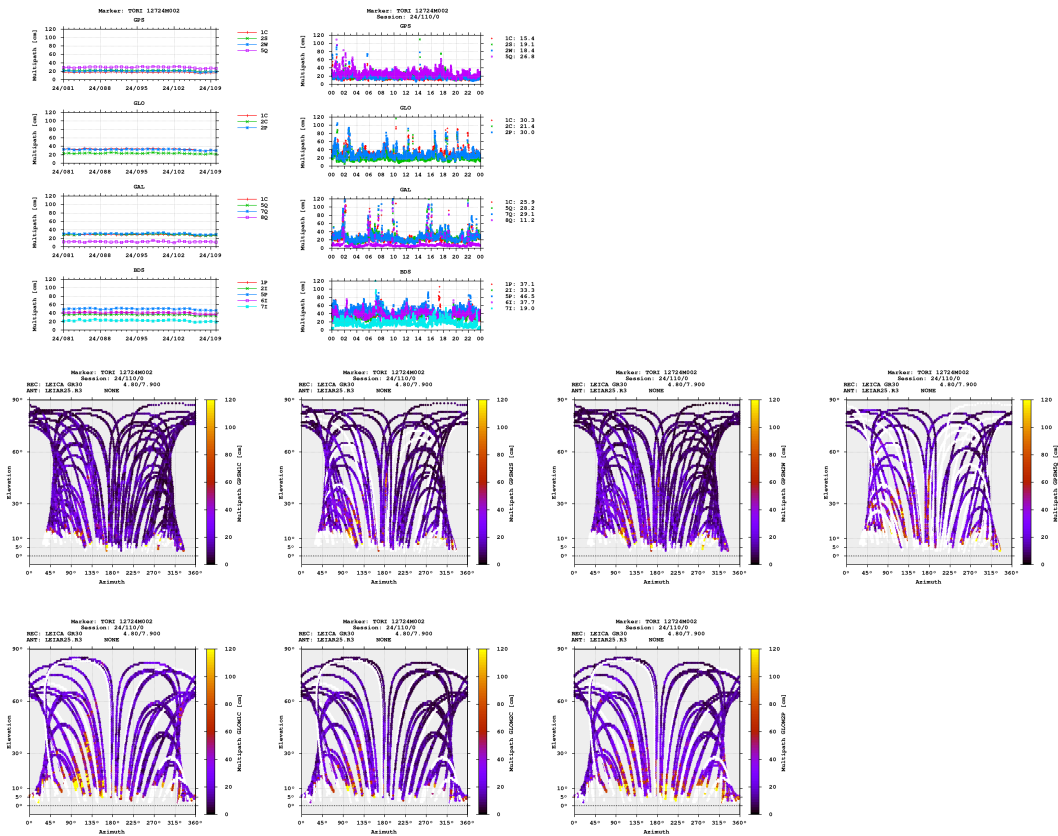


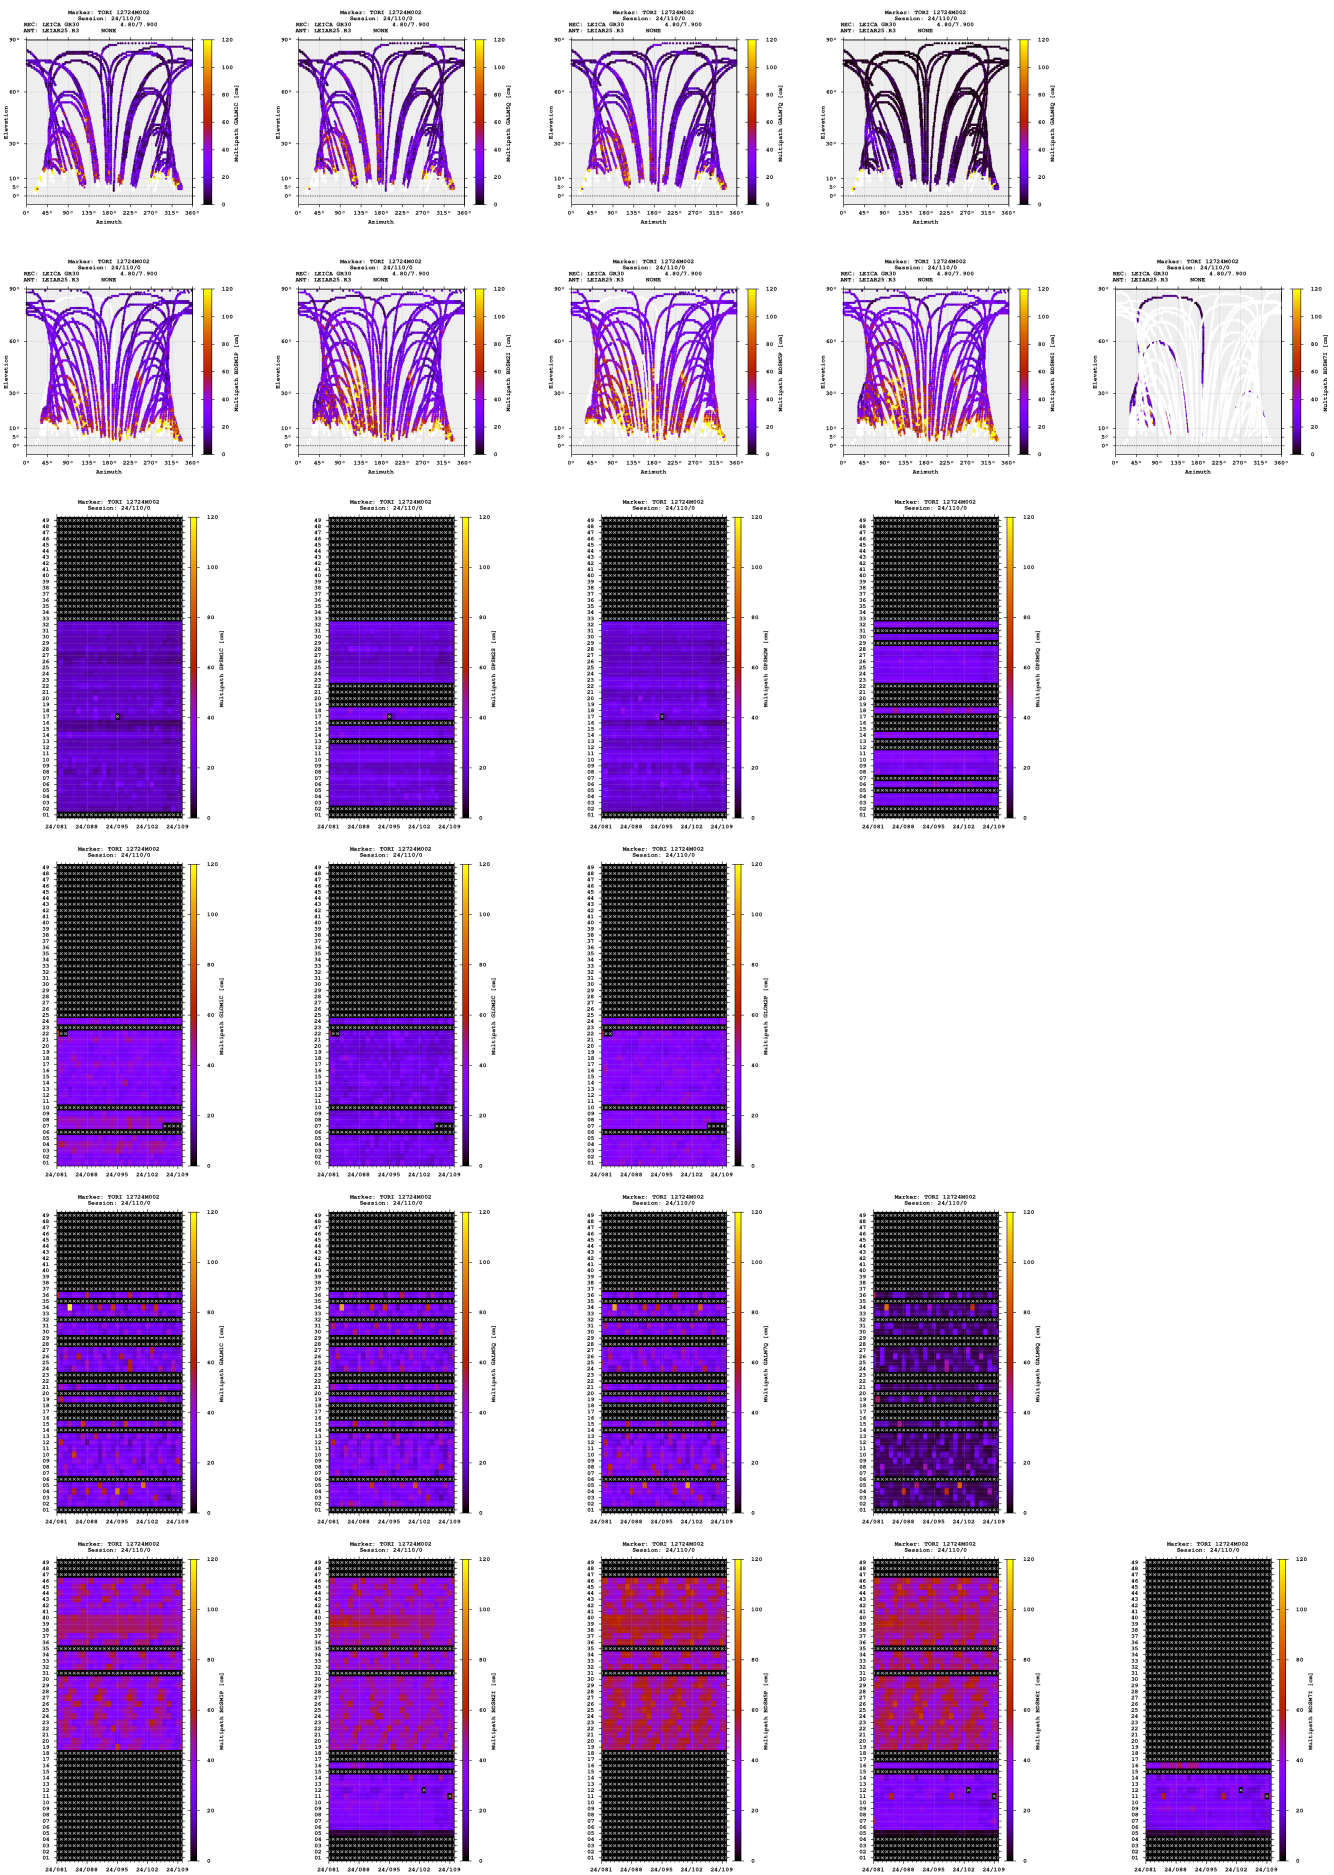

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

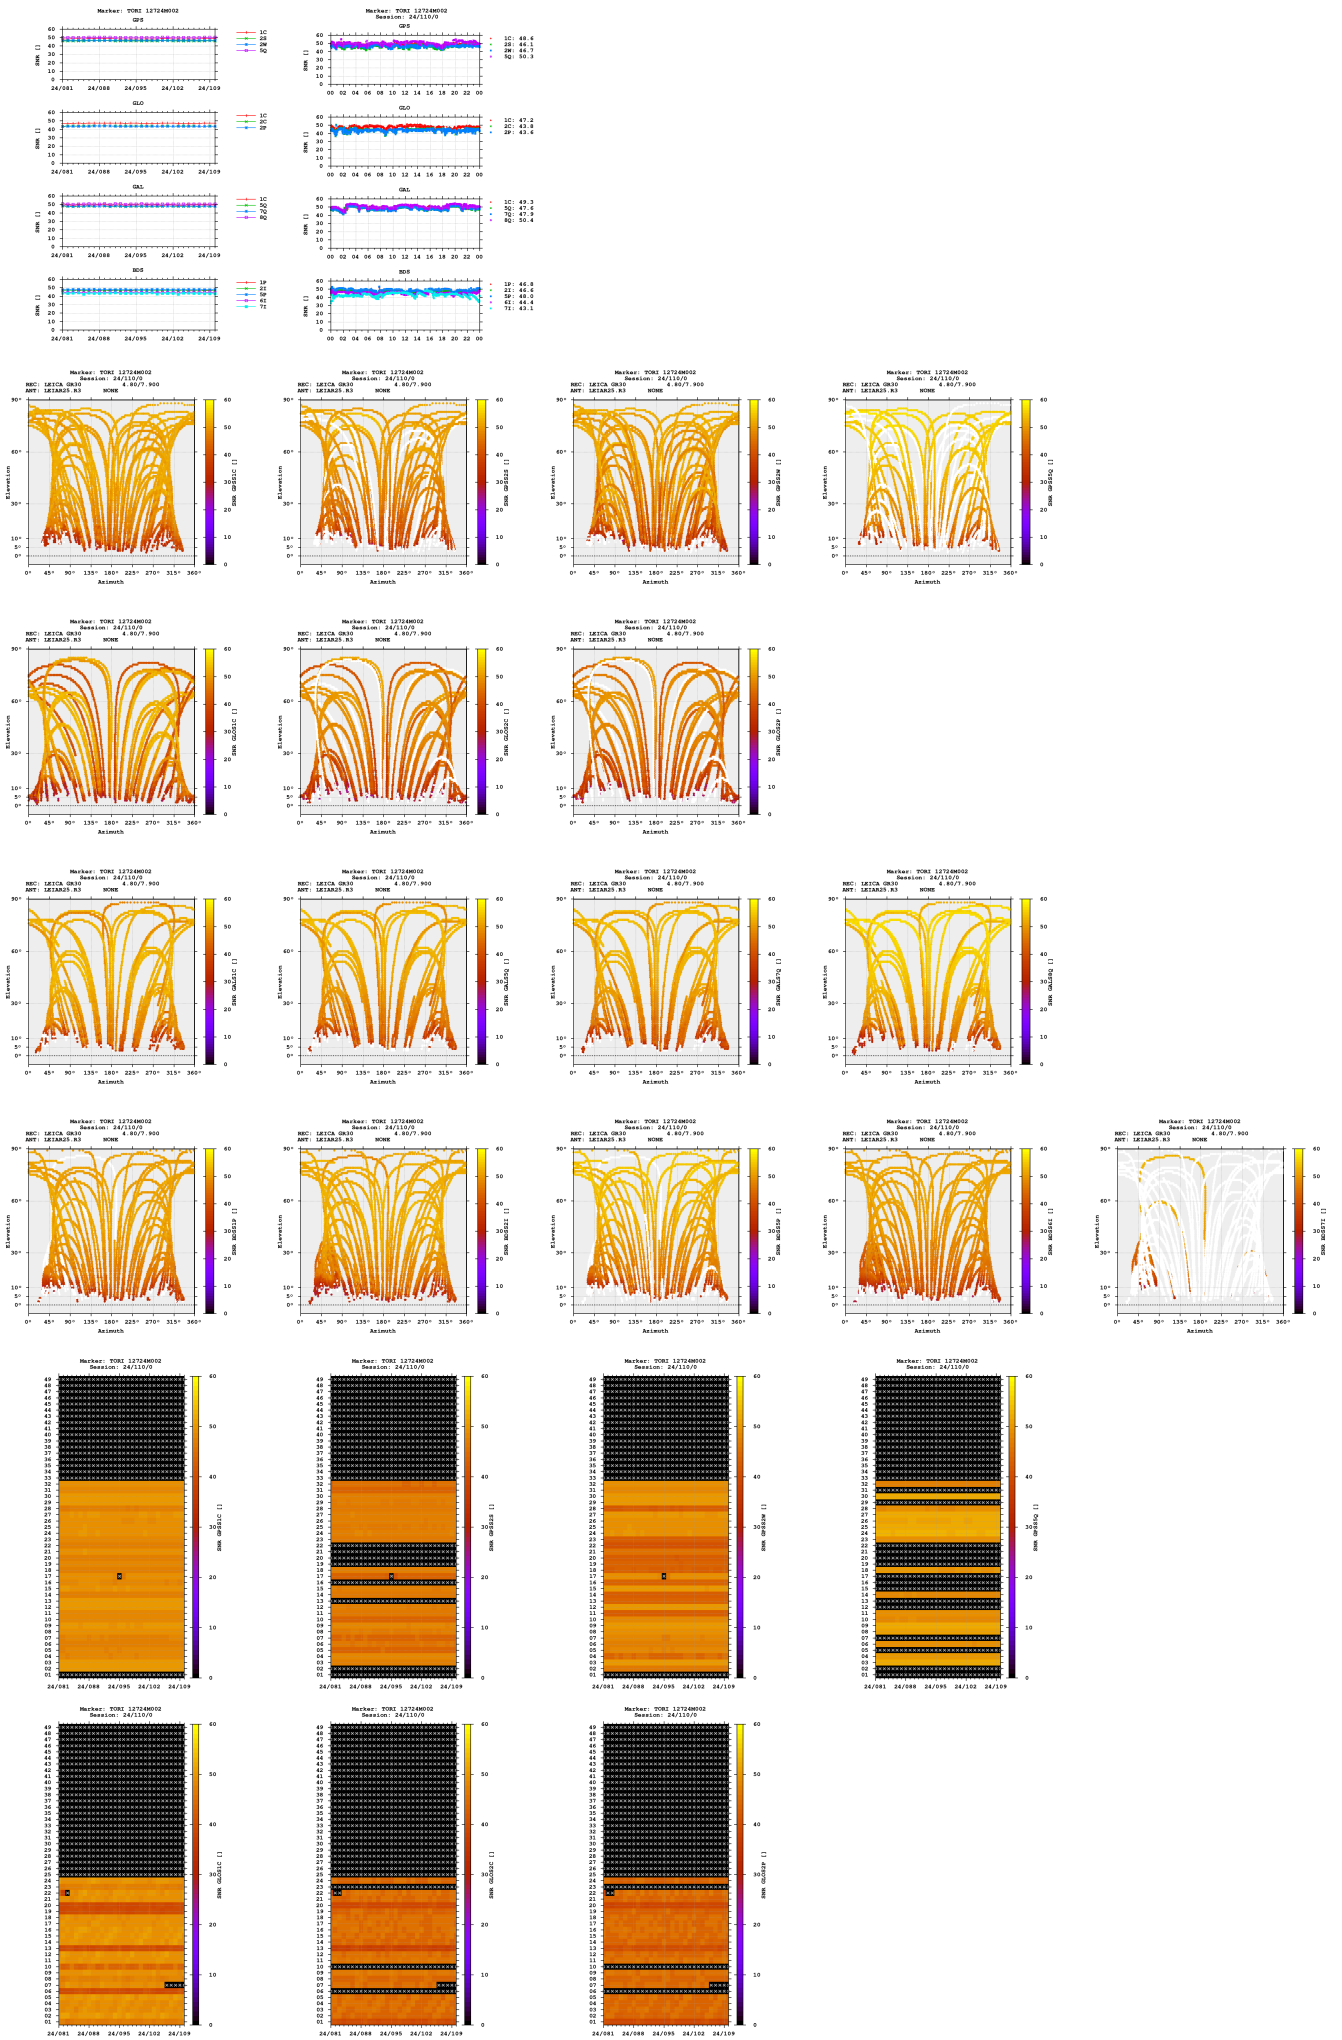

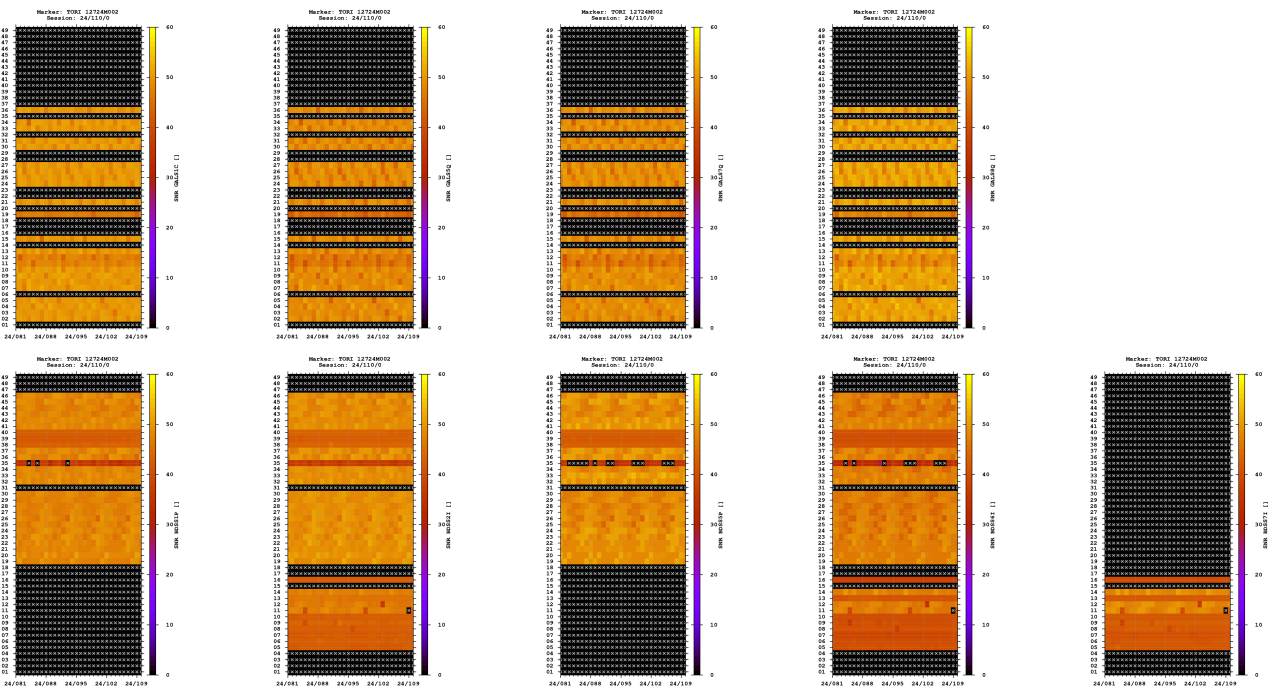

Estimates

2024-04-19 00:00:00	GPS	4472544.0129	601634.6573	4492545.7075	45.063372440	7.661285828	310.8085
2024-04-19 00:00:00	GLO	4472544.5231	601633.7893	4492545.8720	45.063371403	7.661272807	311.5928
2024-04-19 00:00:00	GAL	4472544.5454	601634.7237	4492545.8621	45.063370181	7.661285732	311.3806
2024-04-19 00:00:00	BDS	4472572.0590	601616.4510	4492564.9768	45.063333496	7.661009239	342.4513

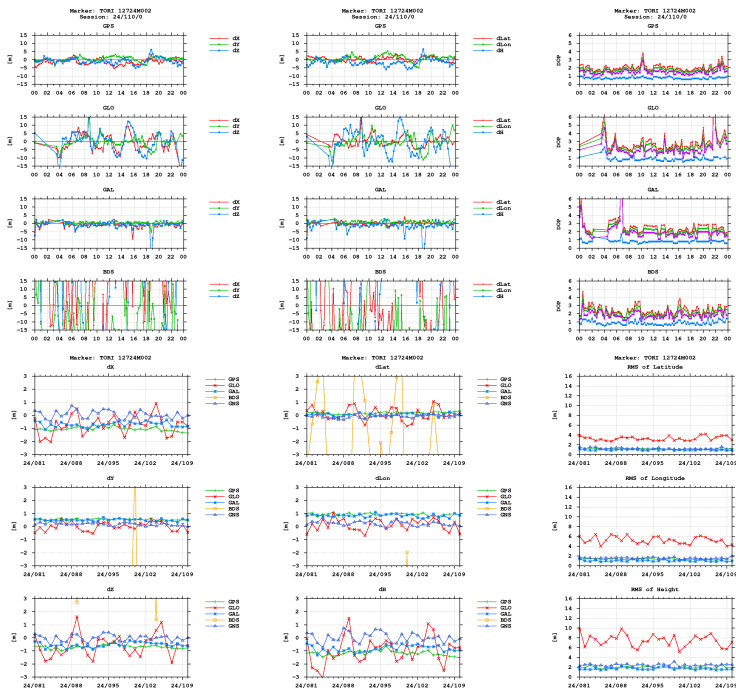

Equipment

2024-03-21 00:00:00 LEICA GR30 4.80/7.900 1706862 LEICA GR30

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)