


GNSS observation file monitoring for TRLK


Last RINEX file: TRLK1090.24D.Z
 RINEX version: 3.04
 Marker: TRLK TRLK
 Receiver: 496692 LEICA GRX1200+GNSS 9.20/6.407
 Antenna: 10251023 LEIAR25.R4 NONE

Epochs

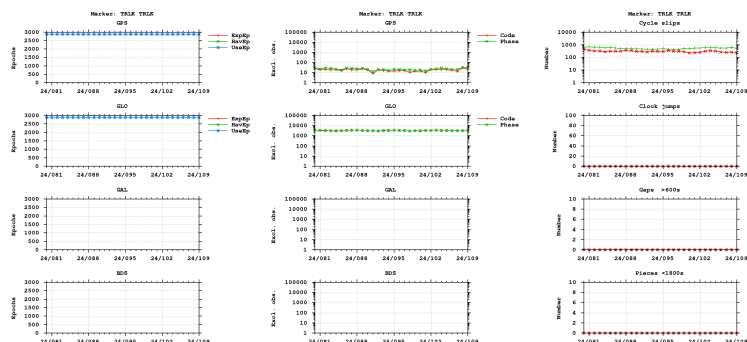



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

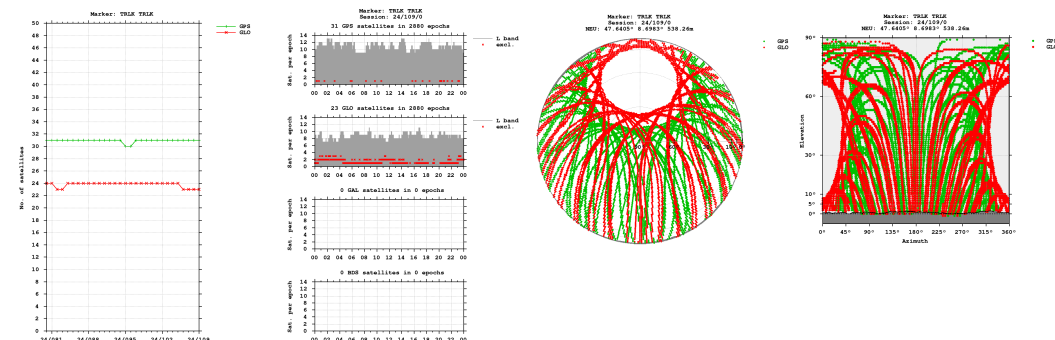


Bands

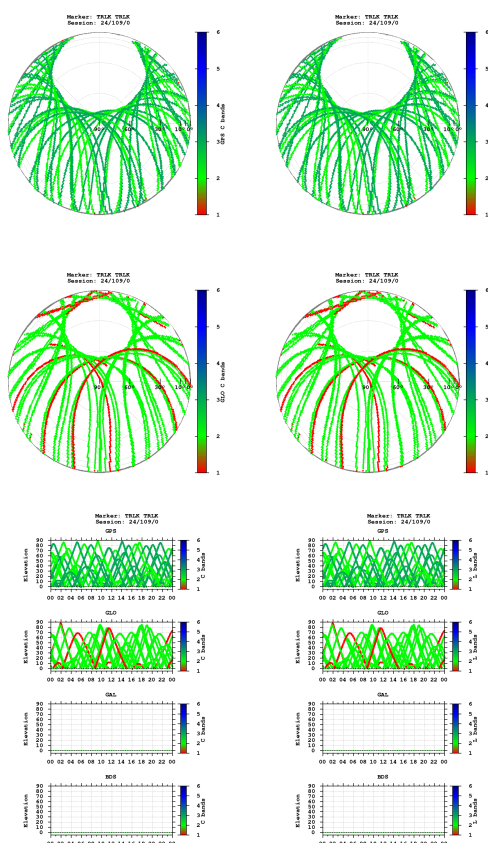


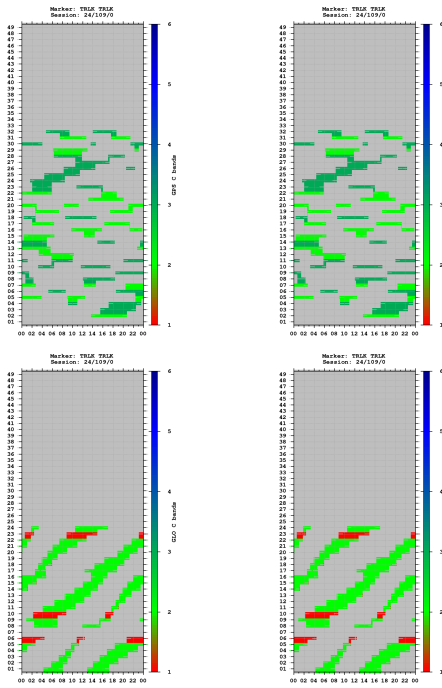


Observations



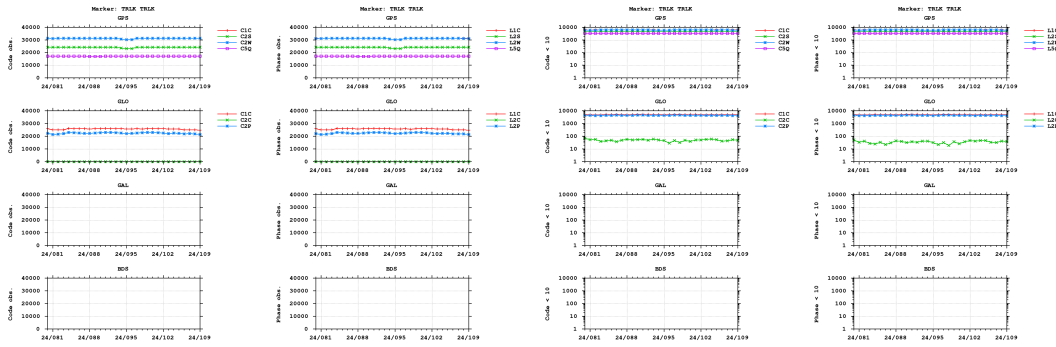



Cycle slips

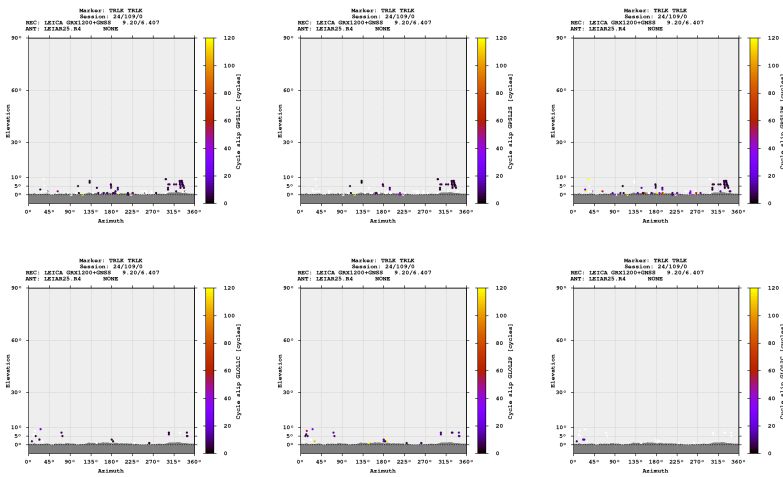

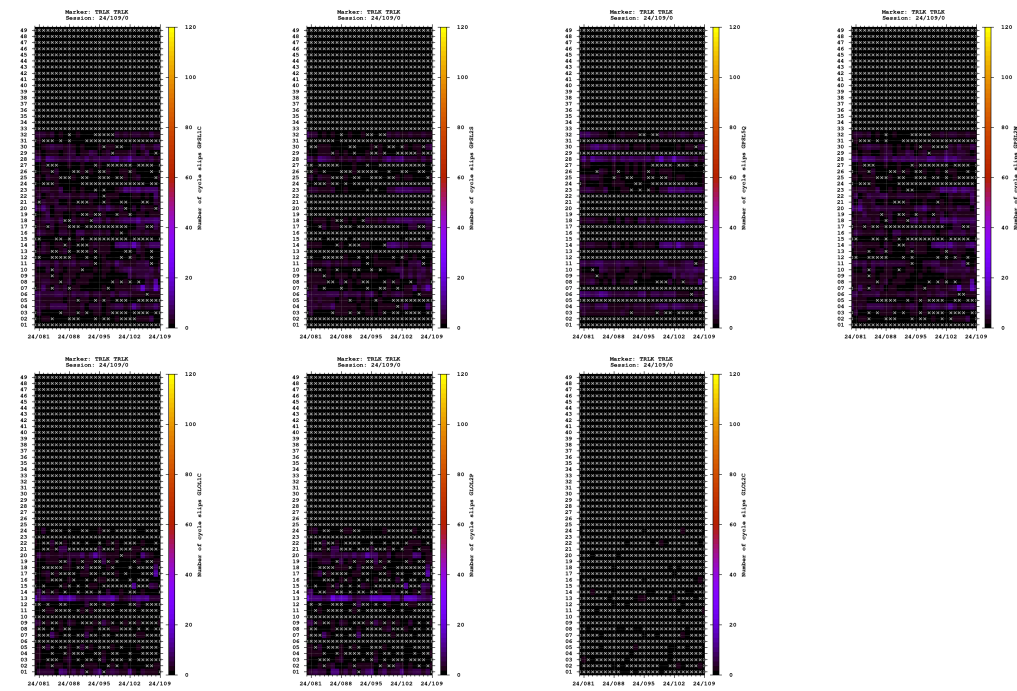






Multipath

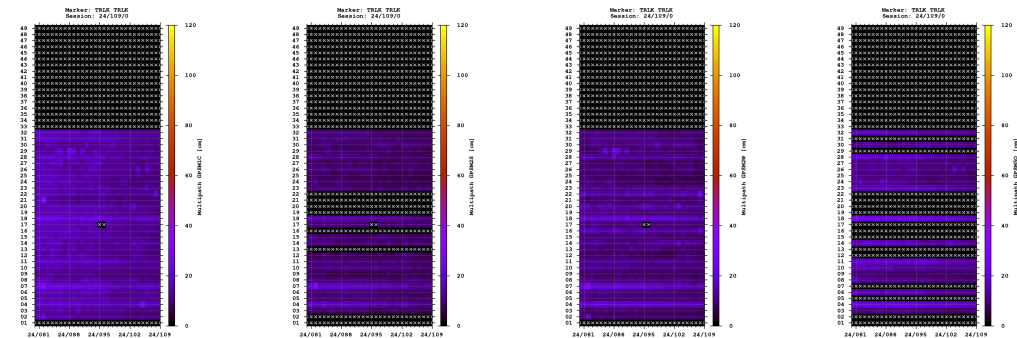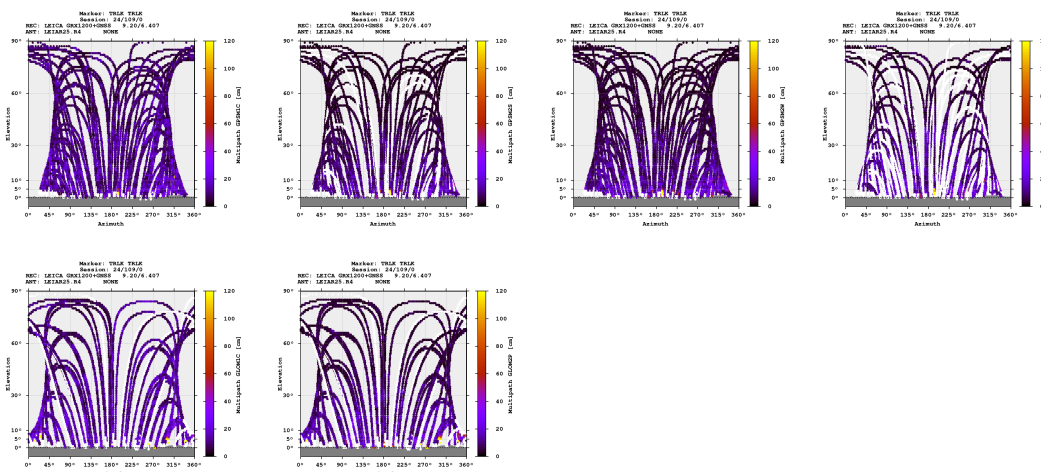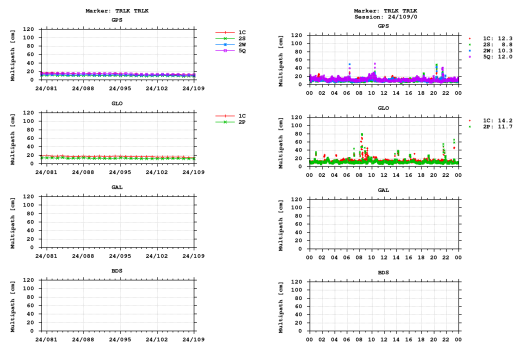

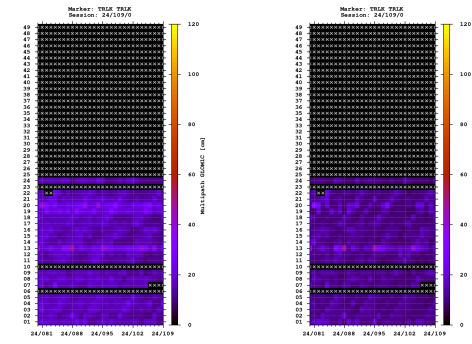


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

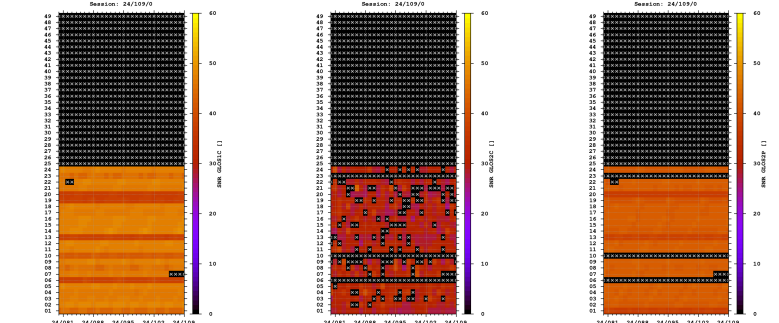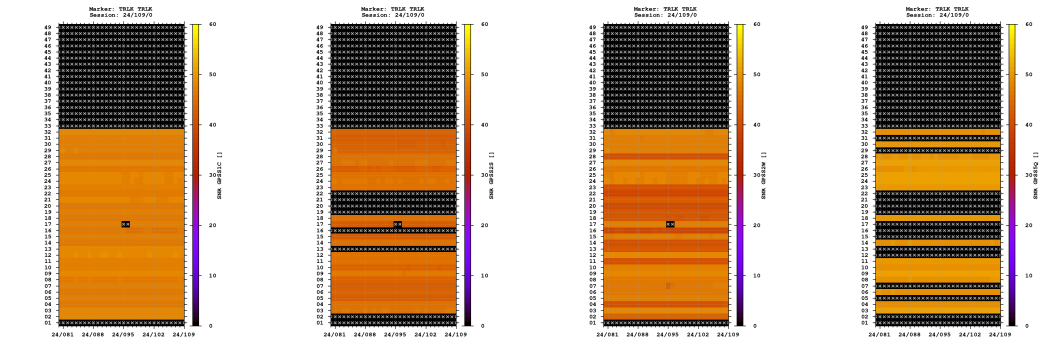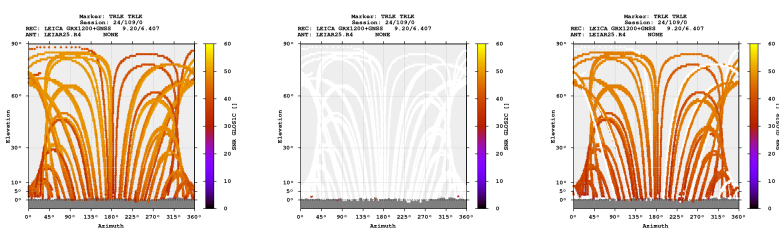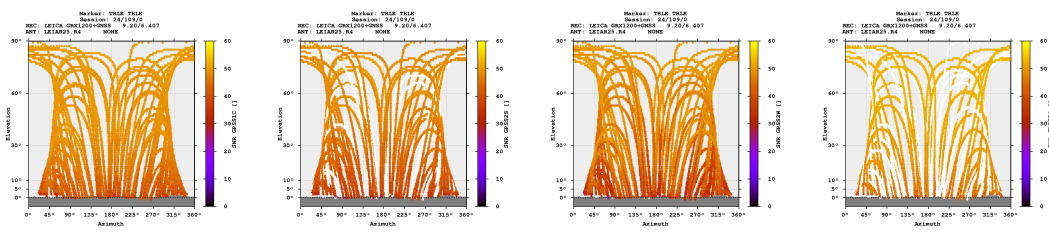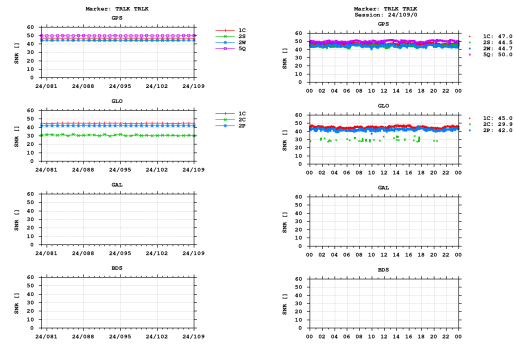

Estimates

2024-04-18 00:00:00 GPS 4256176.6701 651159.3993 4690436.3967 47.640520377 8.698327346 538.4553
2024-04-18 00:00:00 GLO 4256177.1417 651159.1469 4690436.3480 47.640517084 8.698323196 538.6359

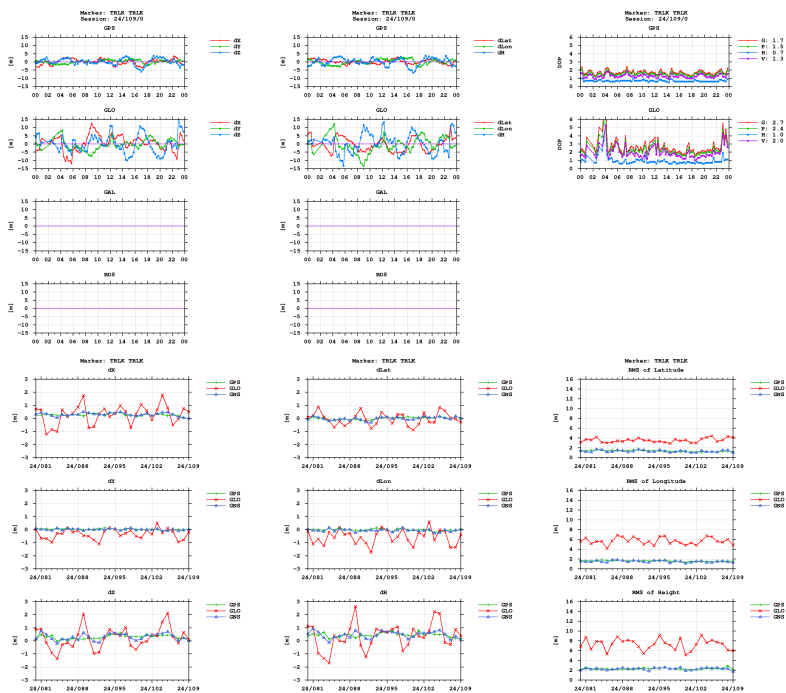

Equipment

2024-03-20 00:00:00 LEICA GRX1200+GNSS 9.20/6.407 496692 LEICA GRX1

Program info

G-Nut/Anubis Free [3.8] Mar 3 2024 20:32:19 (Rev: 4233)