


GNSS observation file monitoring for 0511


Last RINEX file: 05110941.22O
RINEX version: 3.02
Marker: 1085
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

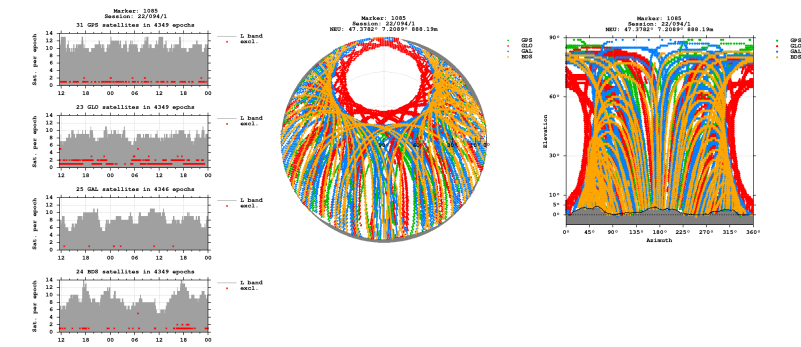


Bands

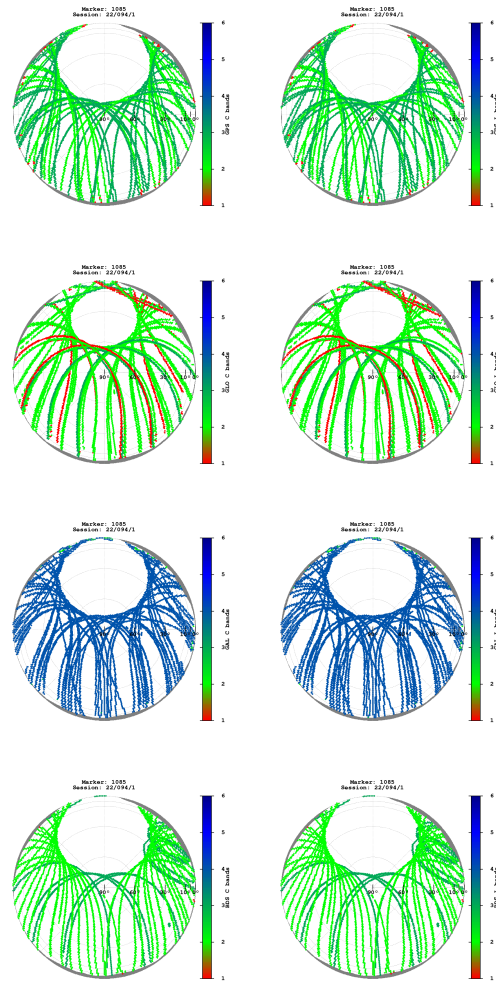

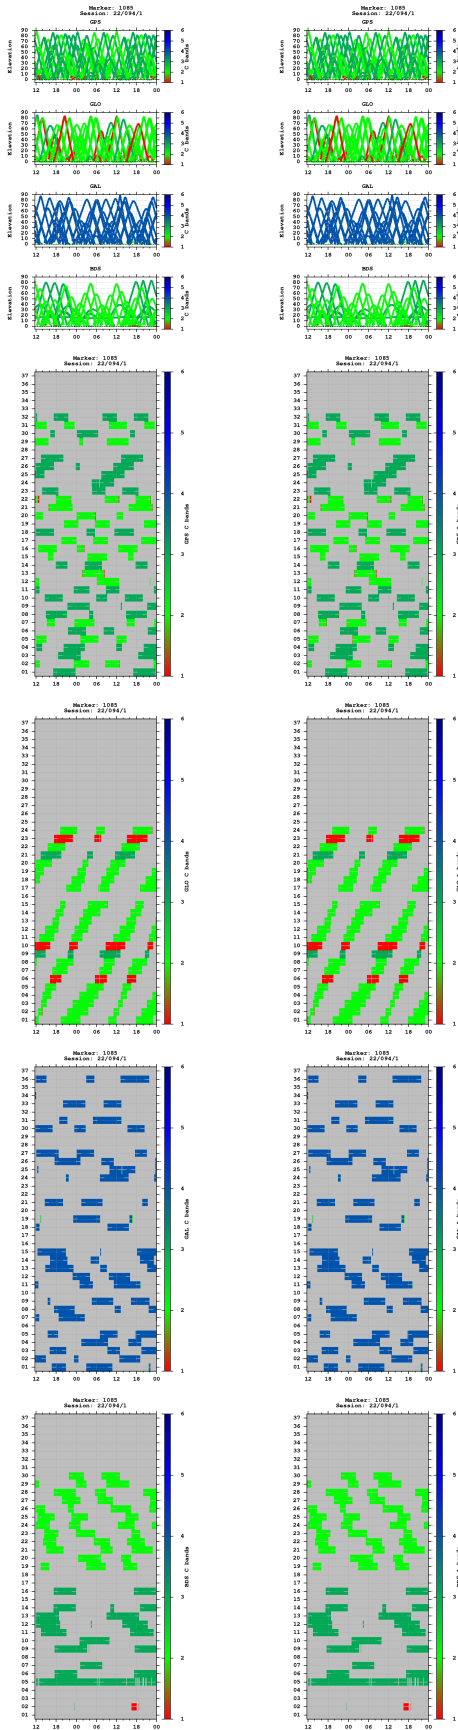



Multipath

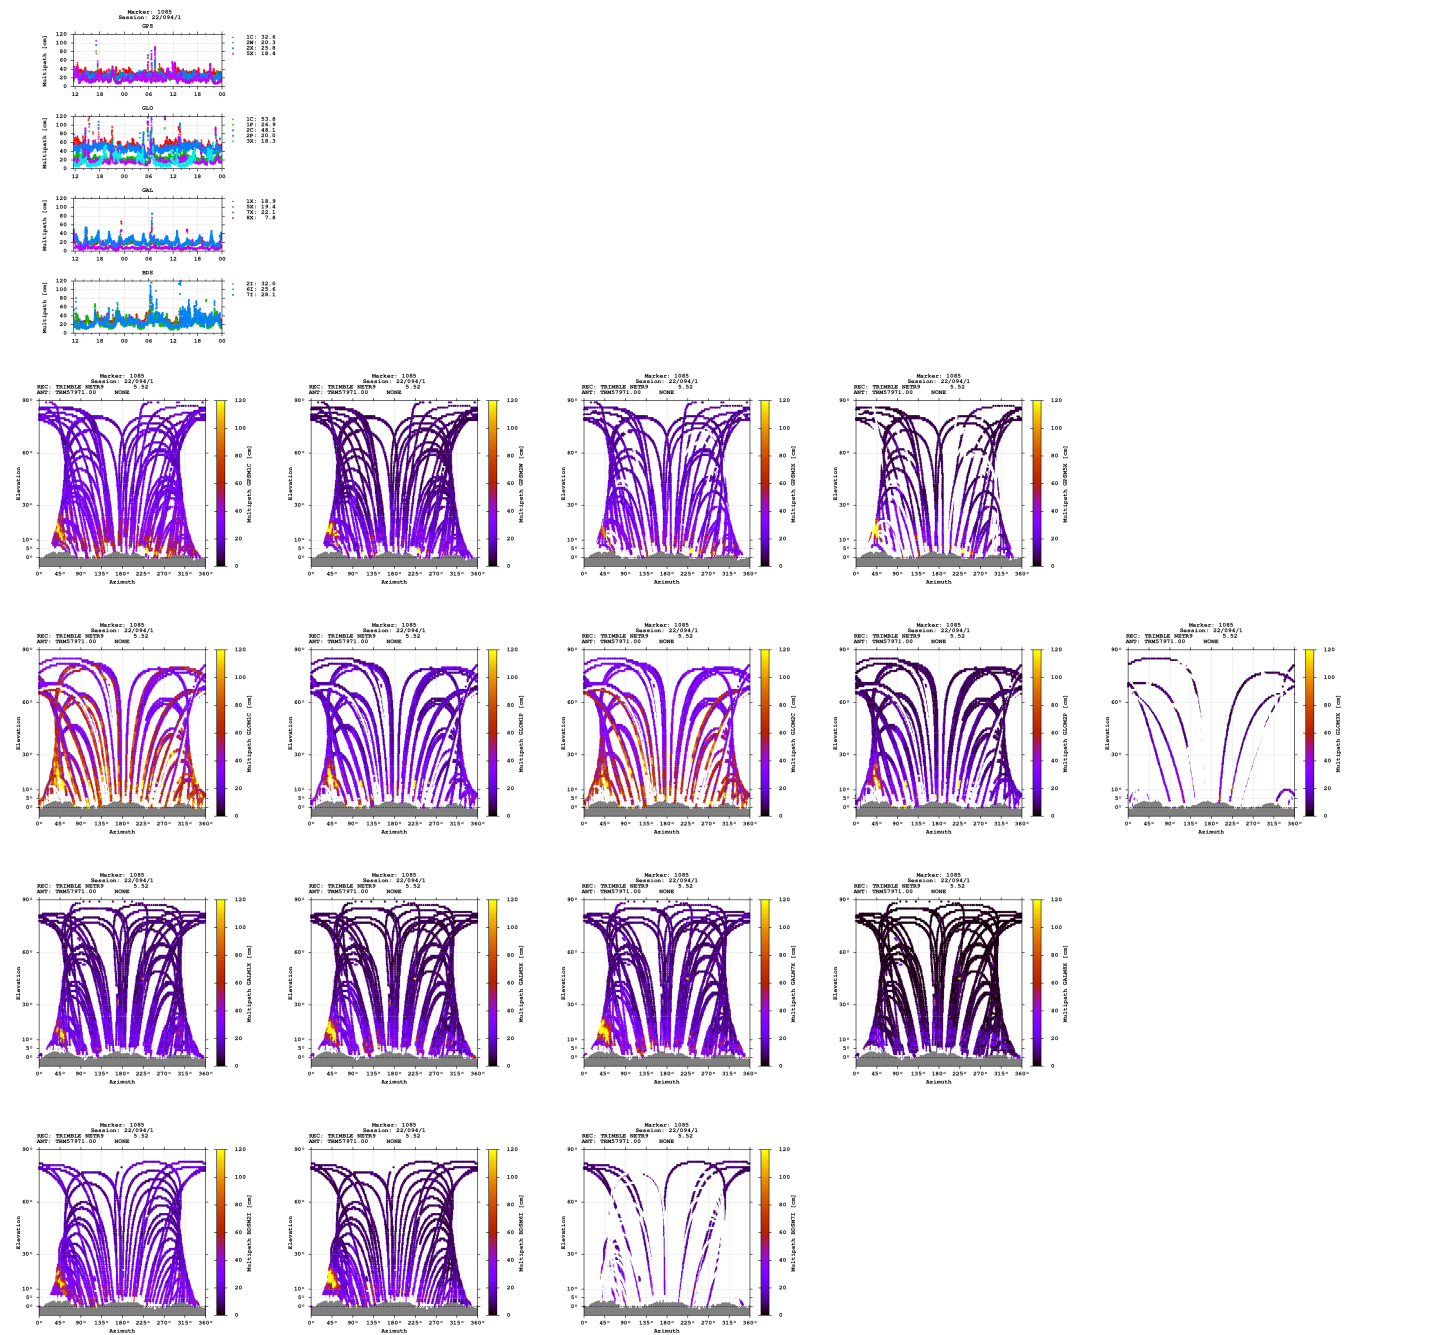

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

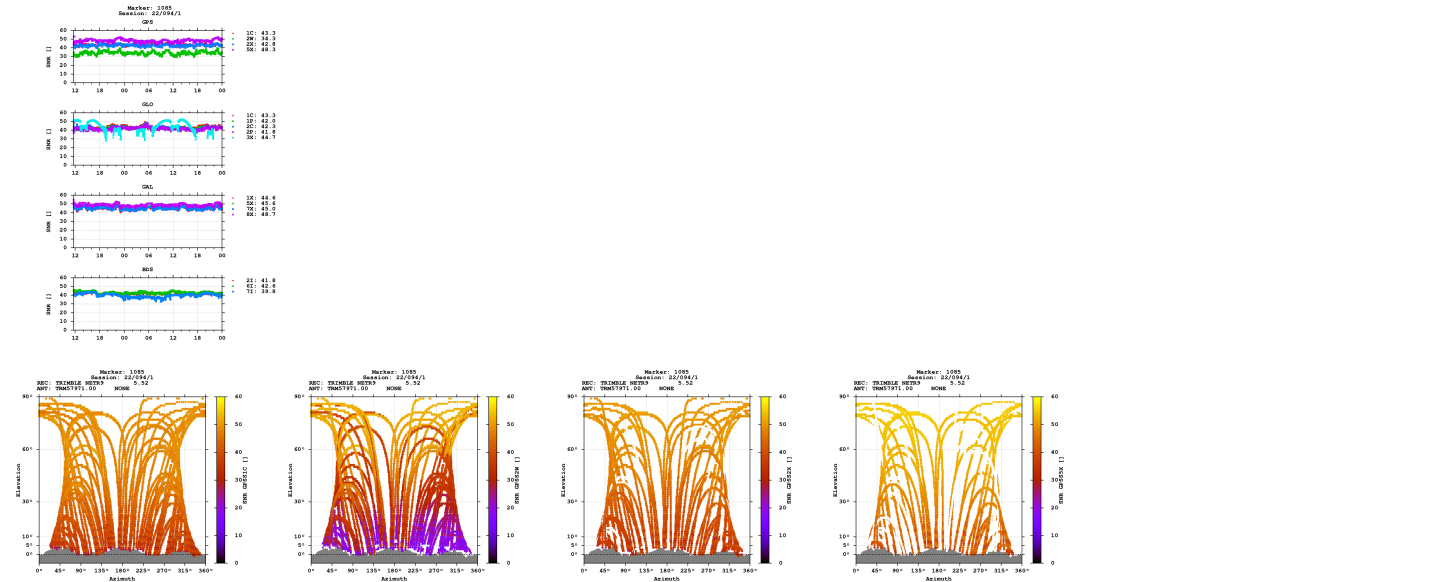

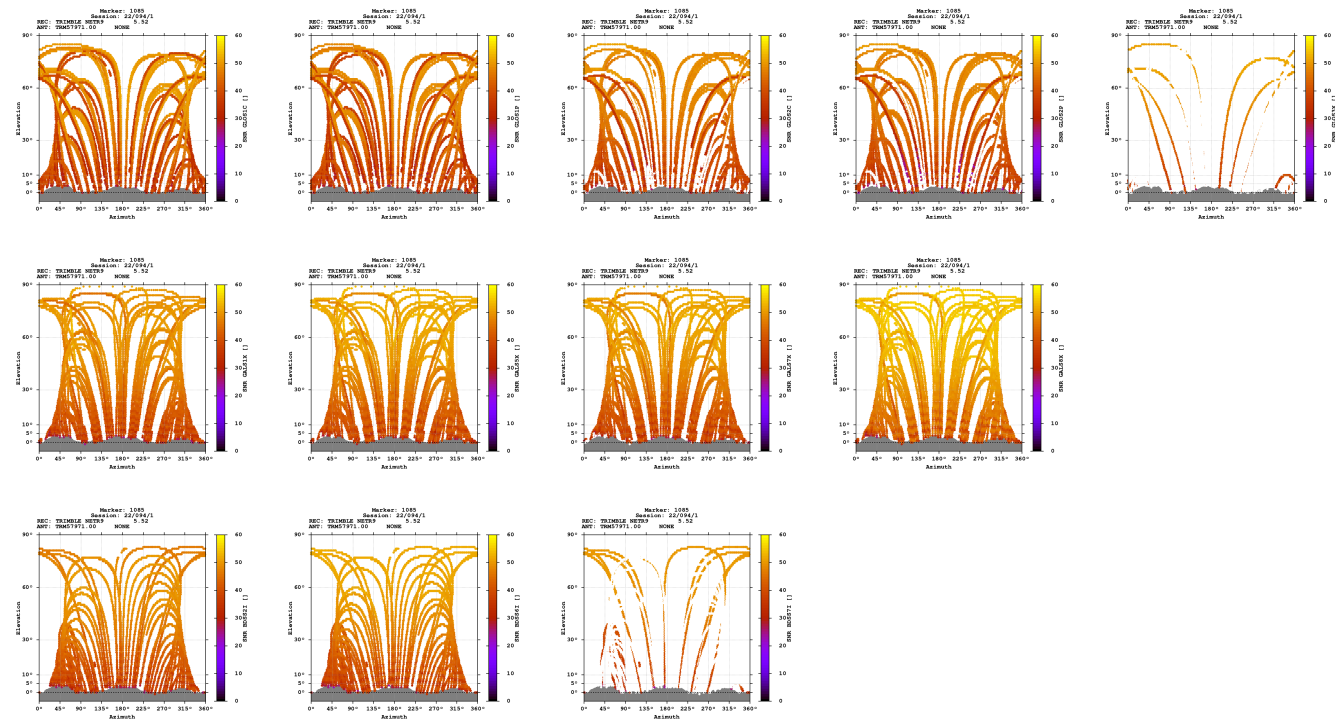

Estimates

2022-04-04 11:37:30	GPS	4293234.6583	543042.8177	4670993.4770	47.378218312	7.208947405	888.1885
2022-04-04 11:37:30	GLO	4293233.6944	543042.2569	4670993.3145	47.378224117	7.208941641	887.3737
2022-04-04 11:37:30	GAL	4293234.6154	543042.3743	4670993.3204	47.378218008	7.208941652	888.0068
2022-04-04 11:37:30	BDS	4293233.9756	543041.5576	4670994.7360	47.378231508	7.208931987	888.5492

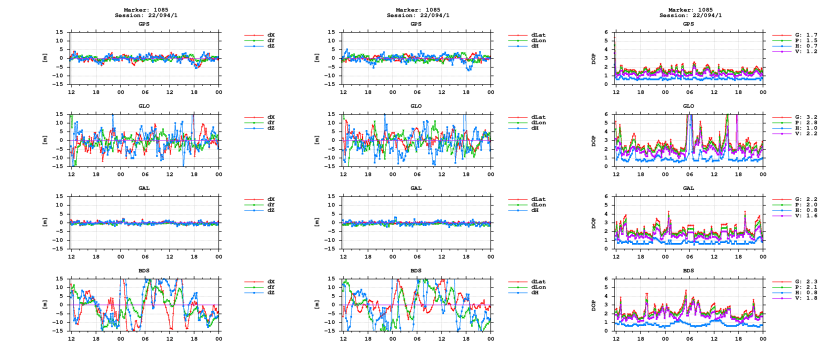

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)