

GNSS observation file monitoring for 0511

Last RINEX file: 05110951.220


RINEX version: 3.02

Marker: 1085

Receiver: 511 TRIMBLE NETR9 5.52


Antenna: 511 TRM57971.00 NONE

Epochs

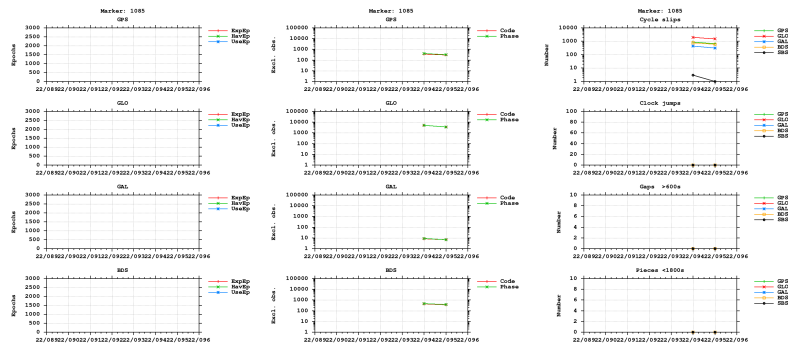



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

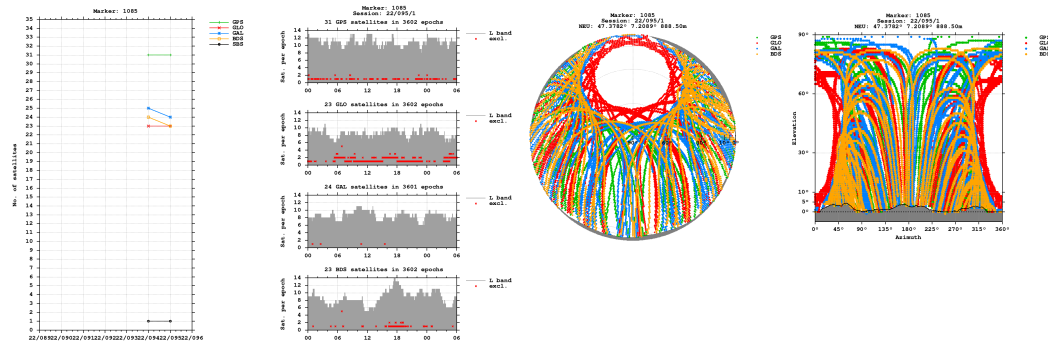


Bands

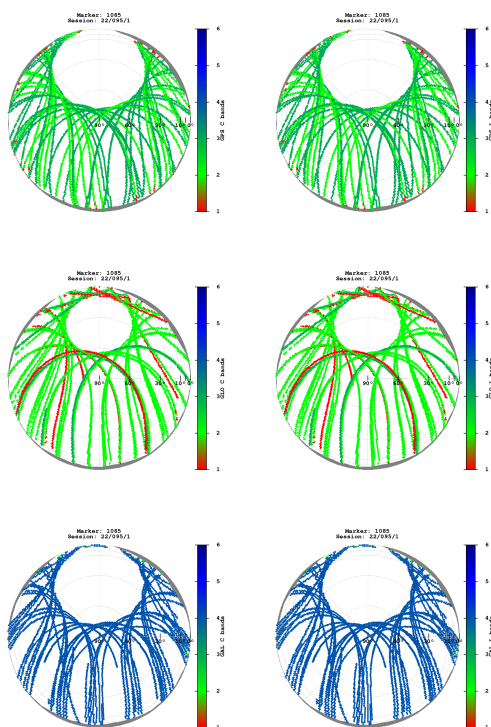


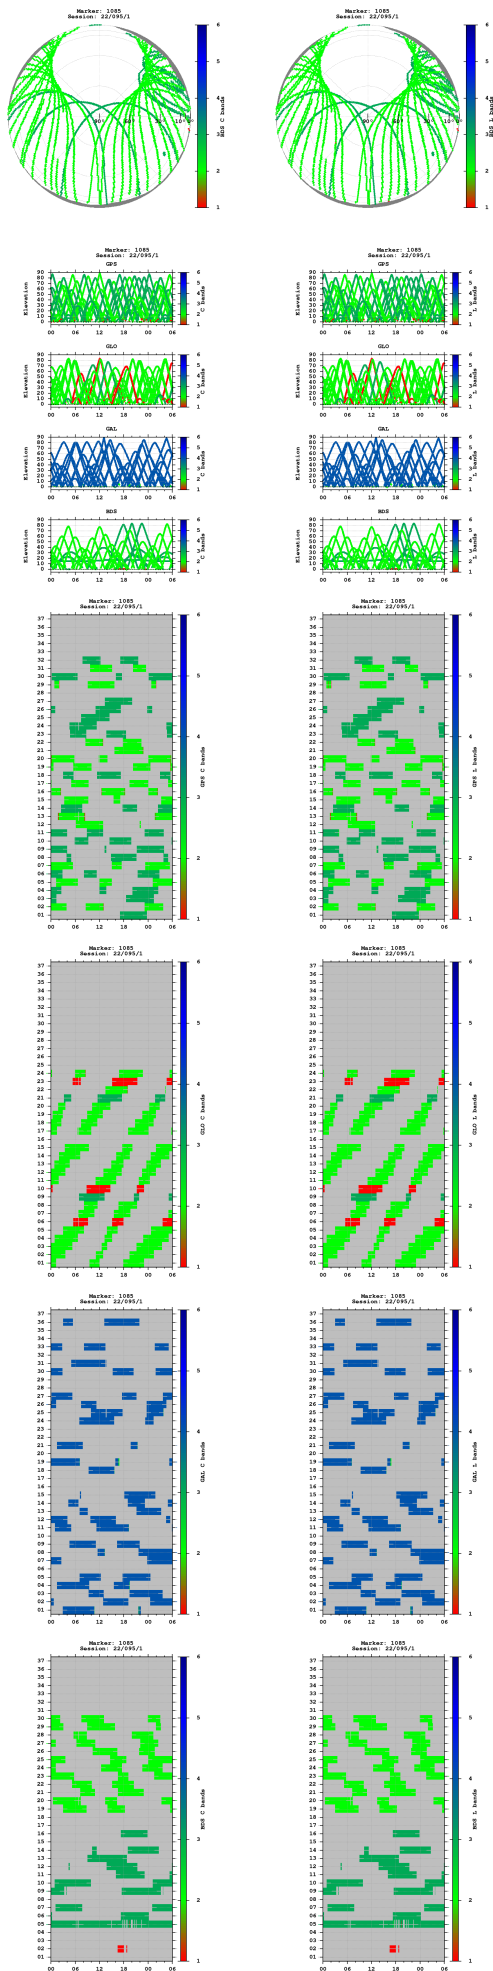


Observations

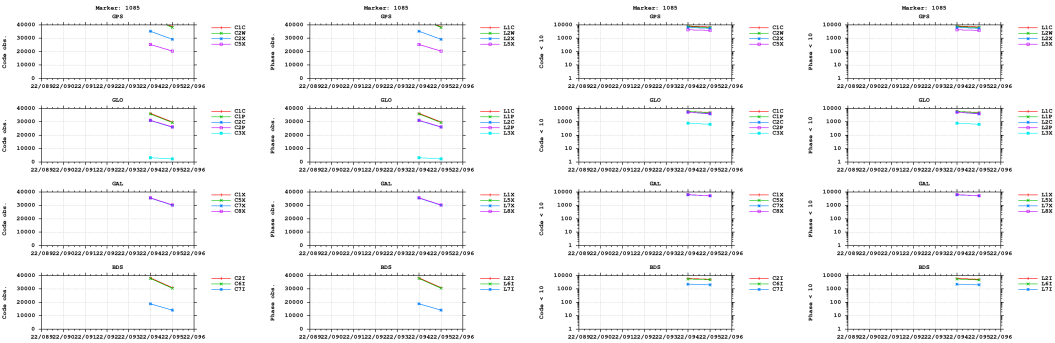


Multipath

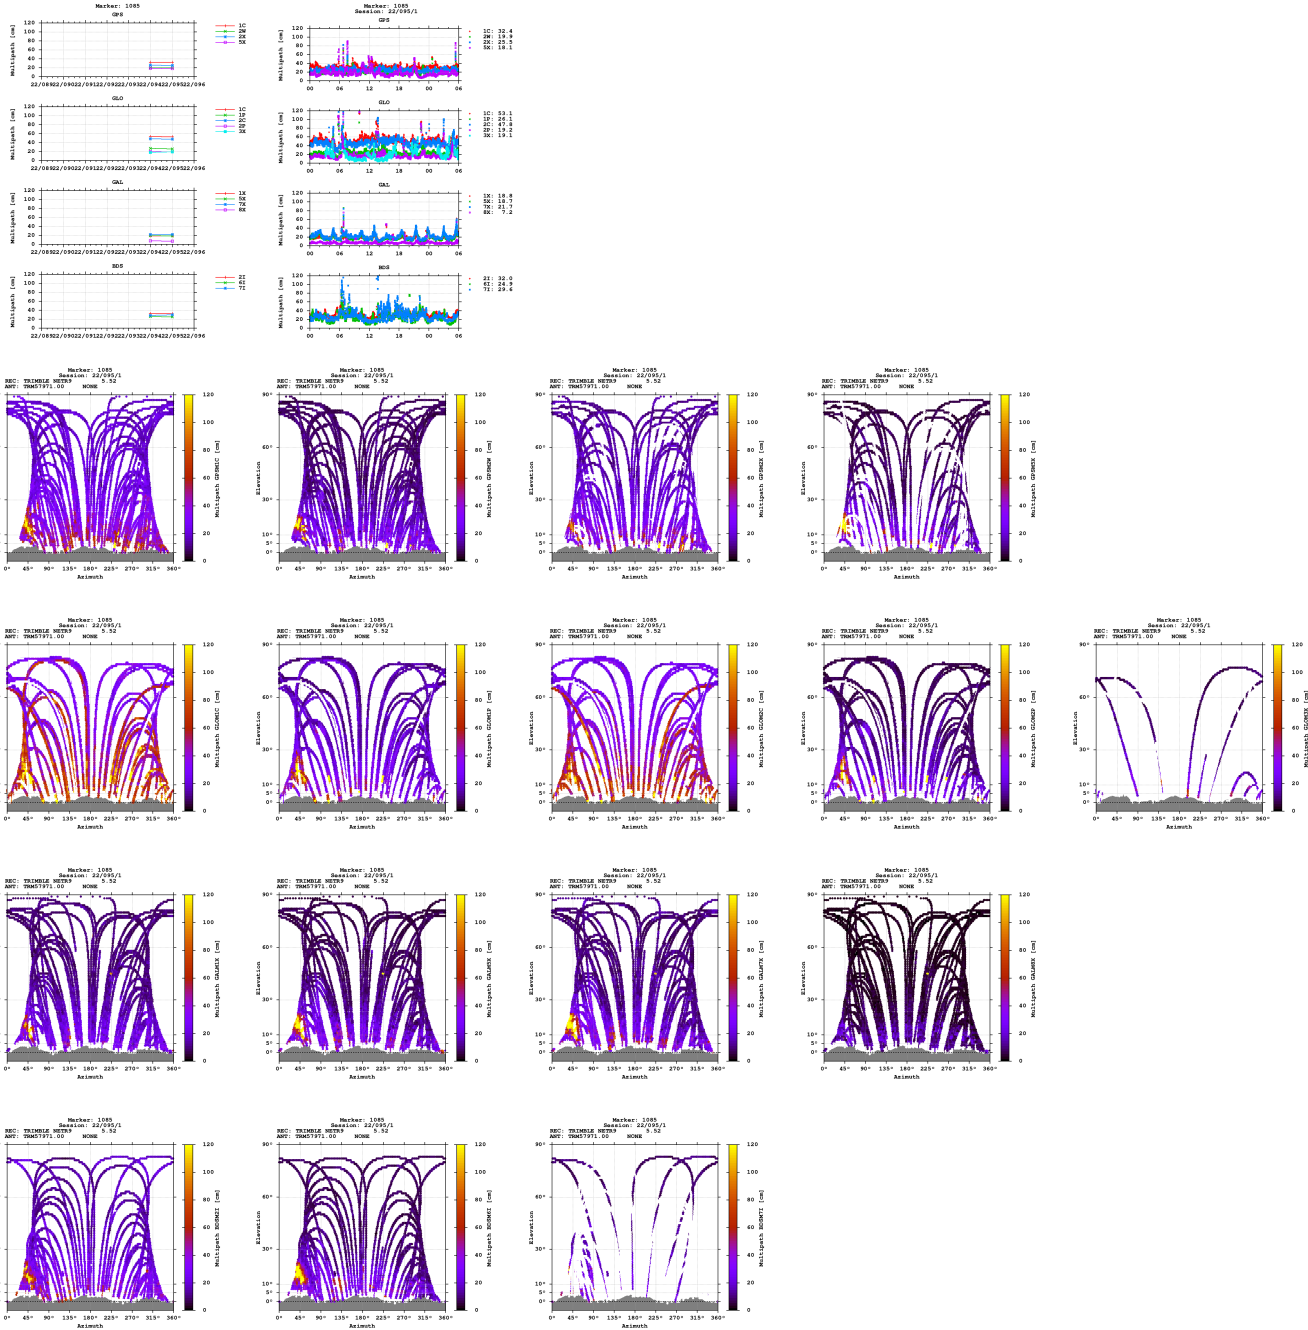


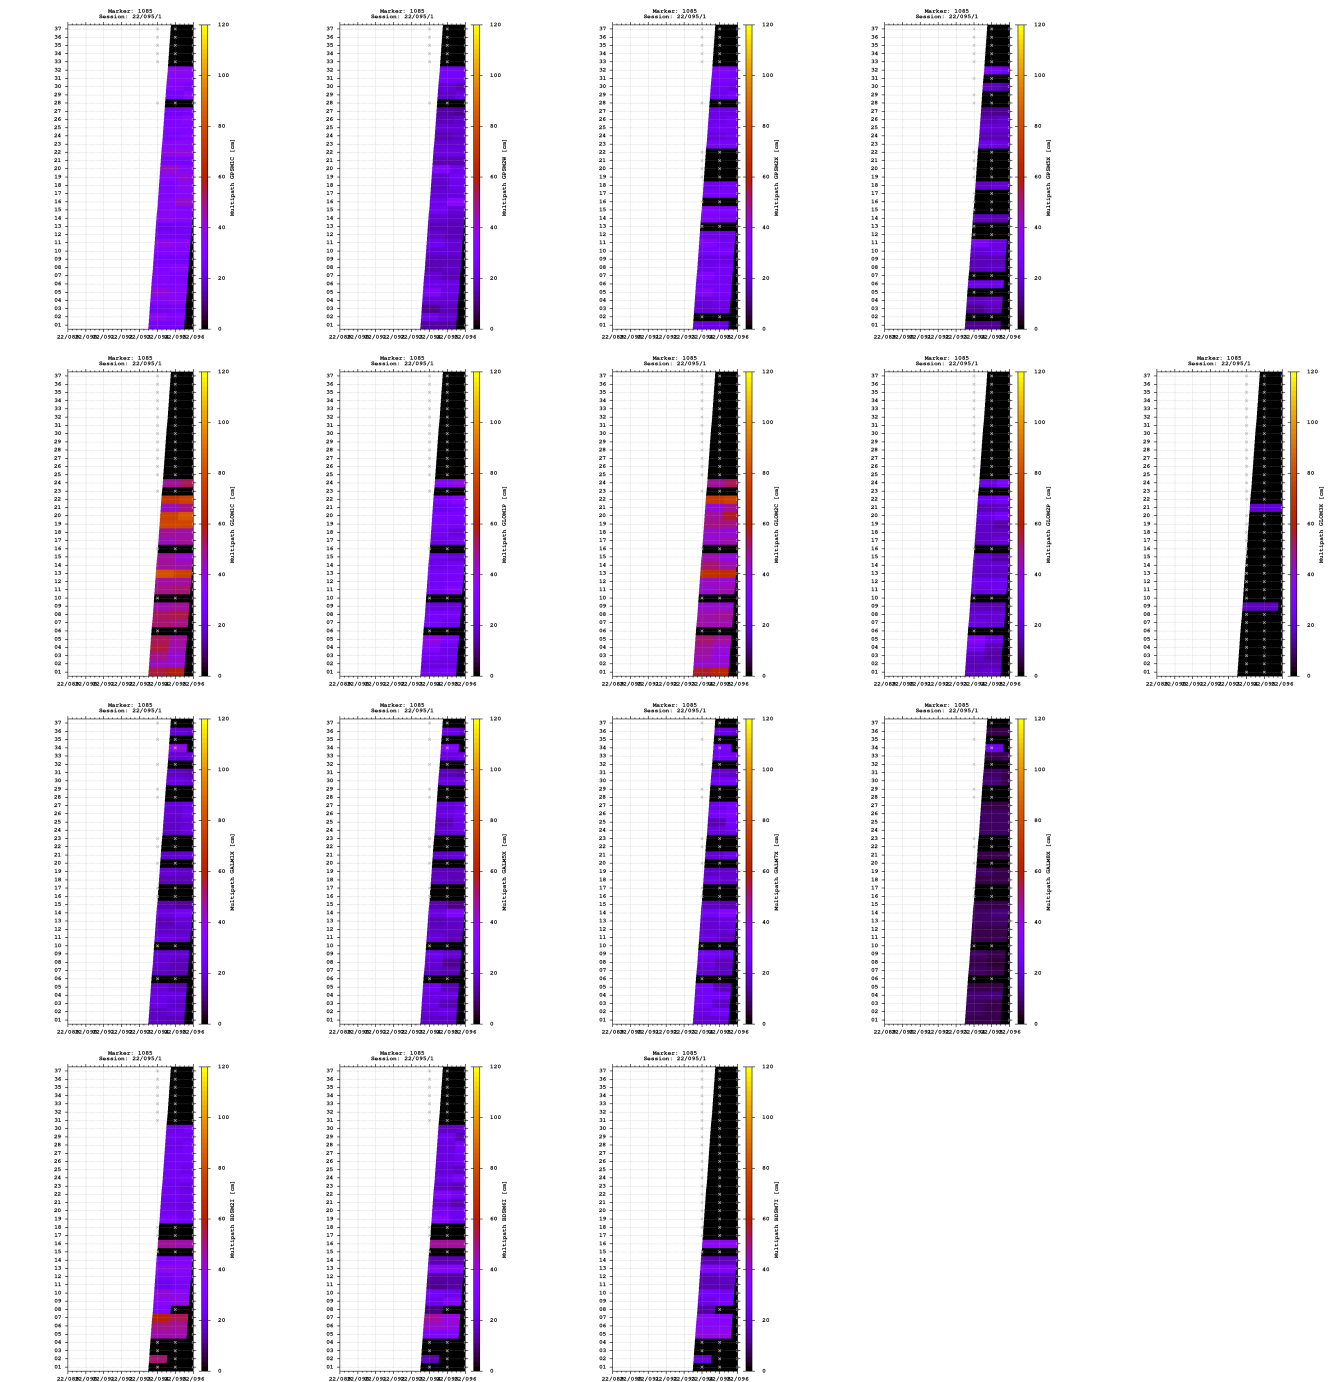


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

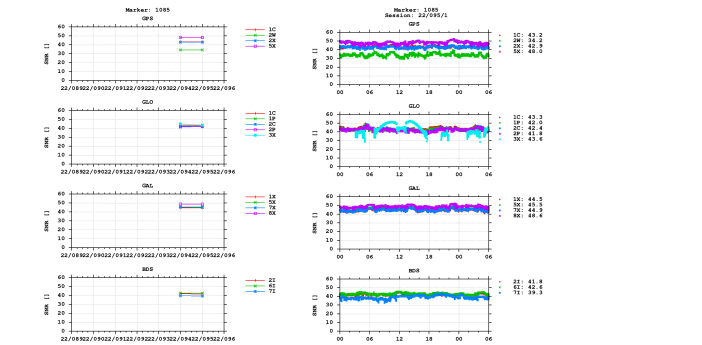


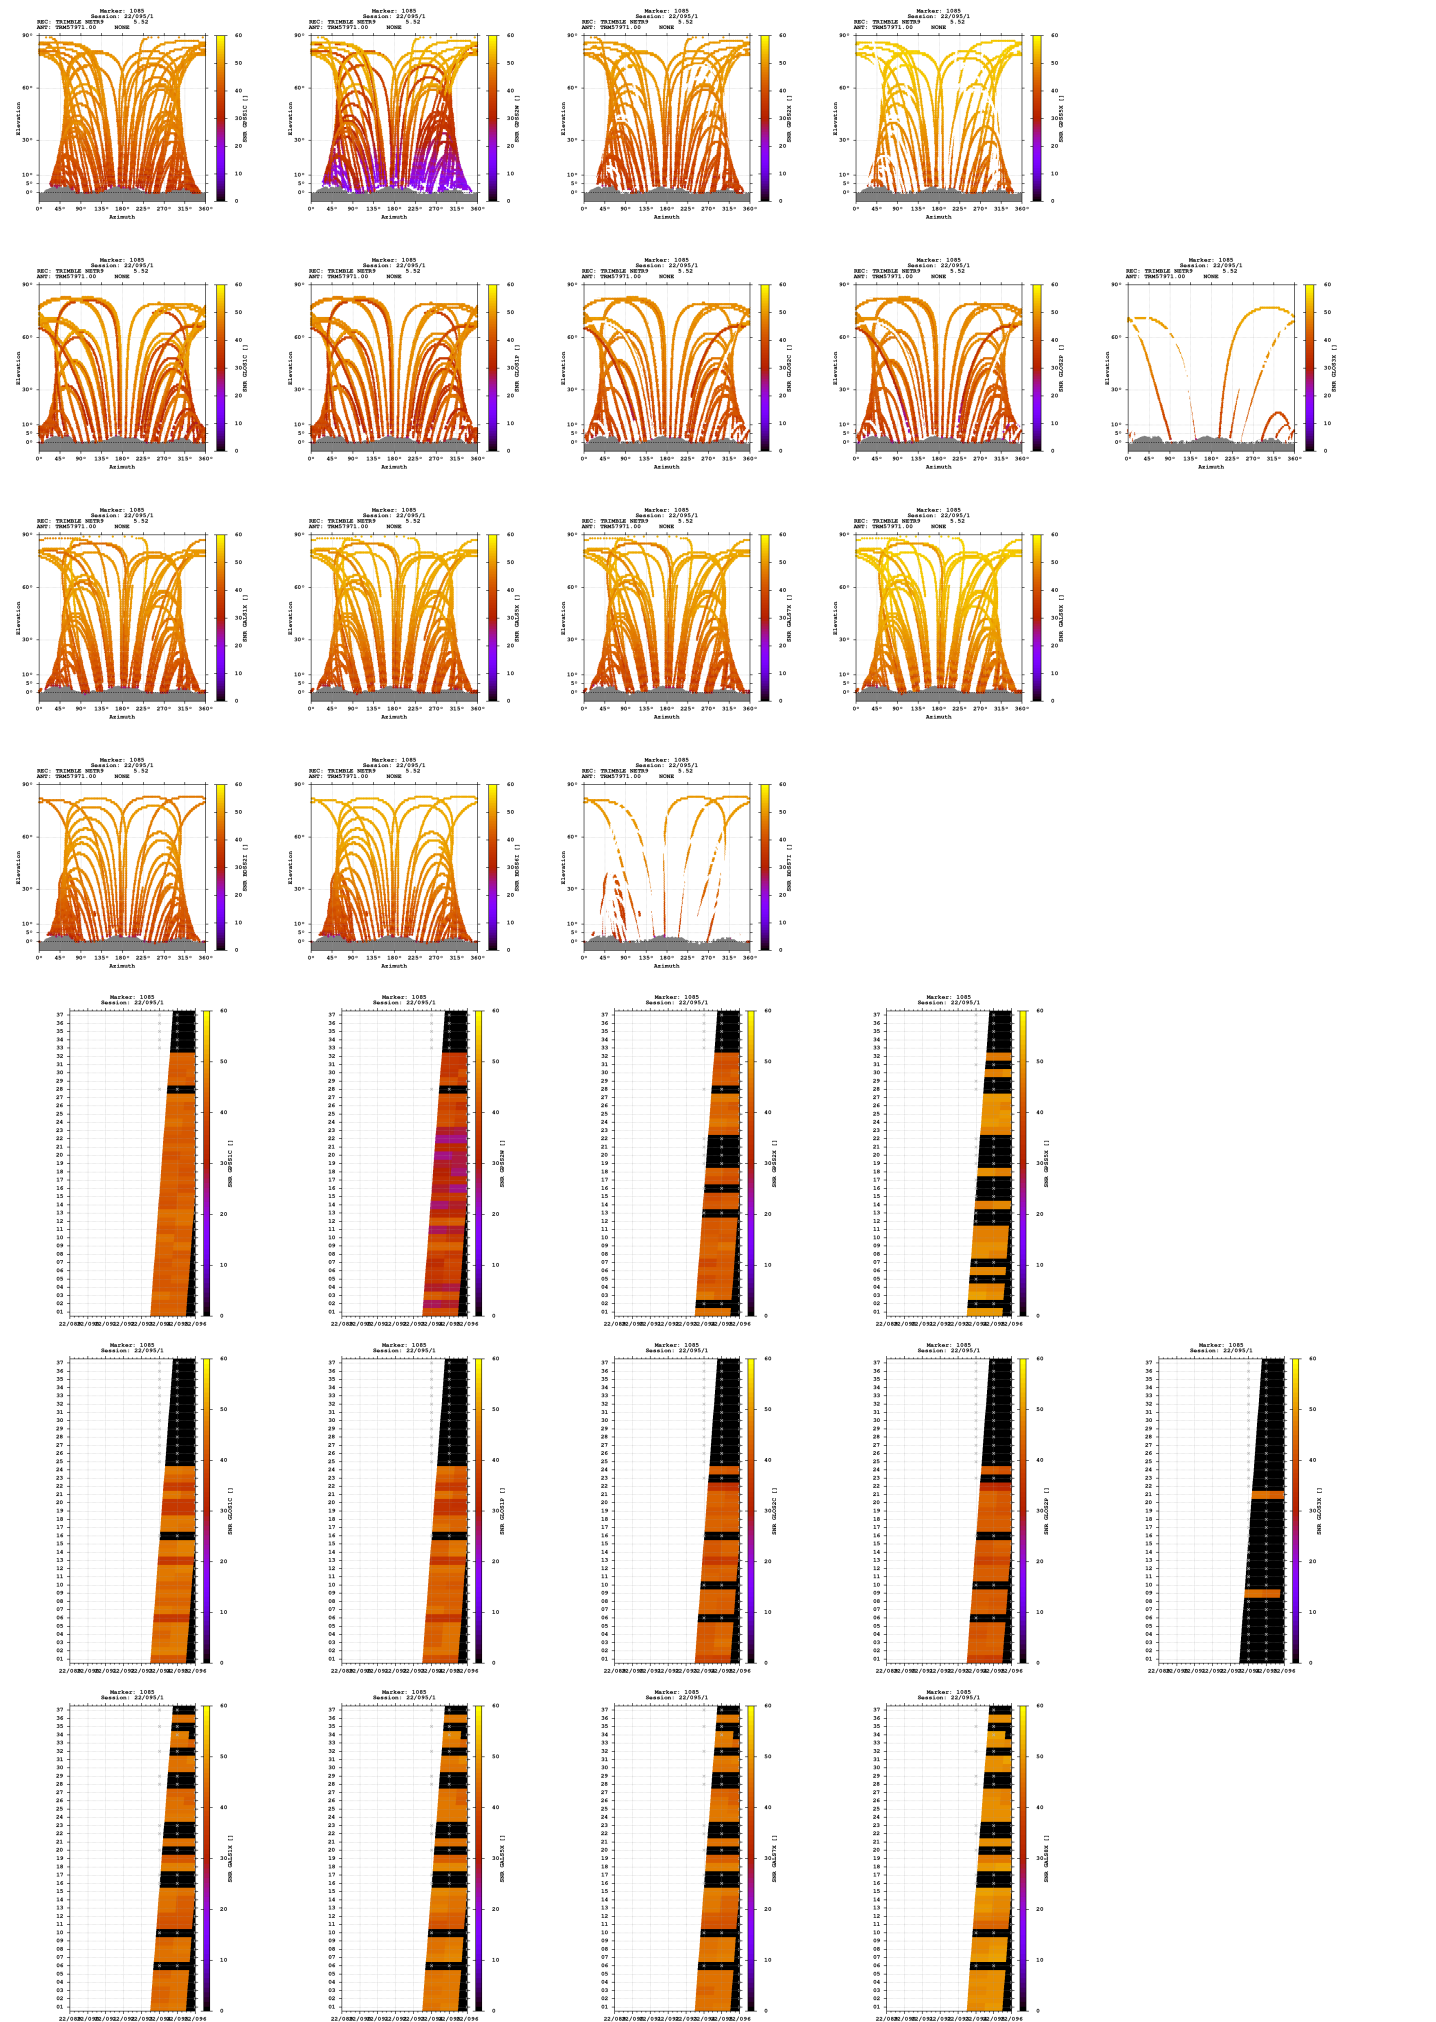

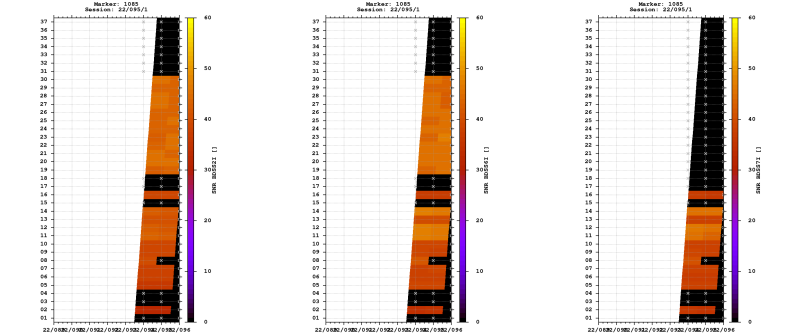


Estimates

2022-04-04 11:37:30	GPS	4293234.8038	543042.6909	4670993.7820	47.378219320	7.208945497	888.5000
2022-04-04 11:37:30	GLO	4293233.8997	543042.2663	4670992.8082	47.378219678	7.208941423	887.1399
2022-04-04 11:37:30	GAL	4293234.3957	543042.3649	4670993.2283	47.378218898	7.208941893	887.7906
2022-04-04 11:37:30	BDS	4293233.9951	543042.9904	4670997.1098	47.378244646	7.208950776	890.4308

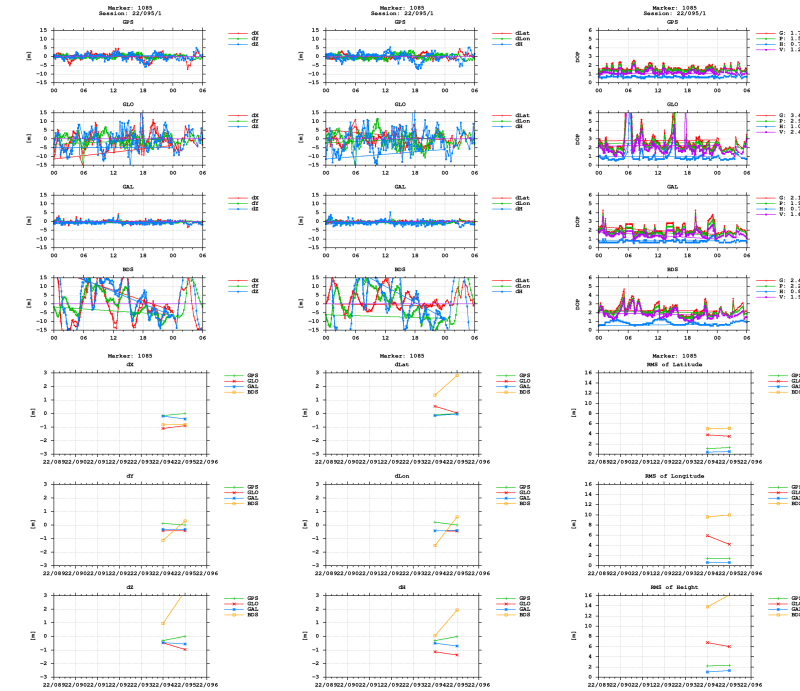

BNC



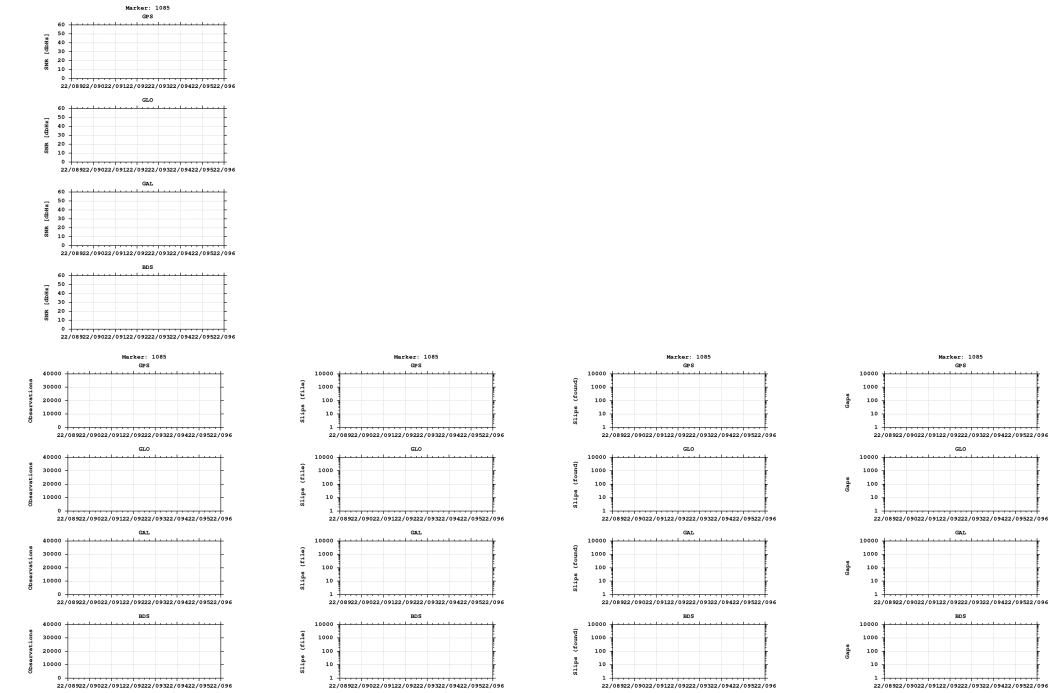

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)