


GNSS observation file monitoring for 0512


Last RINEX file: 05120941.22O
RINEX version: 3.02
Marker: 1086
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


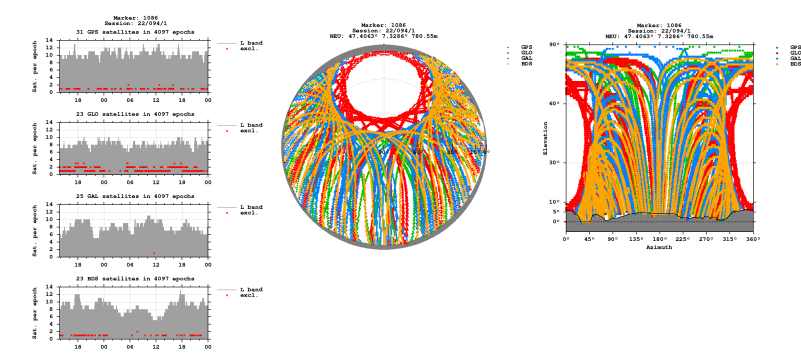


Bands

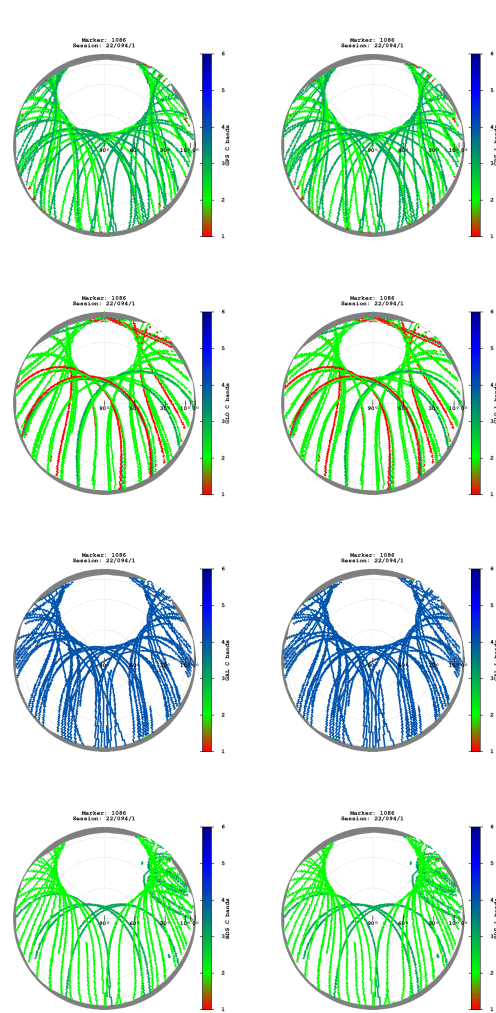

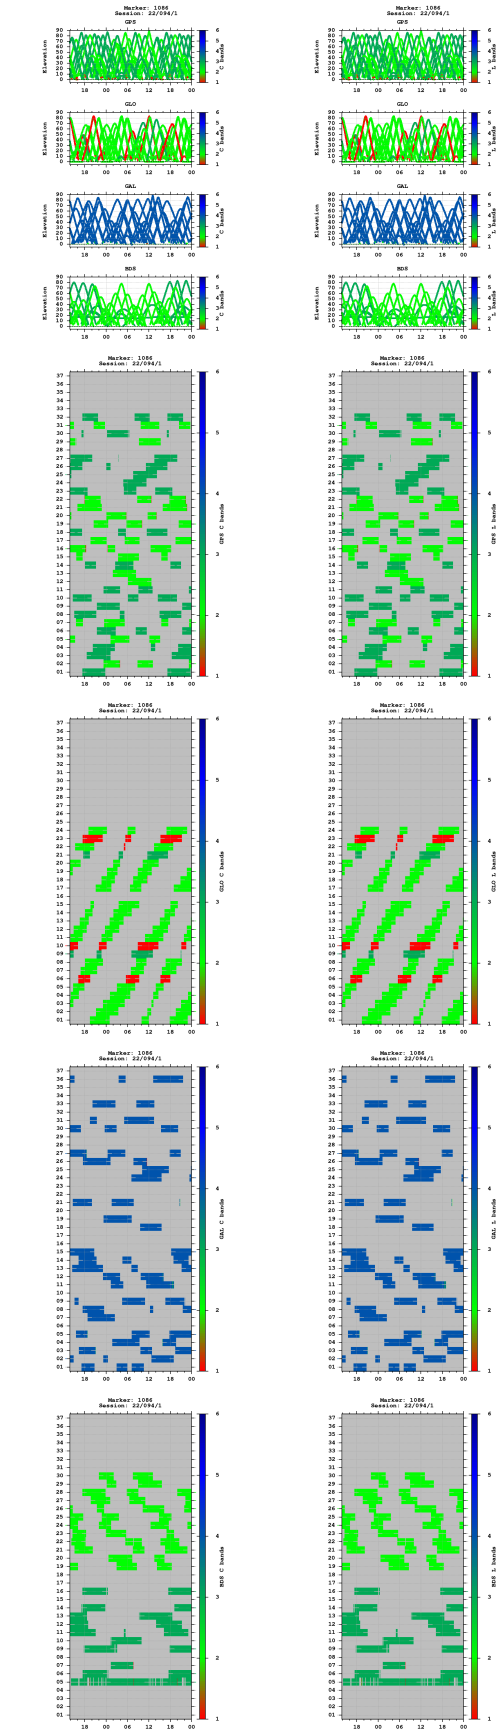



Multipath

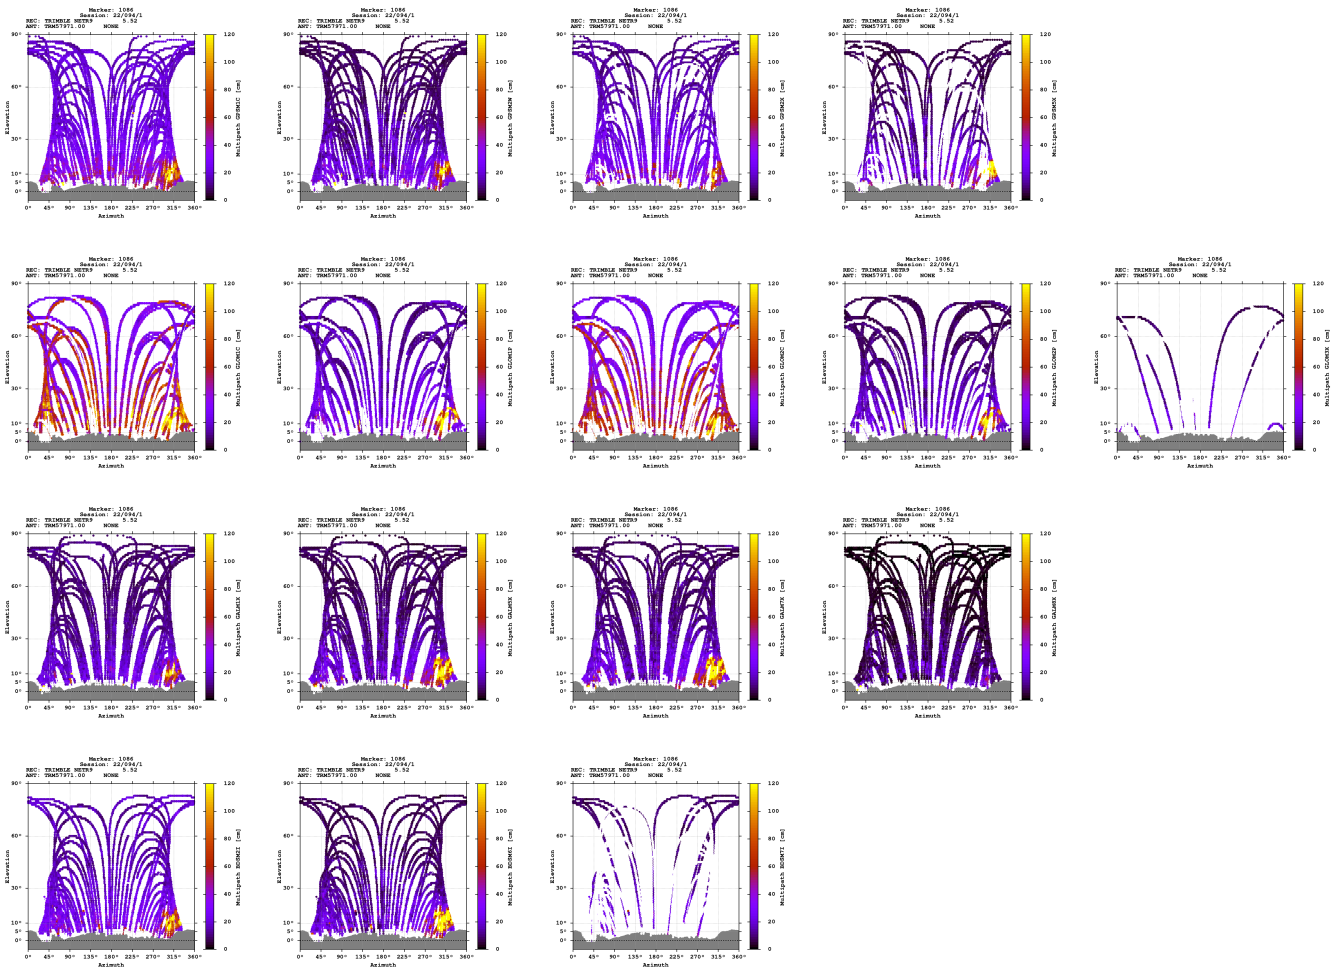

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

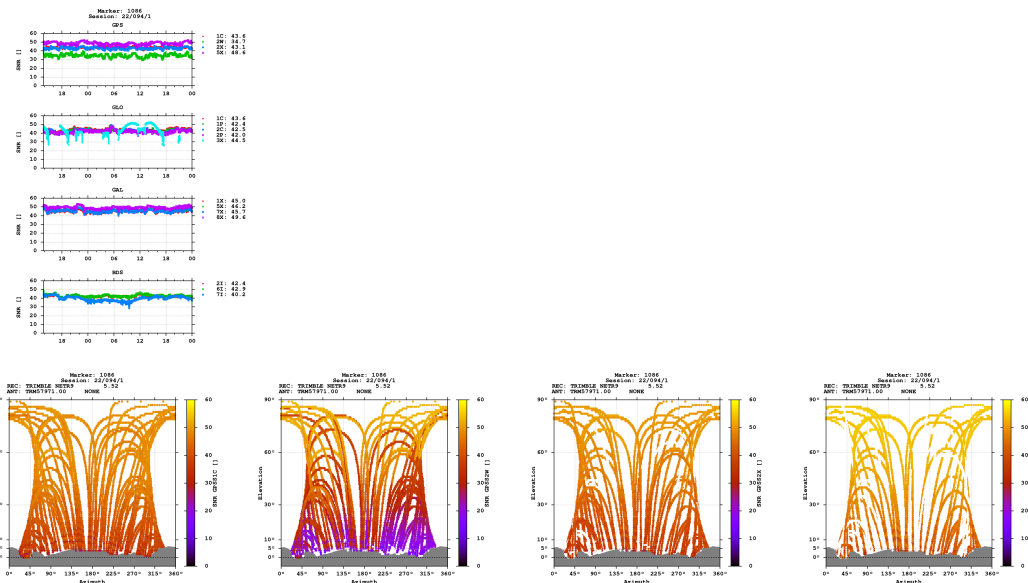

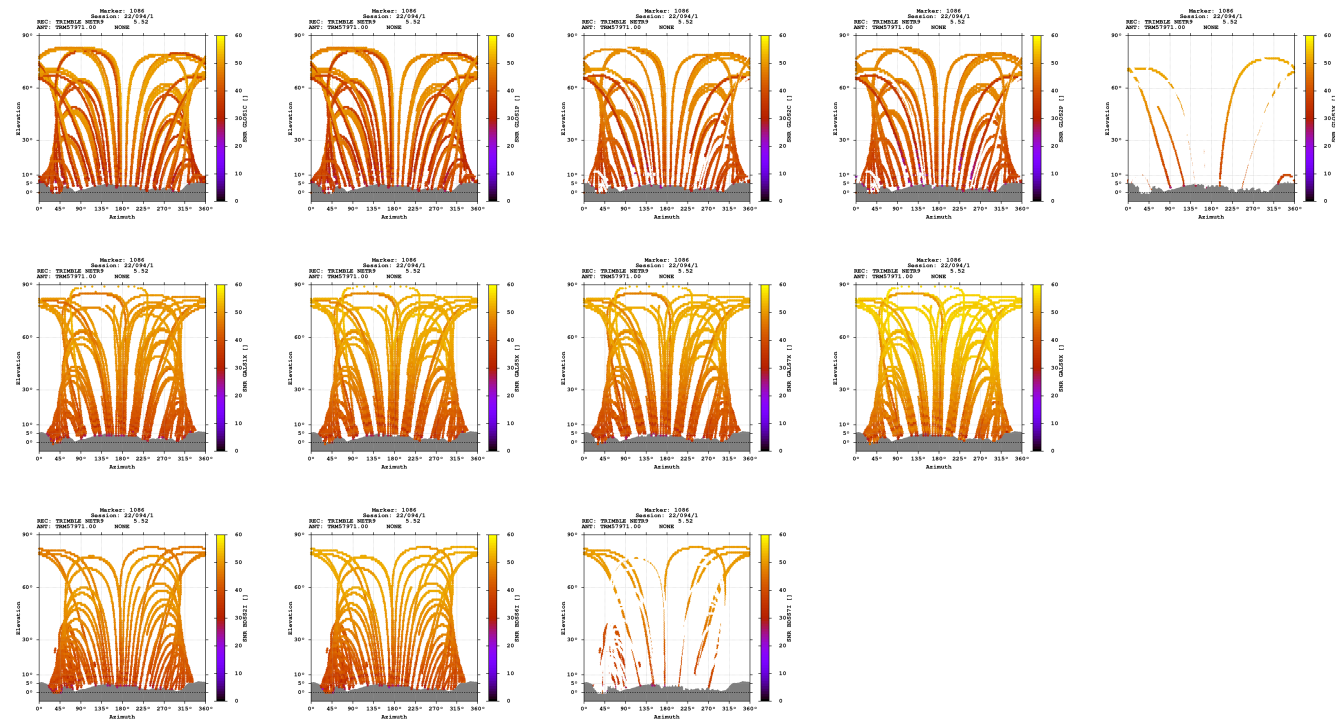

Estimates

2022-04-04 13:49:30	GPS	4289737.8793	551703.3692	4673029.8276	47.406322911	7.328583064	780.5514
2022-04-04 13:49:30	GLO	4289737.9962	551703.3573	4673030.3826	47.406325532	7.328582710	781.0374
2022-04-04 13:49:30	GAL	4289737.7264	551702.9958	4673029.5305	47.406322422	7.328578415	780.1978
2022-04-04 13:49:30	BDS	4289737.2887	551701.6929	4673031.2926	47.406337122	7.328562036	781.0888

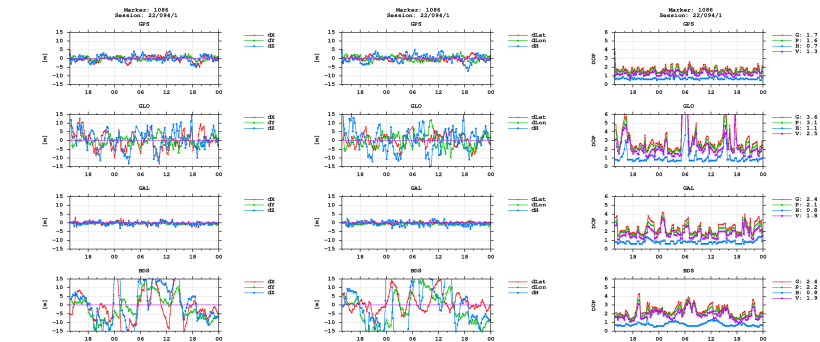

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)