

GNSS observation file monitoring for 0512

Last RINEX file: 05120951.220


RINEX version: 3.02

Marker: 1086

Receiver: 512 TRIMBLE NETR9 5.52


Antenna: 512 TRM57971.00 NONE

Epochs

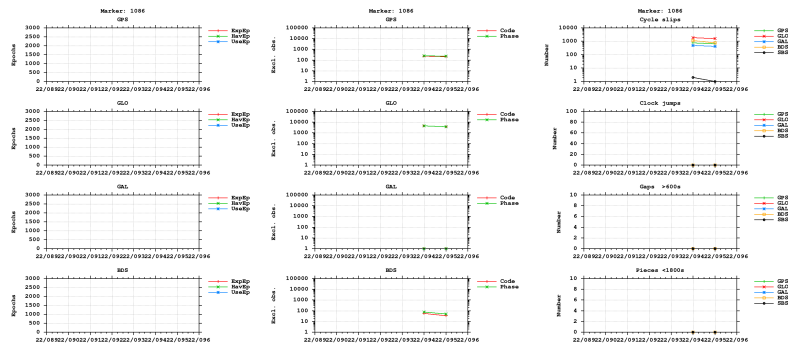



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

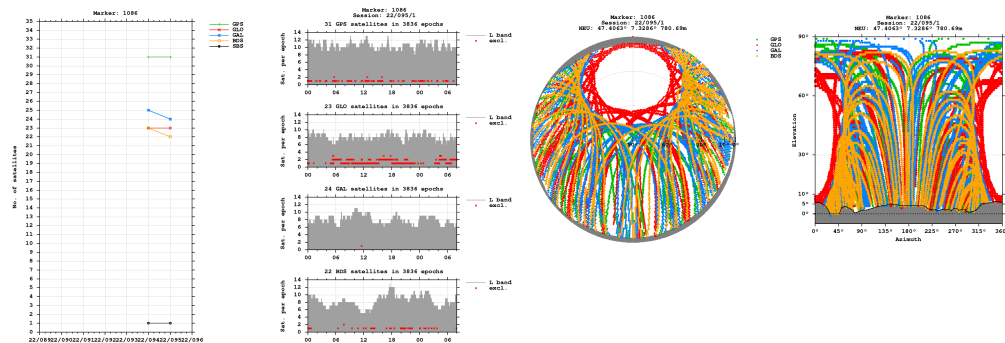


Bands

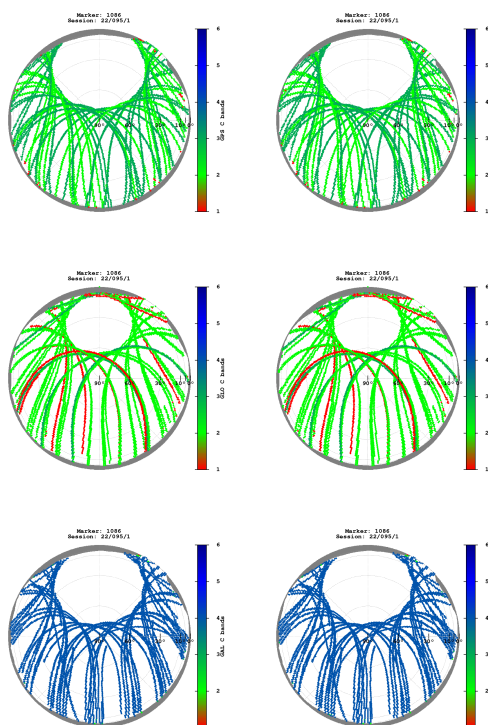


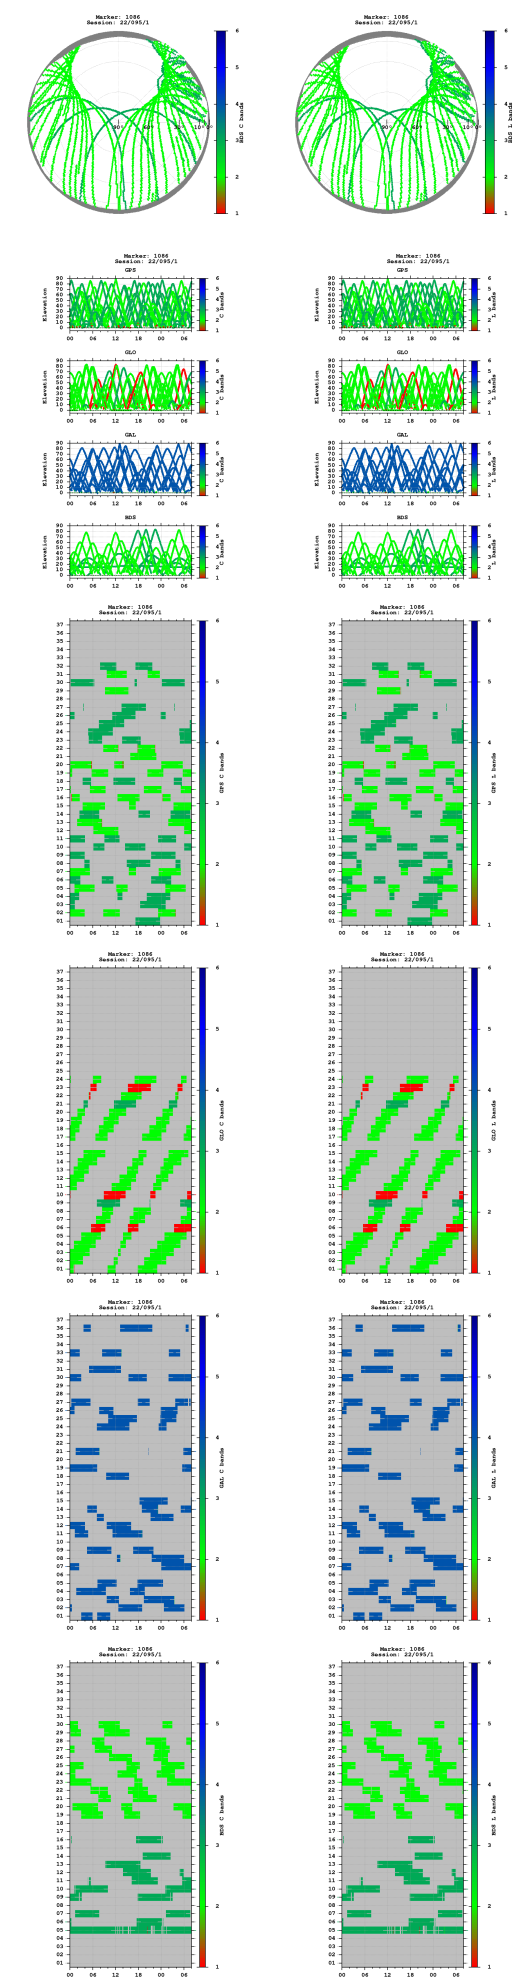


Observations

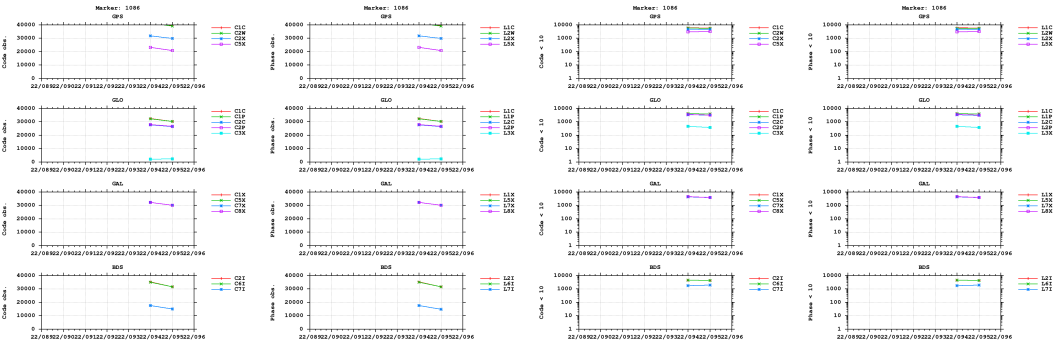


Multipath

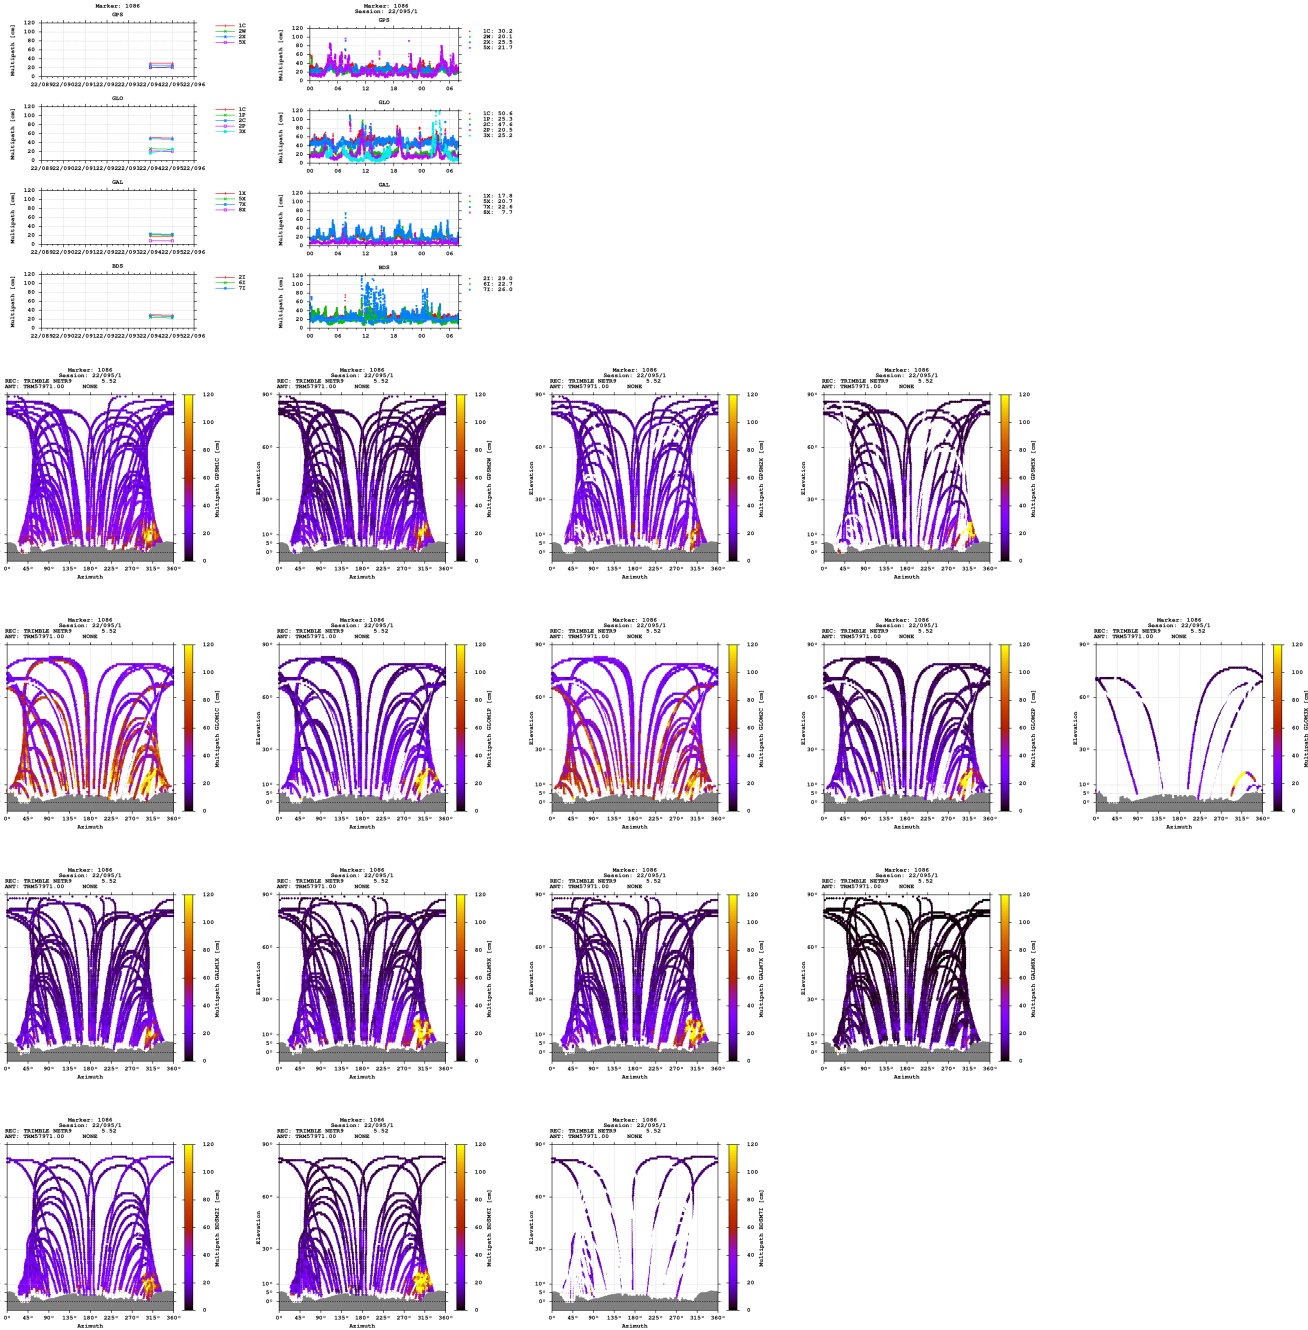


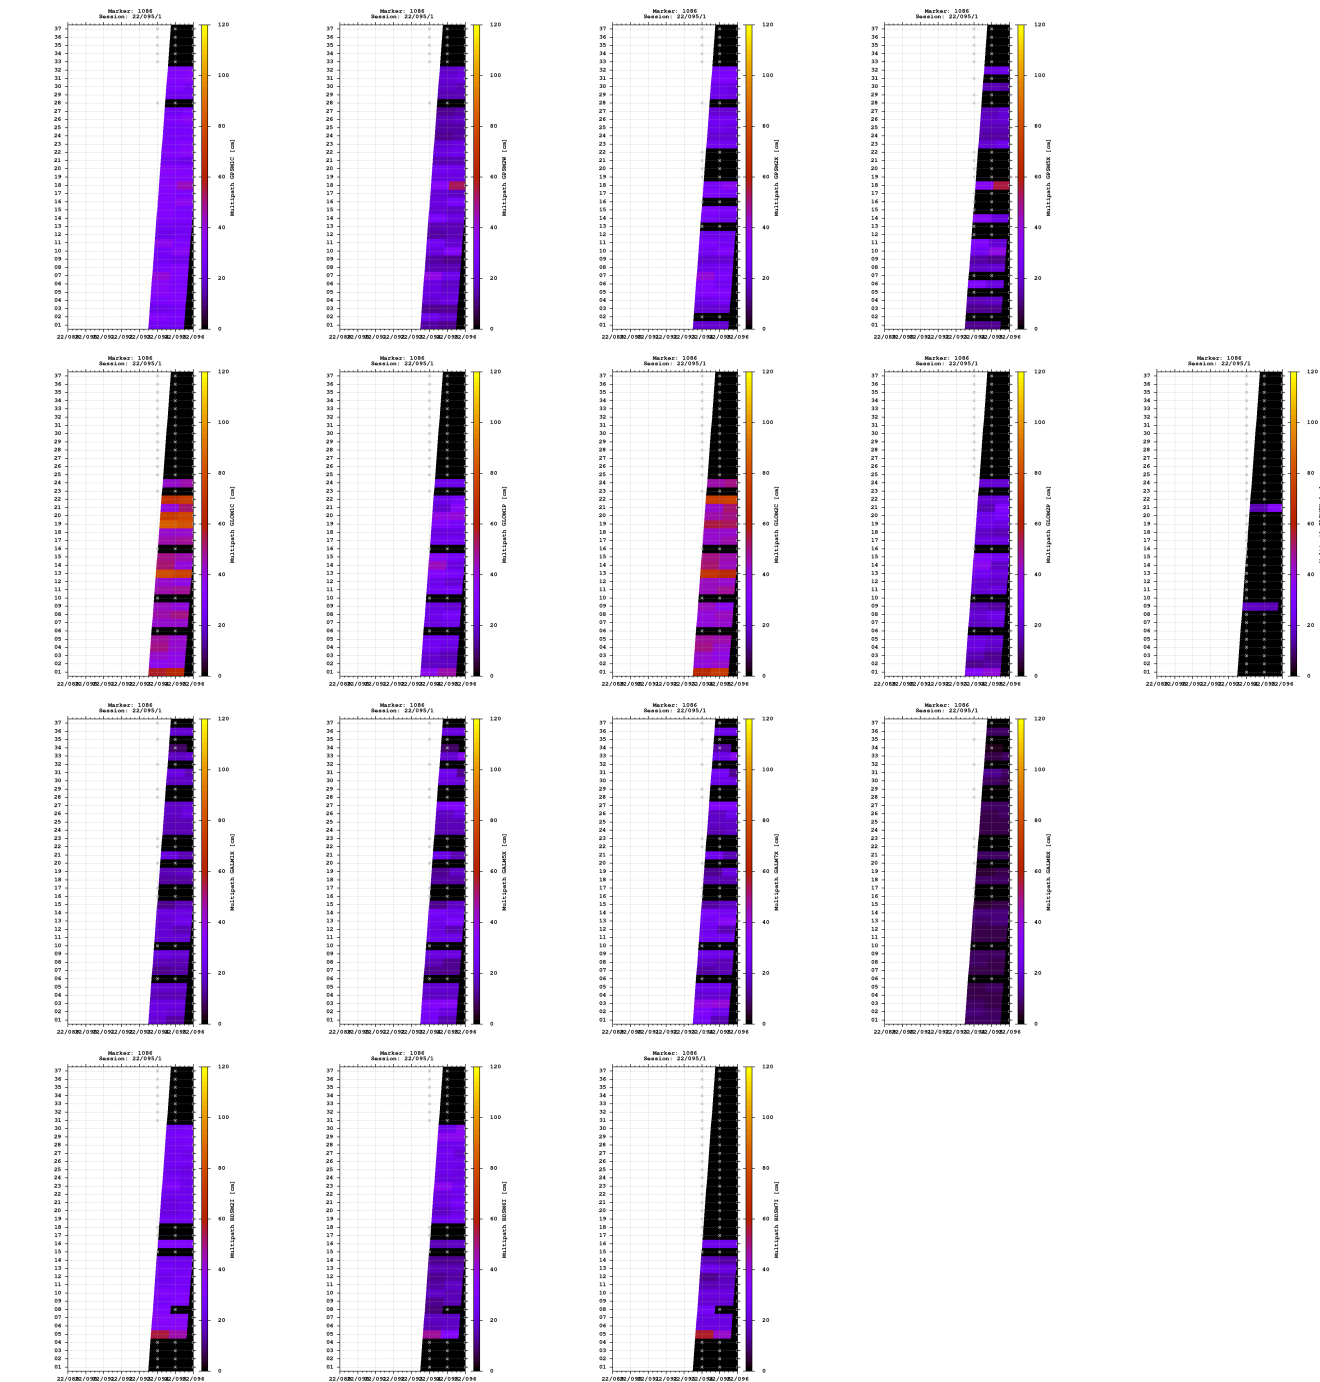


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

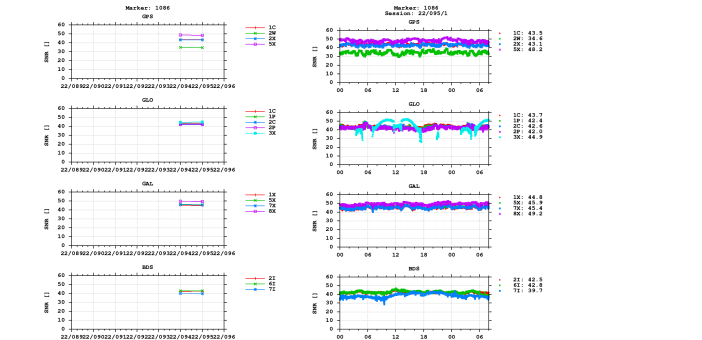


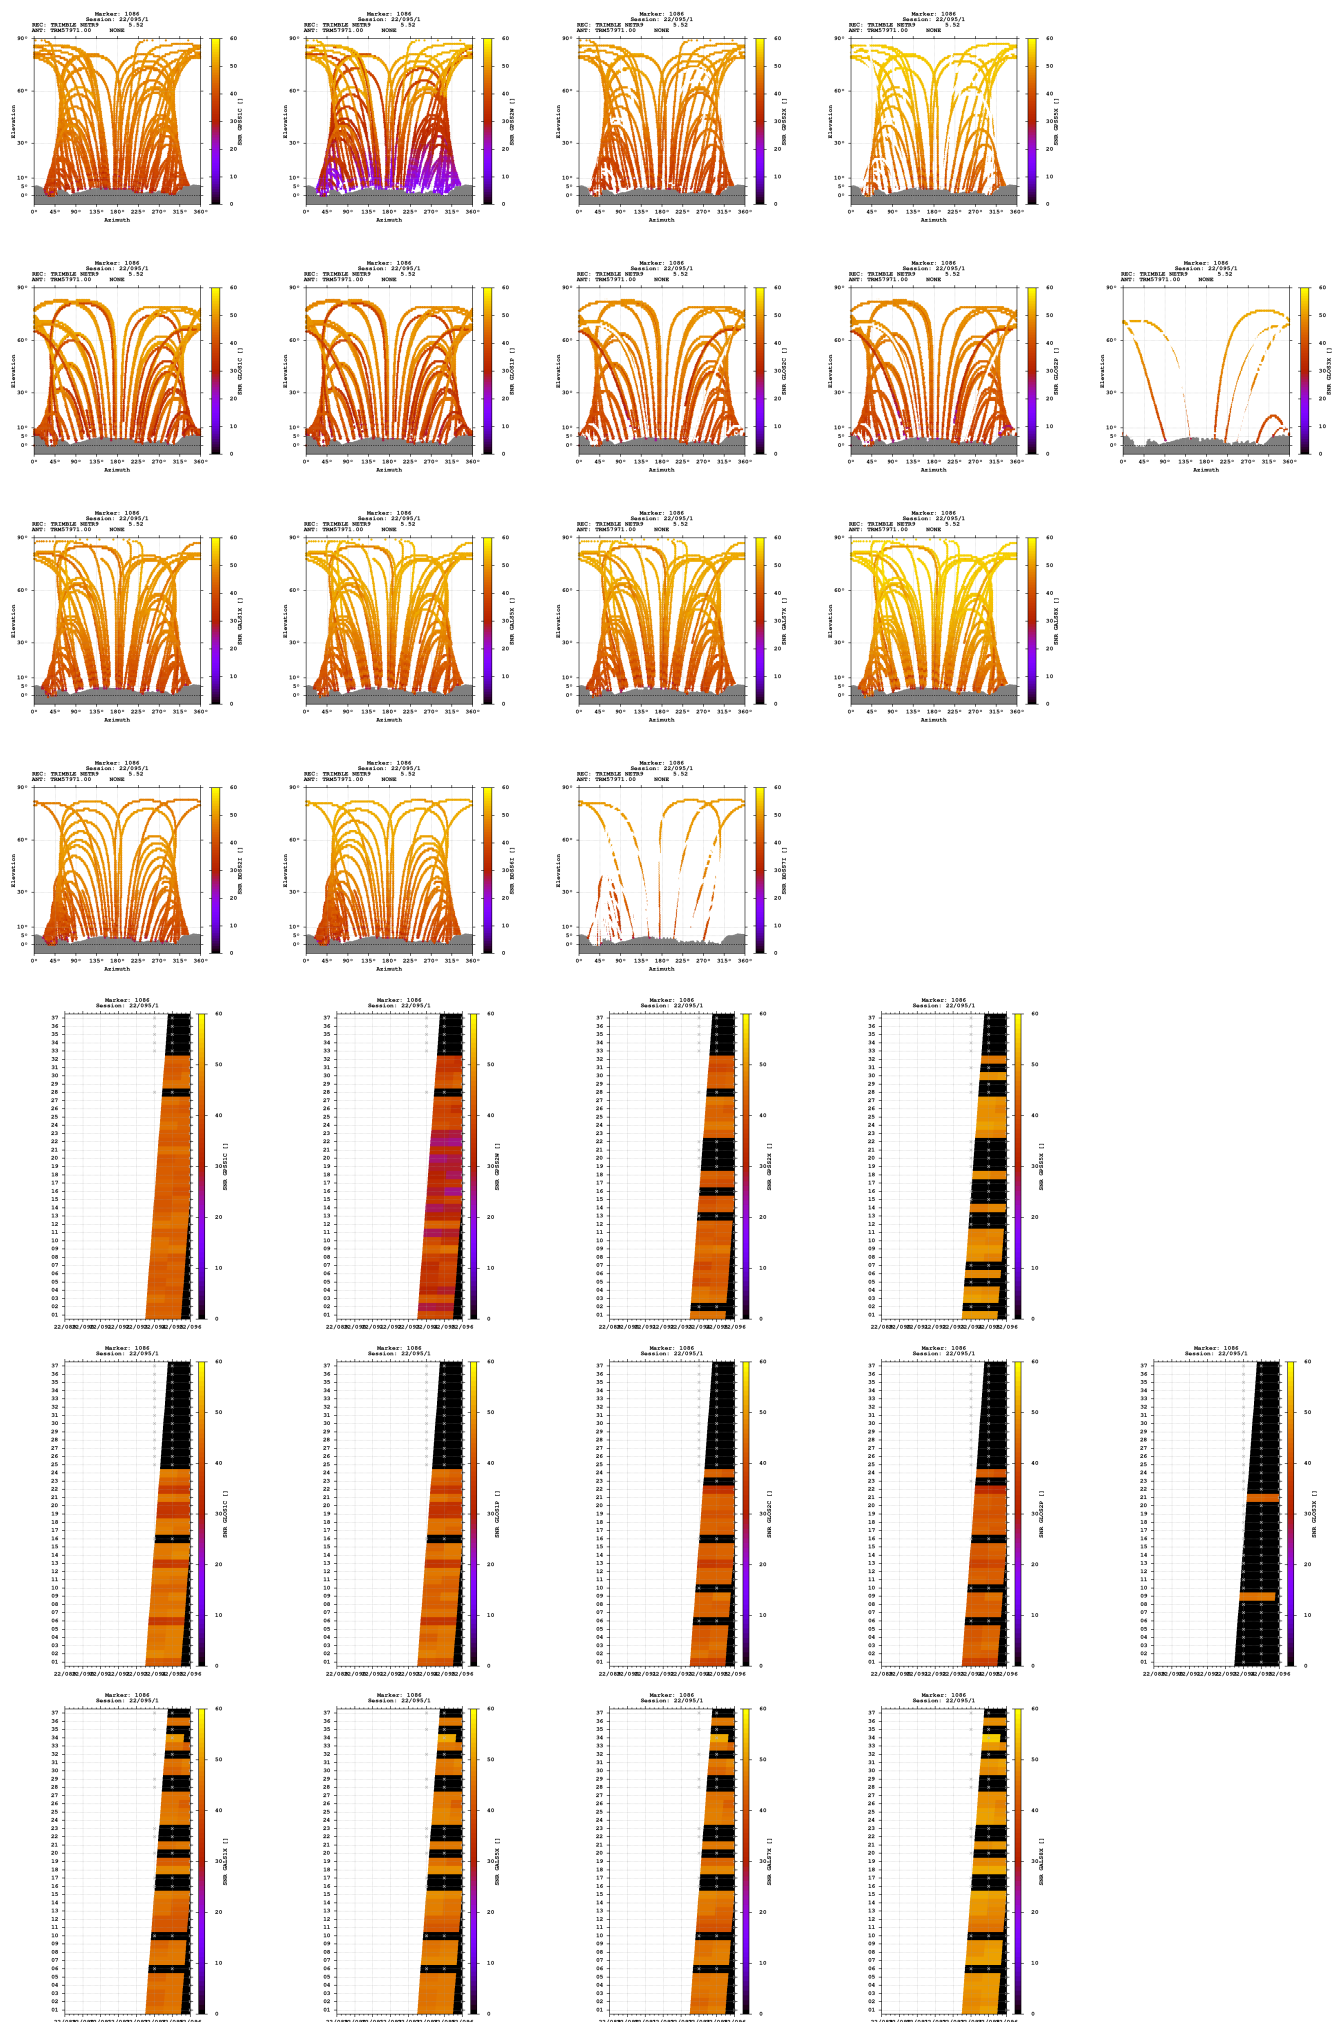

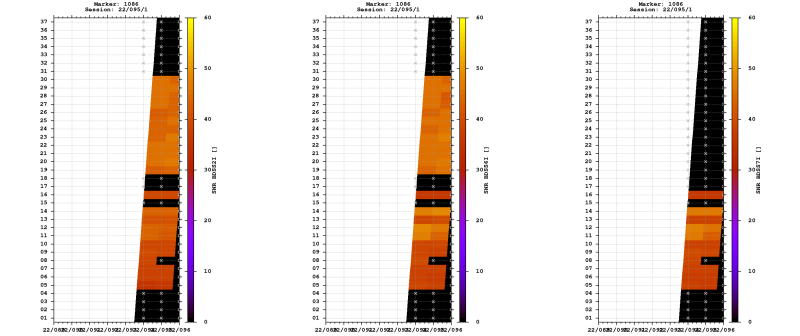


Estimates

2022-04-04 13:49:30	GPS	4289738.0148	551703.2990	4673029.8976	47.406322507	7.328581912	780.6878
2022-04-04 13:49:30	GLO	4289737.6075	551703.3223	4673029.2396	47.406321156	7.328582906	779.9320
2022-04-04 13:49:30	GAL	4289737.6907	551702.9896	4673029.5137	47.406322559	7.328578395	780.1609
2022-04-04 13:49:30	BDS	4289736.0791	551703.5581	4673031.8190	47.406346694	7.328588587	780.8253

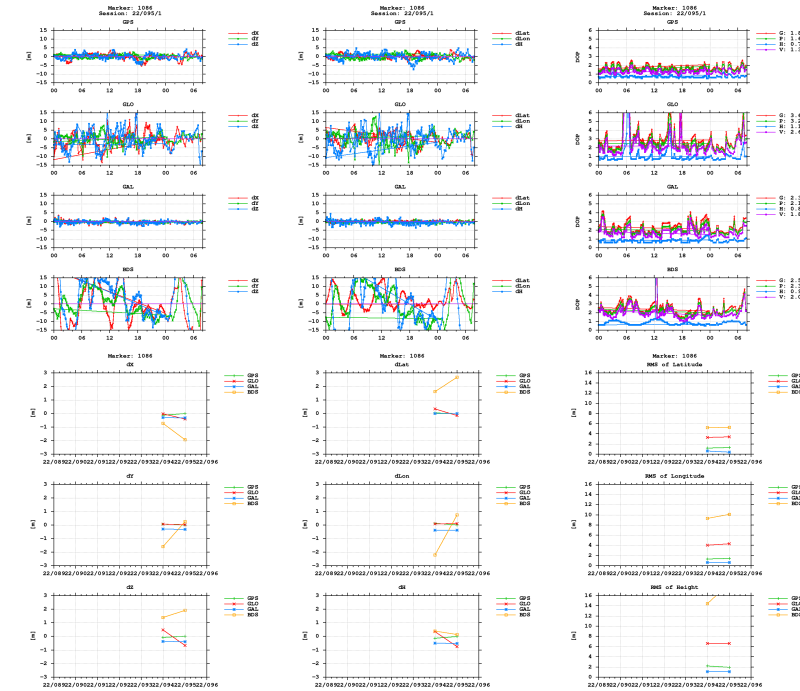

BNC



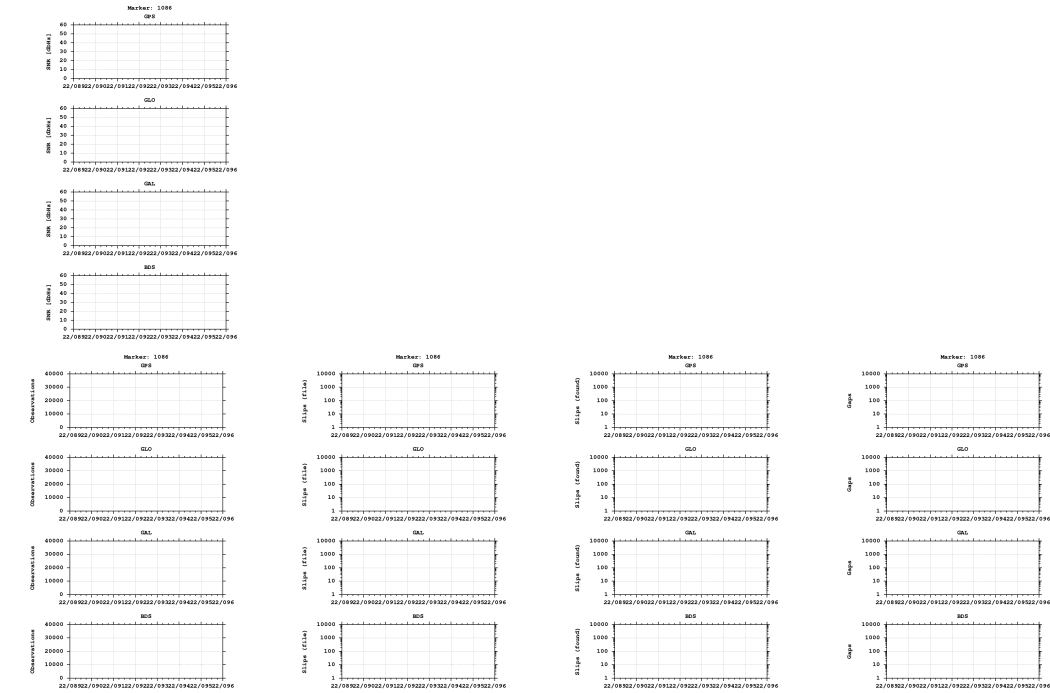

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 512 TRM57971.00 NONE 512

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)