


GNSS observation file monitoring for 0513


Last RINEX file: 05130951.22O
RINEX version: 3.02
Marker: 1084
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


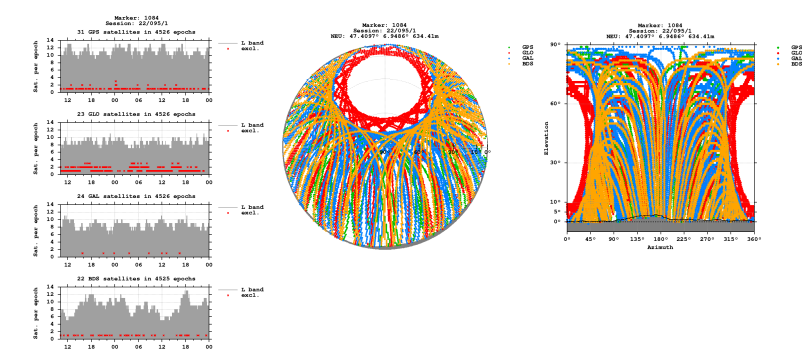


Bands

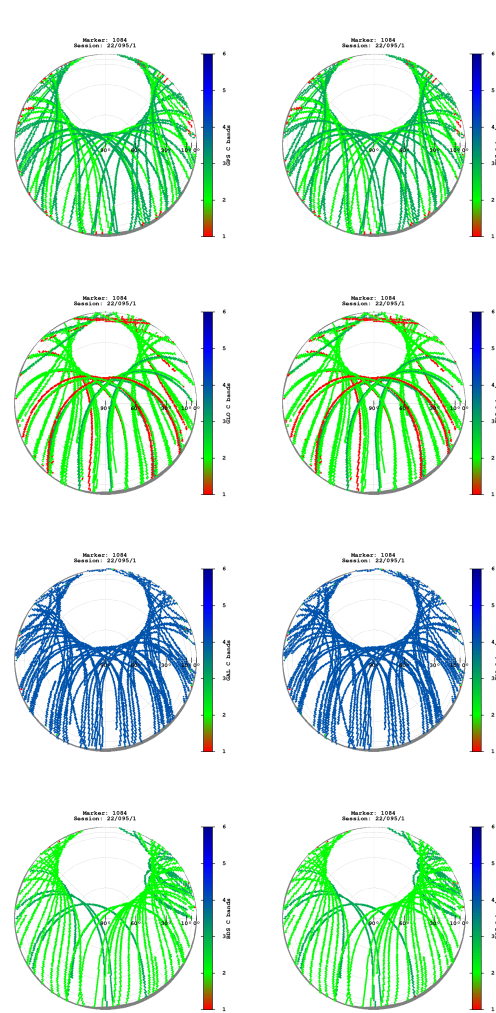

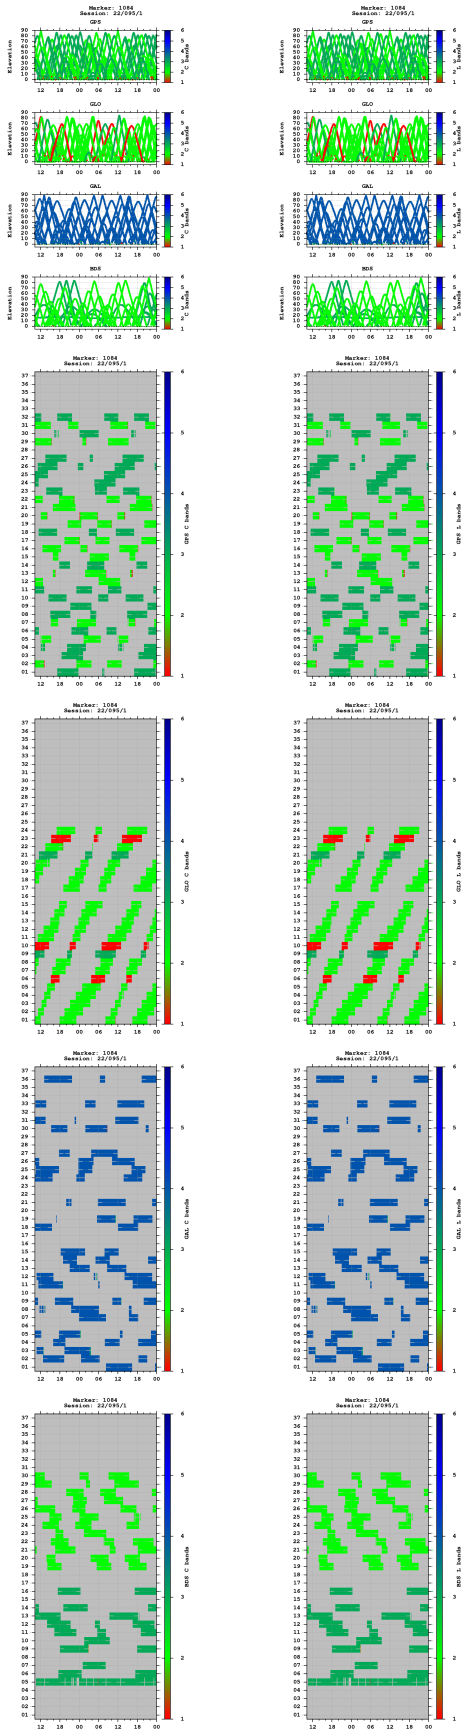



Multipath

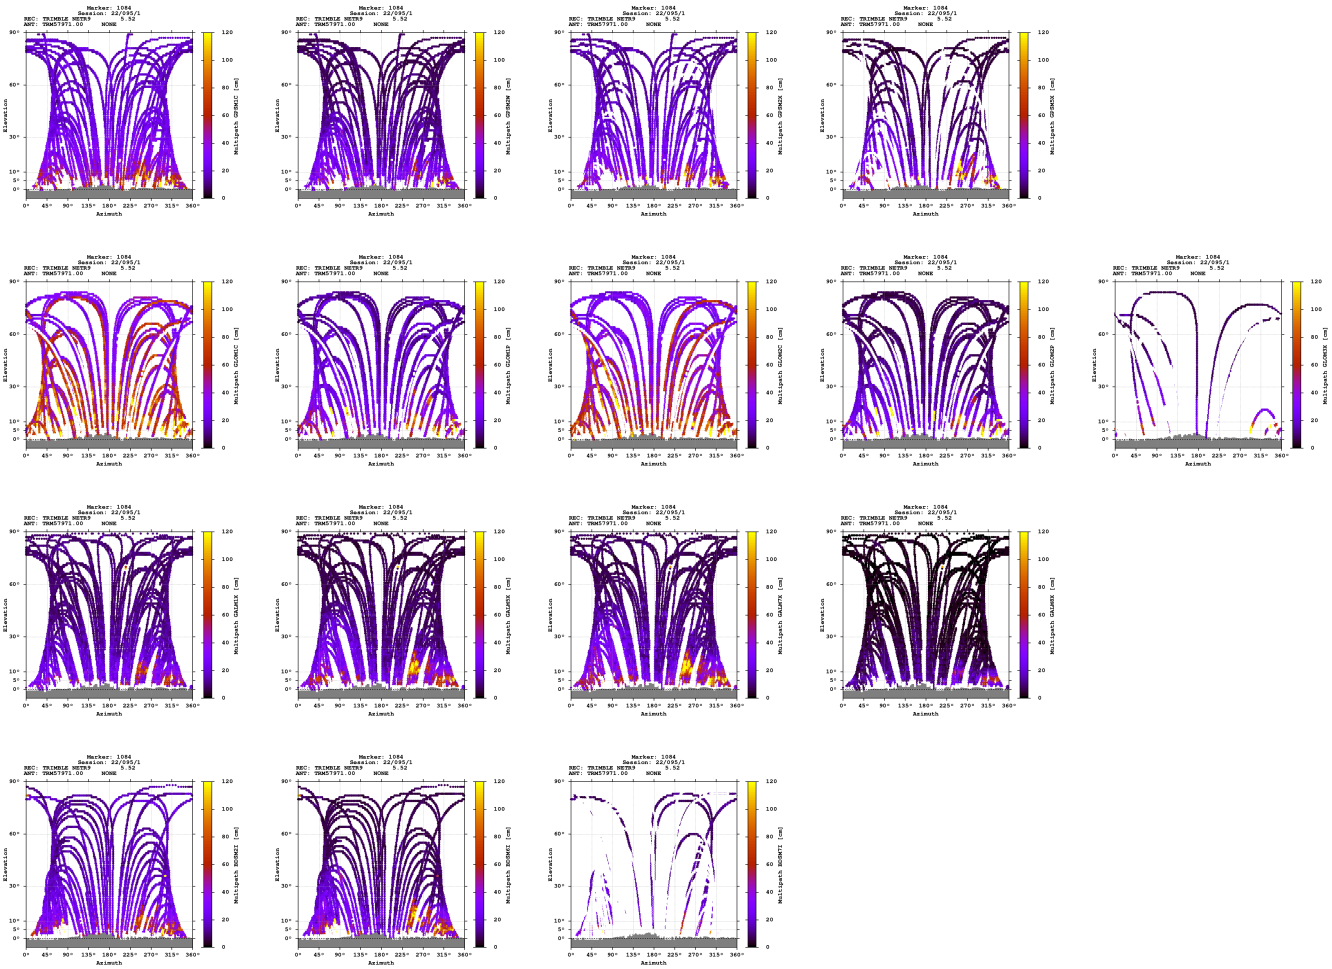

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

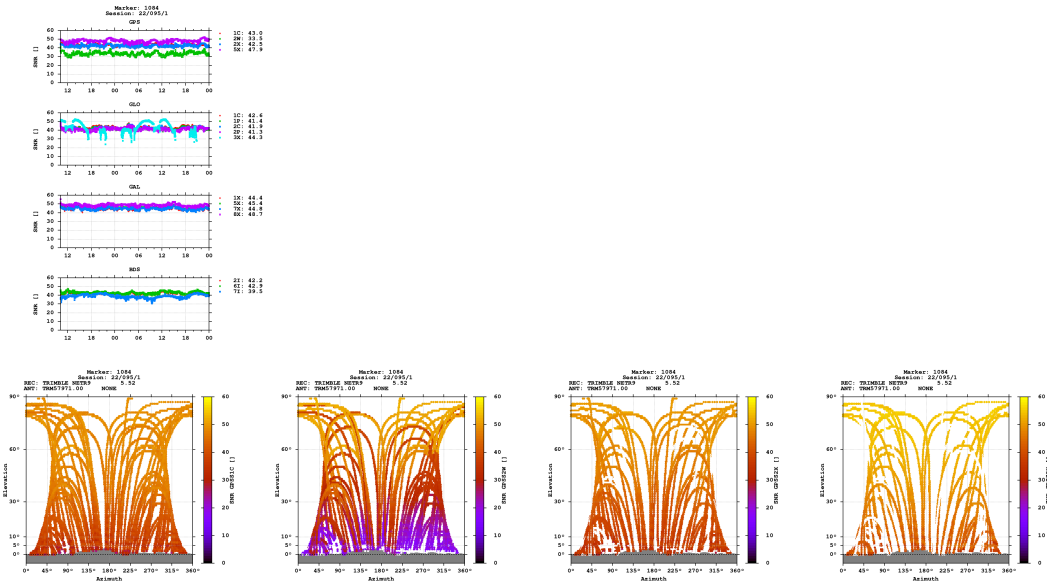

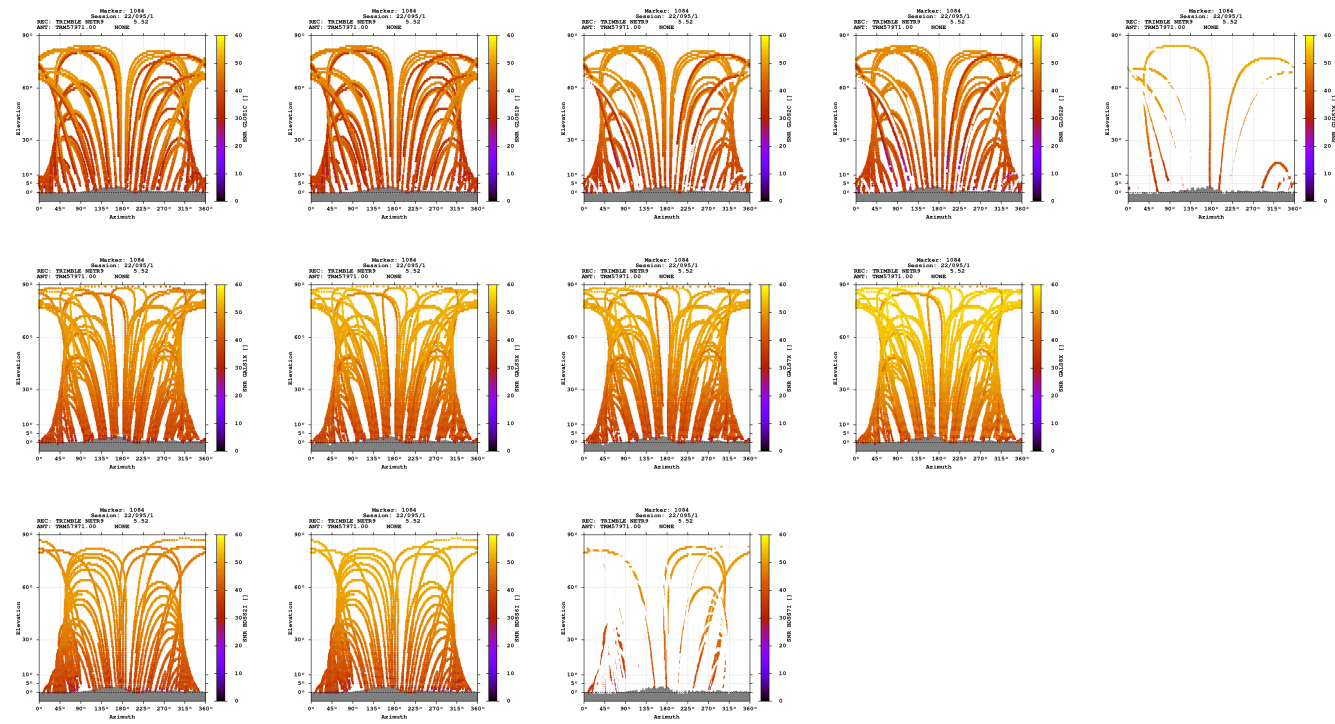

Estimates

2022-04-05 10:12:30	GPS	4292927.5120	523199.0411	4673178.1951	47.409724251	6.948634648	634.4112
2022-04-05 10:12:30	GLO	4292926.9611	523198.0268	4673178.0669	47.409727904	6.948622193	633.8637
2022-04-05 10:12:30	GAL	4292927.3498	523198.6689	4673177.9718	47.409724256	6.948630013	634.1073
2022-04-05 10:12:30	BDS	4292925.3343	523197.9143	4673178.6921	47.409742491	6.948623321	633.2218

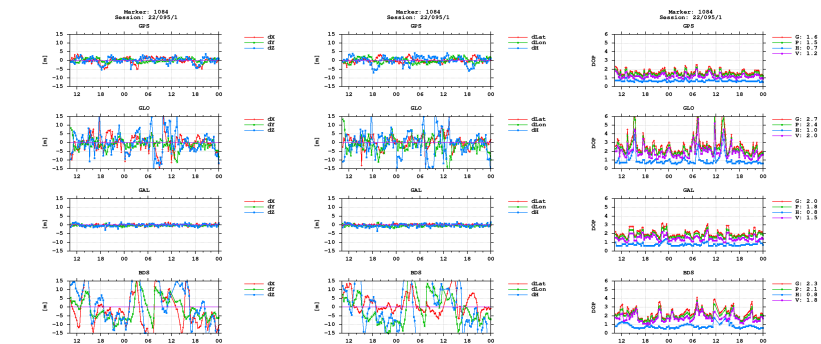

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)