

GNSS observation file monitoring for 0513

Last RINEX file: 05130981.220


RINEX version: 3.02

Marker: 1104

Receiver: 513 TRIMBLE NETR9 5.52


Antenna: 513 TRM57971.00 NONE

Epochs

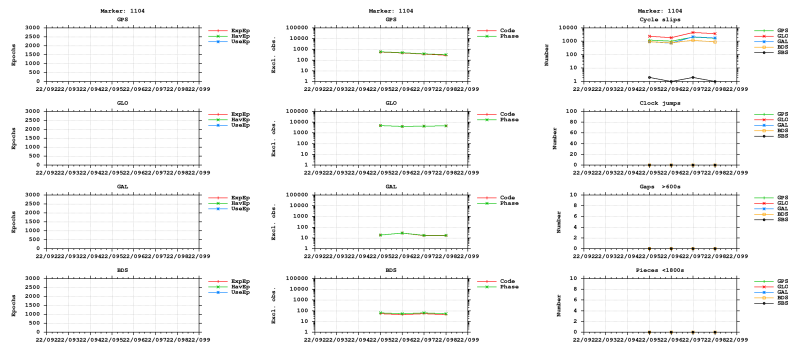



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

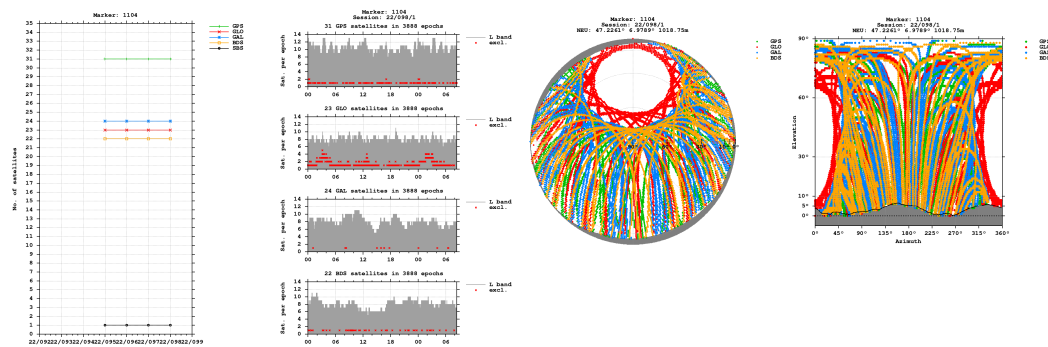


Bands

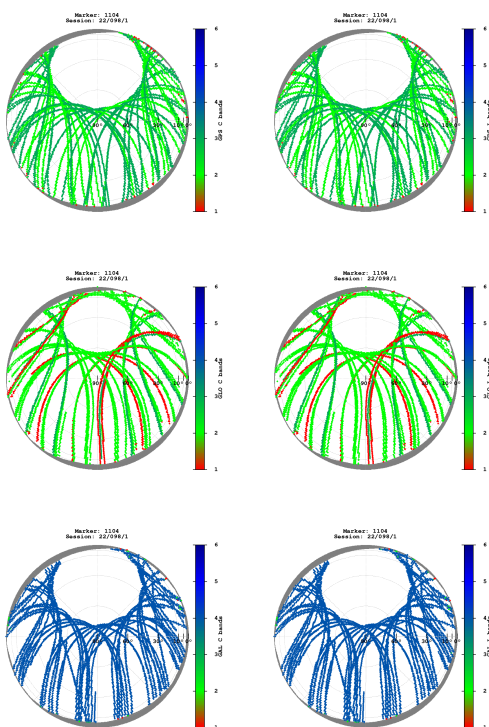


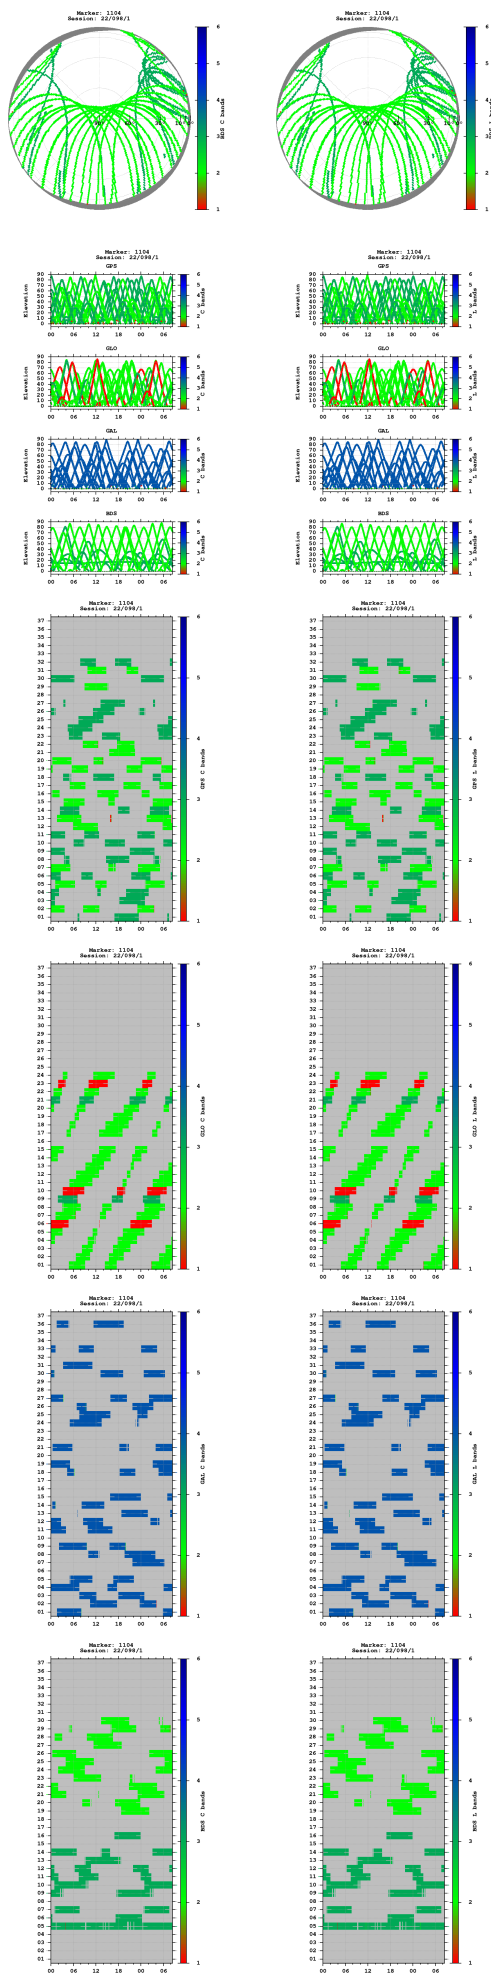


Observations

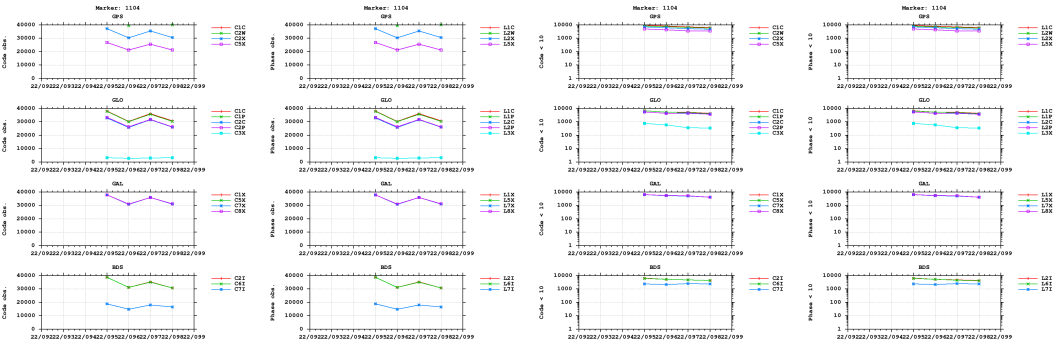


Multipath

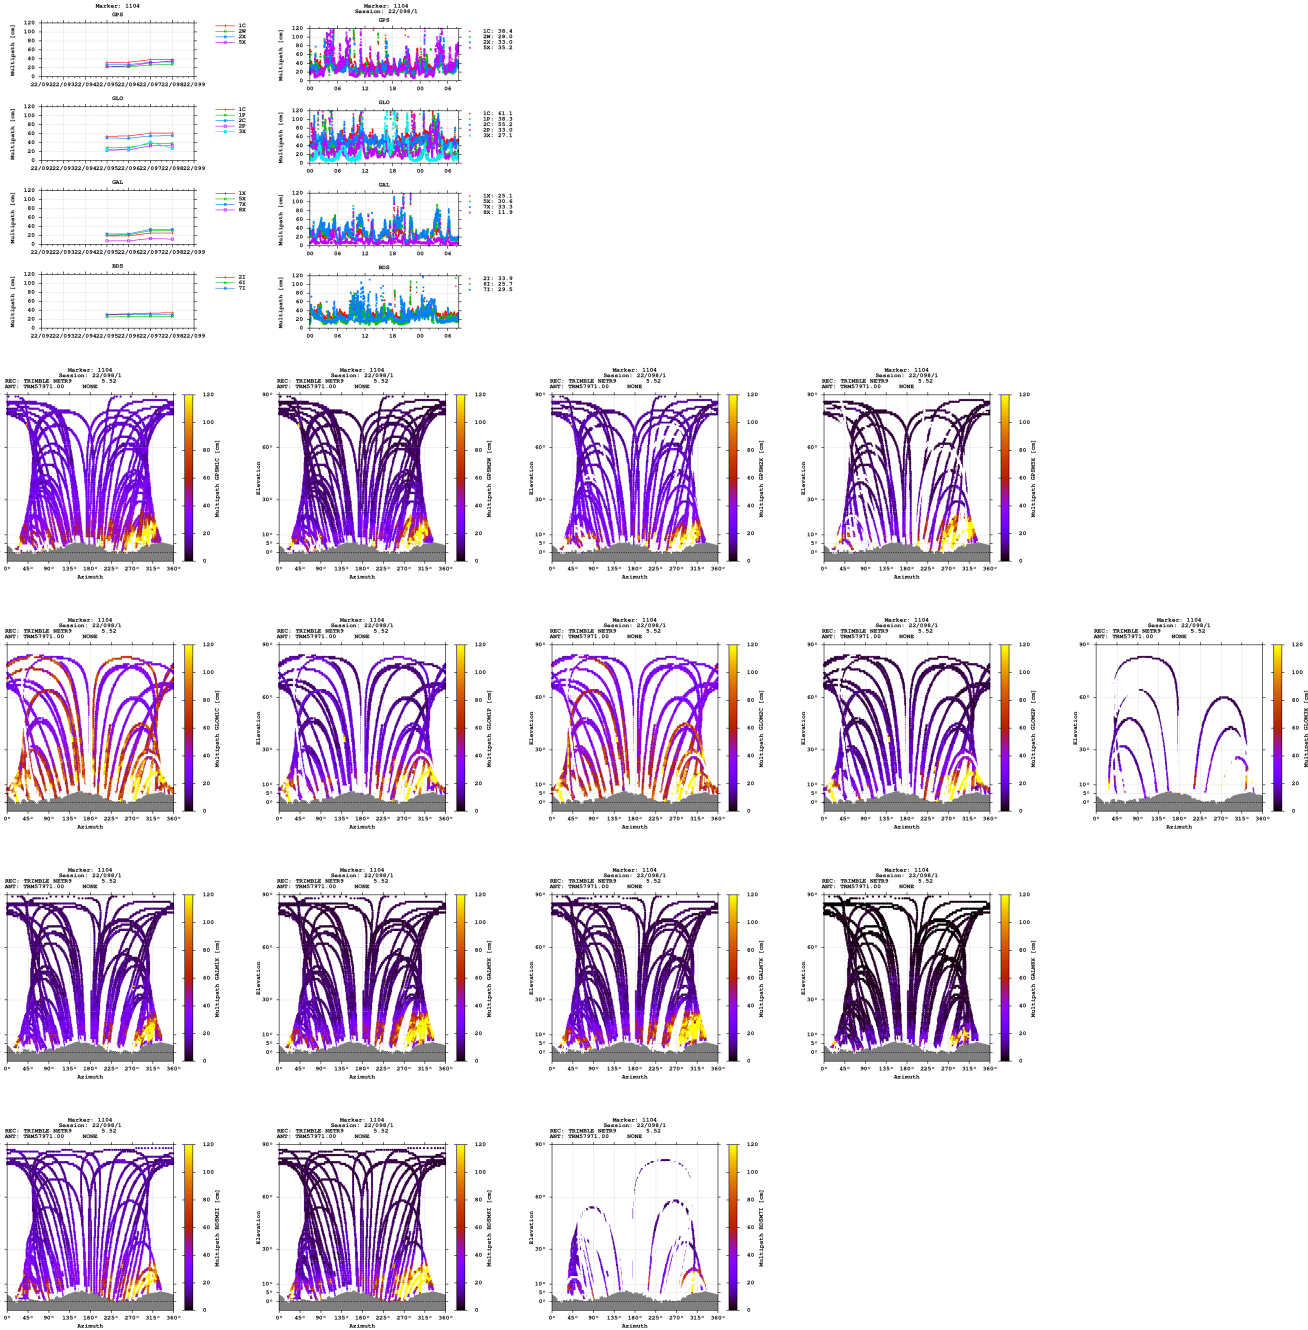


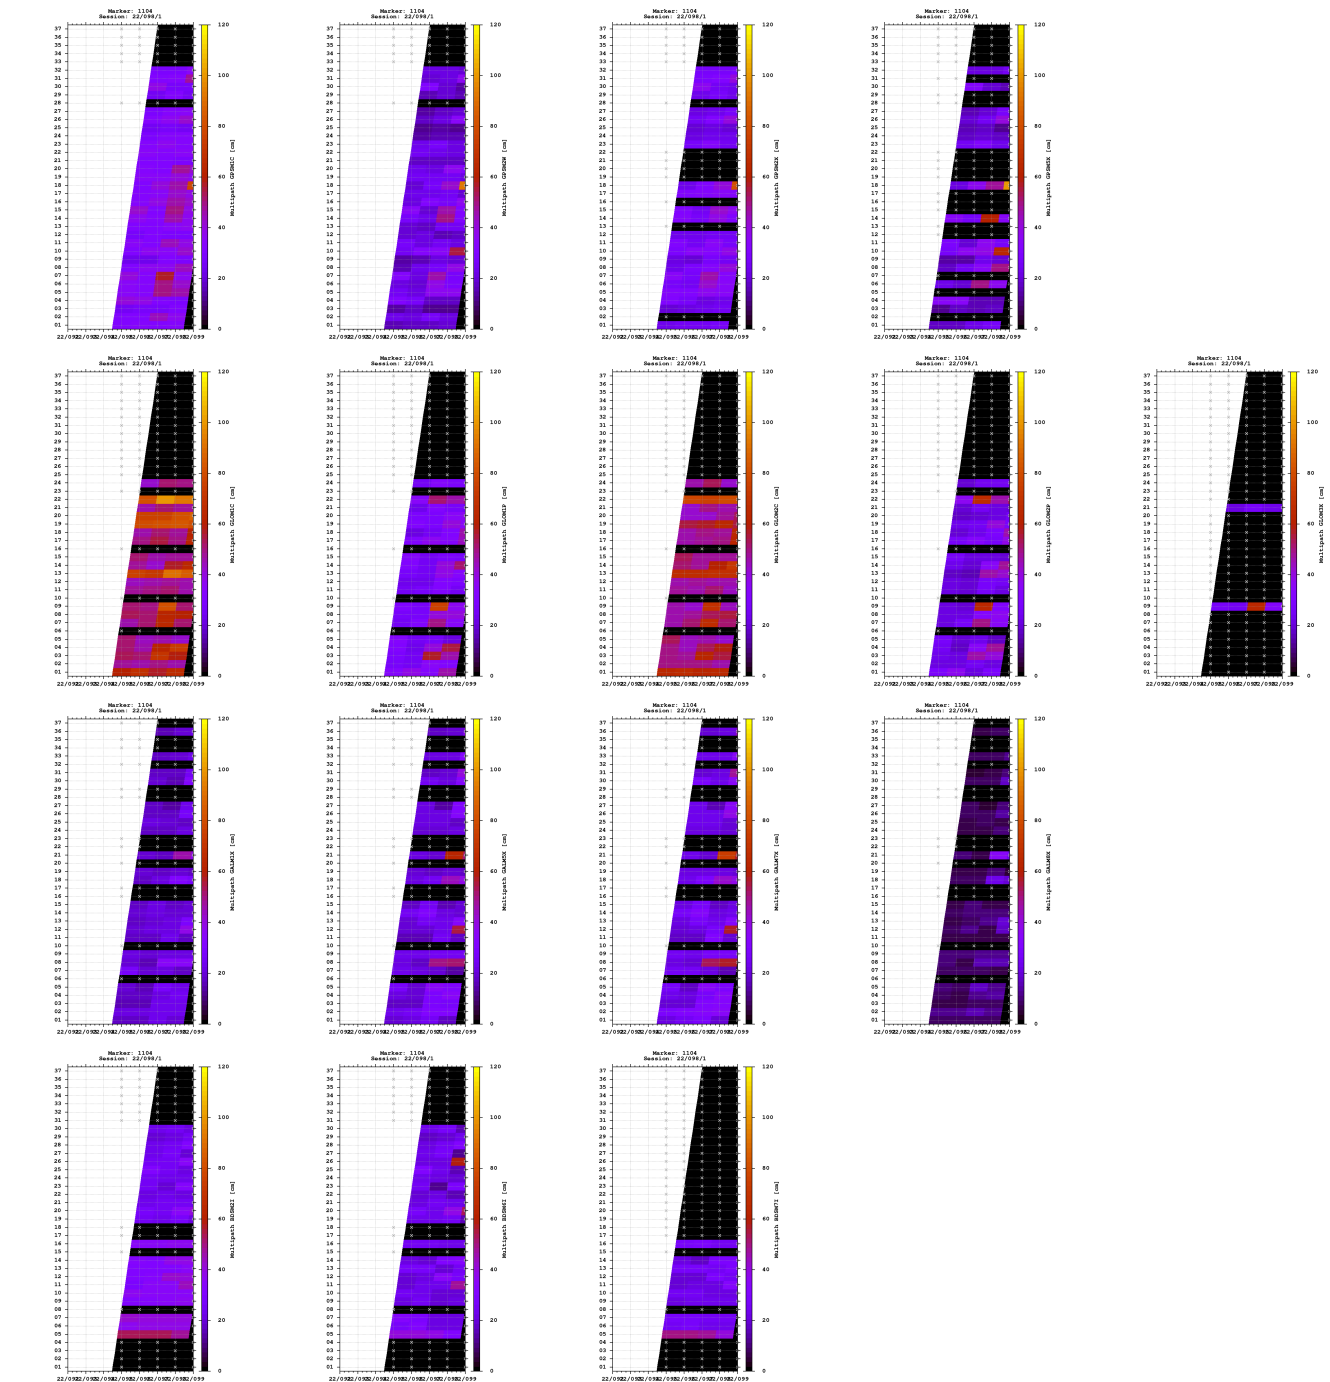


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

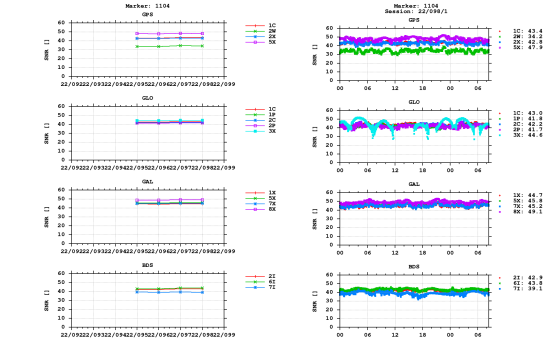


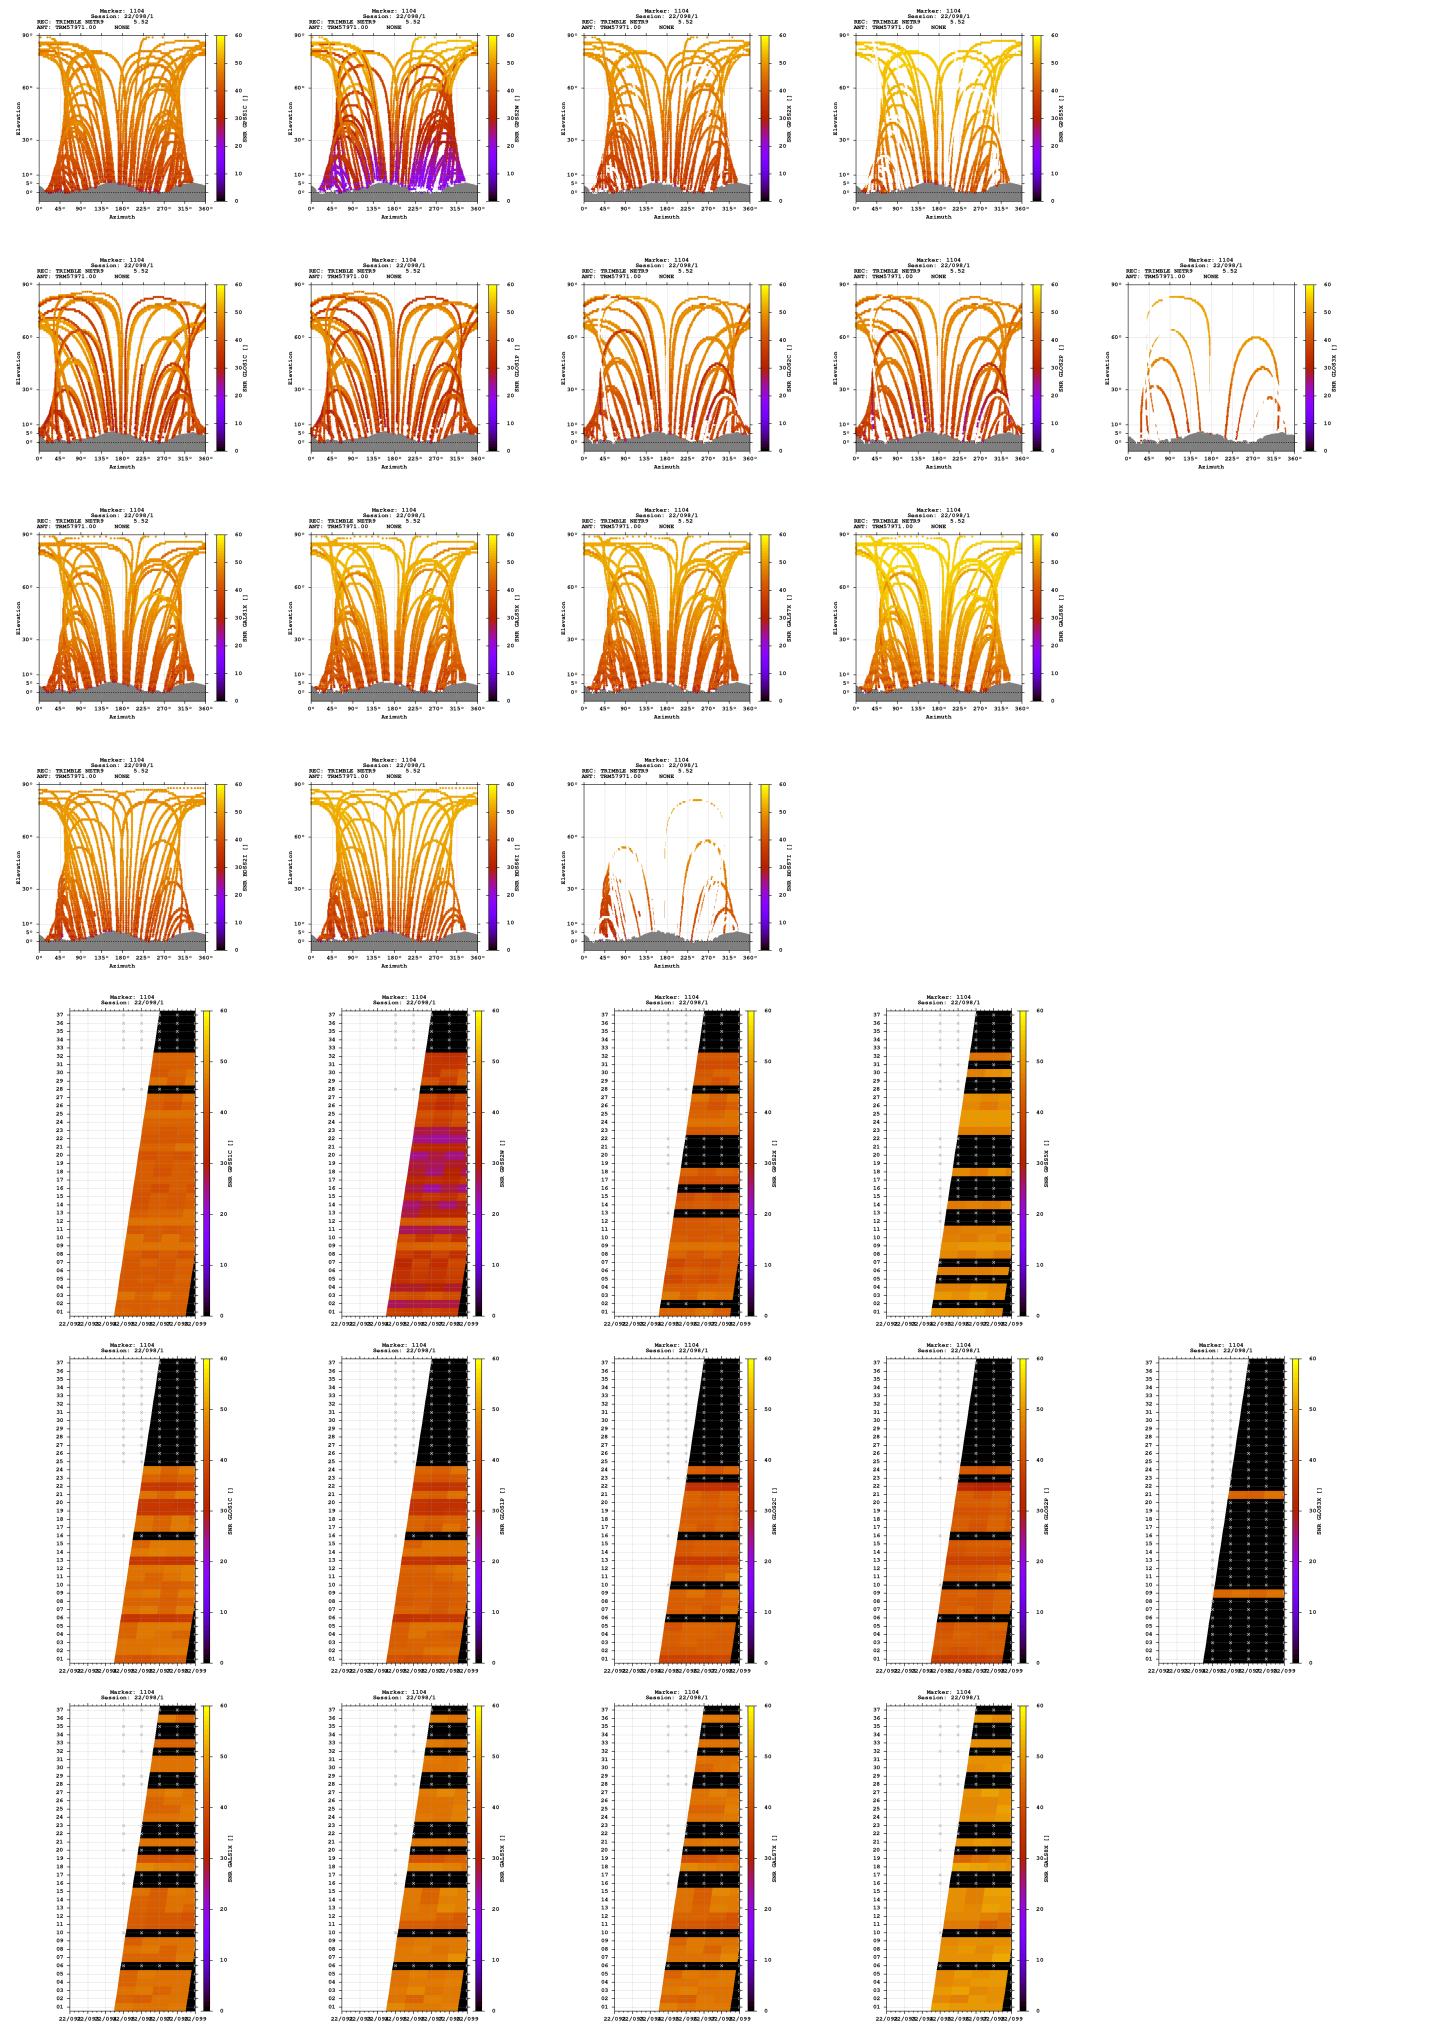

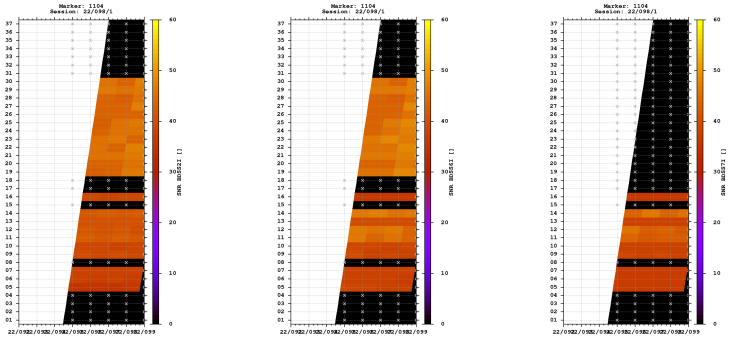



Estimates

2022-04-07 10:07:30	GPS	4307803.5360	527322.8139	4659622.5635	47.226145341	6.978917079	1018.7508
2022-04-07 10:07:30	GLO	4307802.7728	527322.0060	4659622.7123	47.226151899	6.978907716	1018.2789
2022-04-07 10:07:30	GAL	4307803.1913	527322.6177	4659622.1162	47.226145026	6.978915061	1018.1739
2022-04-07 10:07:30	BDS	4307803.5179	527323.4388	4659623.9702	47.226153550	6.978925297	1019.8227

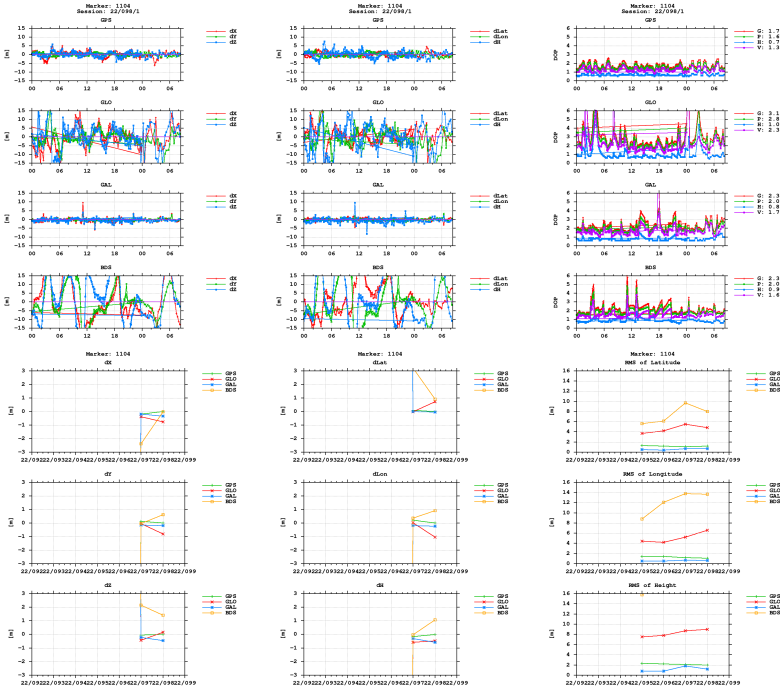

BNC

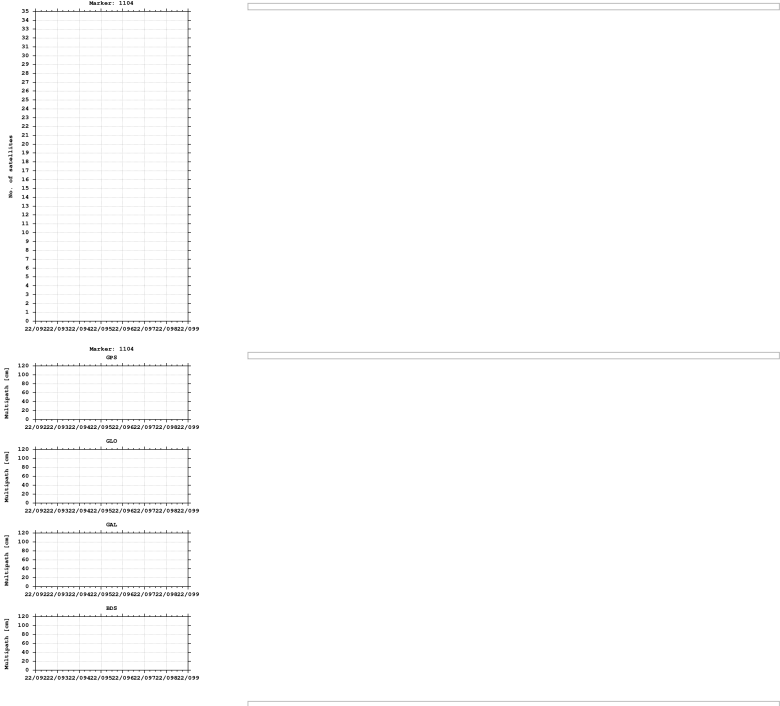

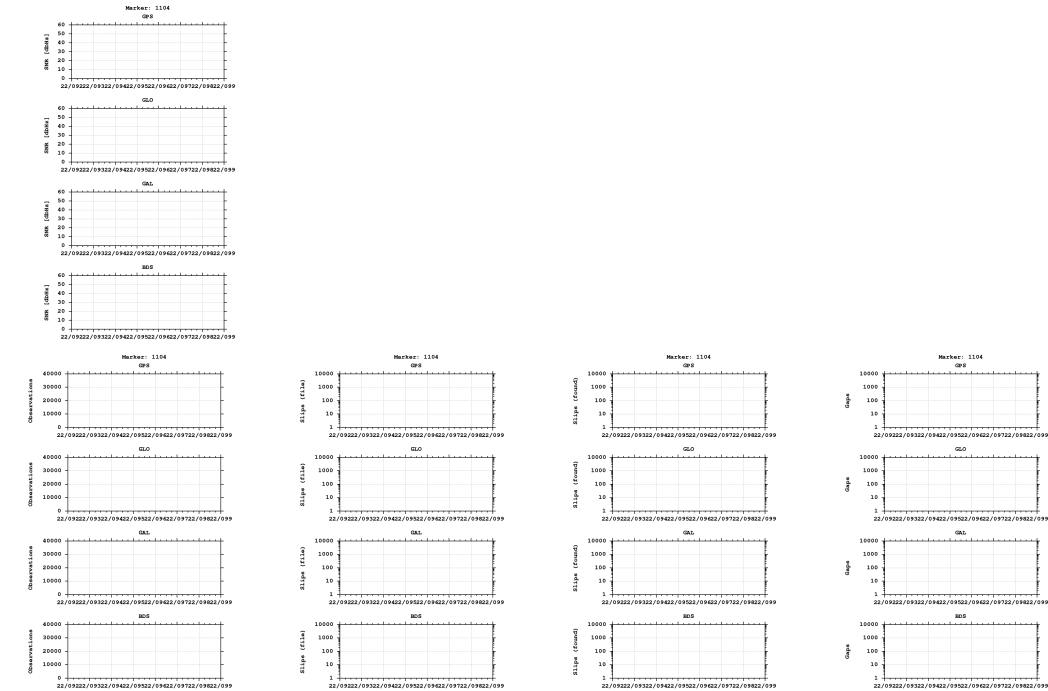

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)