

GNSS observation file monitoring for 0514

Last RINEX file: 05140951.22O

RINEX version: 3.02

Marker: JU_190


Receiver: 514 TRIMBLE NETR9 5.52

Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

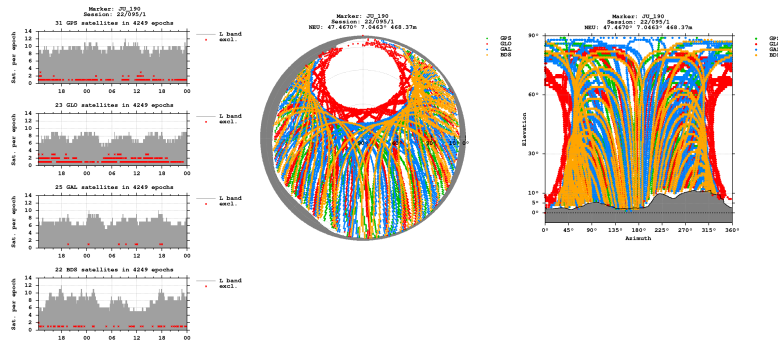


Bands

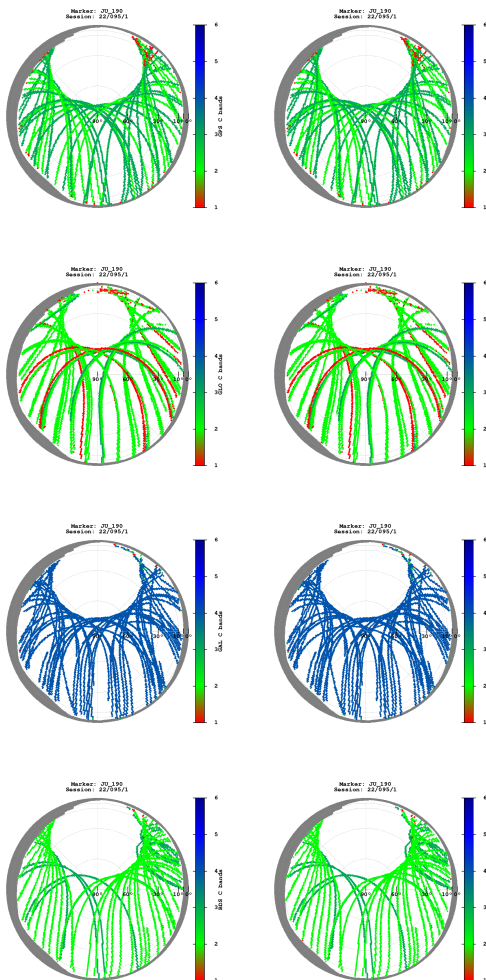


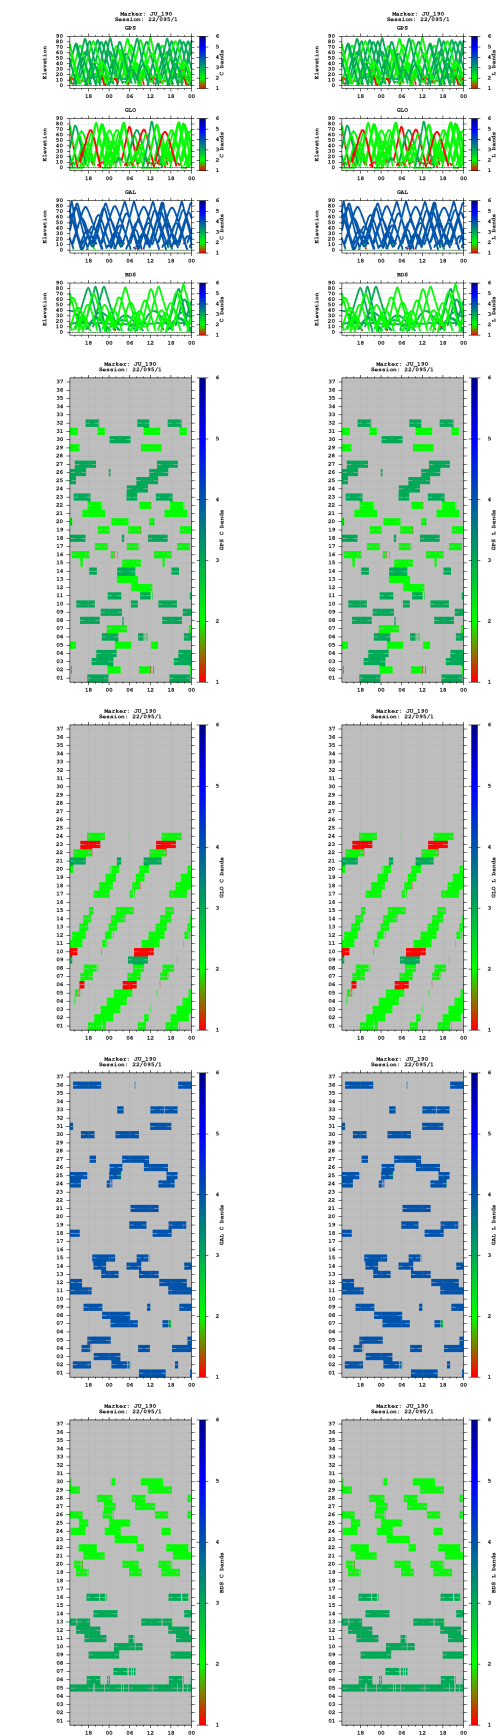


Multipath

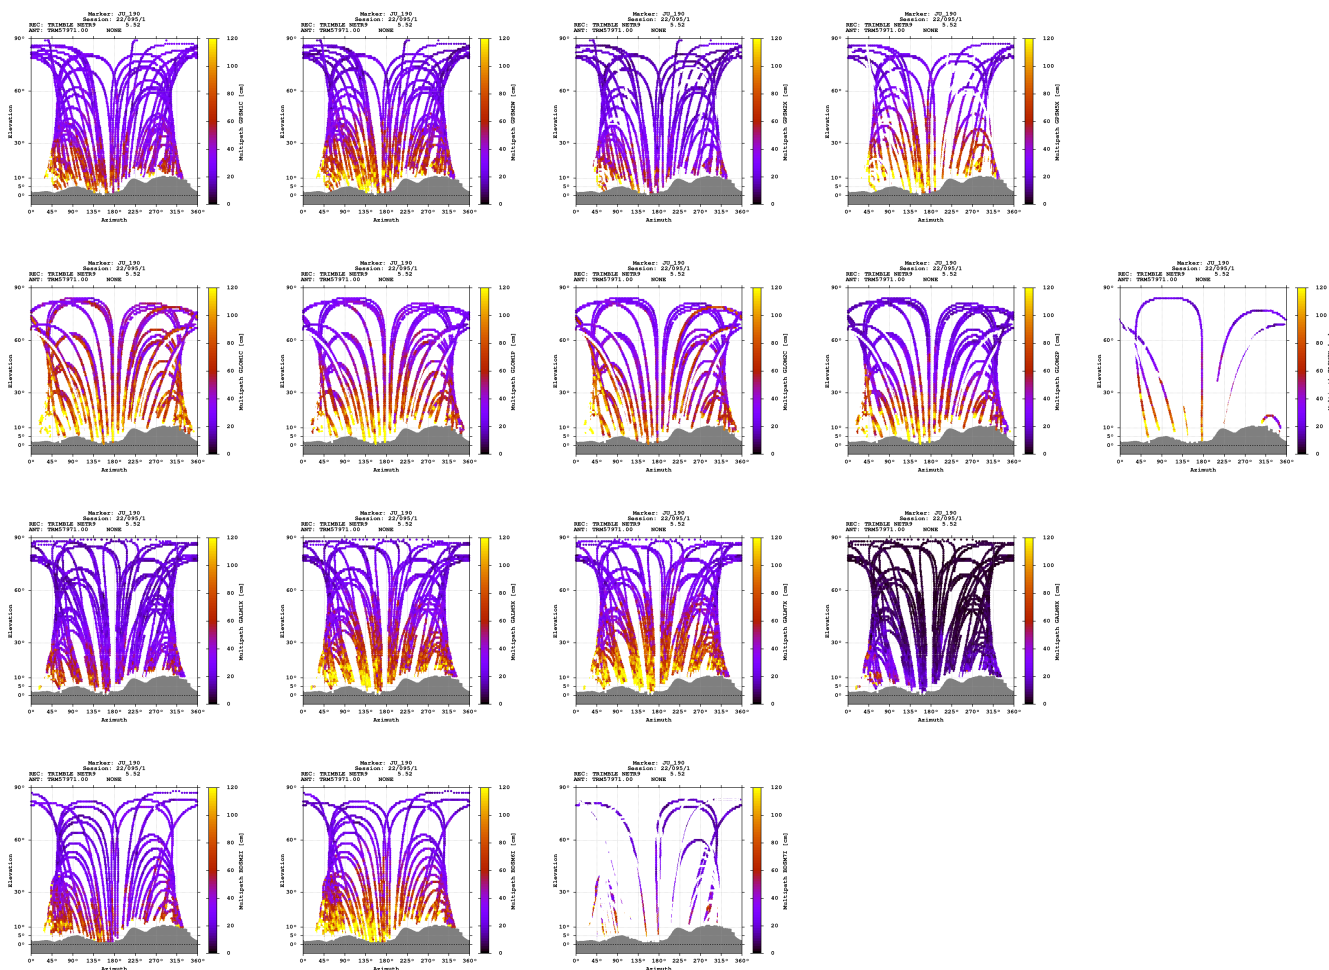


Signal-to-noise ratio



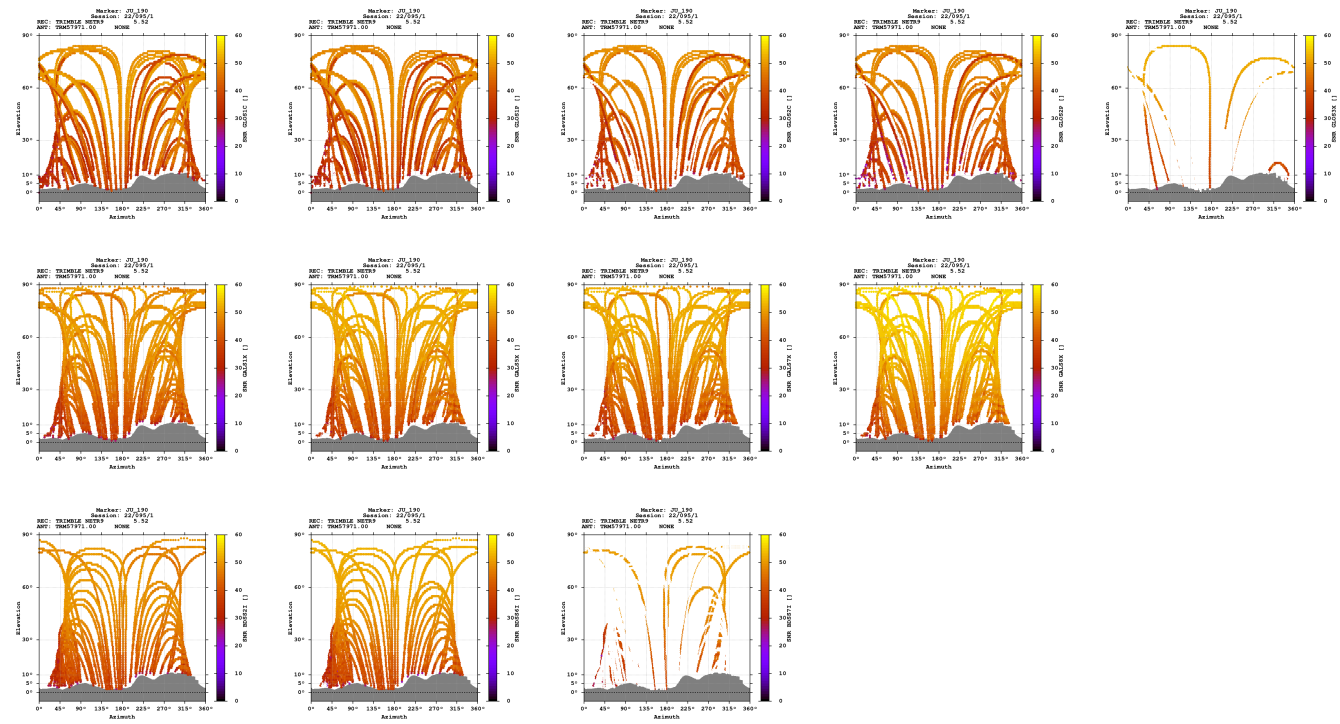

Estimates

2022-04-05 12:33:00	GPS	4287262.6701	529929.3935	4677363.1589	47.466996831	7.046335086	468.3695
2022-04-05 12:33:00	GLO	4287263.4246	529928.4063	4677363.1986	47.466992912	7.046320864	468.8230
2022-04-05 12:33:00	GAL	4287262.6871	529929.0937	4677362.8732	47.466995225	7.046331112	468.1454
2022-04-05 12:33:00	BDS	4287260.4968	529928.2160	4677363.0501	47.467011422	7.046323123	466.7335

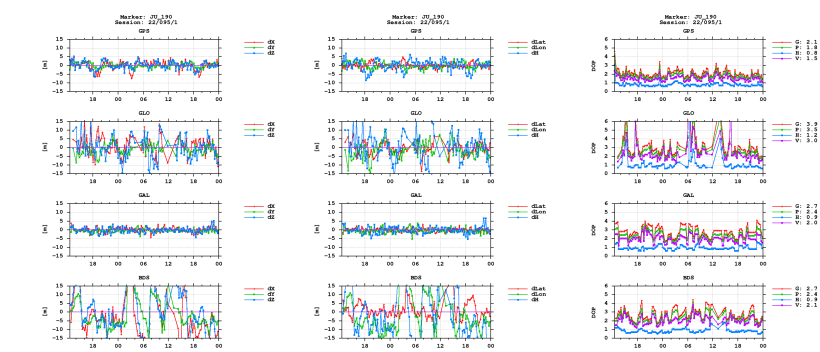

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)