

GNSS observation file monitoring for 0514

Last RINEX file: 05140961.220


RINEX version: 3.02

Marker: JU_190

Receiver: 514 TRIMBLE NETR9 5.52

Antenna: 514 TRM57971.00 NONE


Epochs

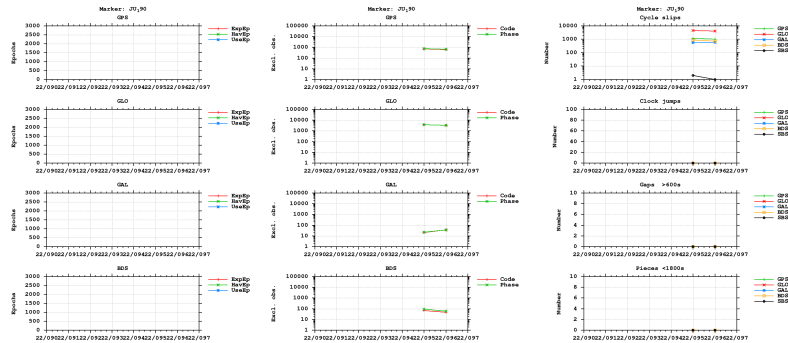


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

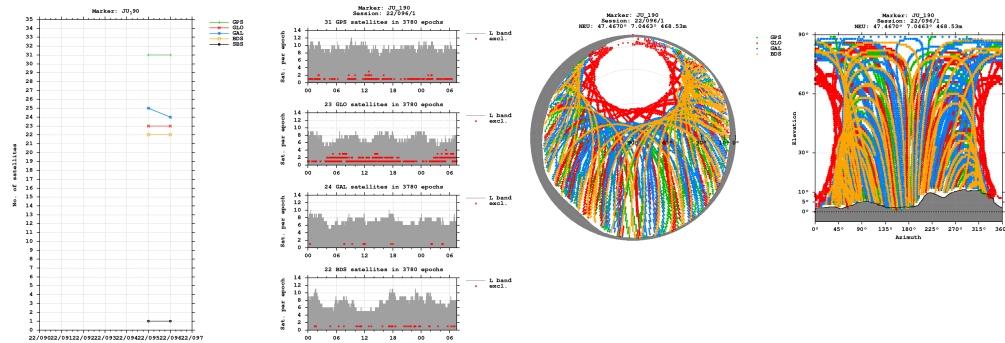


Bands

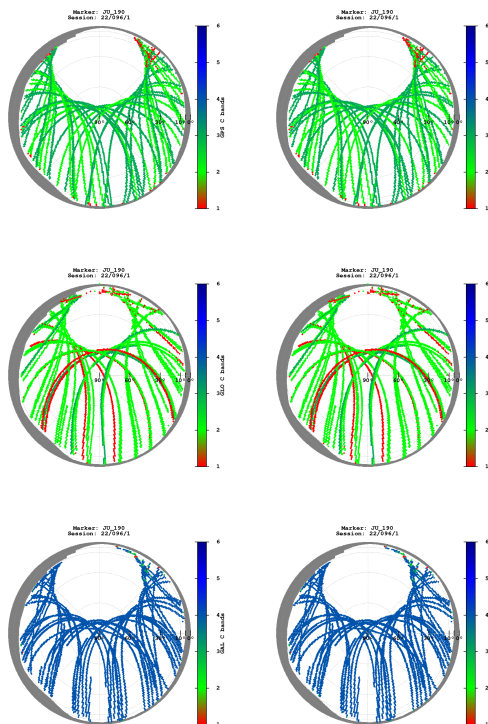


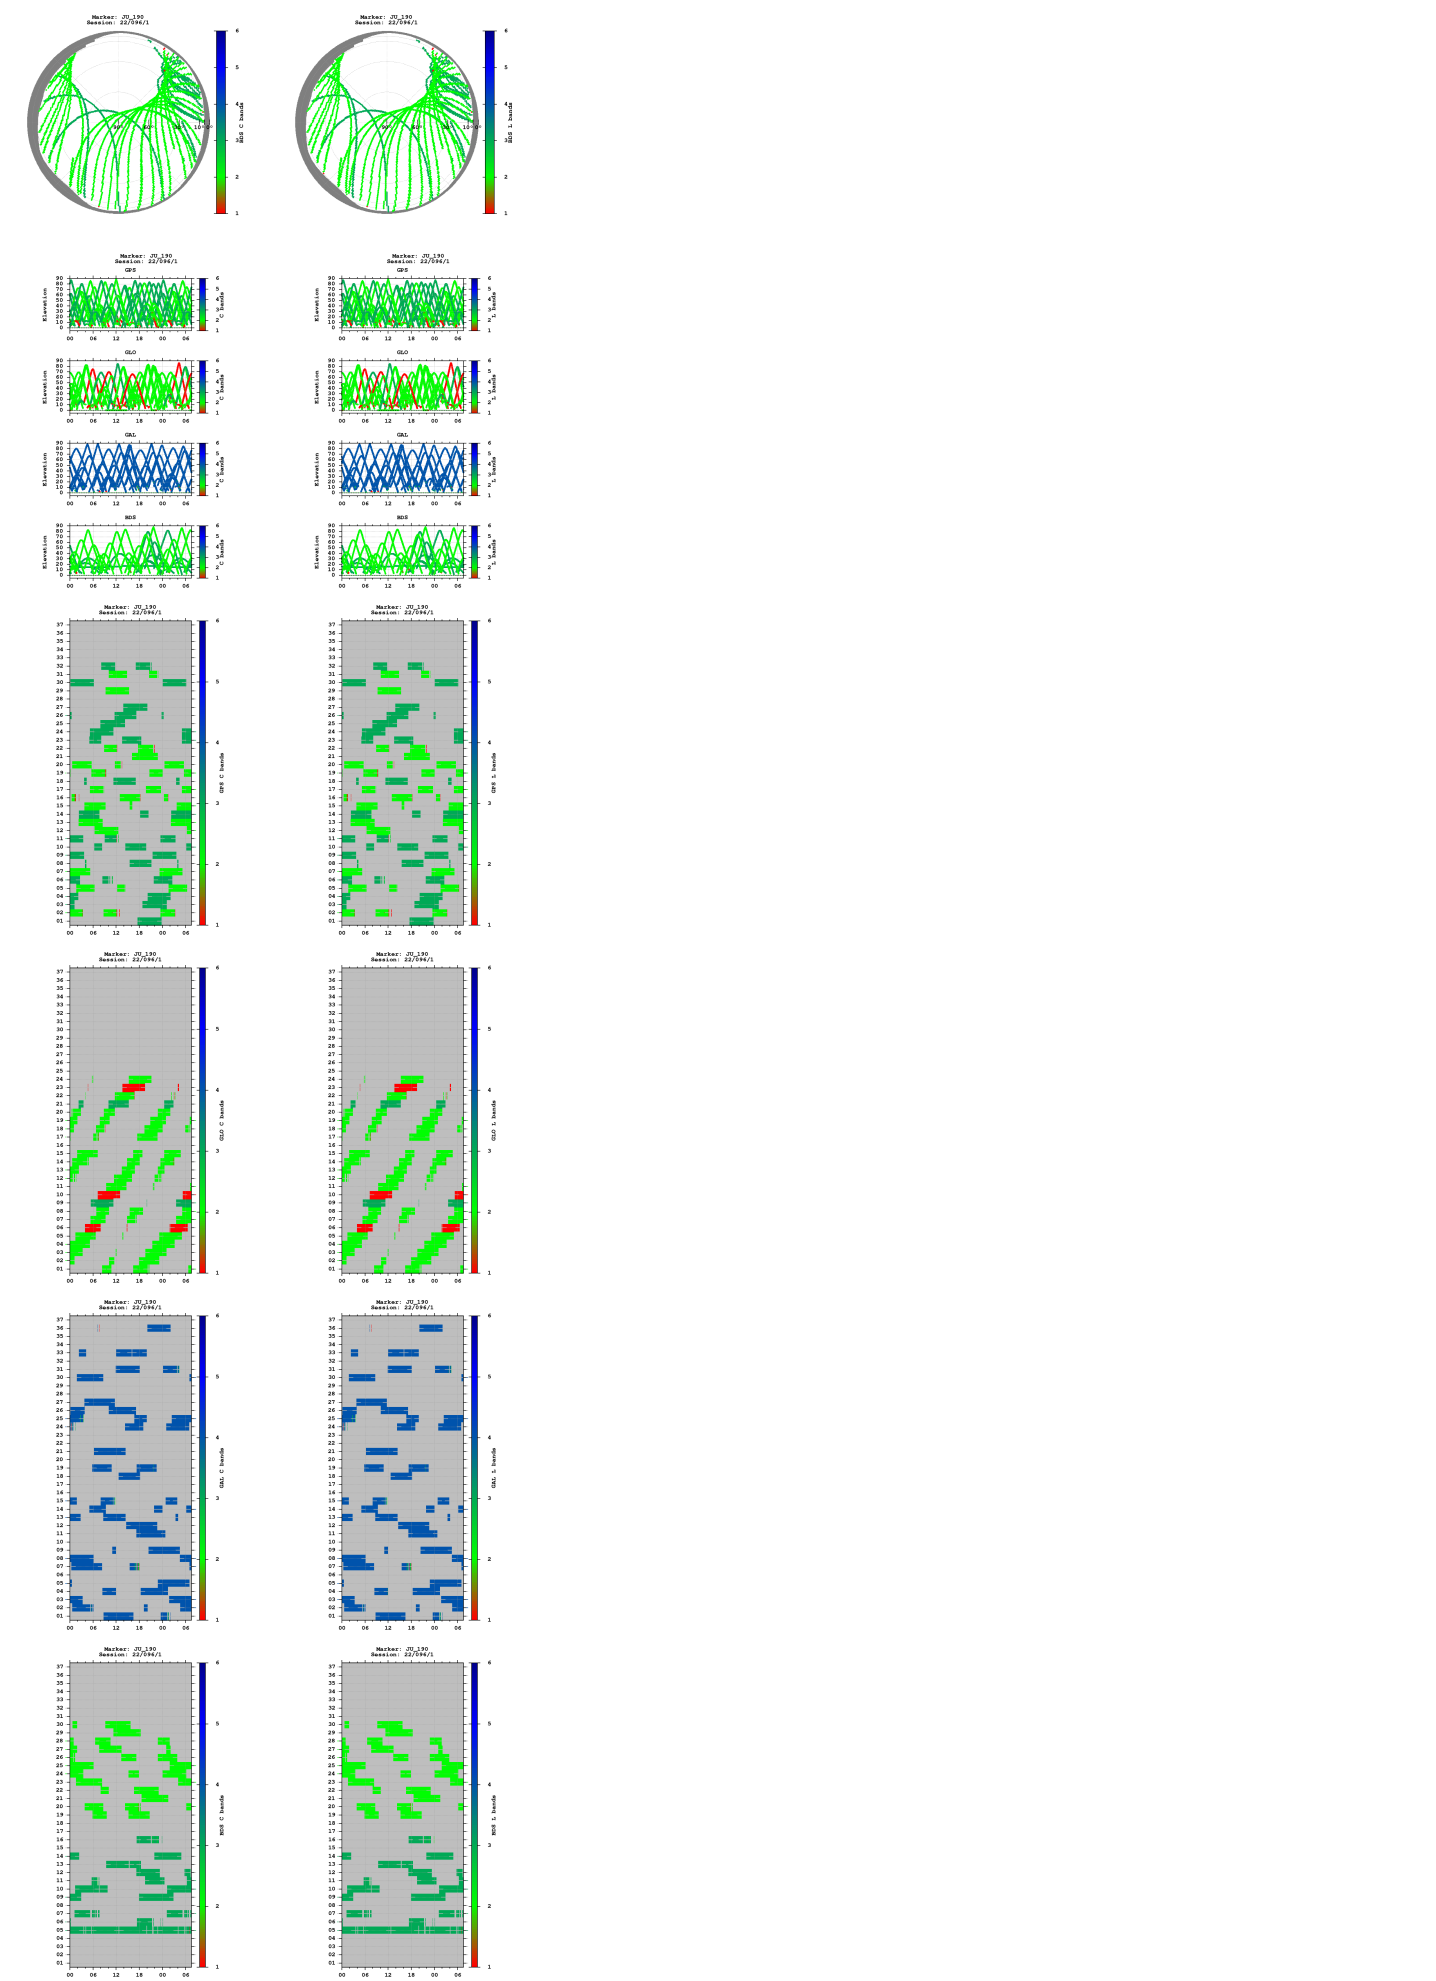

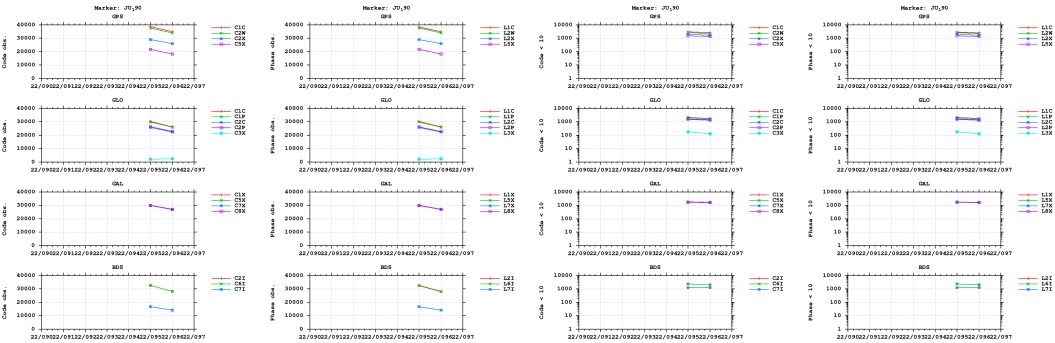


Multipath

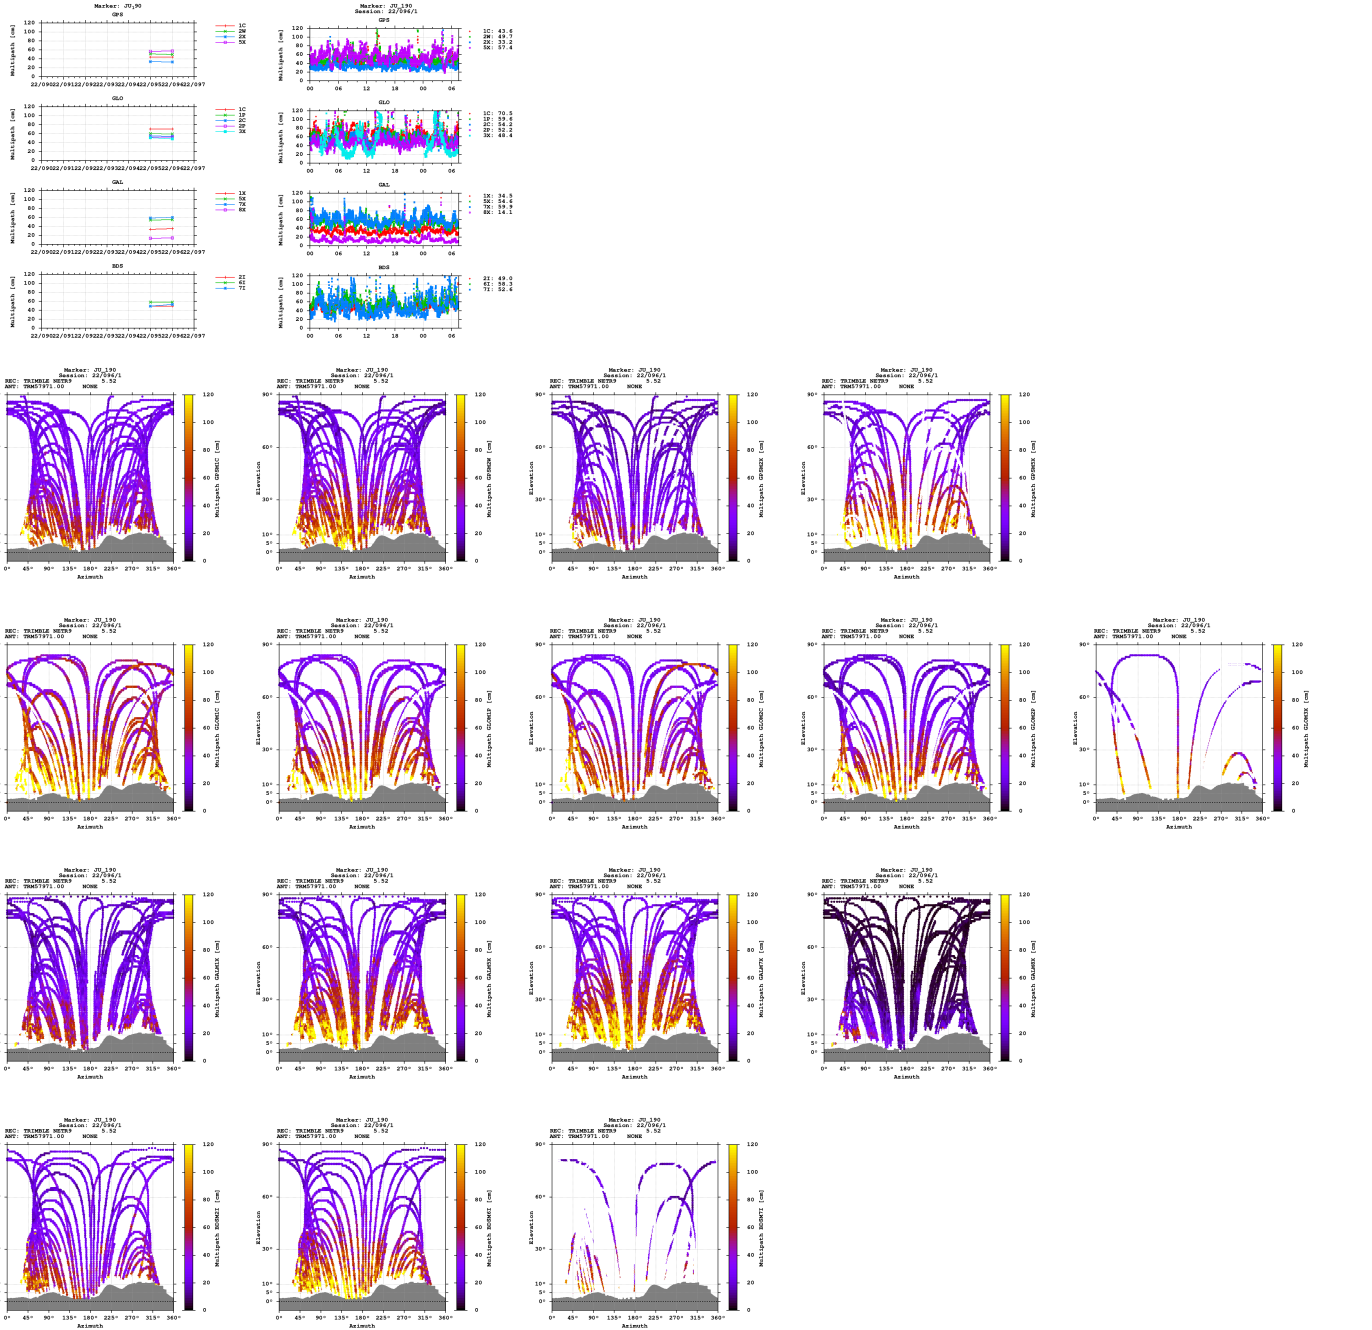


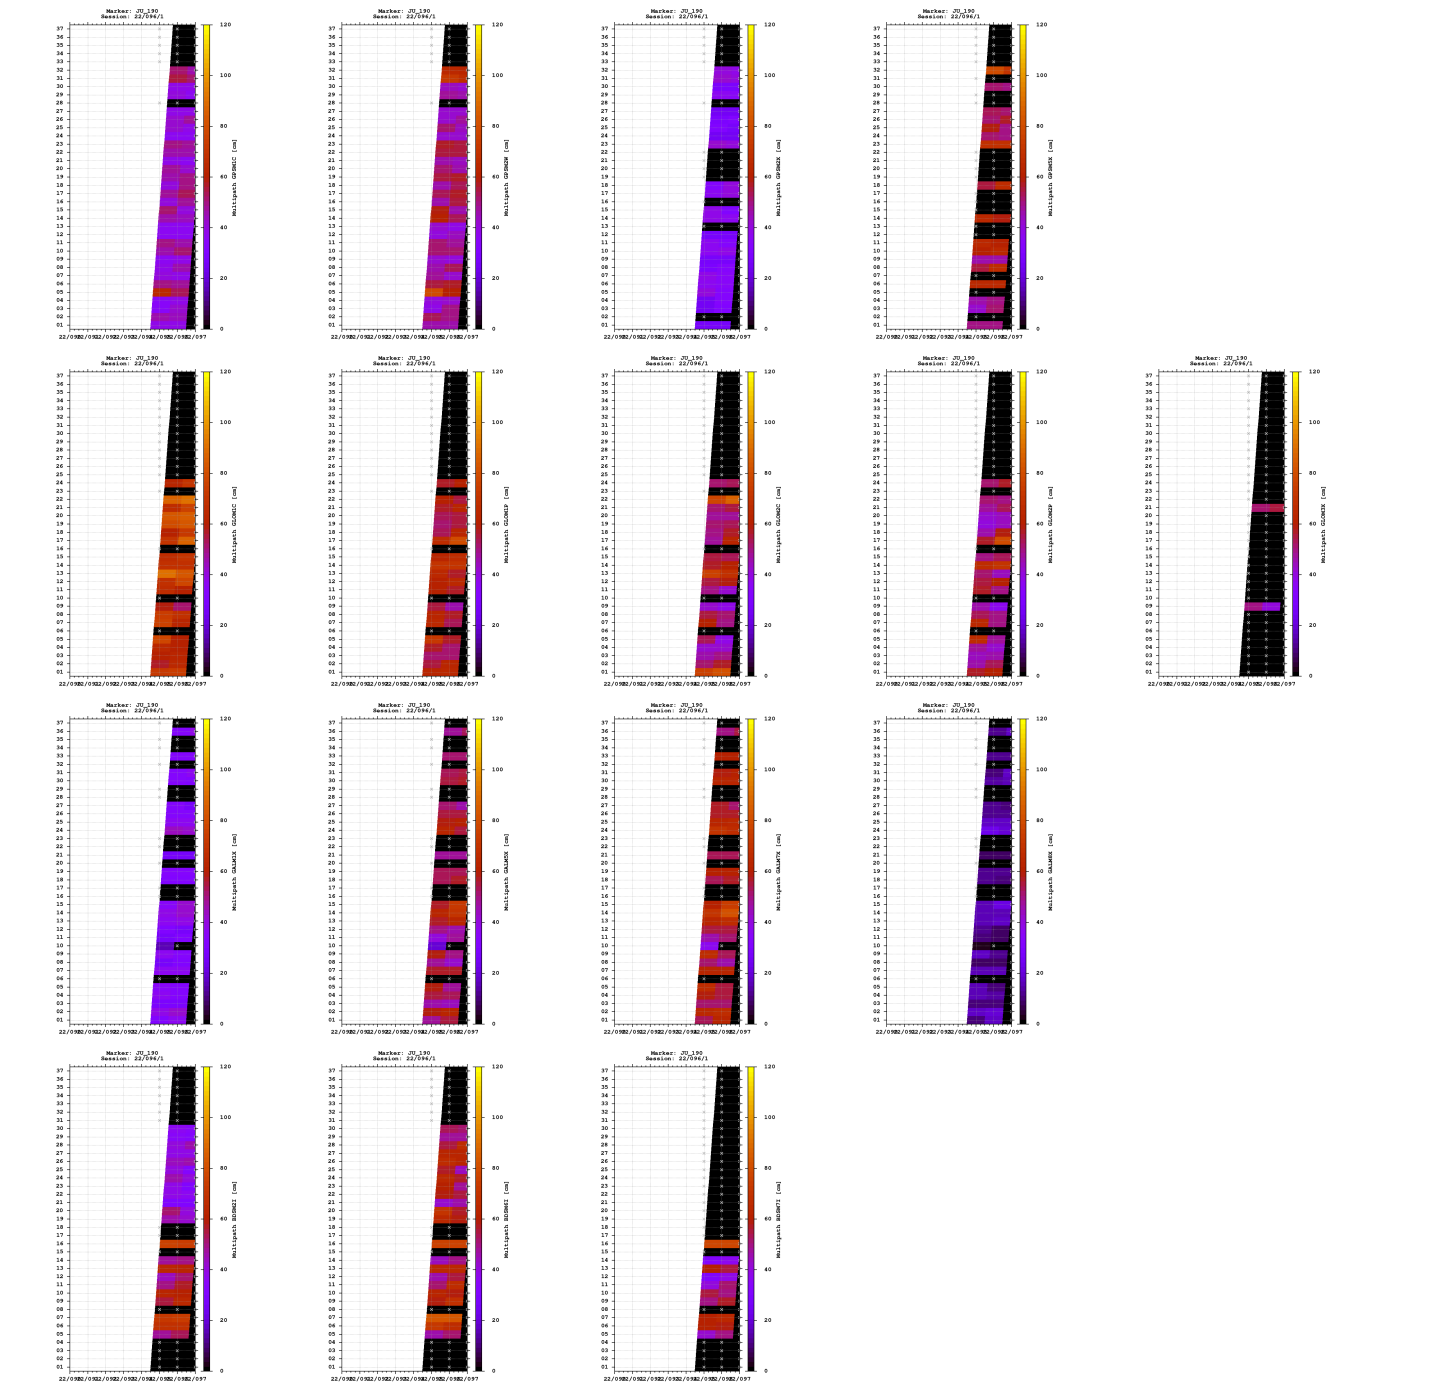

Signal-to-noise ratio




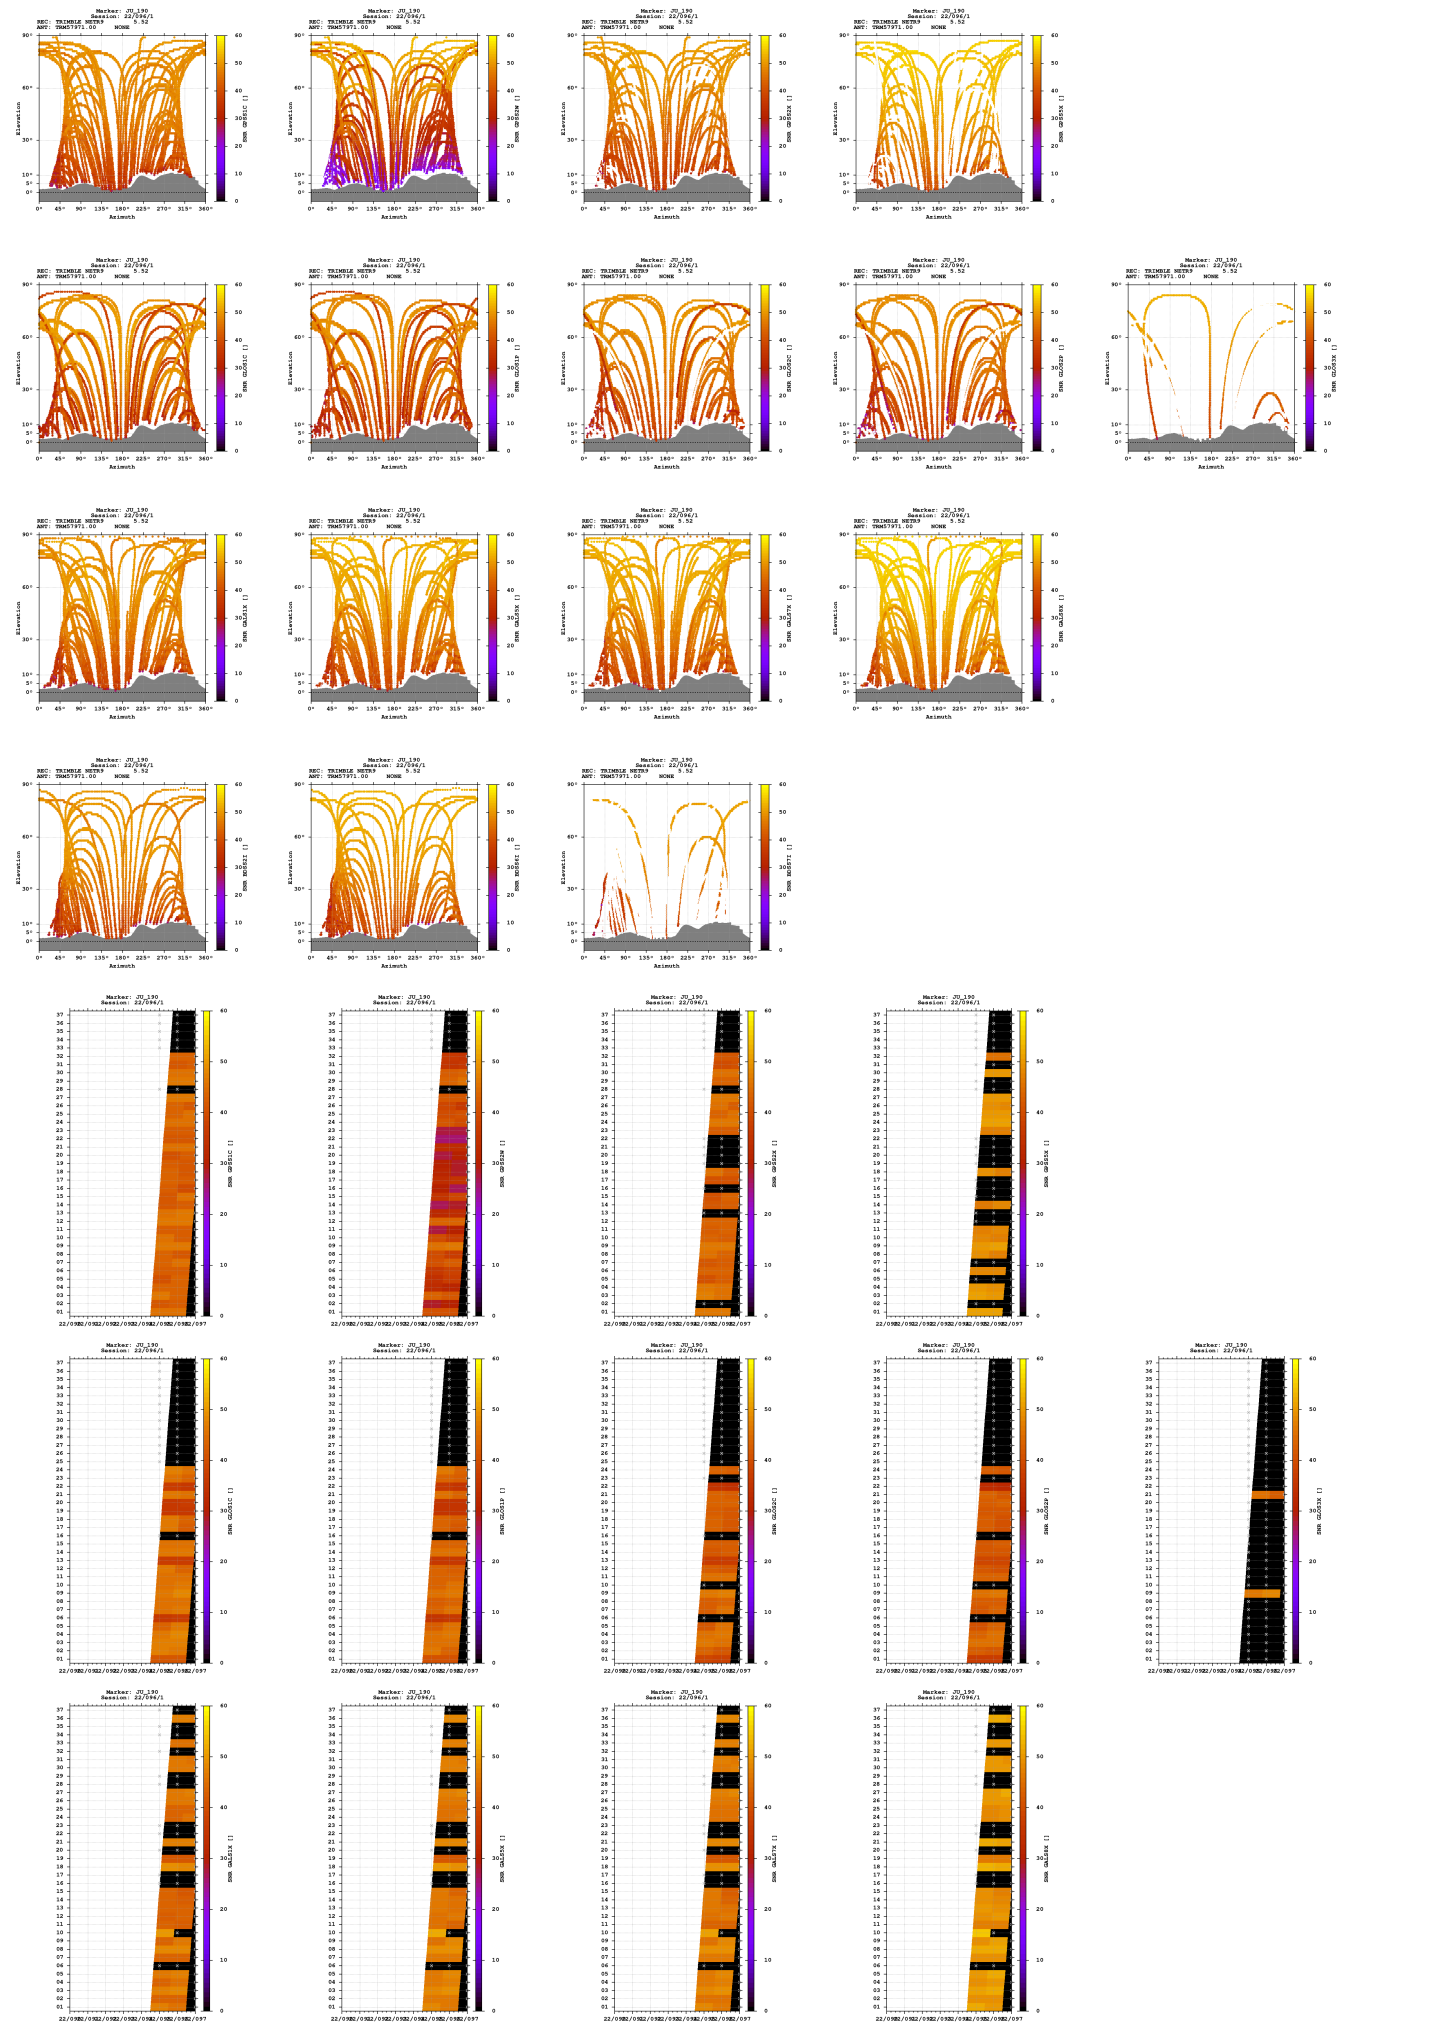

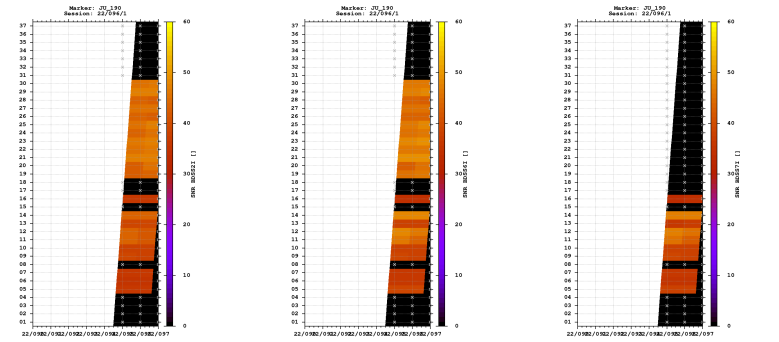



Estimates

2022-04-05 12:33:00	GPS	4287262.8781	529929.2850	4677363.2003	47.466995803	7.046333319	468.5305
2022-04-05 12:33:00	GLO	4287262.7519	529928.2405	4677362.6969	47.466994421	7.046319776	467.9882
2022-04-05 12:33:00	GAL	4287262.6705	529928.9962	4677362.9029	47.466995594	7.046329856	468.1481
2022-04-05 12:33:00	BDS	4287262.4823	529931.4389	4677364.6956	47.467005746	7.046362315	469.5455

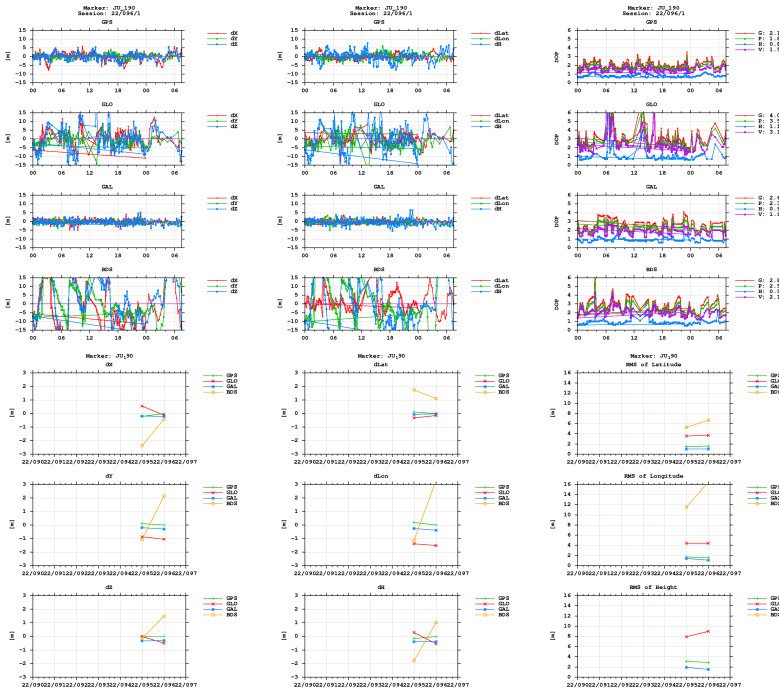

BNC

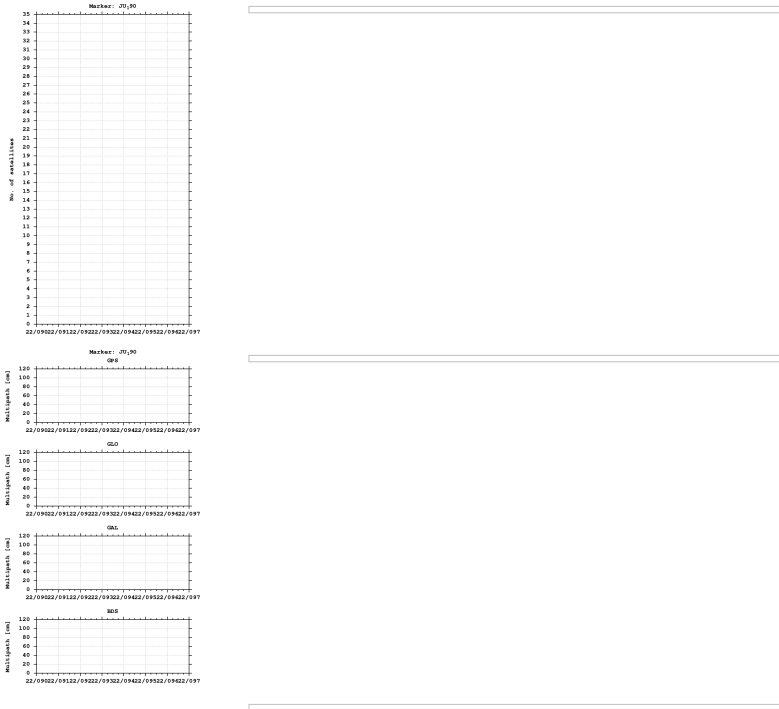

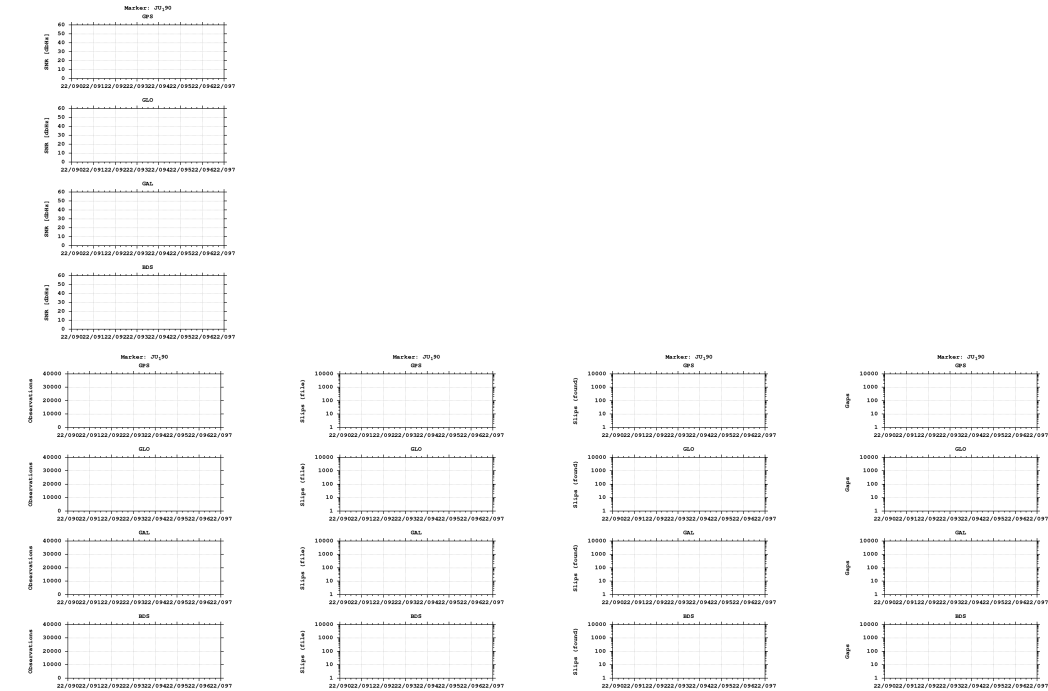

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)