

GNSS observation file monitoring for 0514

Last RINEX file: 05140981.220


RINEX version: 3.02

Marker: 1105

Receiver: 514 TRIMBLE NETR9 5.52

Antenna: 514 TRM57971.00 NONE


Epochs

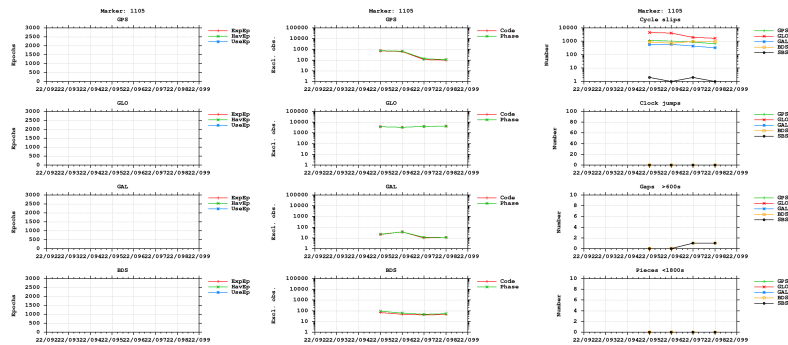


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

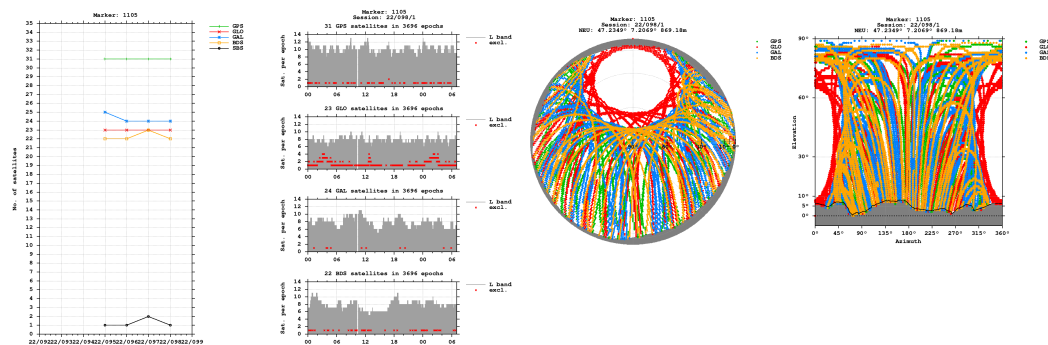


Bands



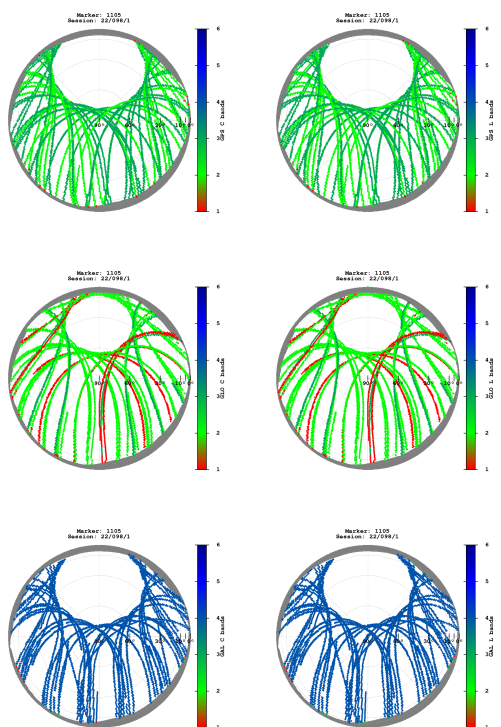


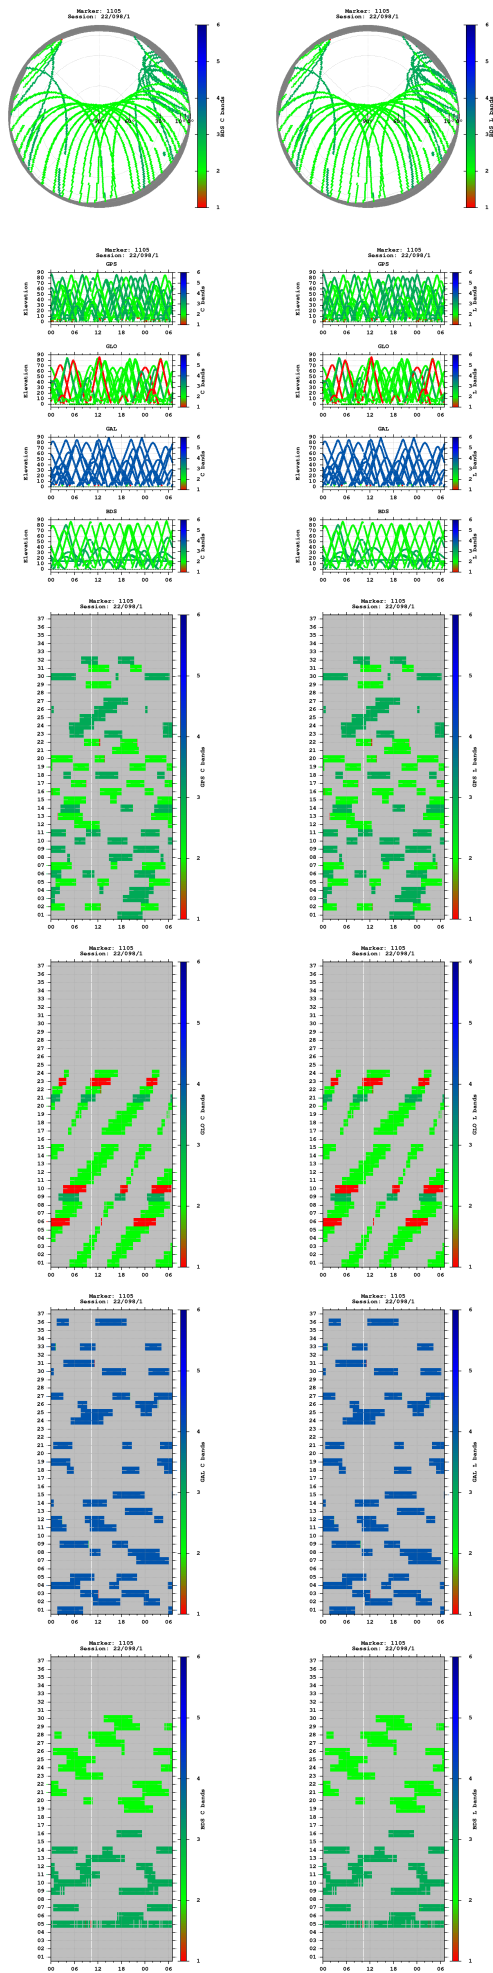


Observations

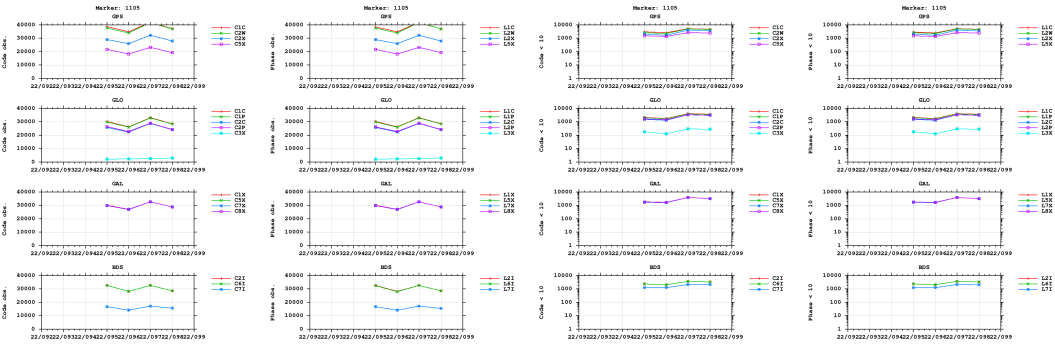


Multipath

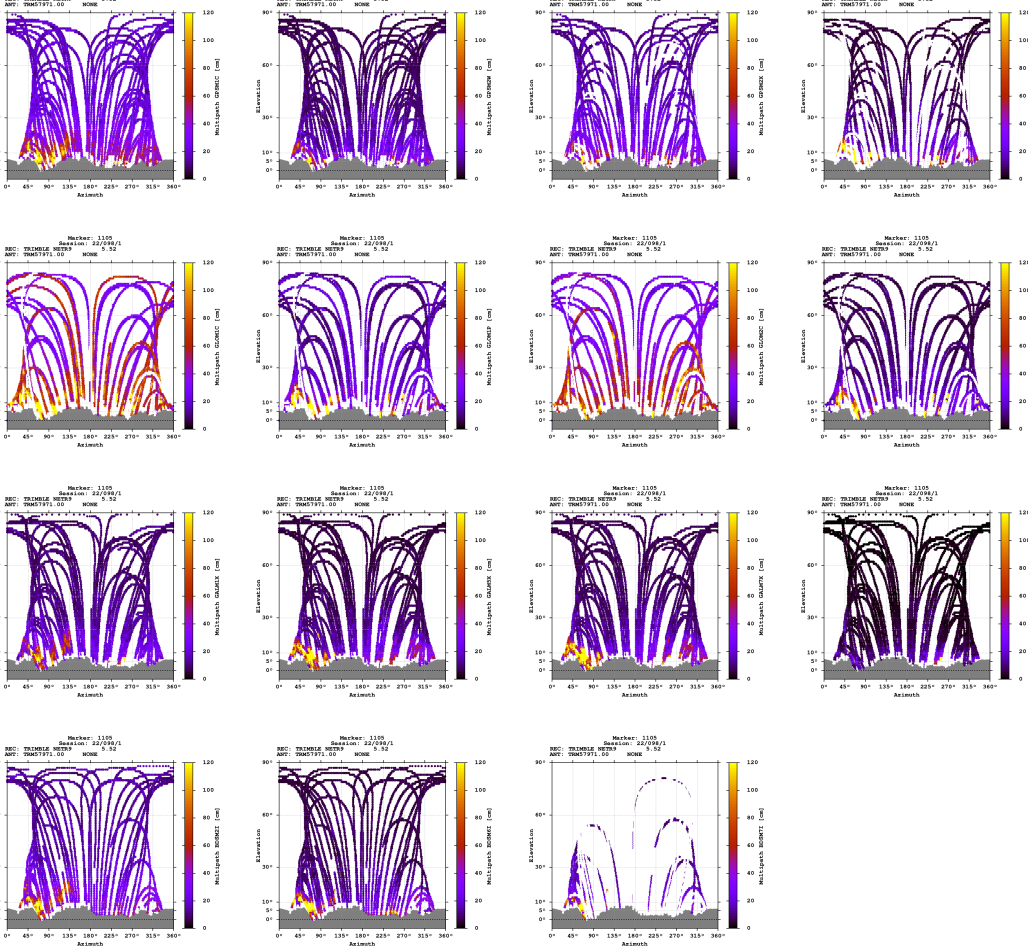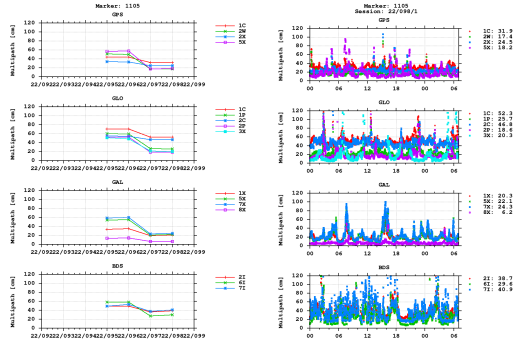


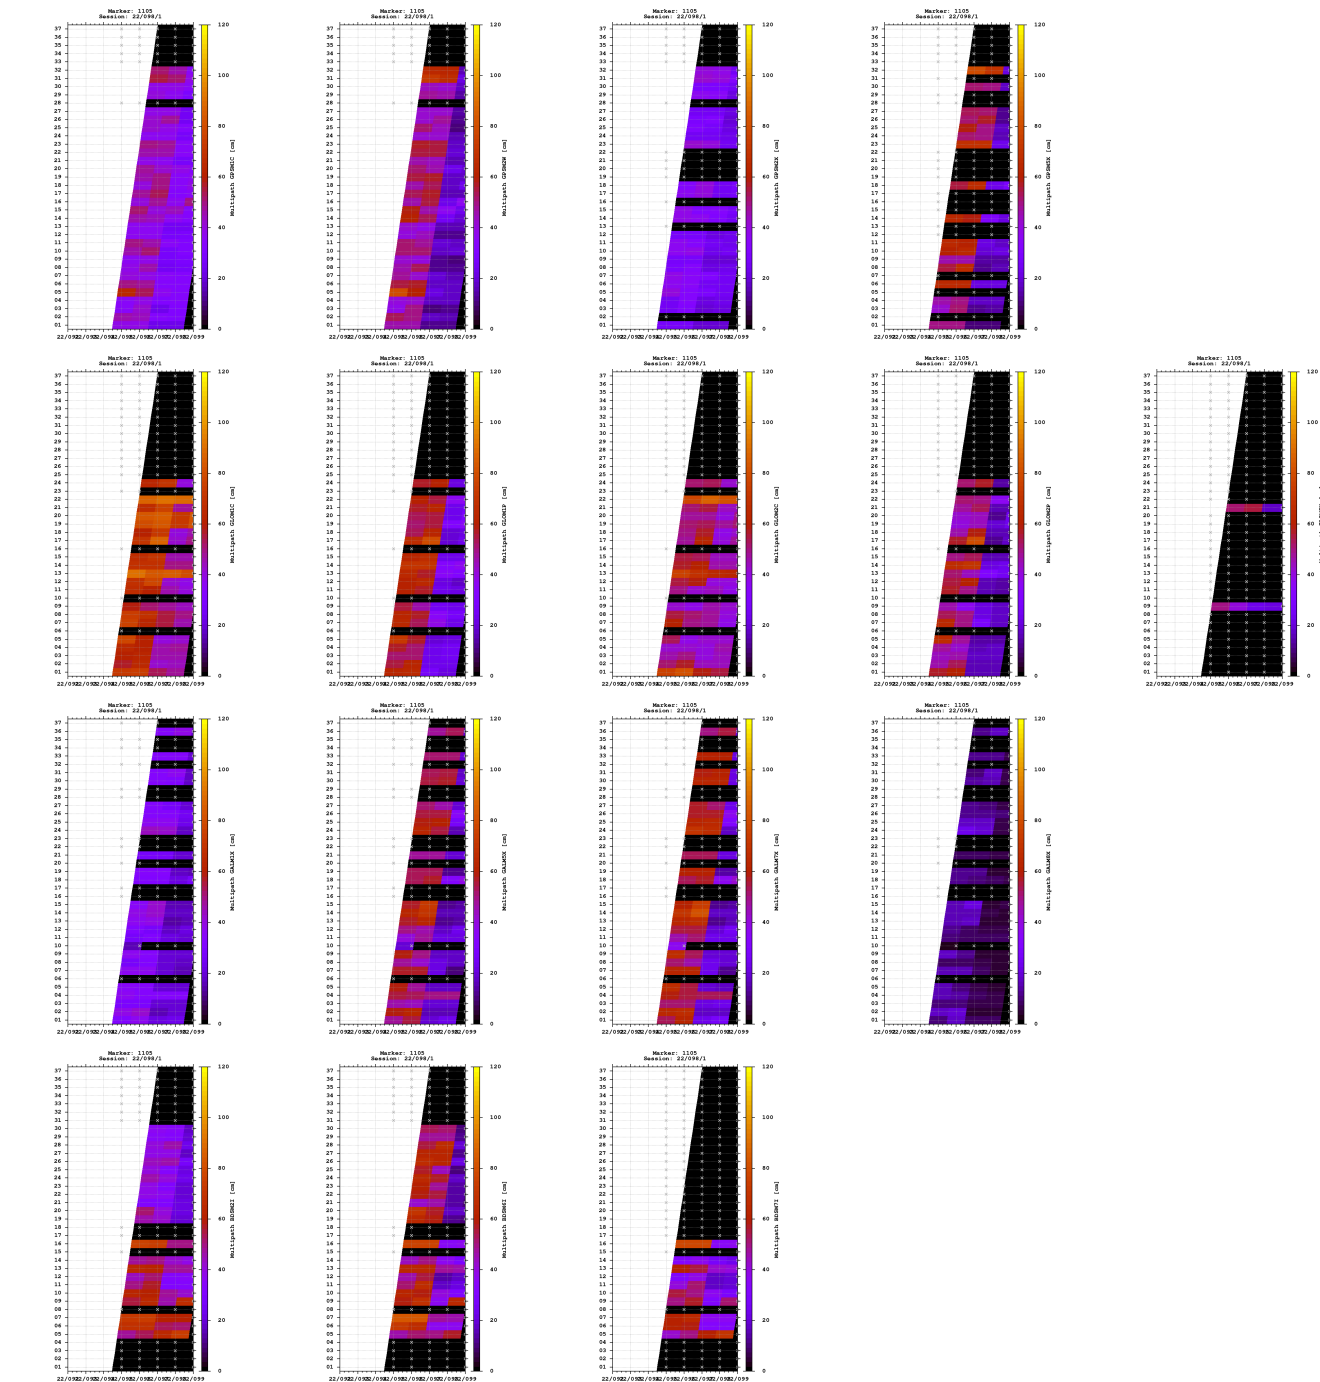


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

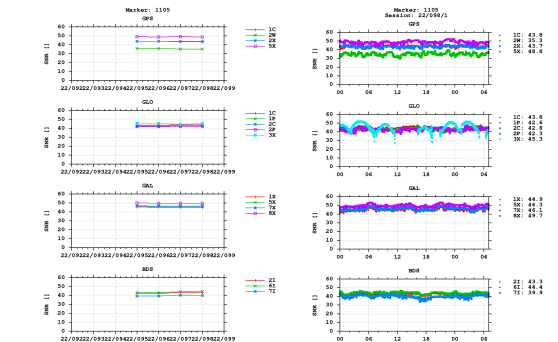


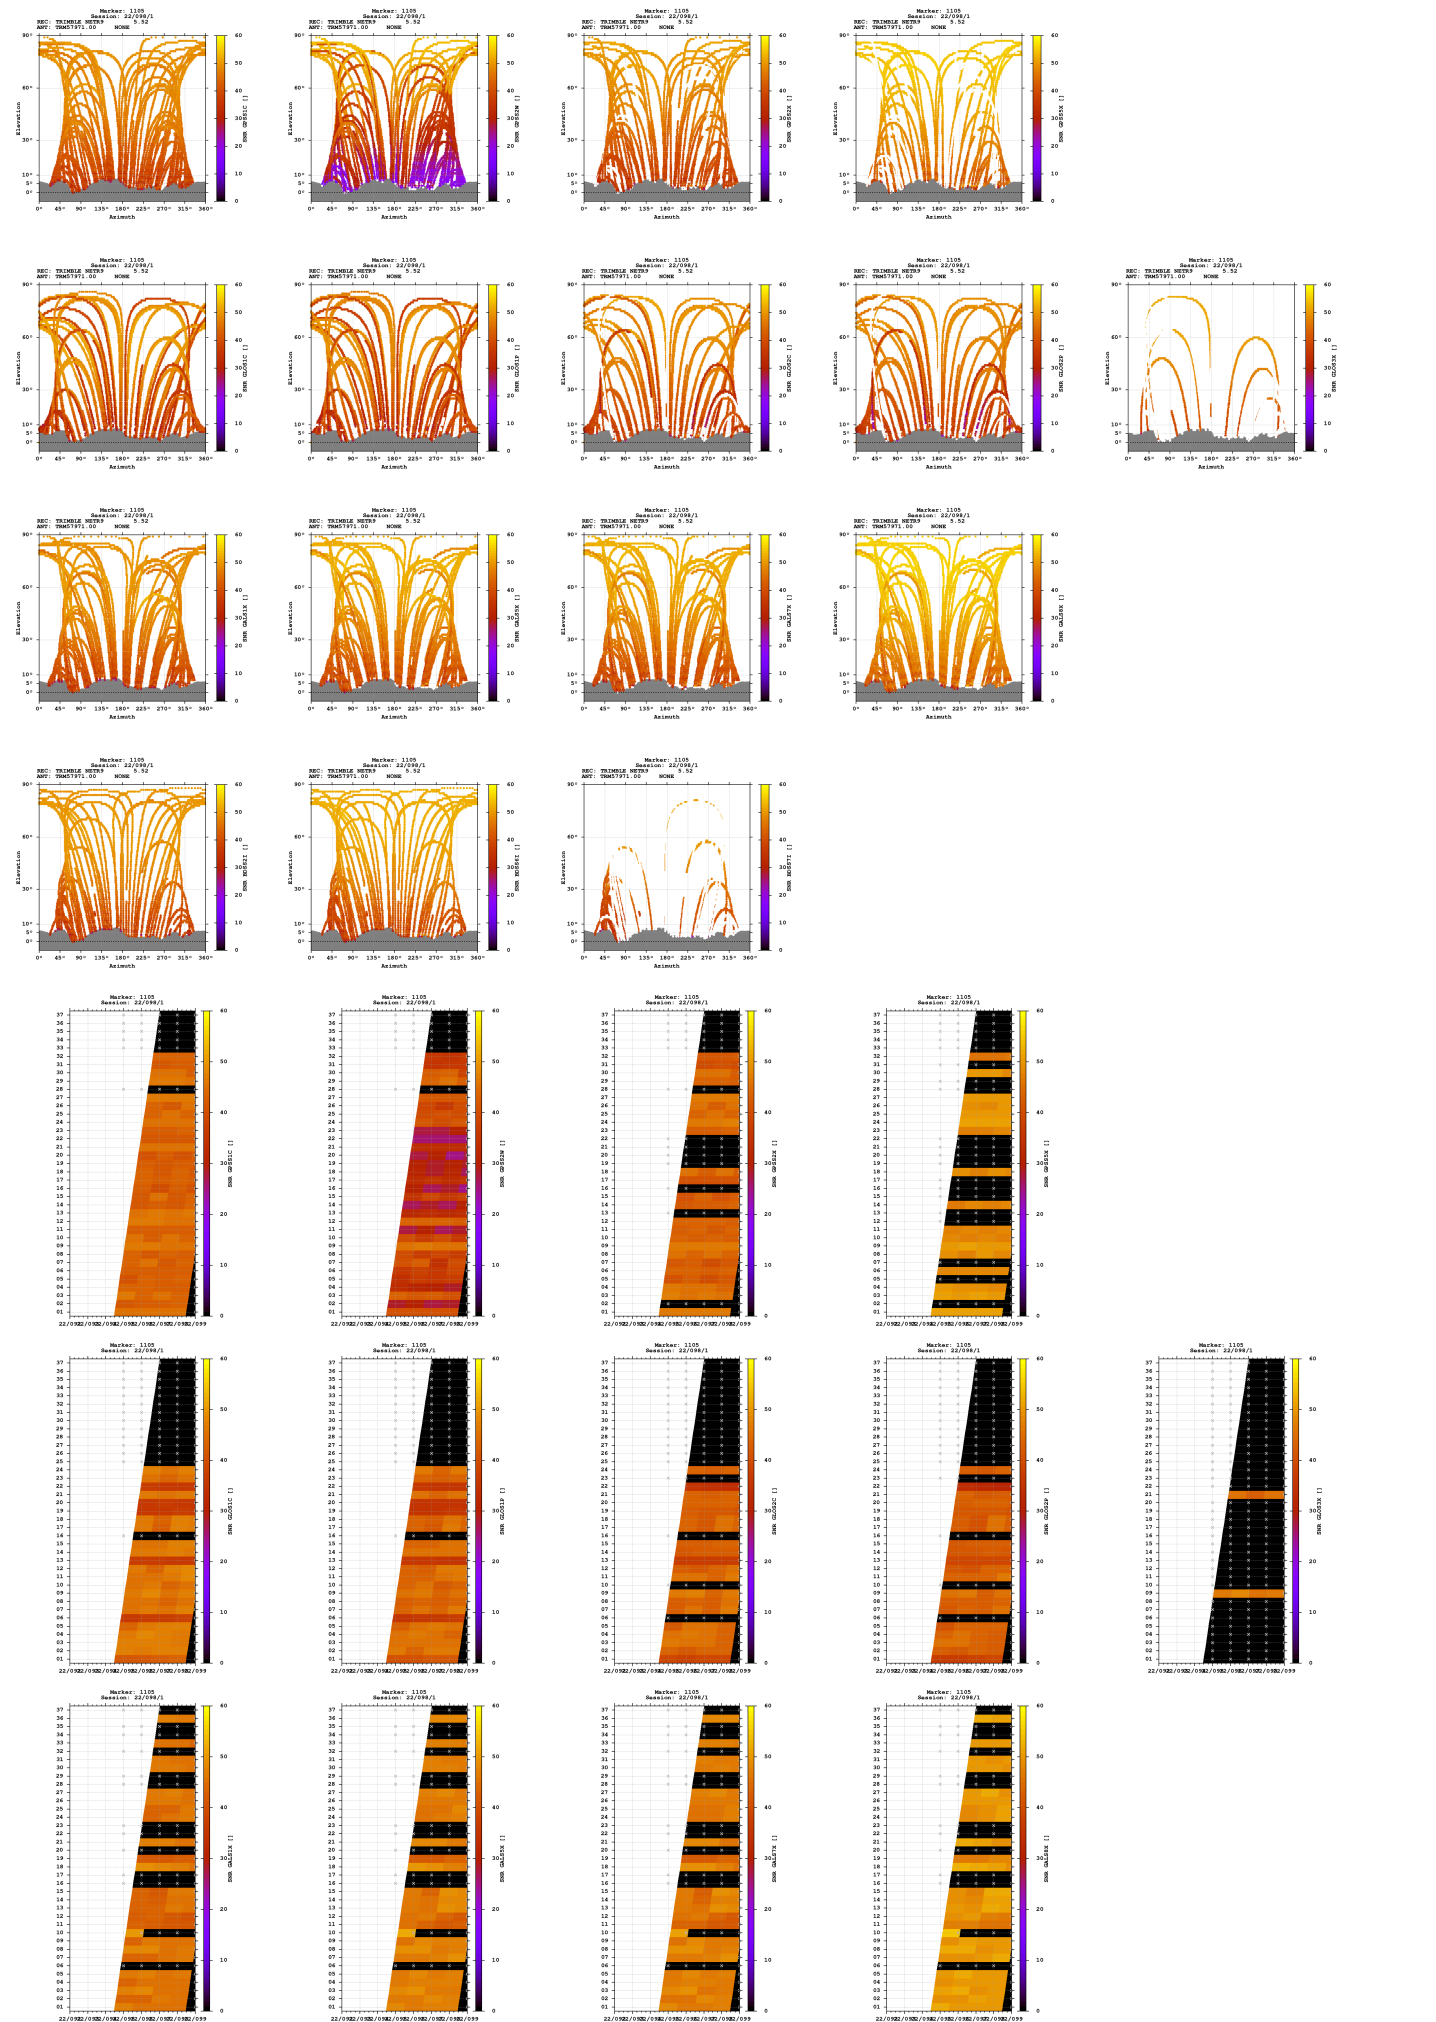

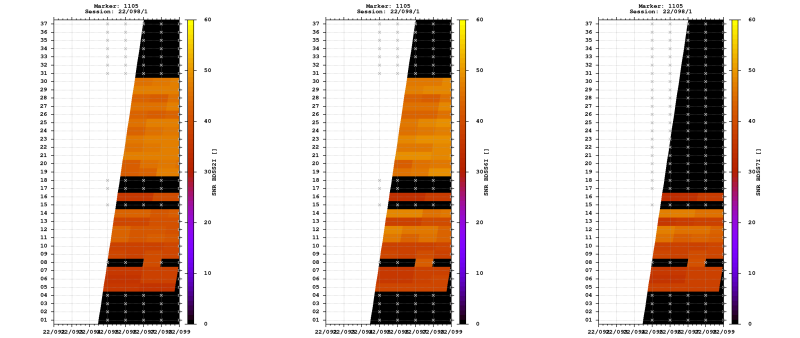


Estimates

2022-04-07 12:25:00	GPS	4304858.3691	544359.4315	4660176.3753	47.234934318	7.206934631	869.1806
2022-04-07 12:25:00	GLO	4304857.0463	544358.4467	4660175.7022	47.234939689	7.206923921	867.7115
2022-04-07 12:25:00	GAL	4304858.0691	544359.2256	4660176.0038	47.234934185	7.206932431	868.6882
2022-04-07 12:25:00	BDS	4304858.4533	544359.7625	4660177.9008	47.234942808	7.206938827	870.3855

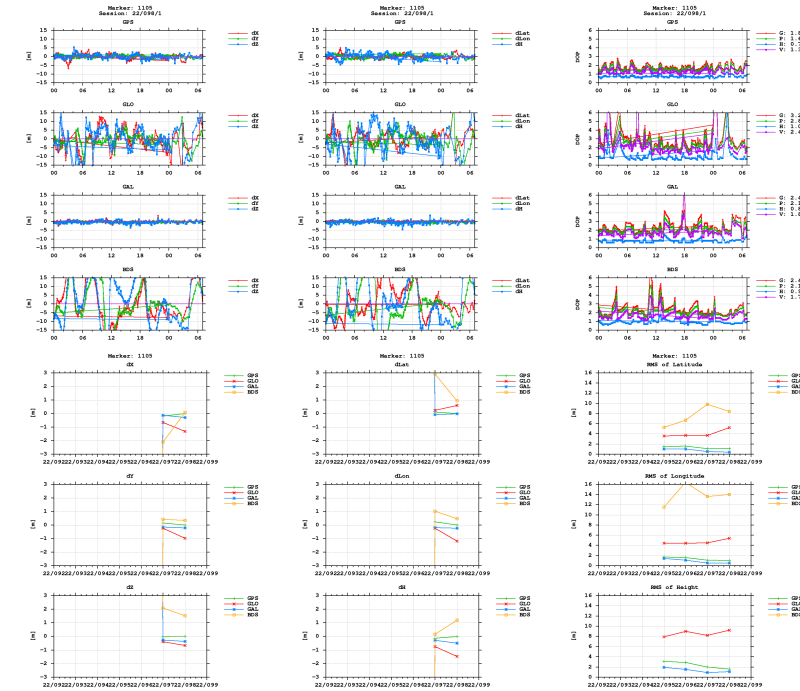

BNC



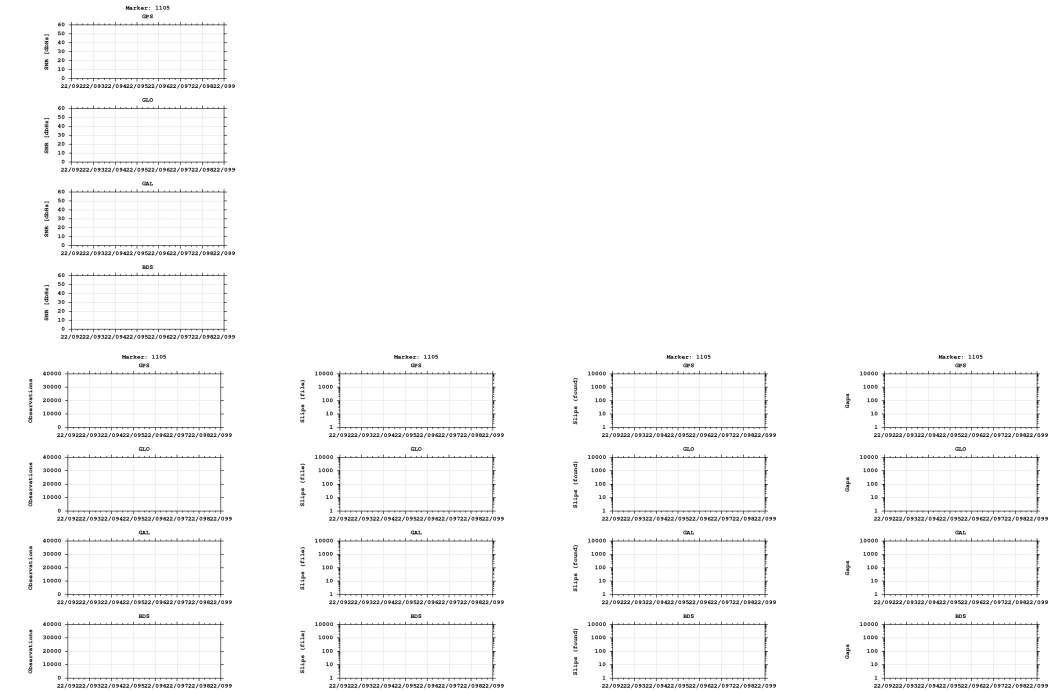

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)