


GNSS observation file monitoring for 0515


Last RINEX file: 05150941.22O
RINEX version: 3.02
Marker: 1107
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

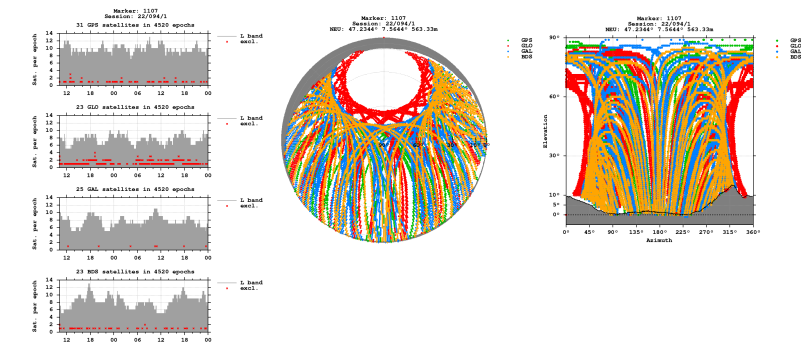


Bands

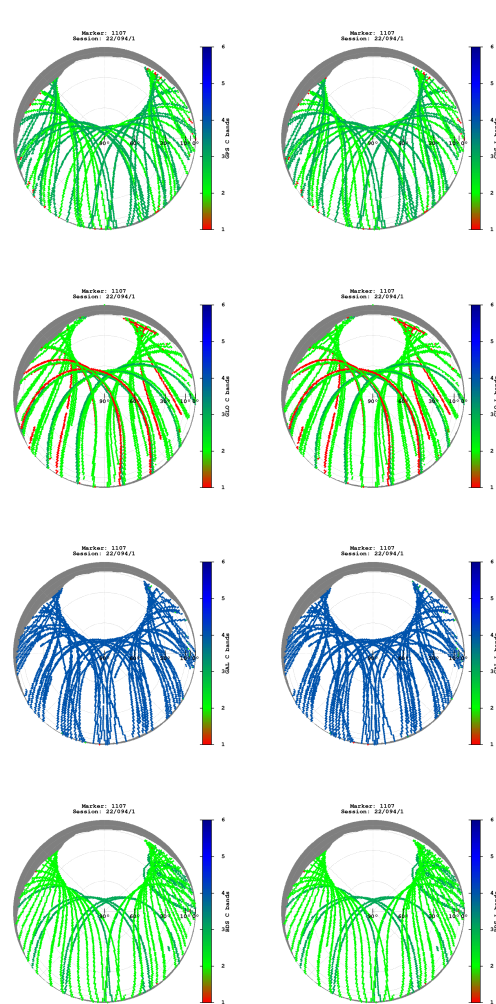

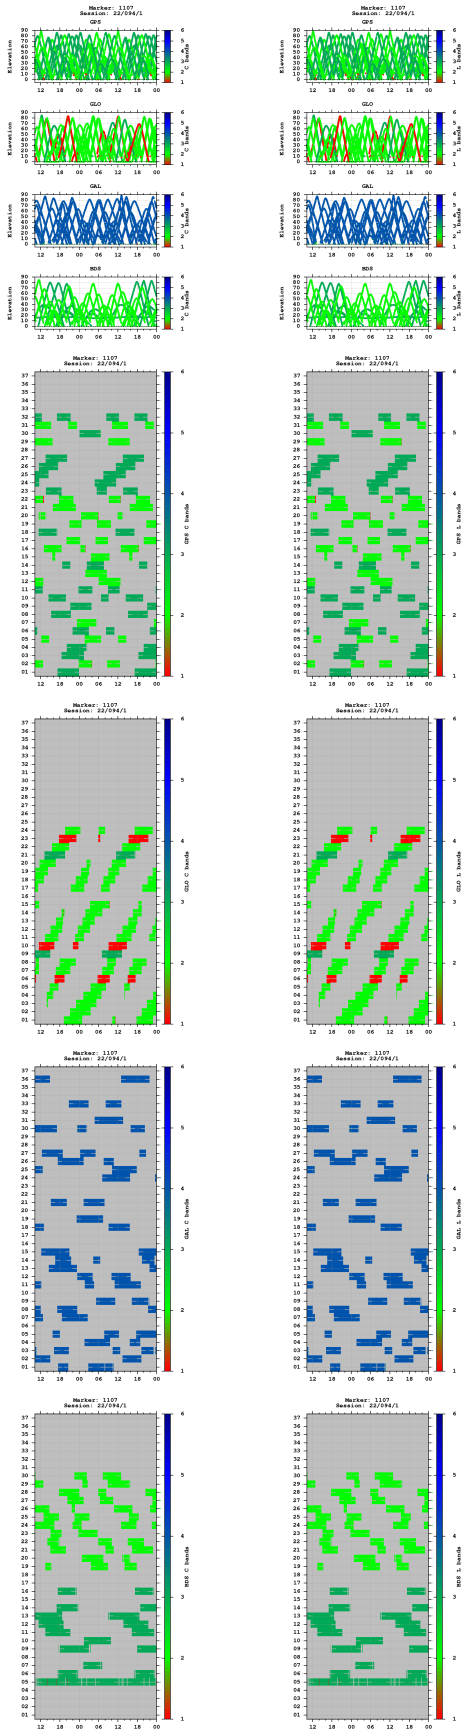



Multipath

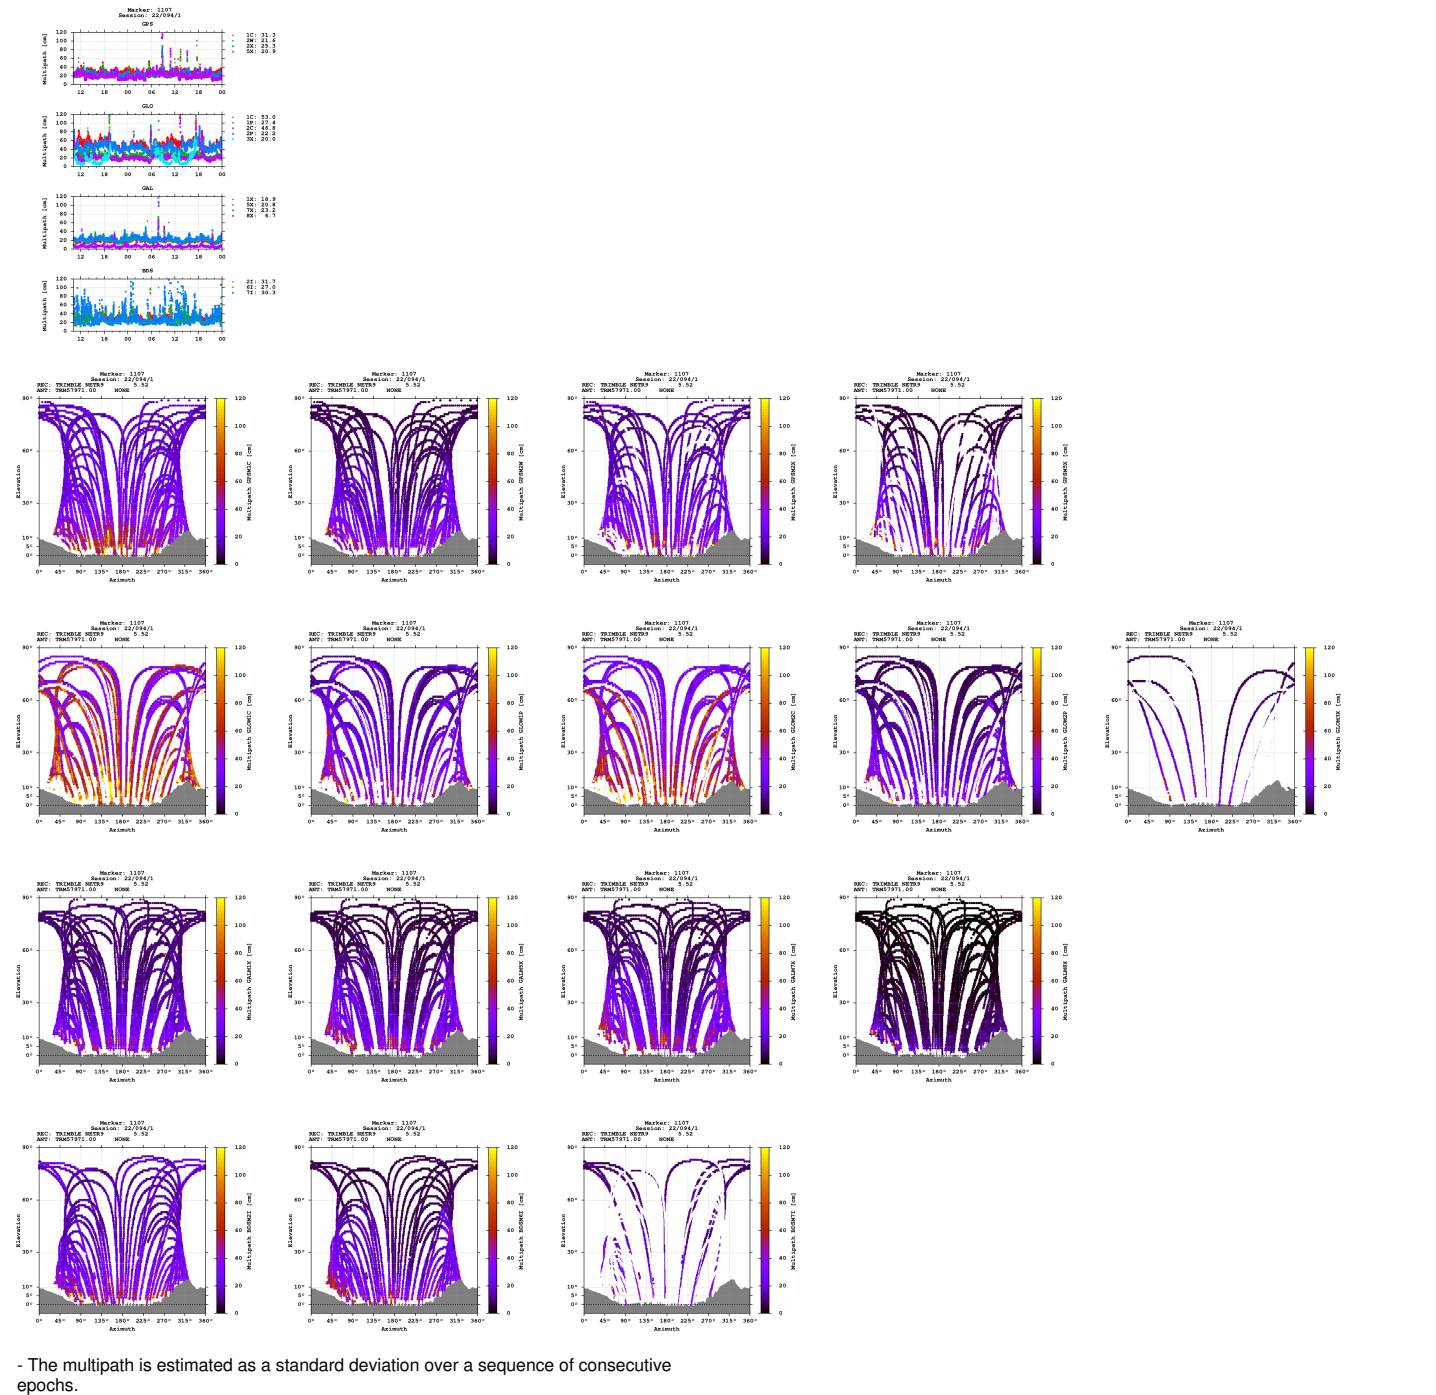

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

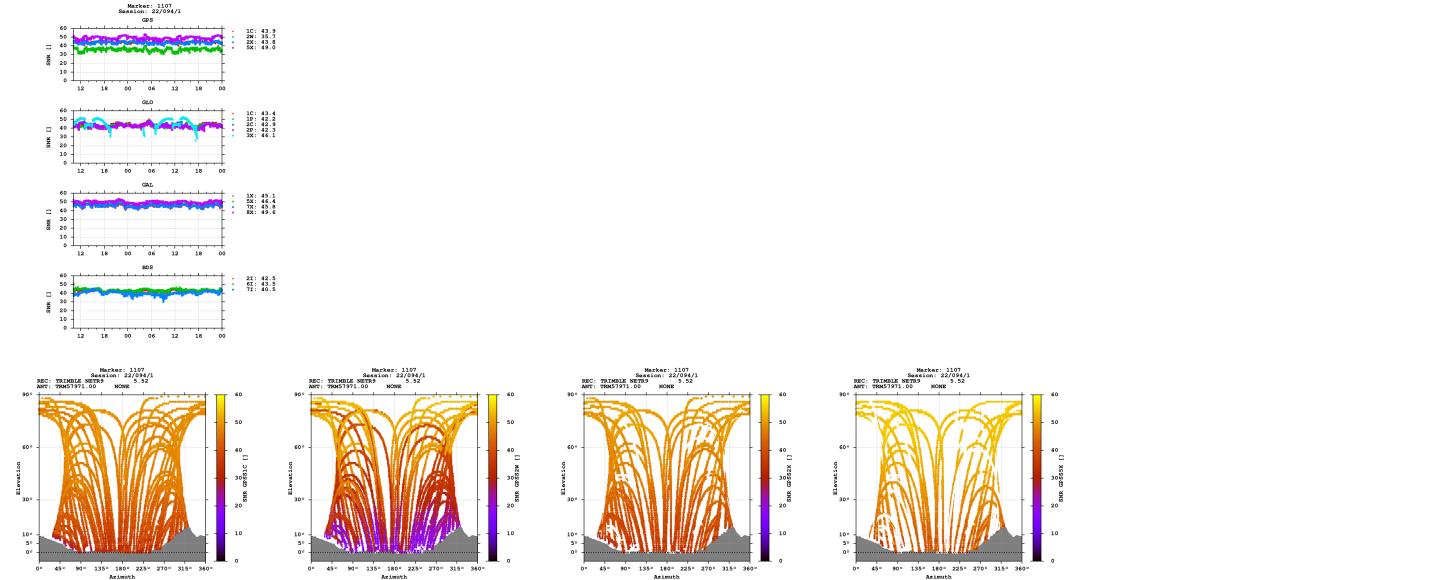

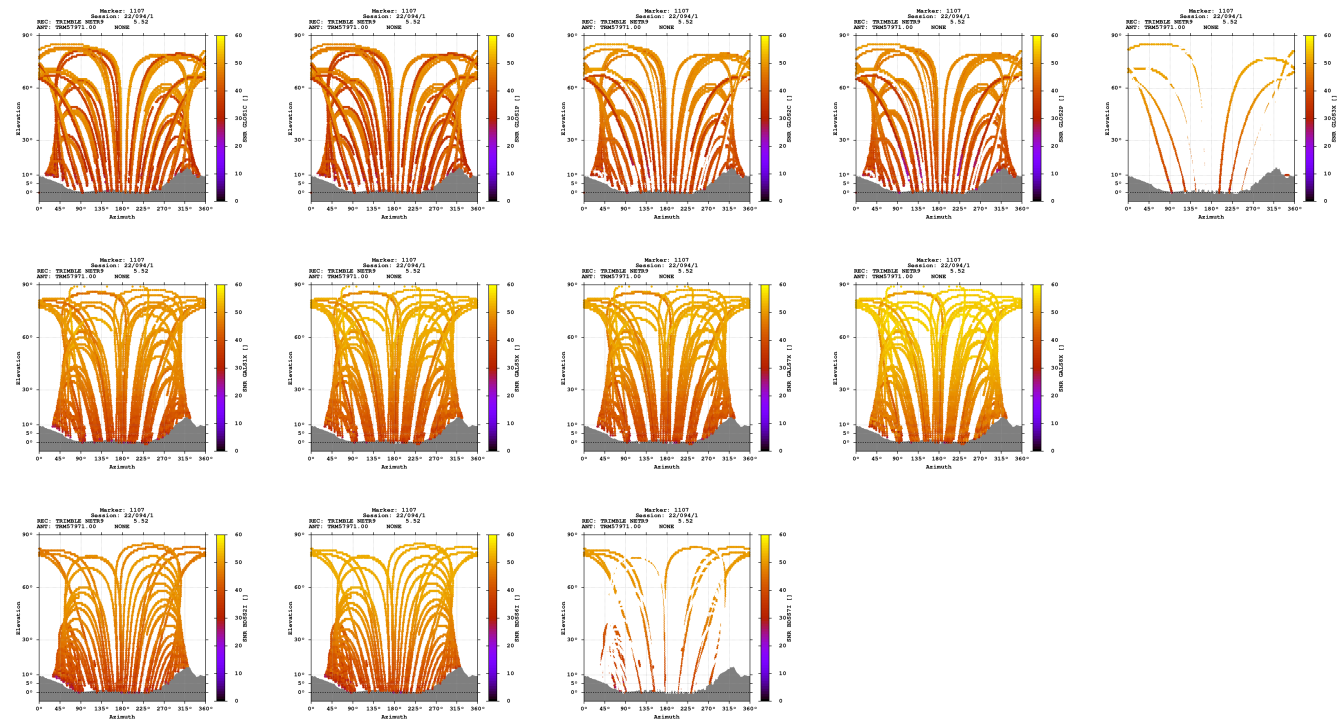

Estimates

2022-04-04 10:13:00	GPS	4301217.7792	571186.7610	4659909.4081	47.234372294	7.564421457	563.3313
2022-04-04 10:13:00	GLO	4301217.5614	571186.6281	4659908.6859	47.234369424	7.564420096	562.6426
2022-04-04 10:13:00	GAL	4301217.5811	571186.3270	4659909.0737	47.234371925	7.564416120	562.9137
2022-04-04 10:13:00	BDS	4301217.0815	571185.5868	4659910.7747	47.234386227	7.564407299	563.7601

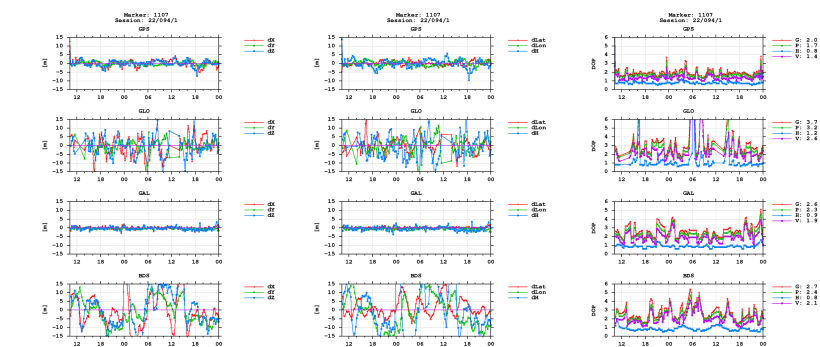

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)