

GNSS observation file monitoring for 0515

Last RINEX file: 05150961.220

RINEX version: 3.02

Marker: 1146

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

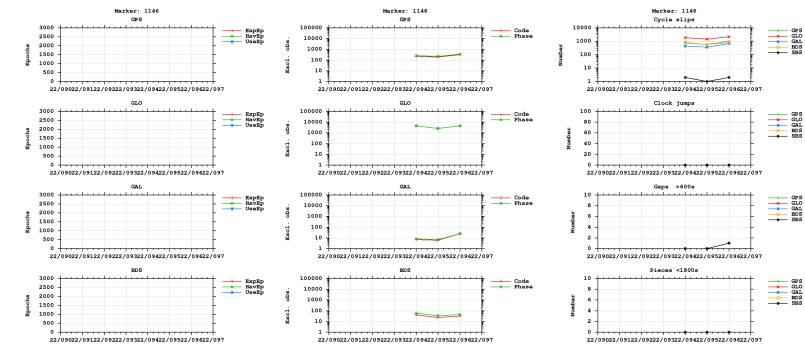



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

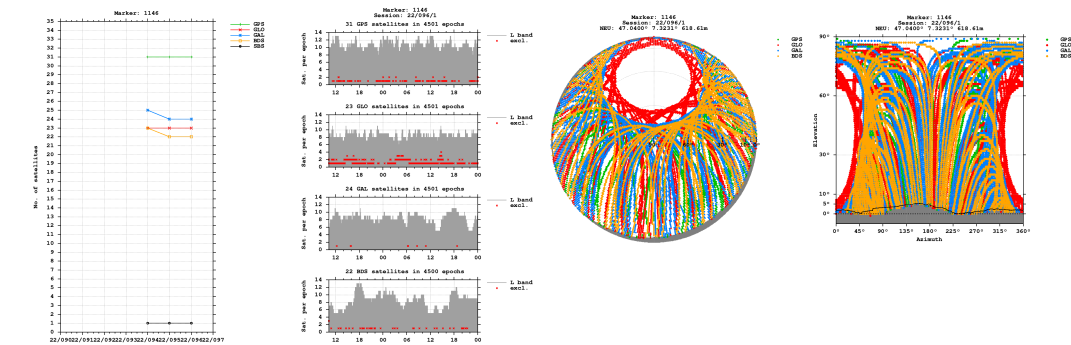


Bands

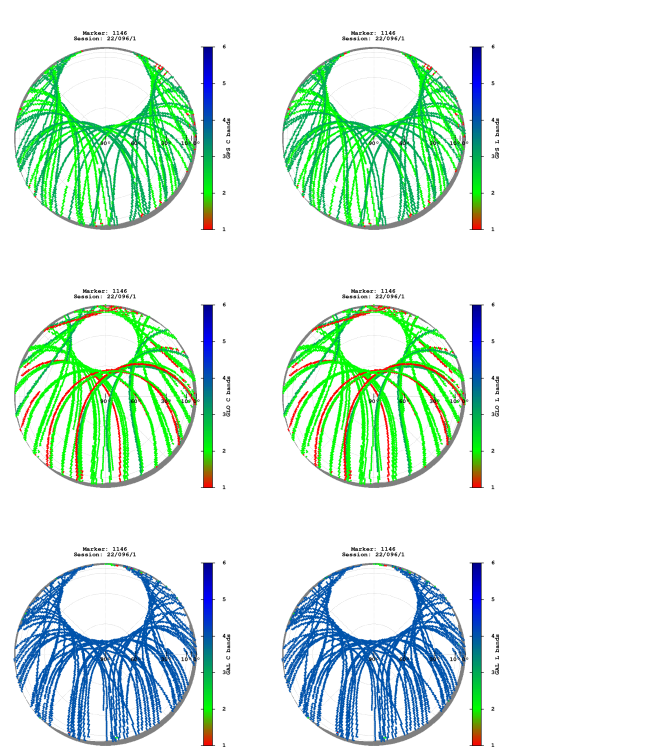


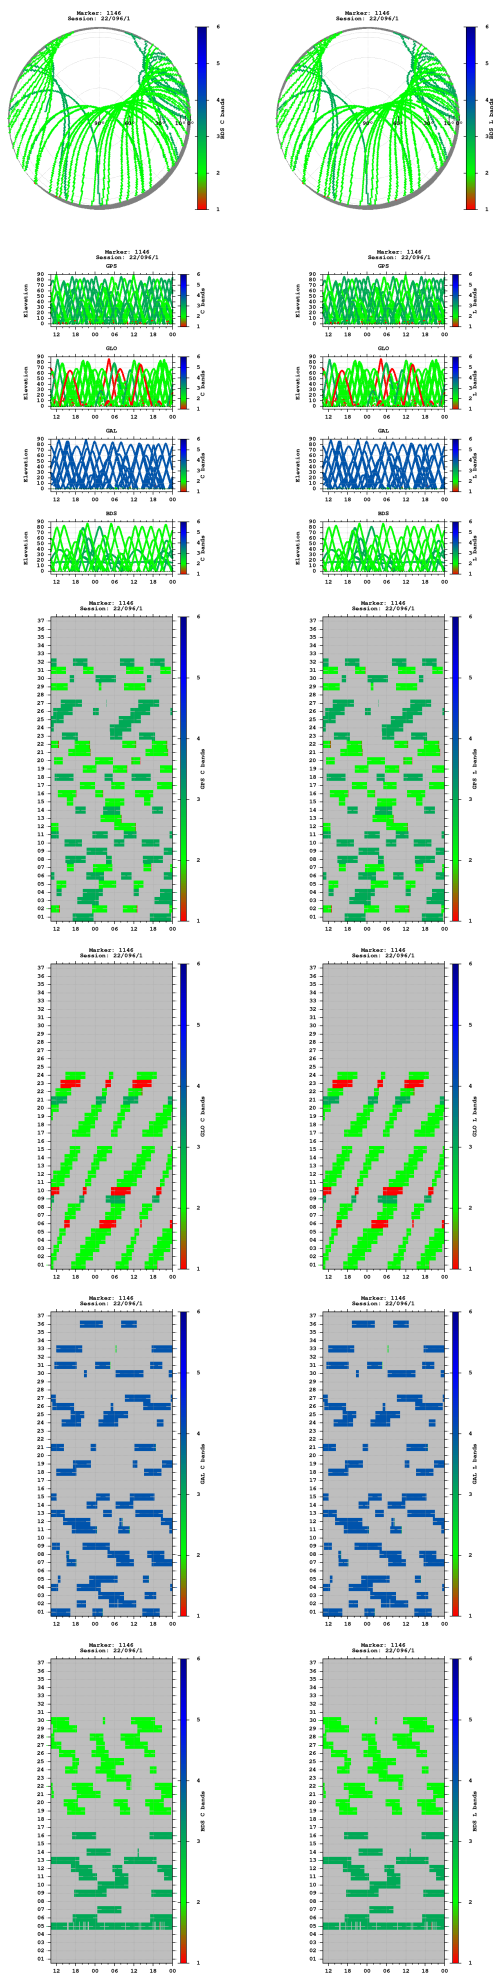


Observations

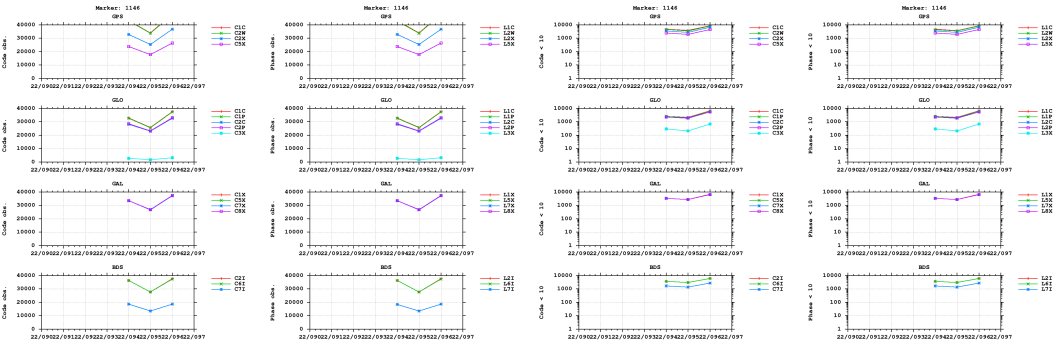


Multipath

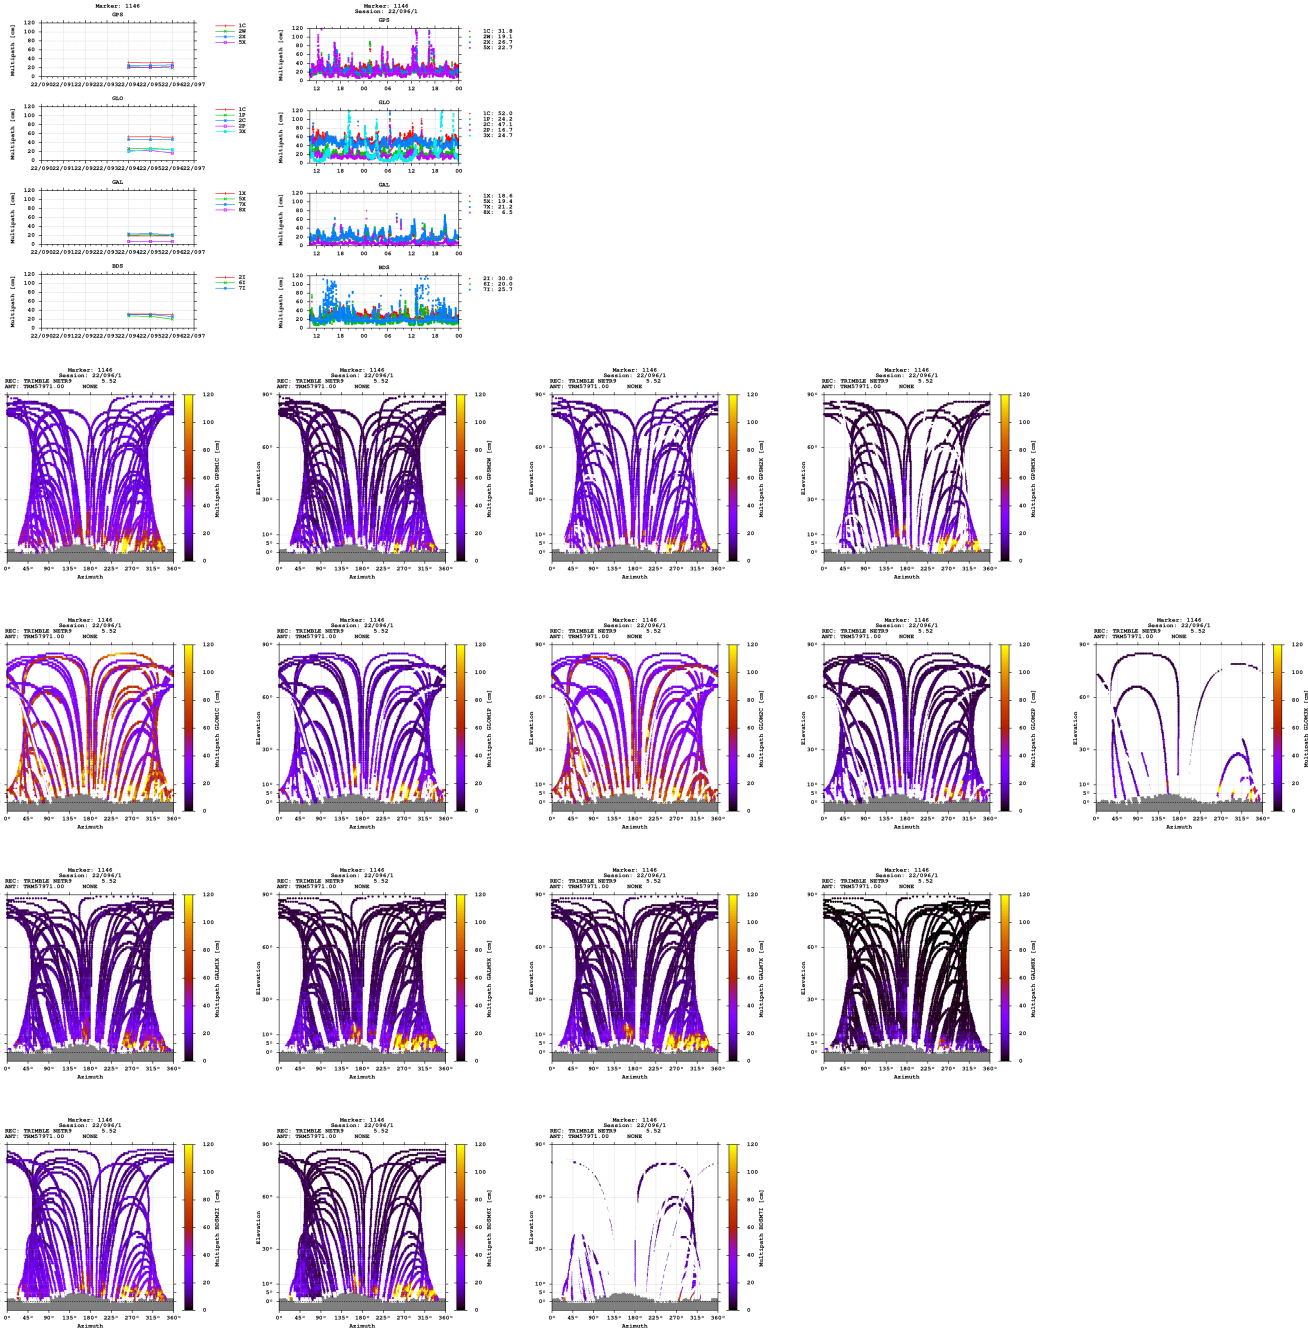


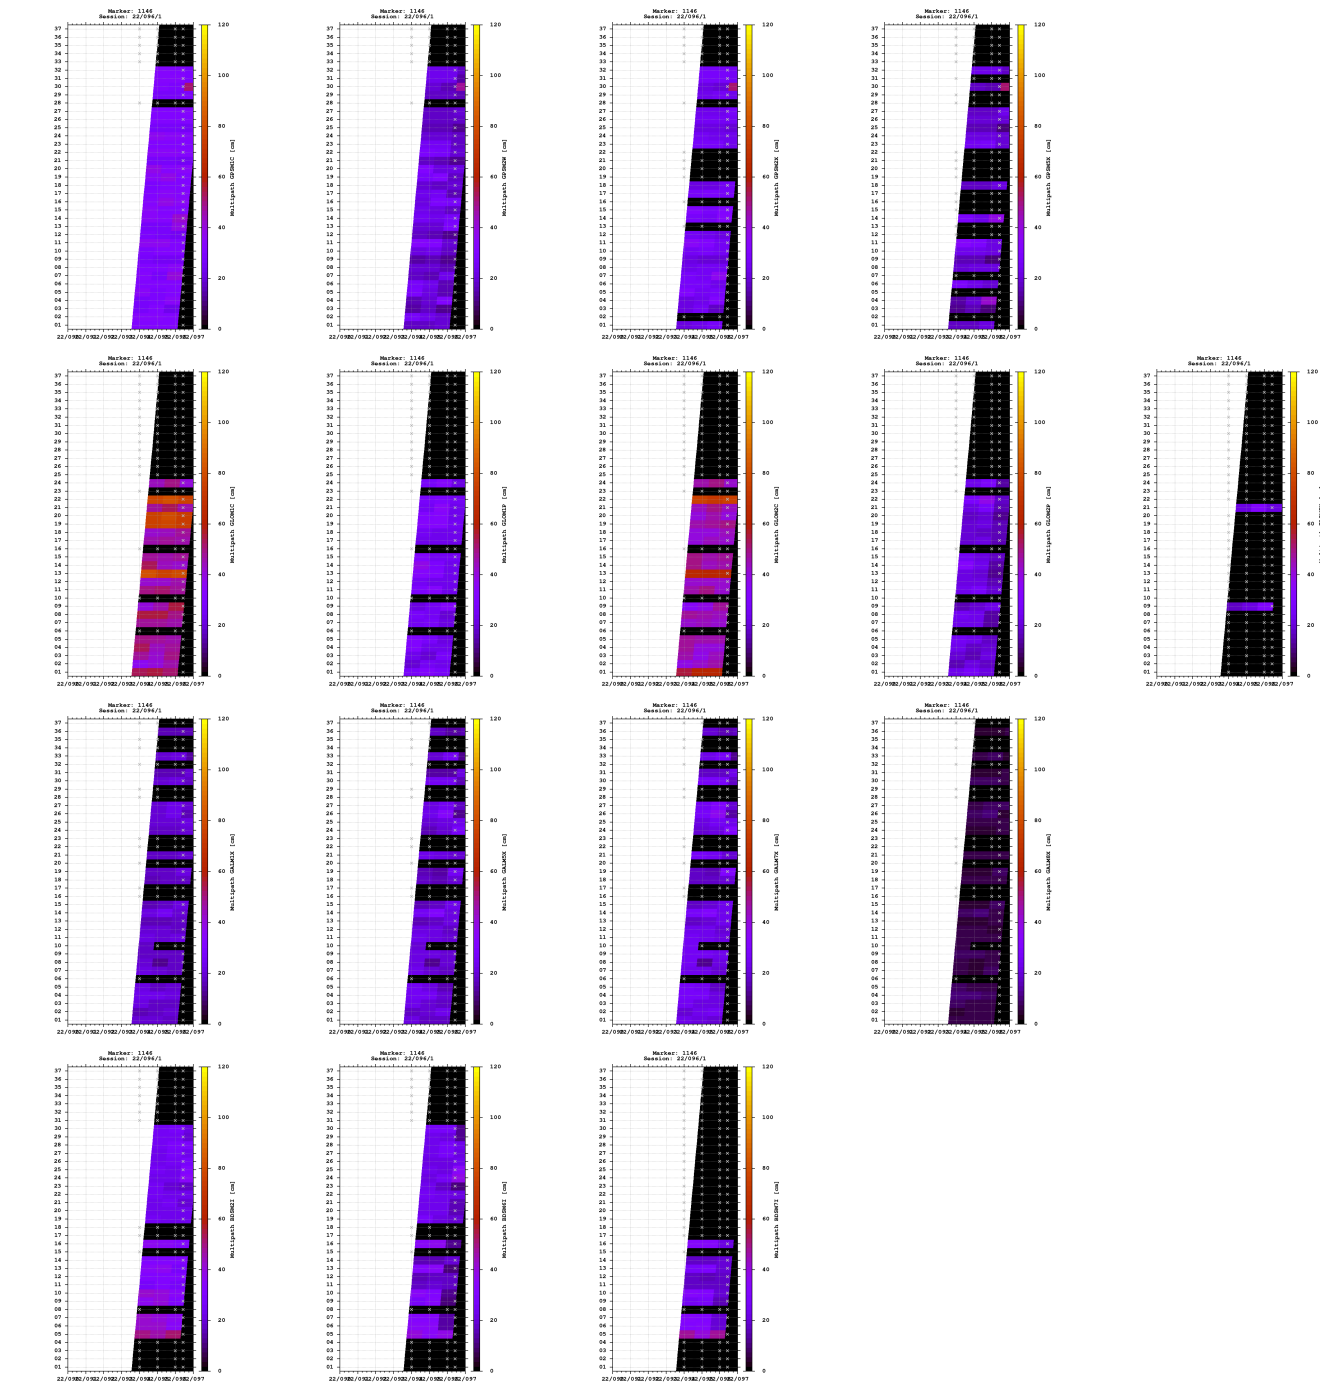


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

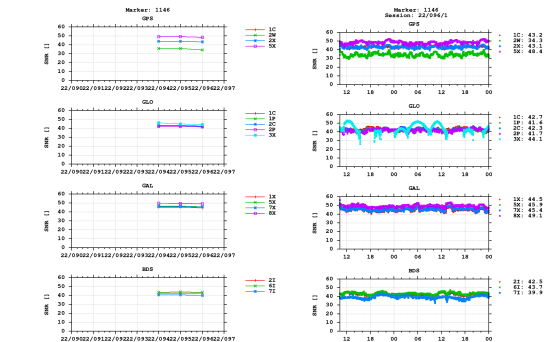


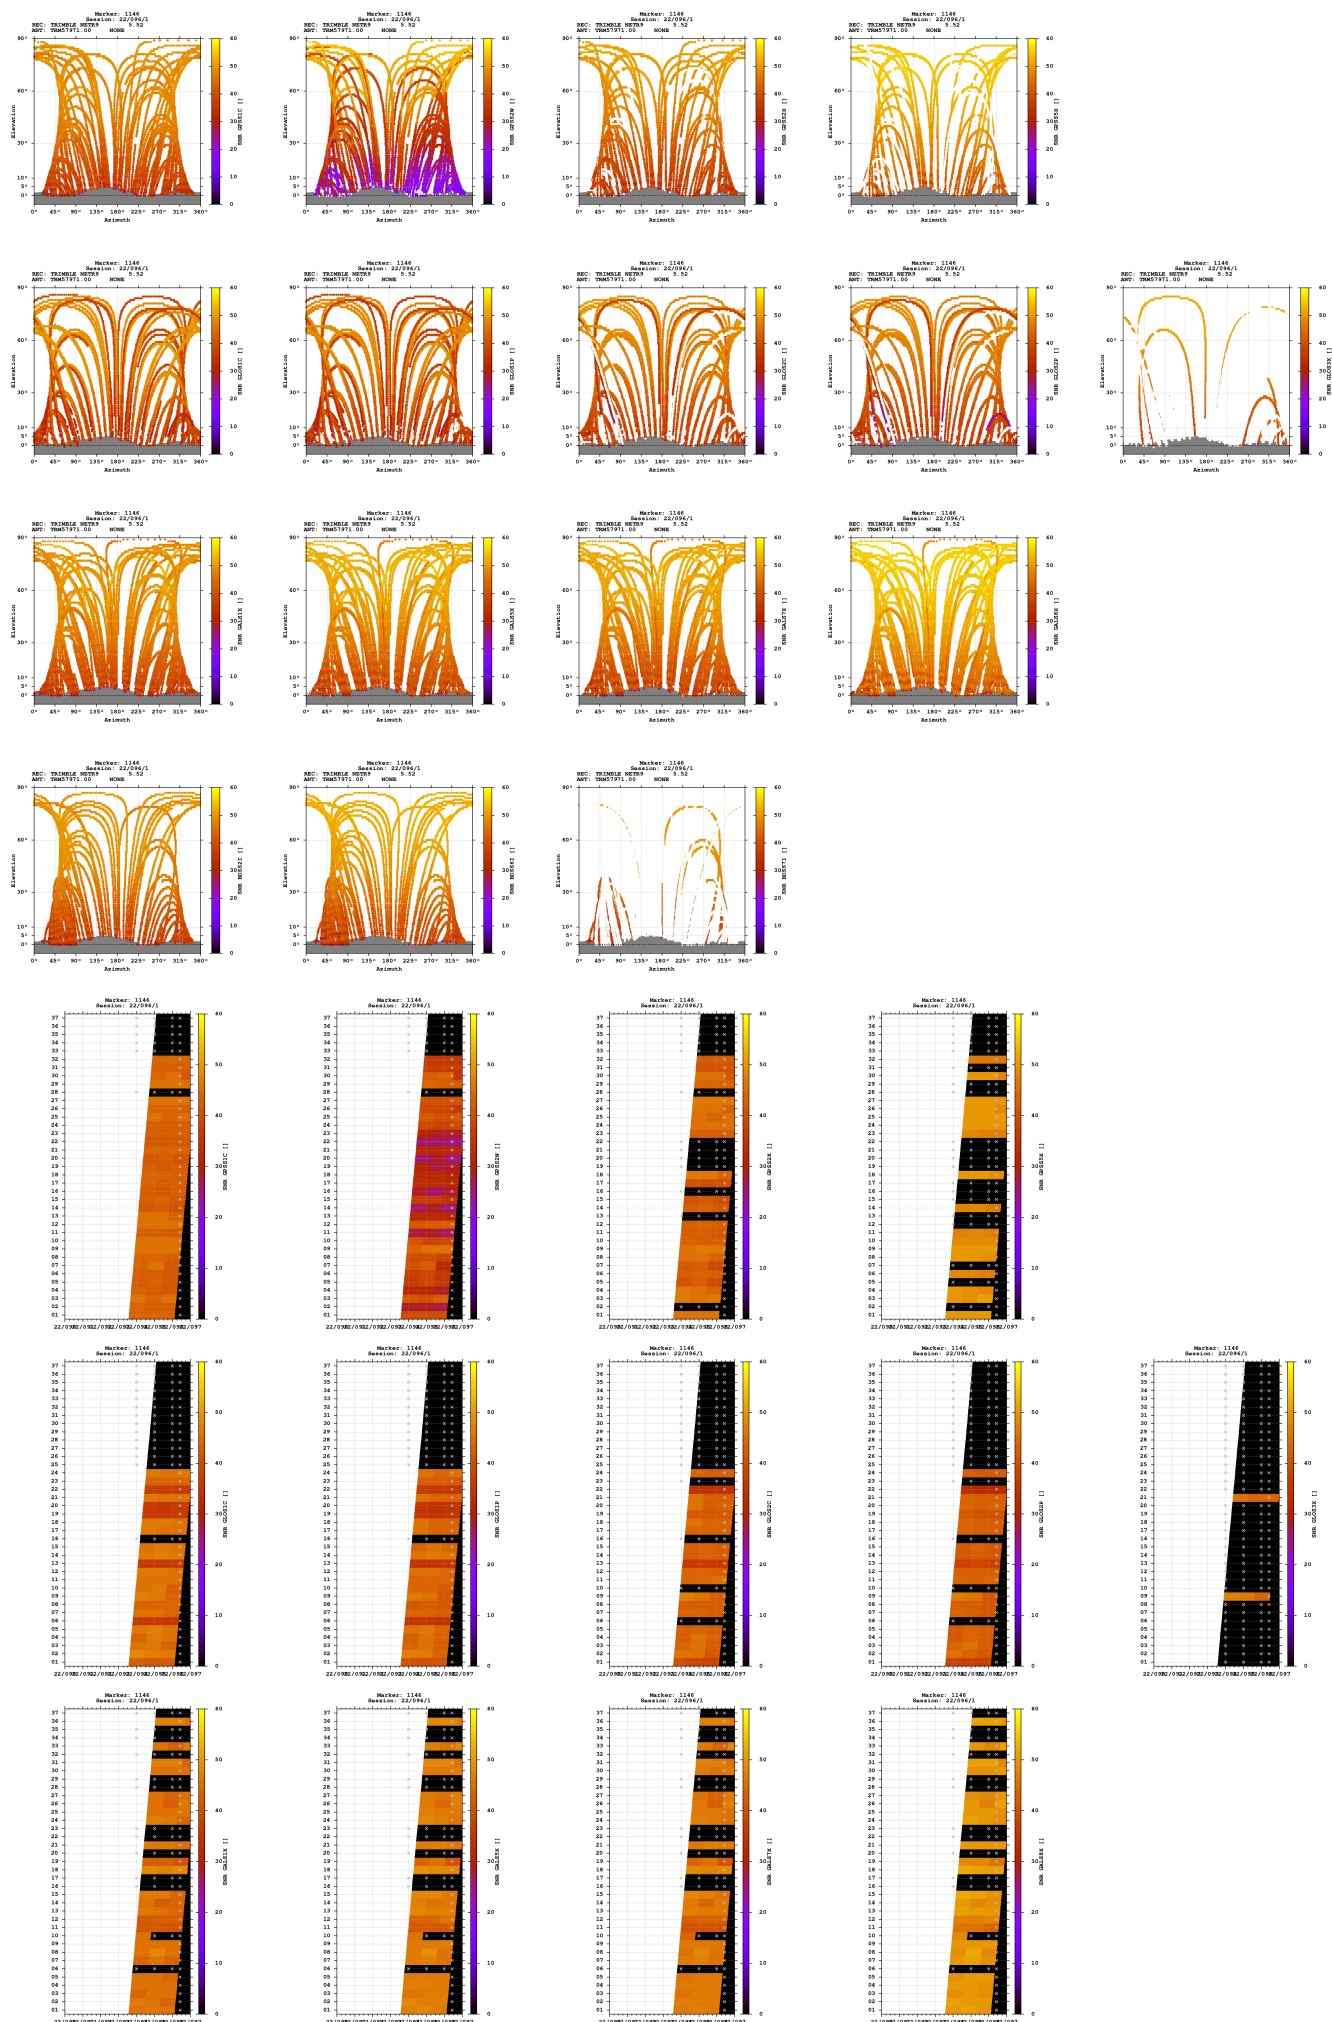

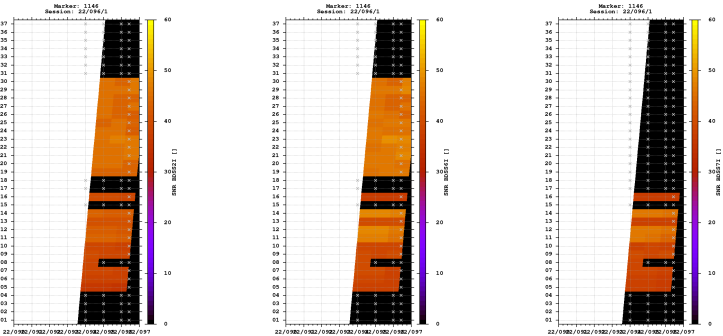



Estimates

2022-04-06 10:19:30	GPS	4319330.7860	555090.3117	4645252.0183	47.040038312	7.323115380	618.6114
2022-04-06 10:19:30	GLO	4319331.3844	555089.5554	4645252.4727	47.040037825	7.323104507	619.2828
2022-04-06 10:19:30	GAL	4319330.8997	555090.1084	4645251.7624	47.040036172	7.323112536	618.4833
2022-04-06 10:19:30	BDS	4319327.8073	555090.0506	4645252.5809	47.040061426	7.323116968	616.9871

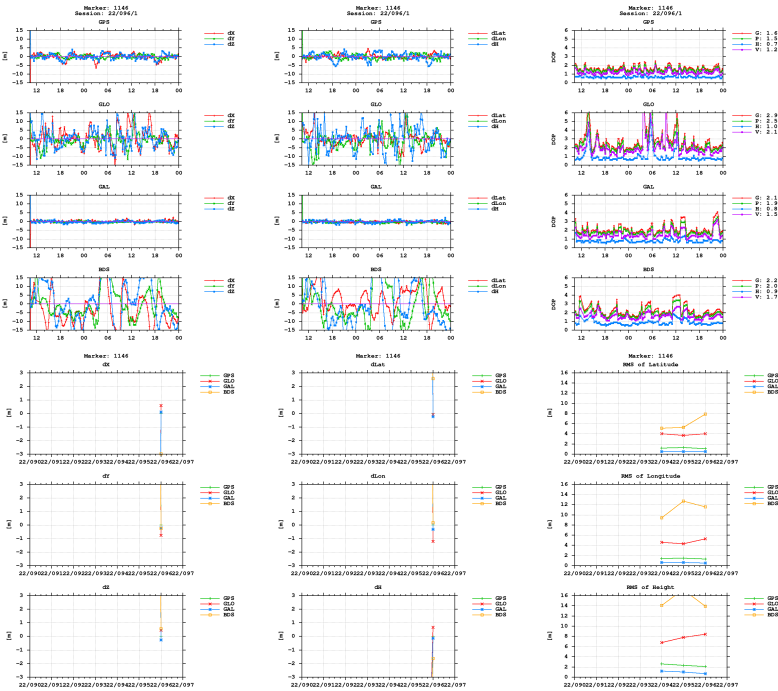

BNC

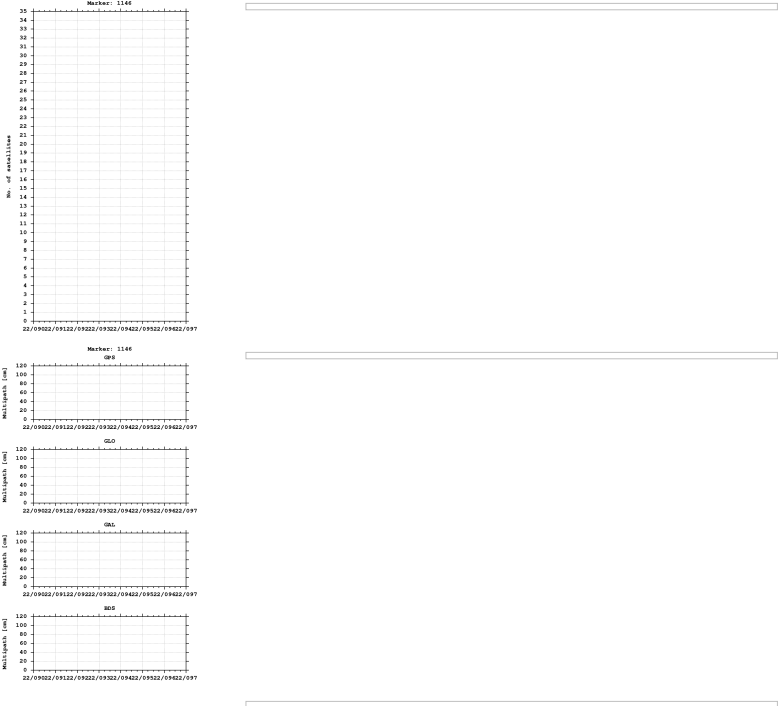

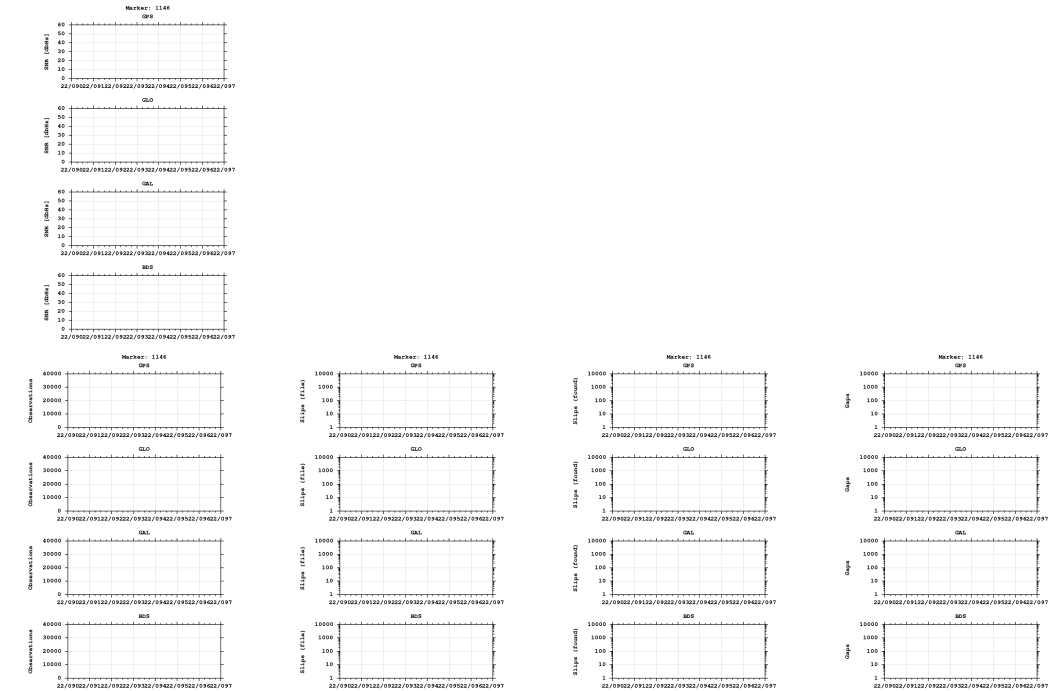

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)