

GNSS observation file monitoring for 0515

Last RINEX file: 05150971.220


RINEX version: 3.02

Marker: 1146

Receiver: 515 TRIMBLE NETR9 5.52


Antenna: 515 TRM57971.00 NONE

Epochs

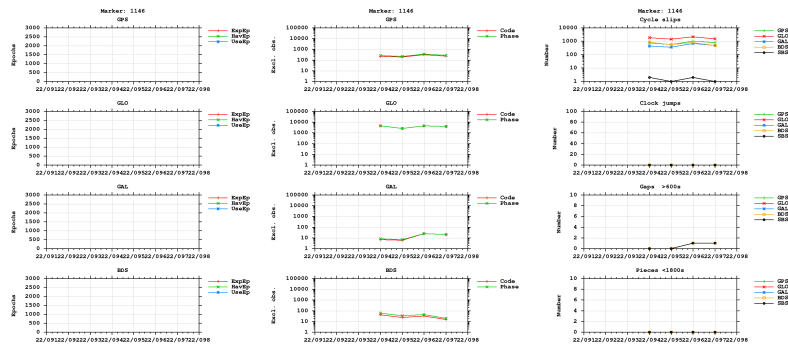



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

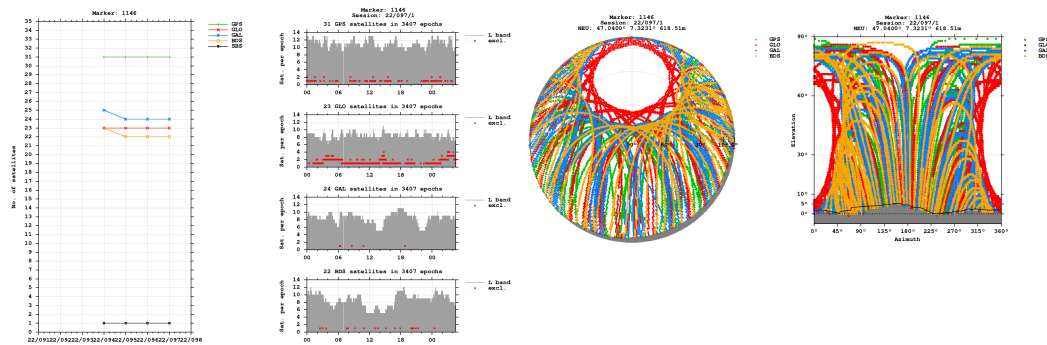


Bands

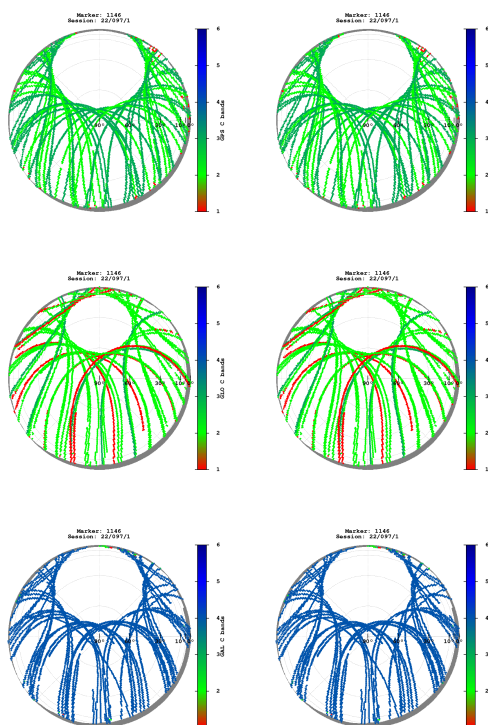


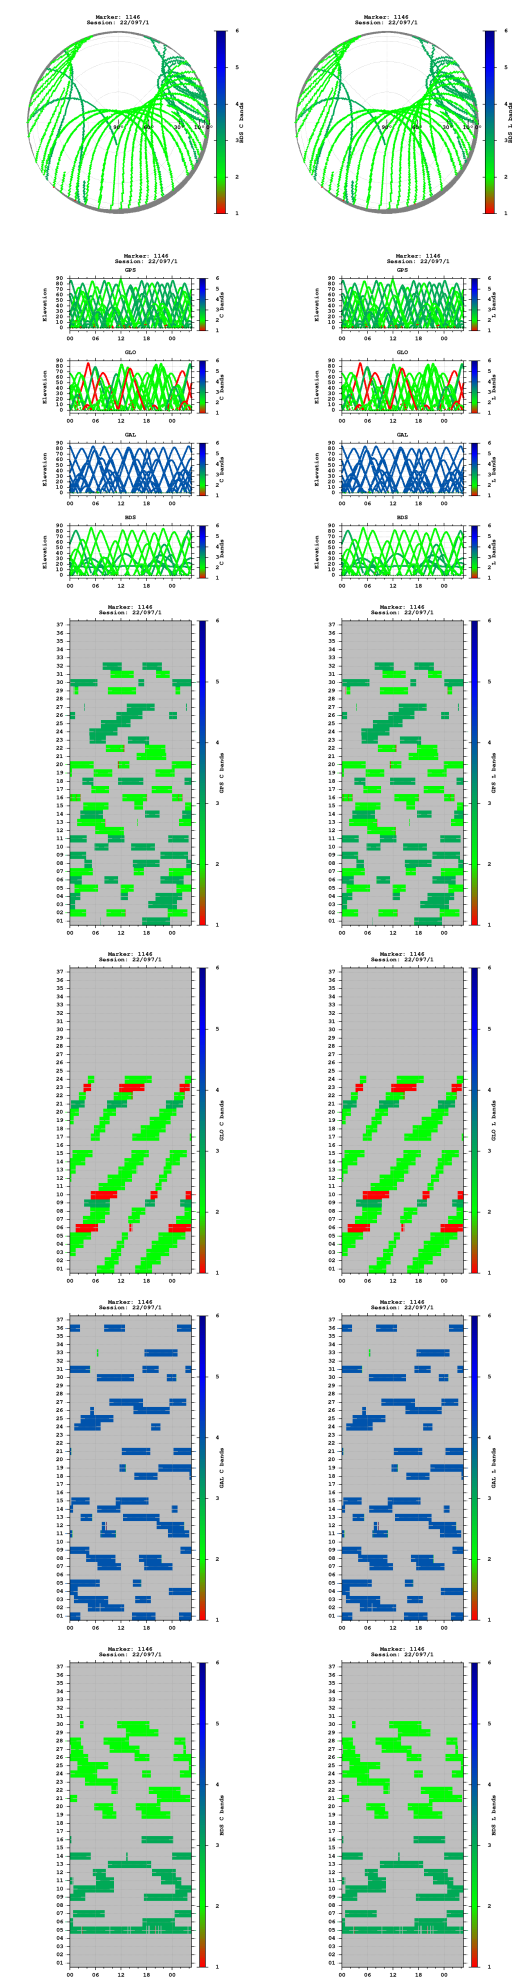

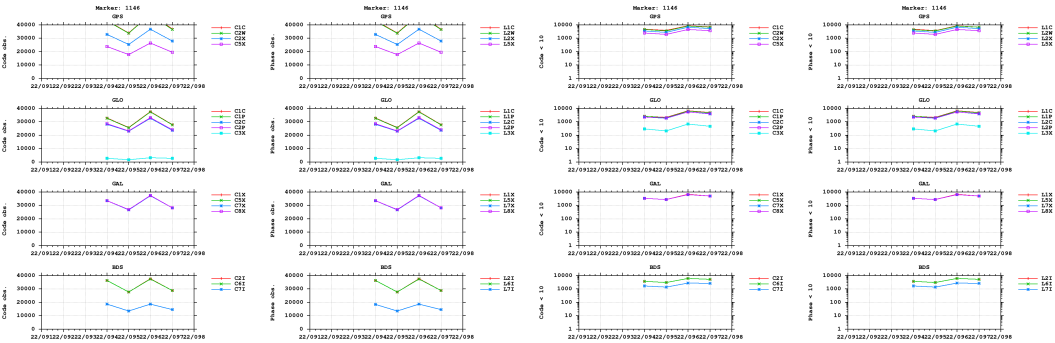


Multipath

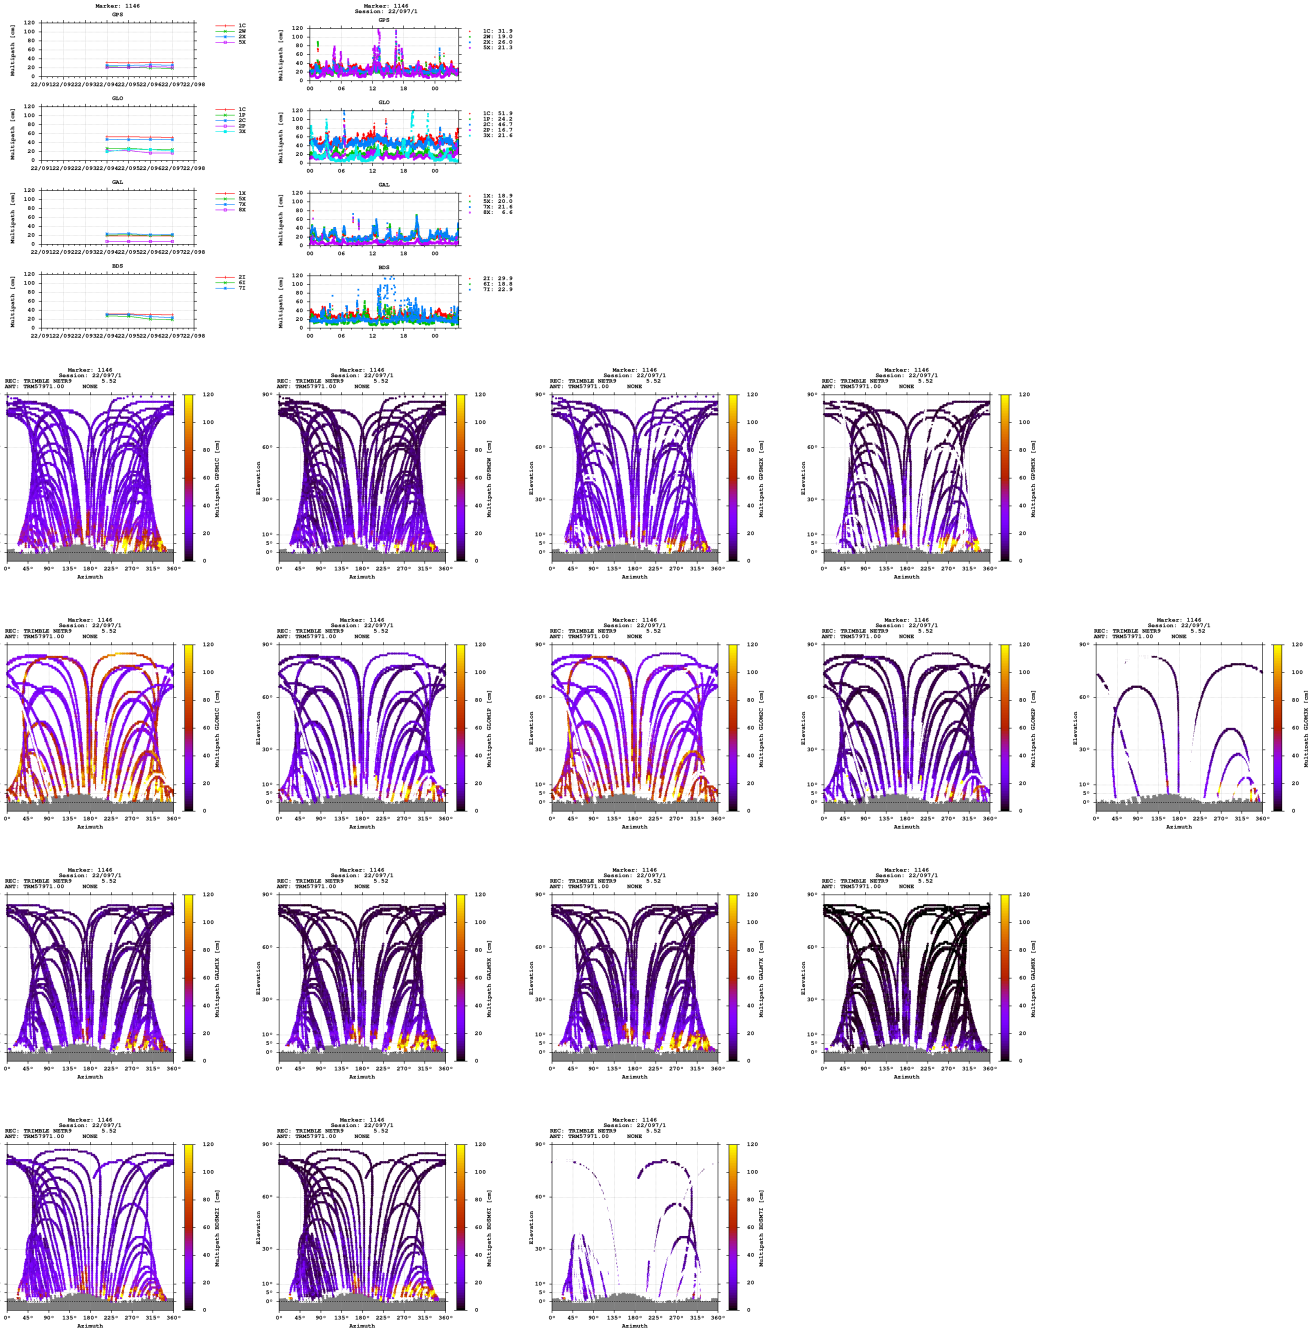

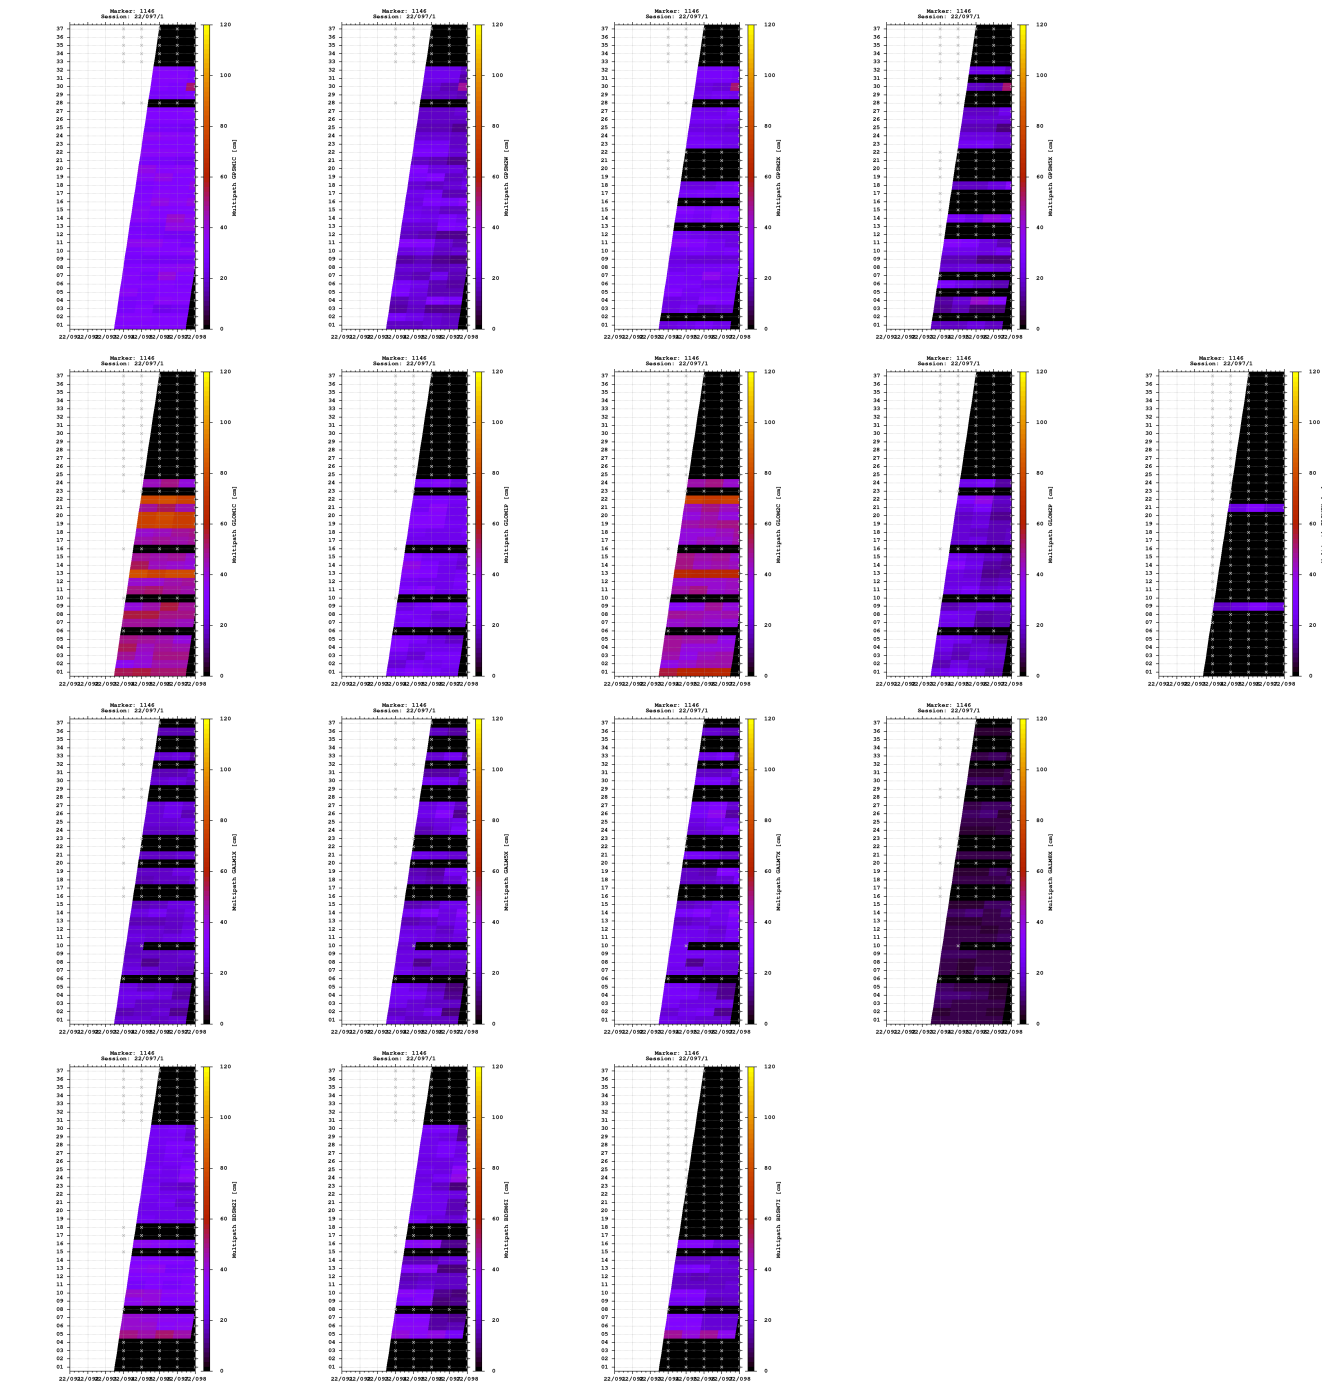


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

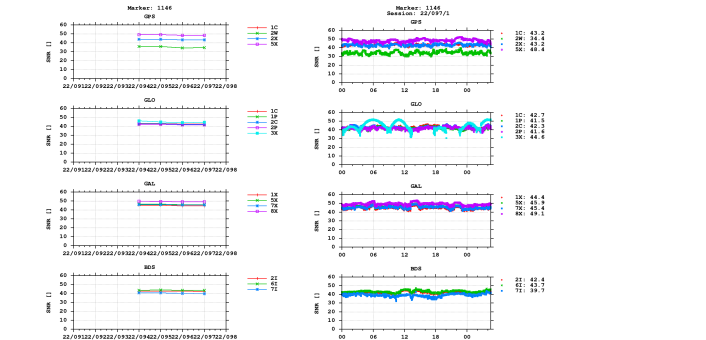




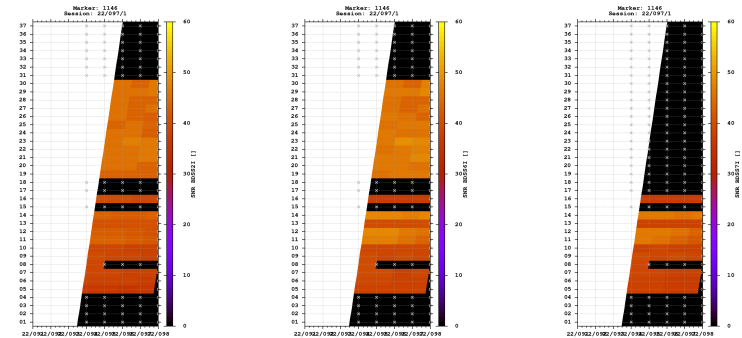



Estimates

2022-04-06 10:19:30	GPS	4319330.6662	555090.2752	4645252.0003	47.040039015	7.323115104	618.5141
2022-04-06 10:19:30	GLO	4319331.0270	555090.1640	4645252.5263	47.040039976	7.323113049	619.1333
2022-04-06 10:19:30	GAL	4319330.8671	555090.0781	4645251.8045	47.040036668	7.323112195	618.4895
2022-04-06 10:19:30	BDS	4319330.0975	555091.8004	4645253.2189	47.040048917	7.323135961	619.1541

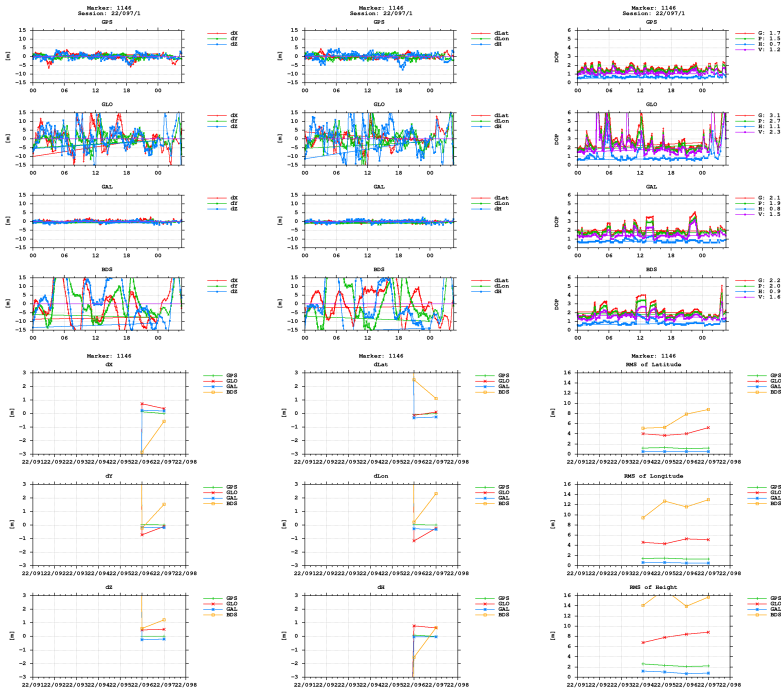

BNC

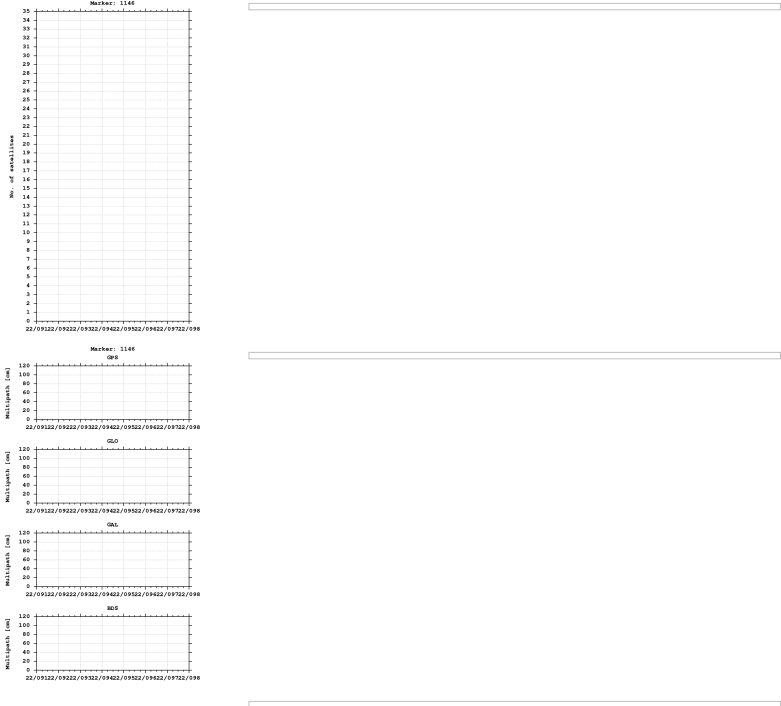

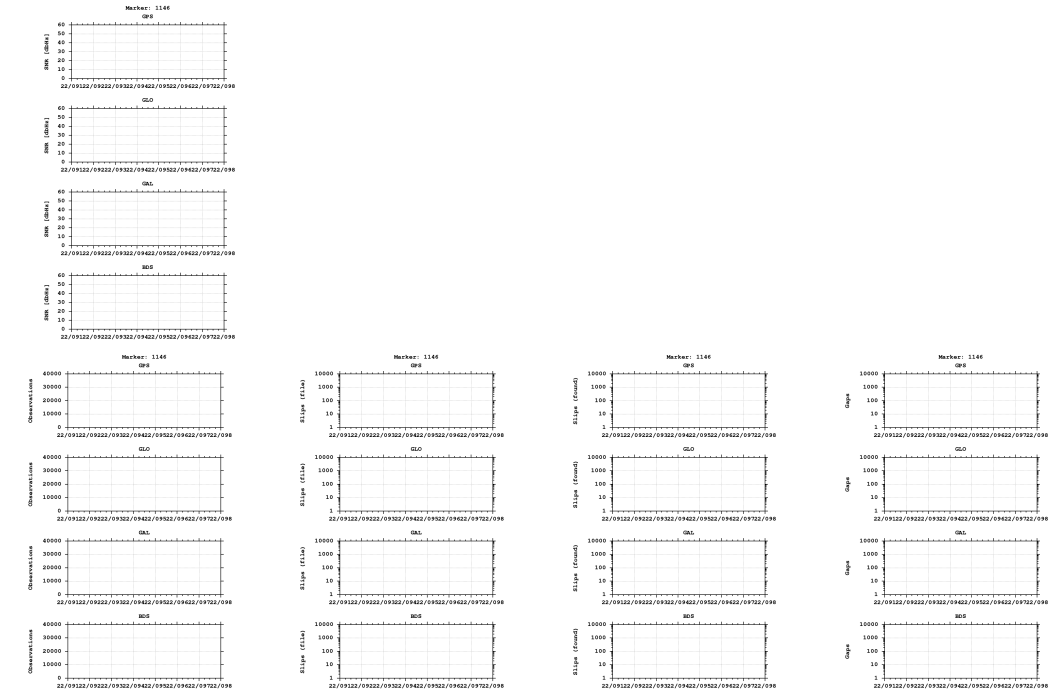

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)