


GNSS observation file monitoring for 0516


Last RINEX file: 05160951.220
RINEX version: 3.02
Marker: 1127
Receiver: 516 TRIMBLE NETR9 5.52
Antenna: 516 TRM57971.00 NONE

Epochs

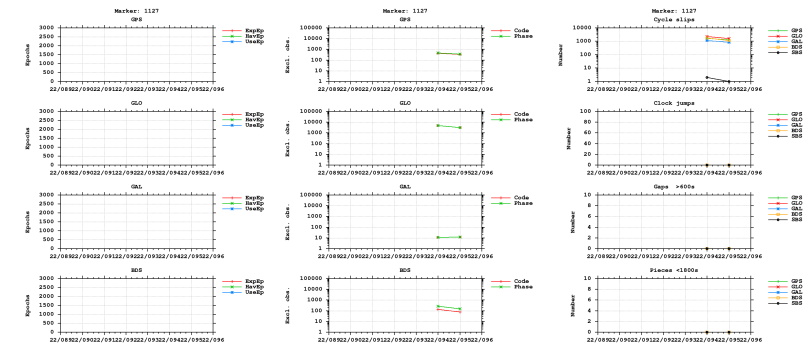



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

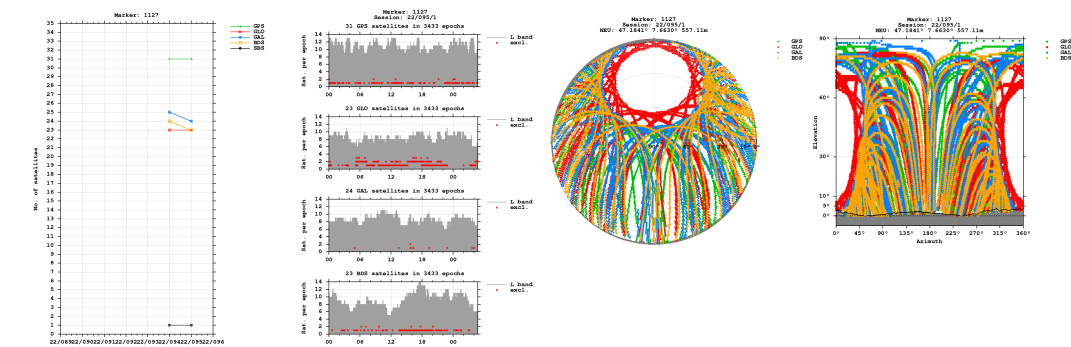


Bands

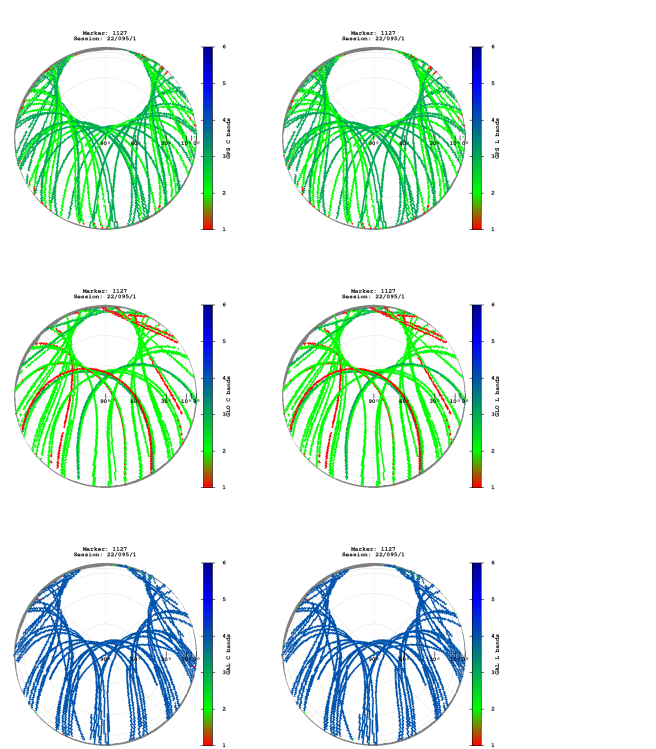


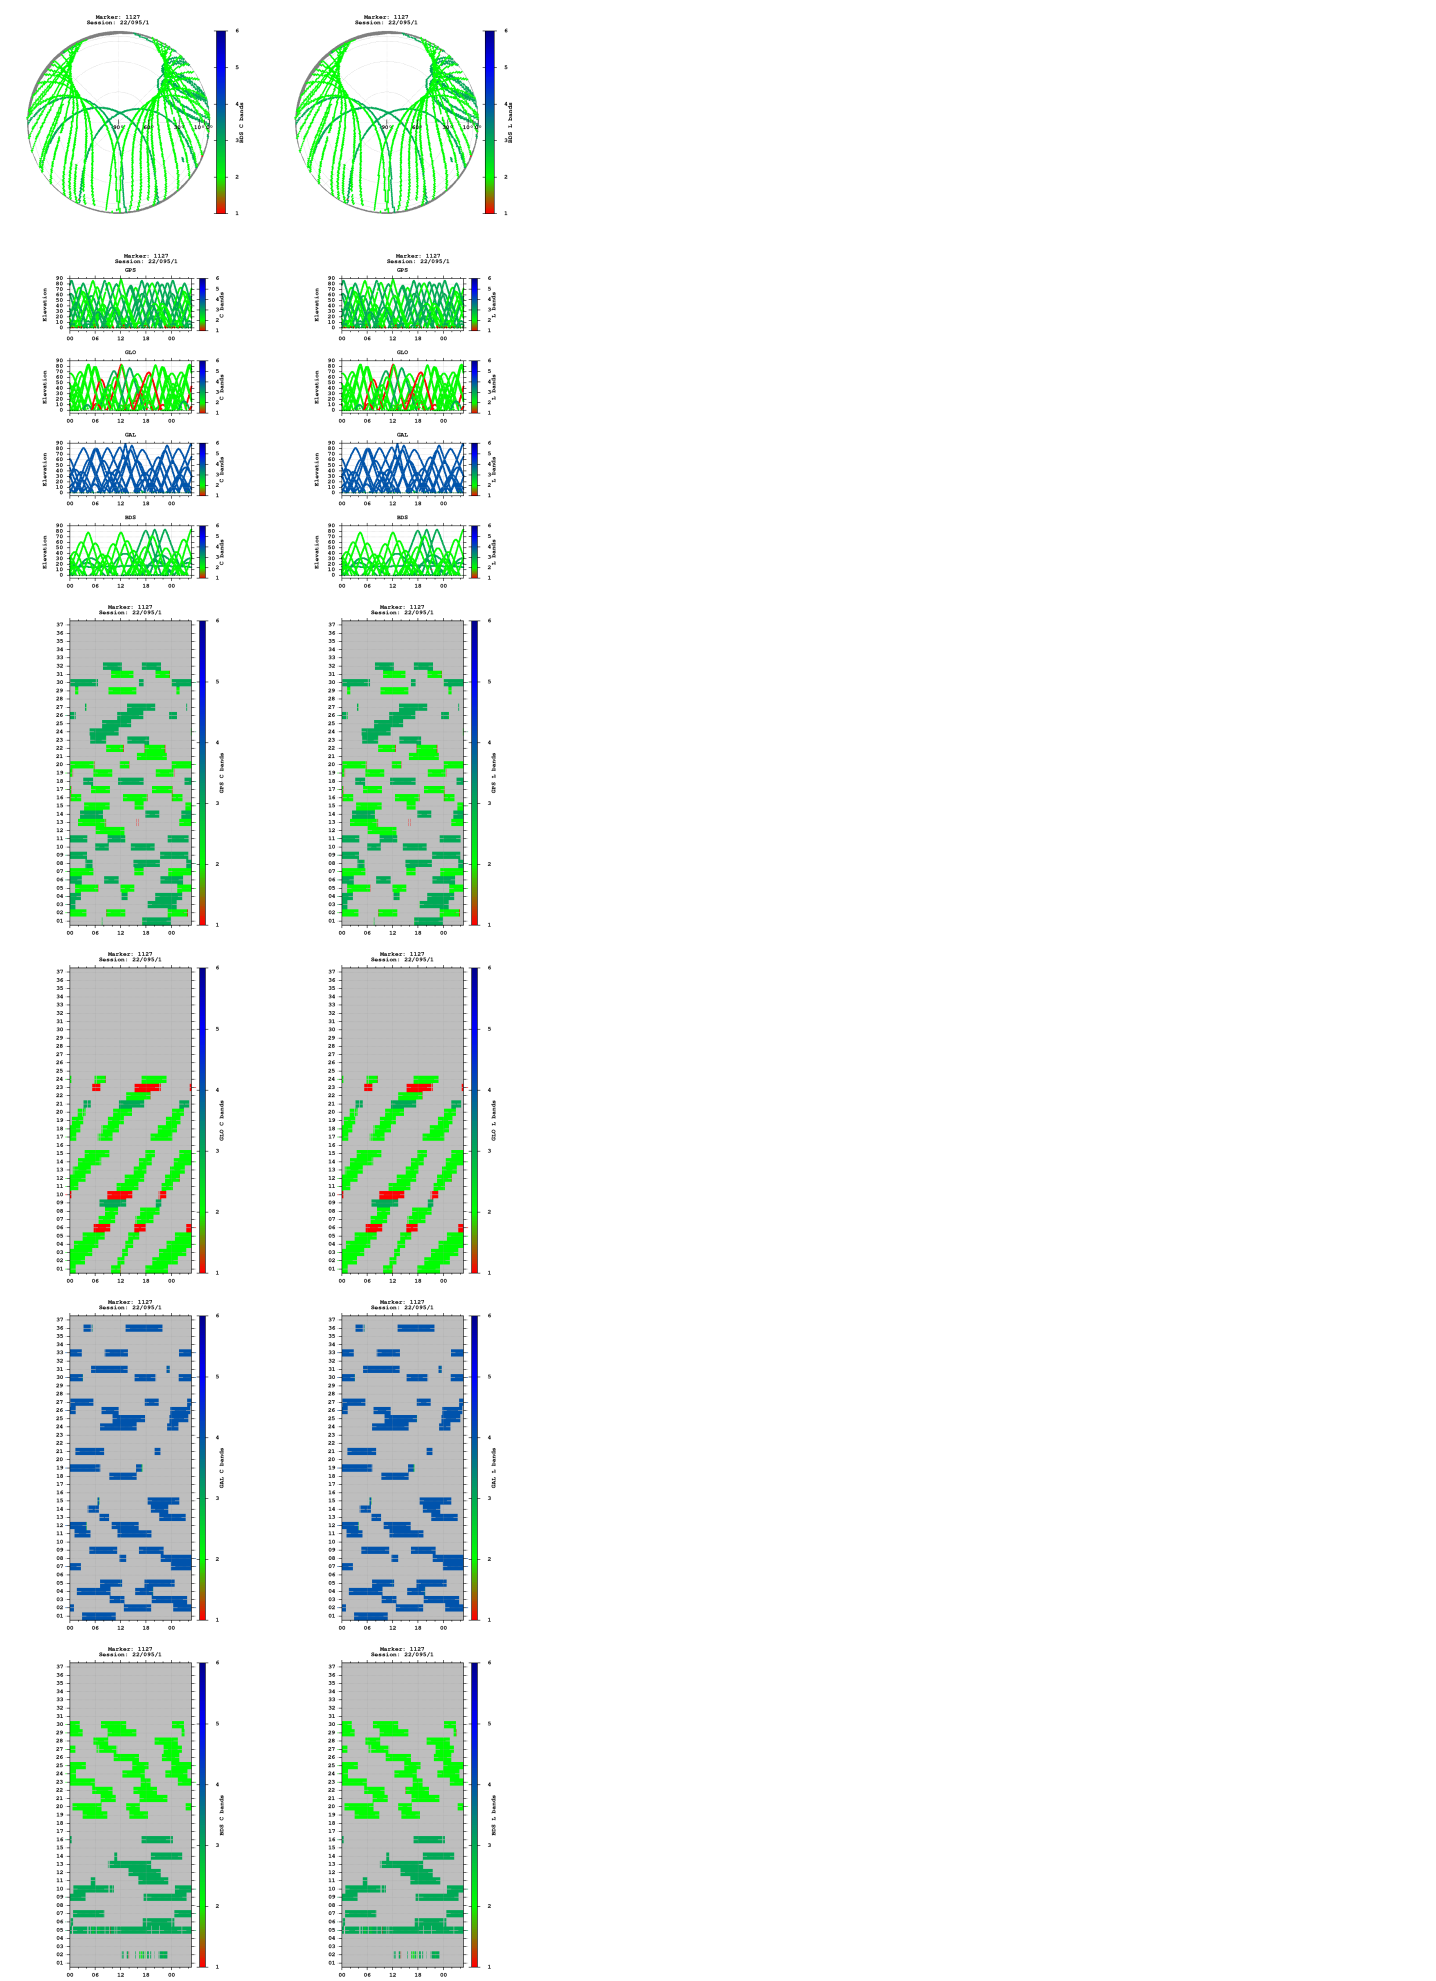


Observations

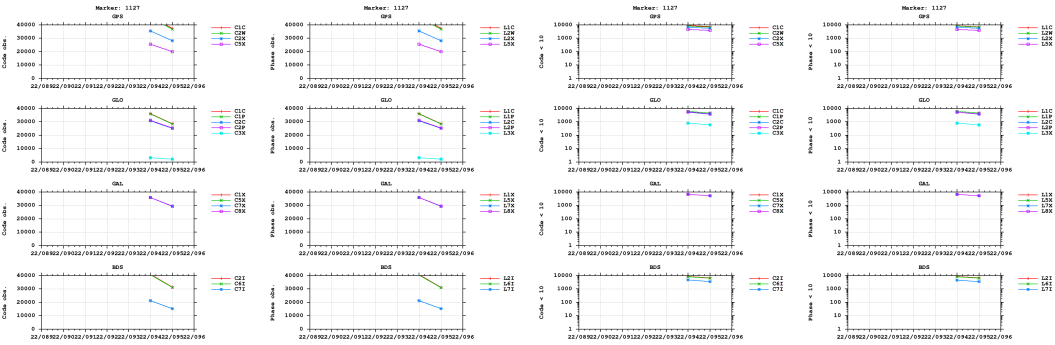



Multipath

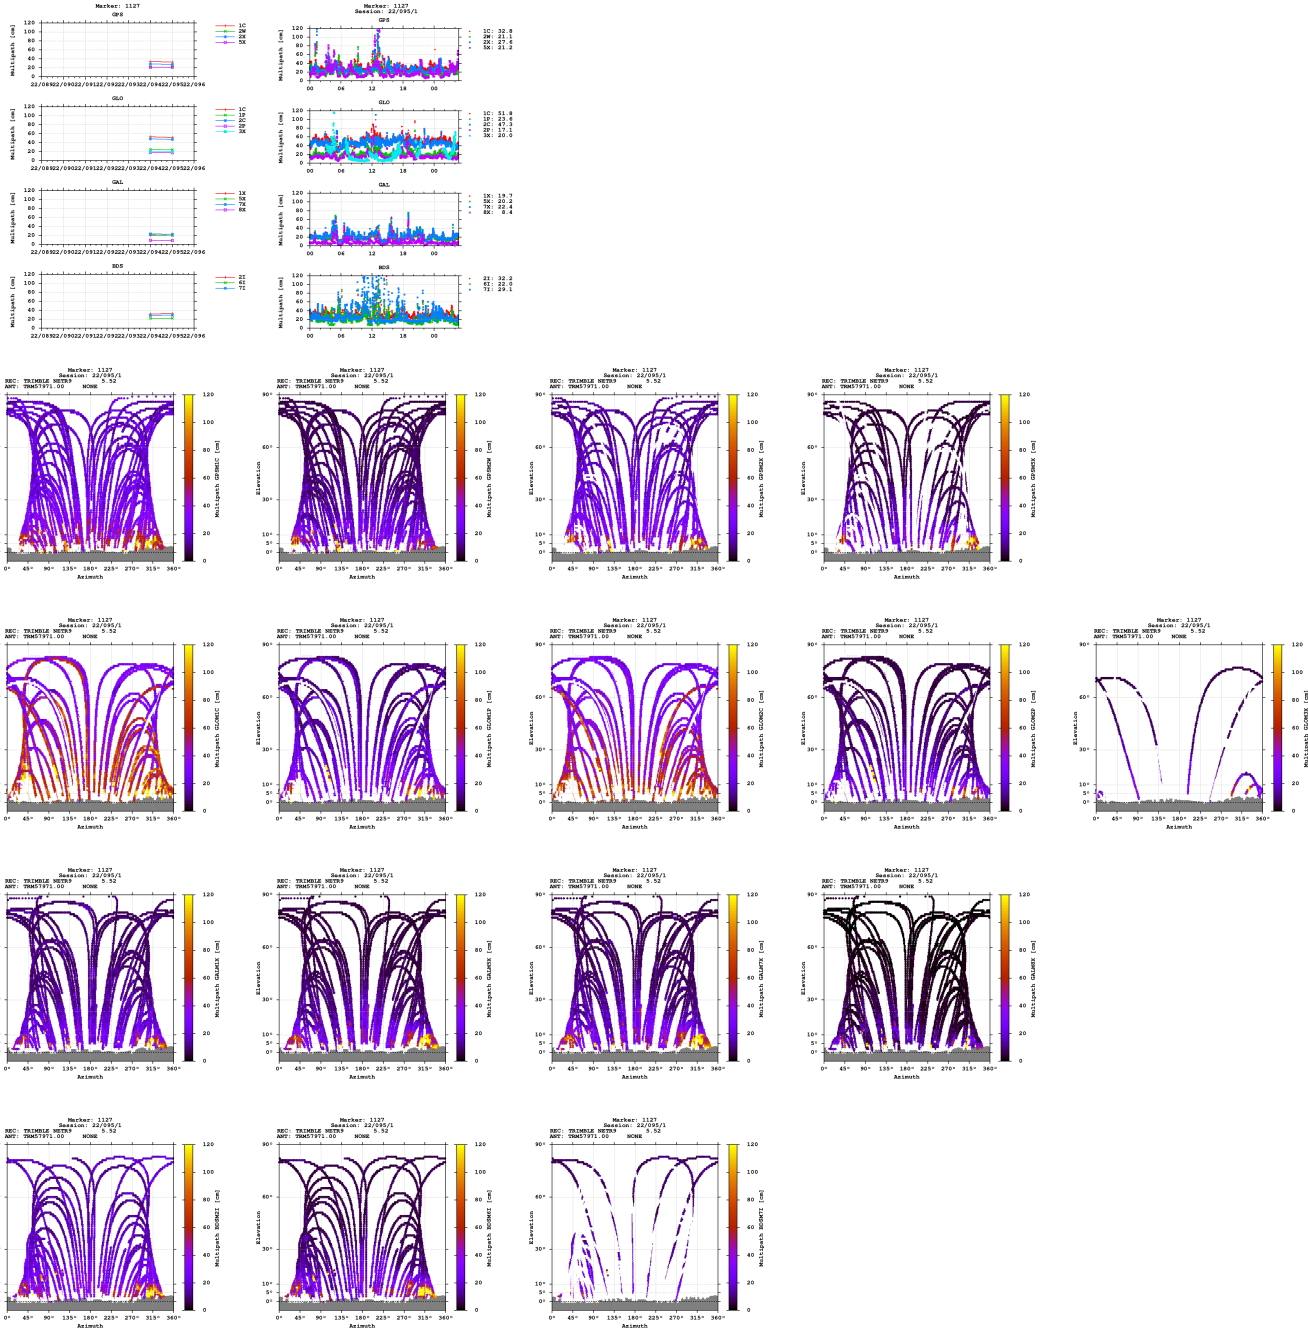


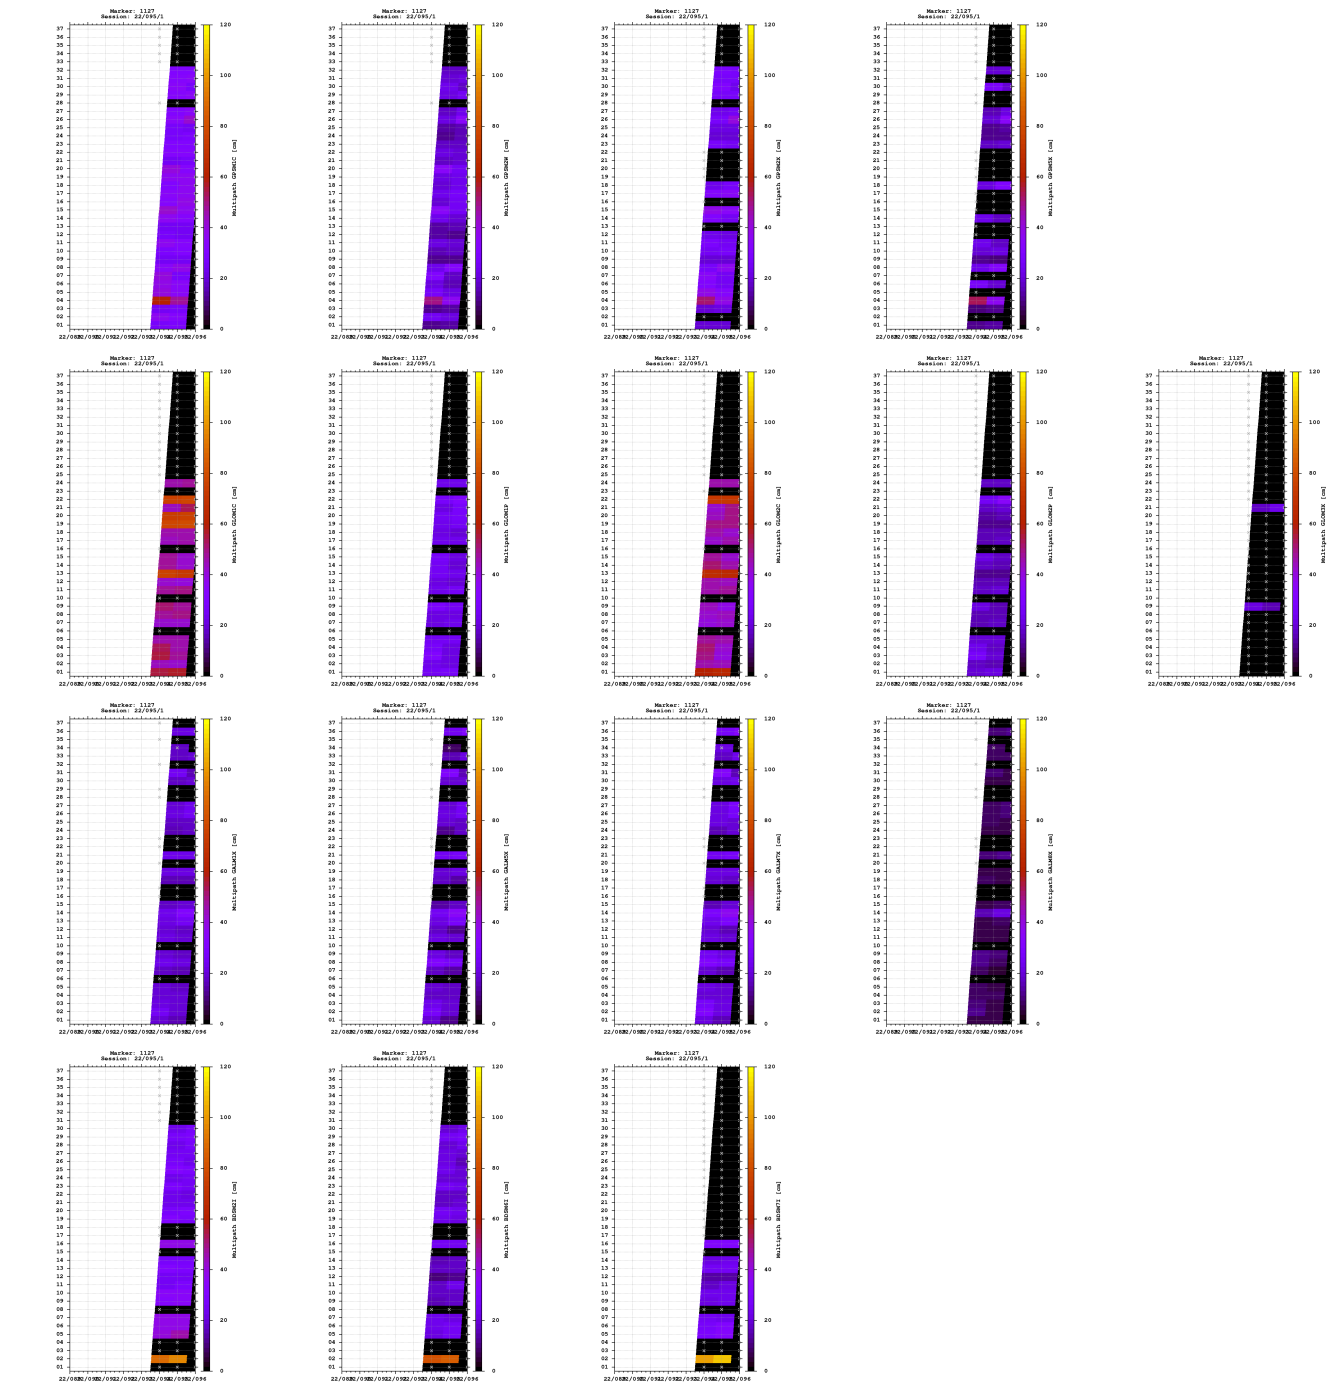


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

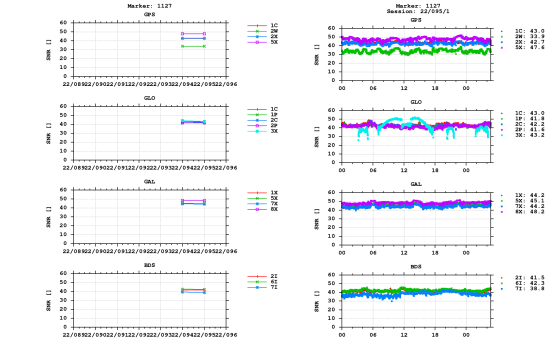


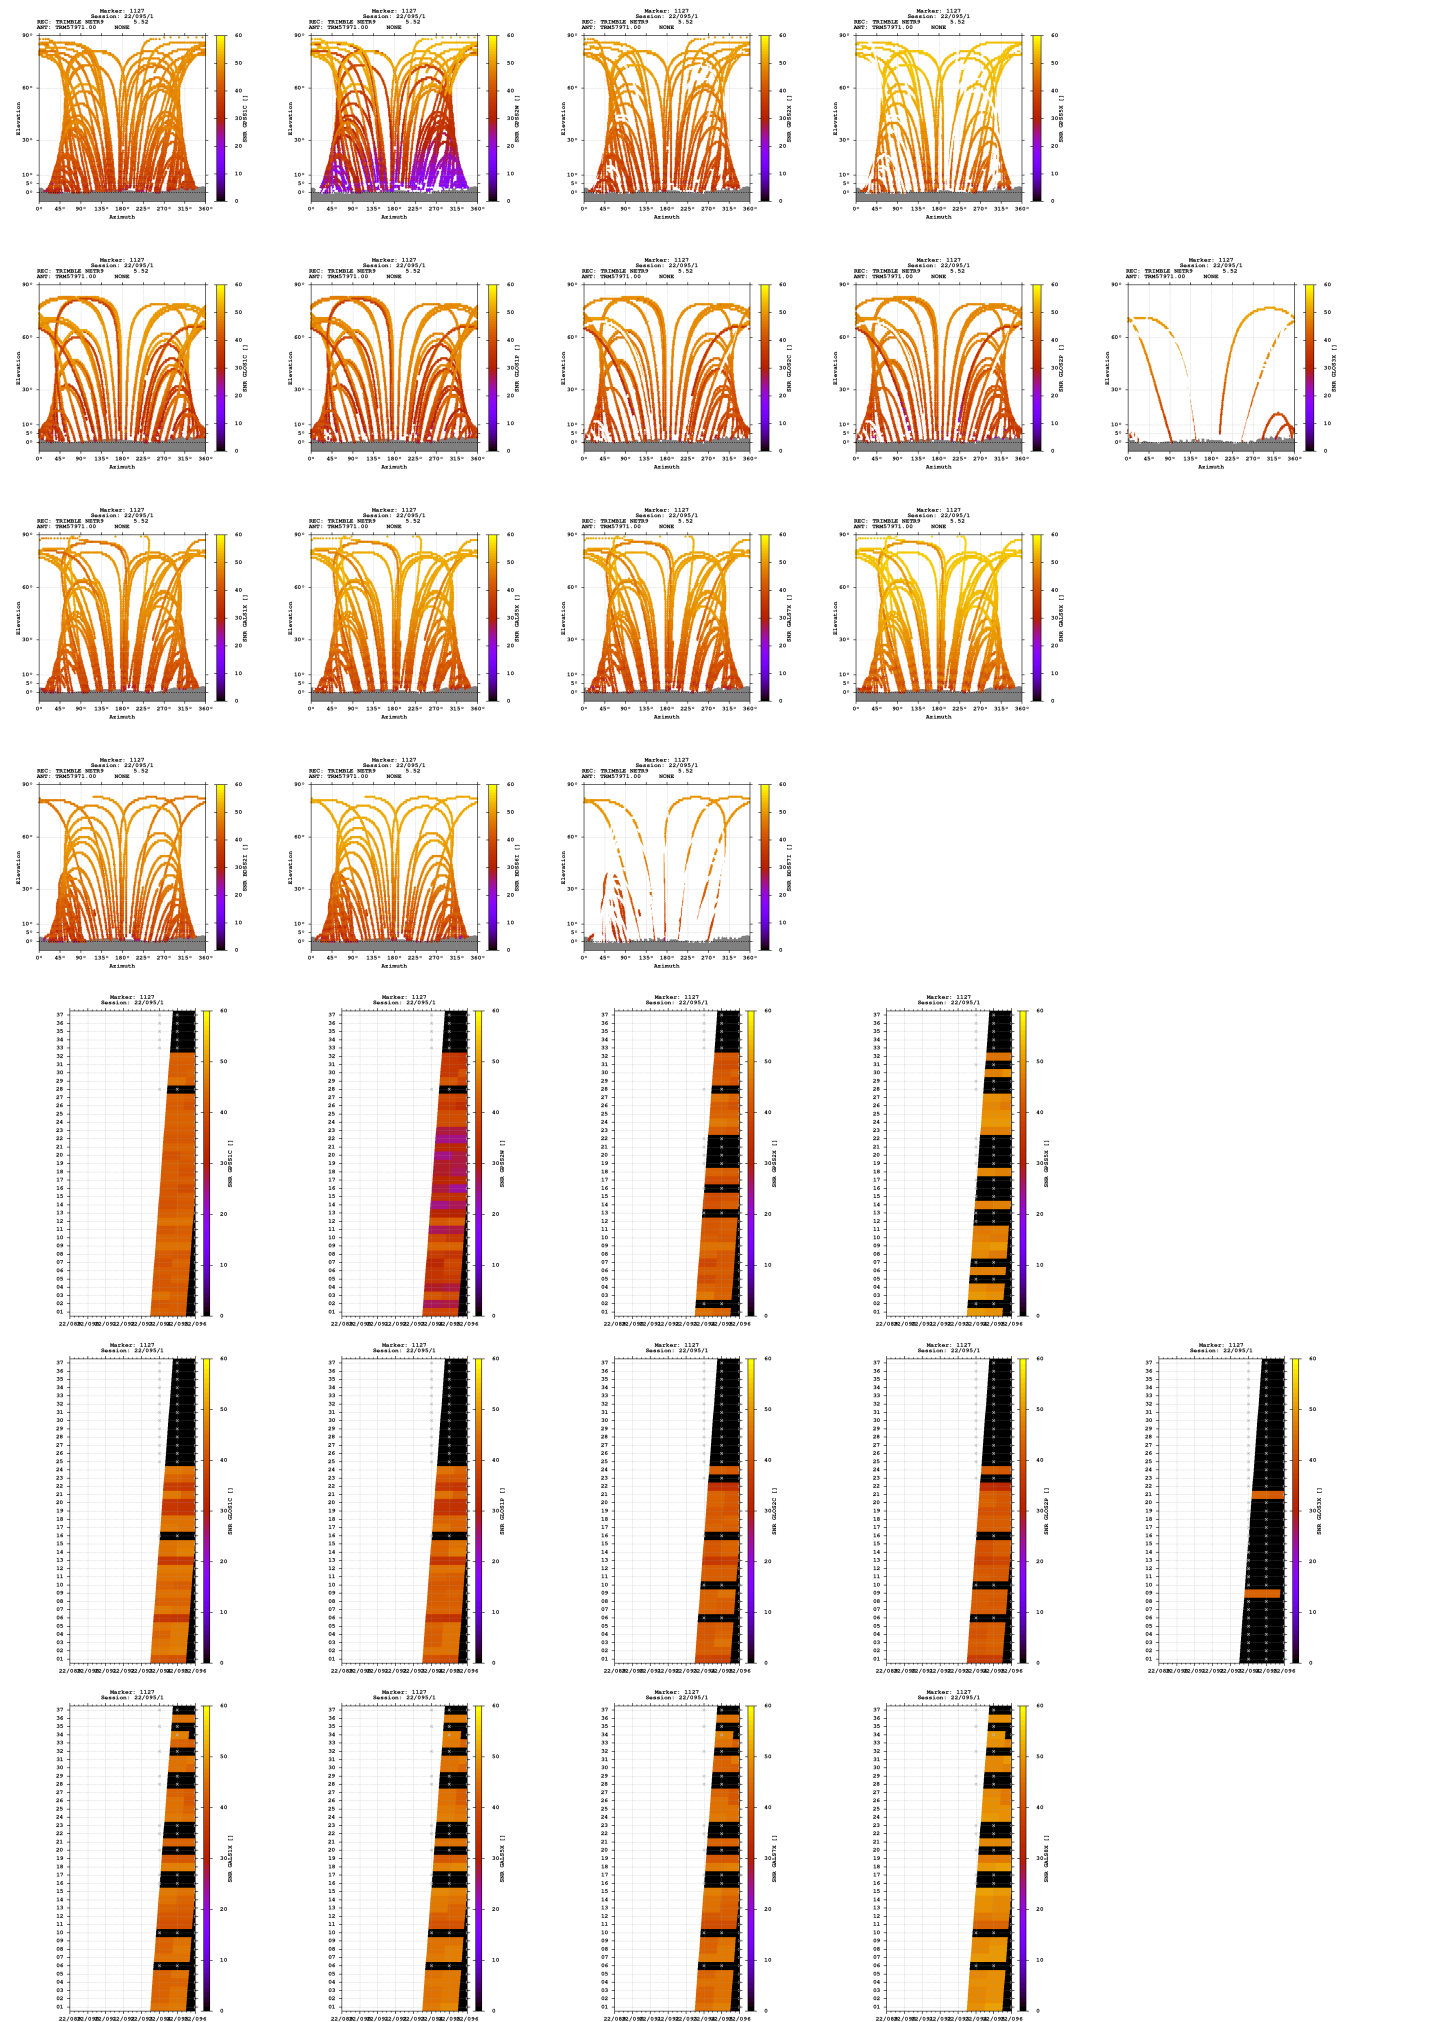

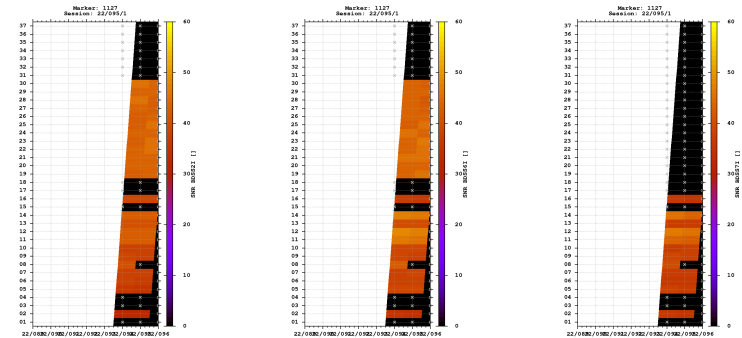



Estimates

2022-04-04 11:41:30	GPS	4304291.6286	579130.2089	4656106.2458	47.184079996	7.662964748	557.1063
2022-04-04 11:41:30	GLO	4304290.6553	579129.8166	4656105.3603	47.184081292	7.662961330	555.7657
2022-04-04 11:41:30	GAL	4304291.5899	579129.8221	4656105.9918	47.184079037	7.662959758	556.8589
2022-04-04 11:41:30	BDS	4304291.4969	579130.4211	4656110.2876	47.184105377	7.662967753	560.0017

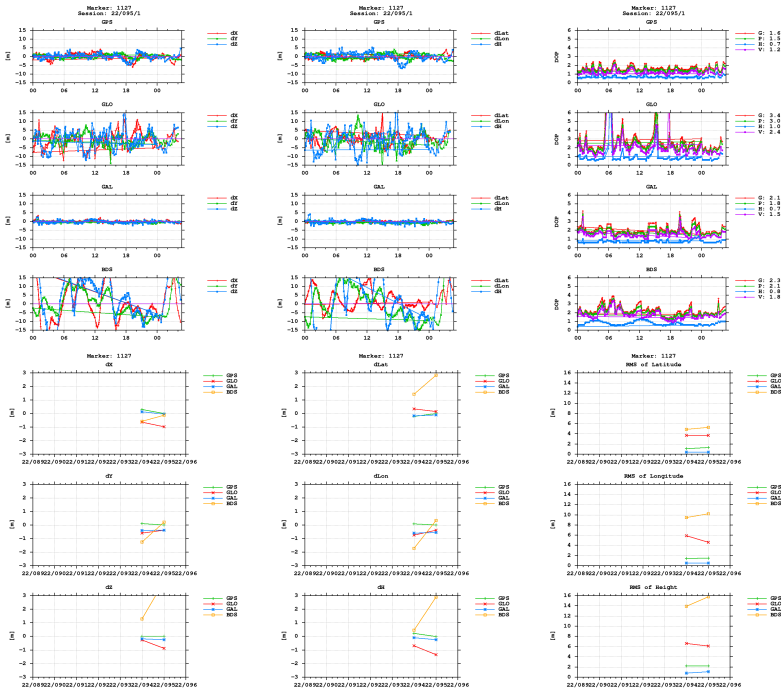

BNC

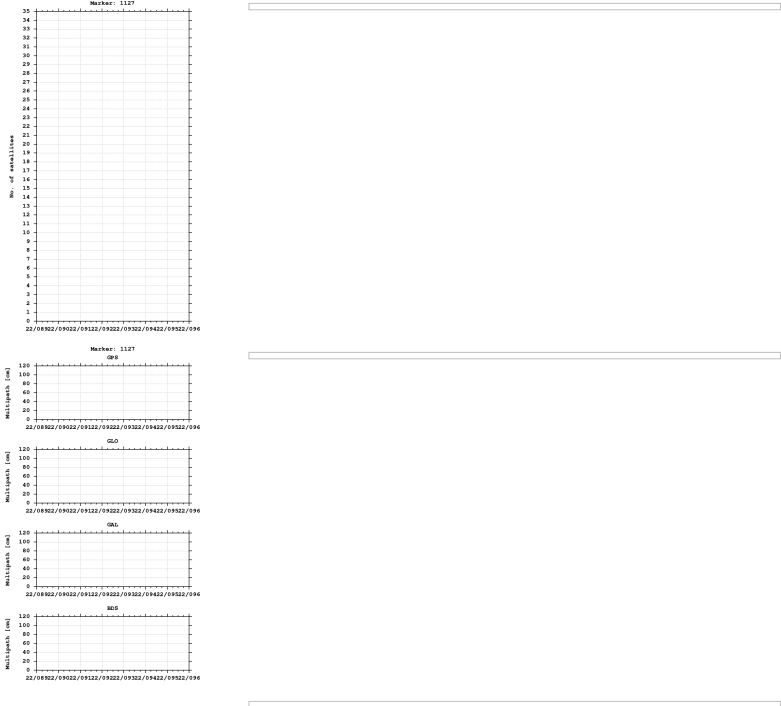

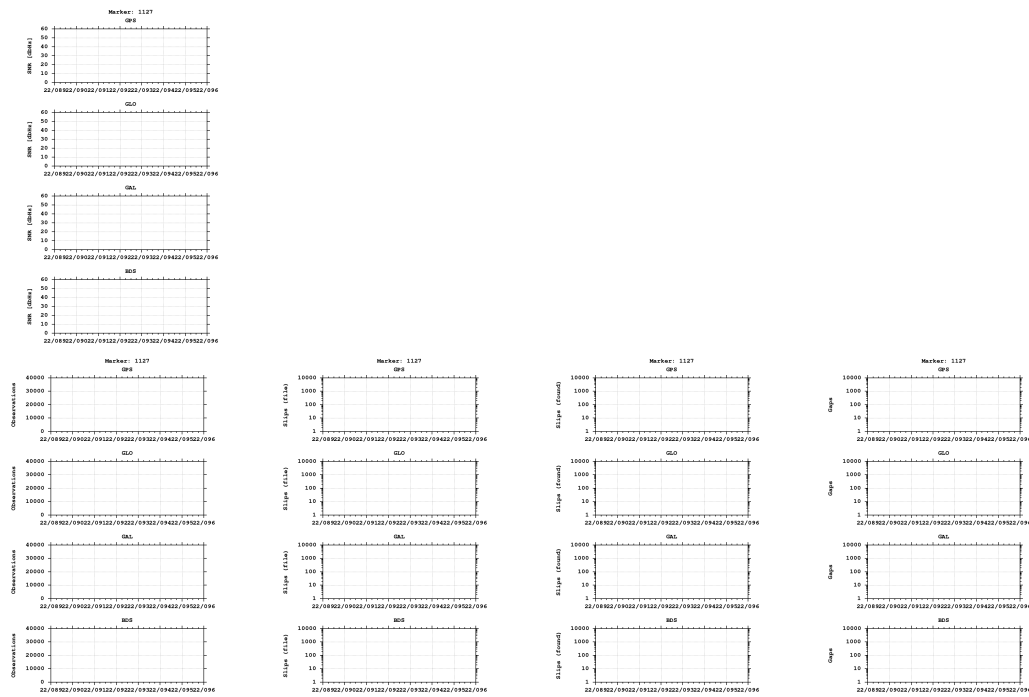

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)