

GNSS observation file monitoring for 0516

Last RINEX file: 05160961.220


RINEX version: 3.02

Marker: 1166

Receiver: 516 TRIMBLE NETR9 5.52


Antenna: 516 TRM57971.00 NONE

Epochs

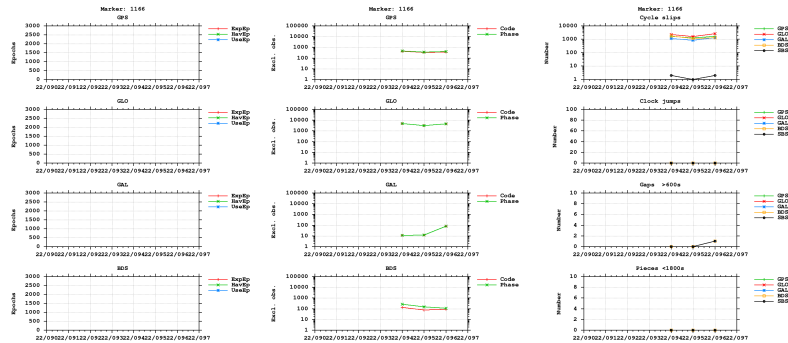



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

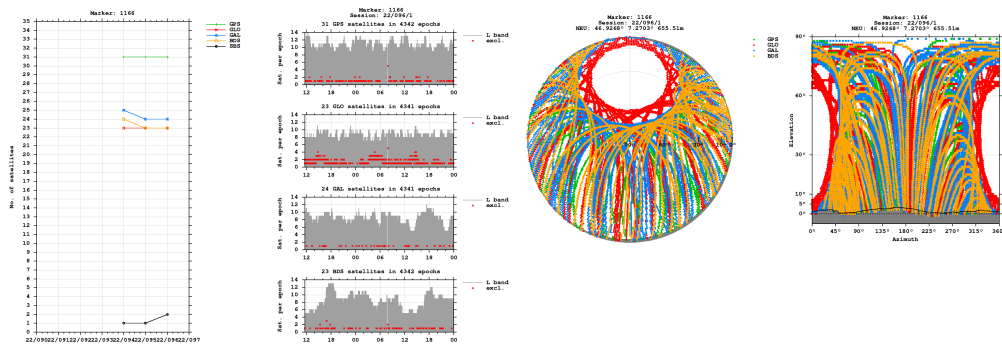


Bands

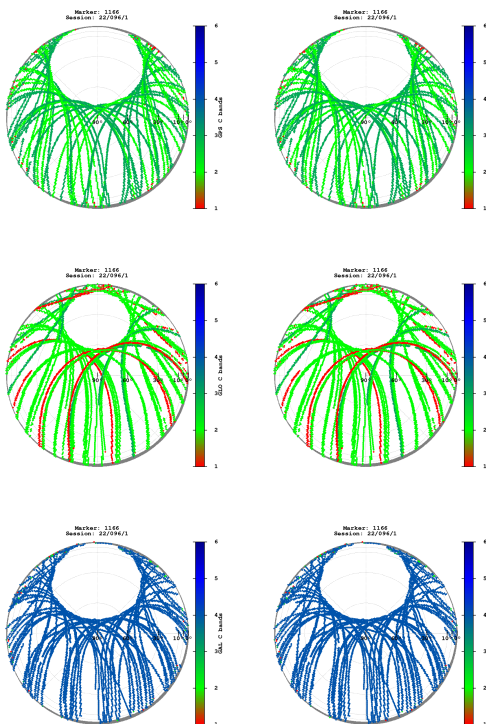


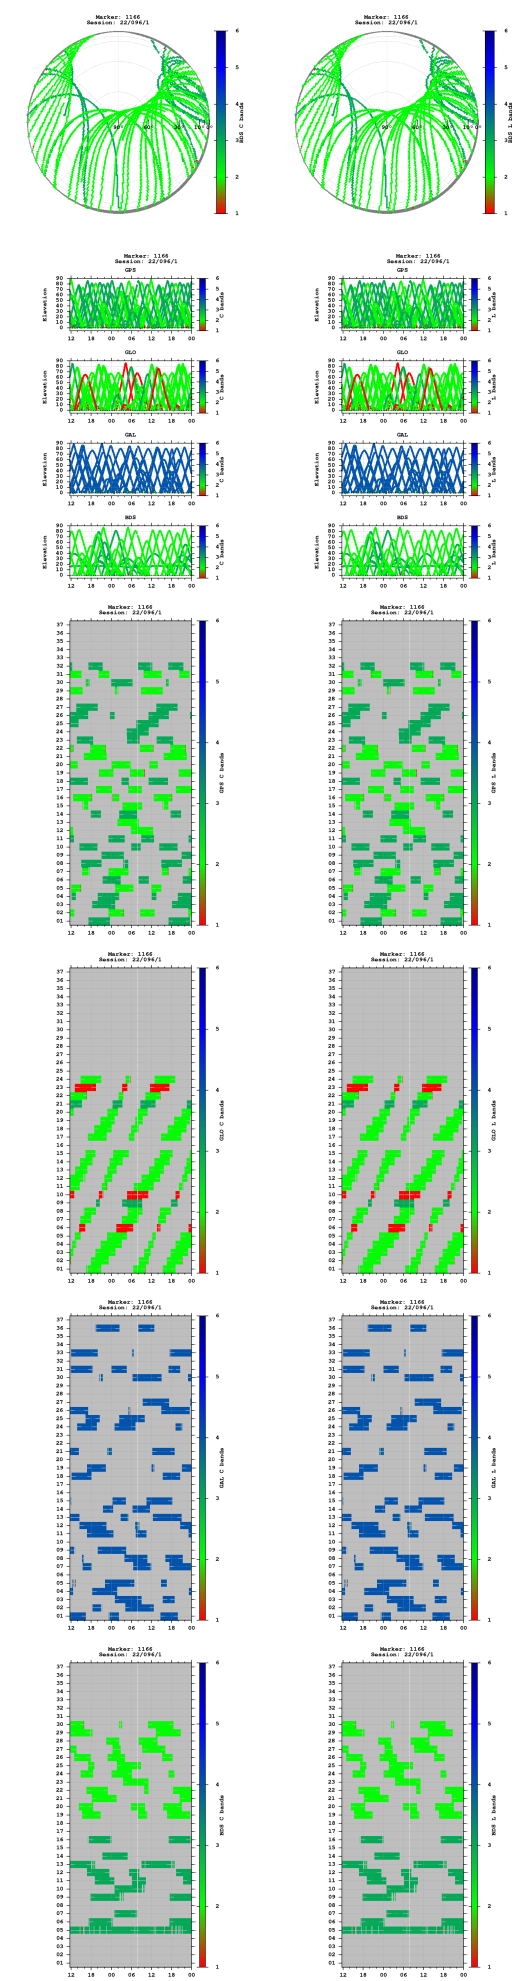



Observations

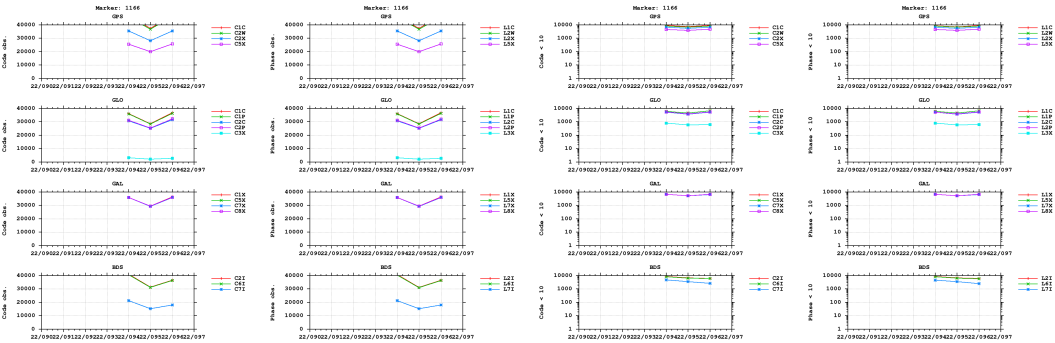


Multipath

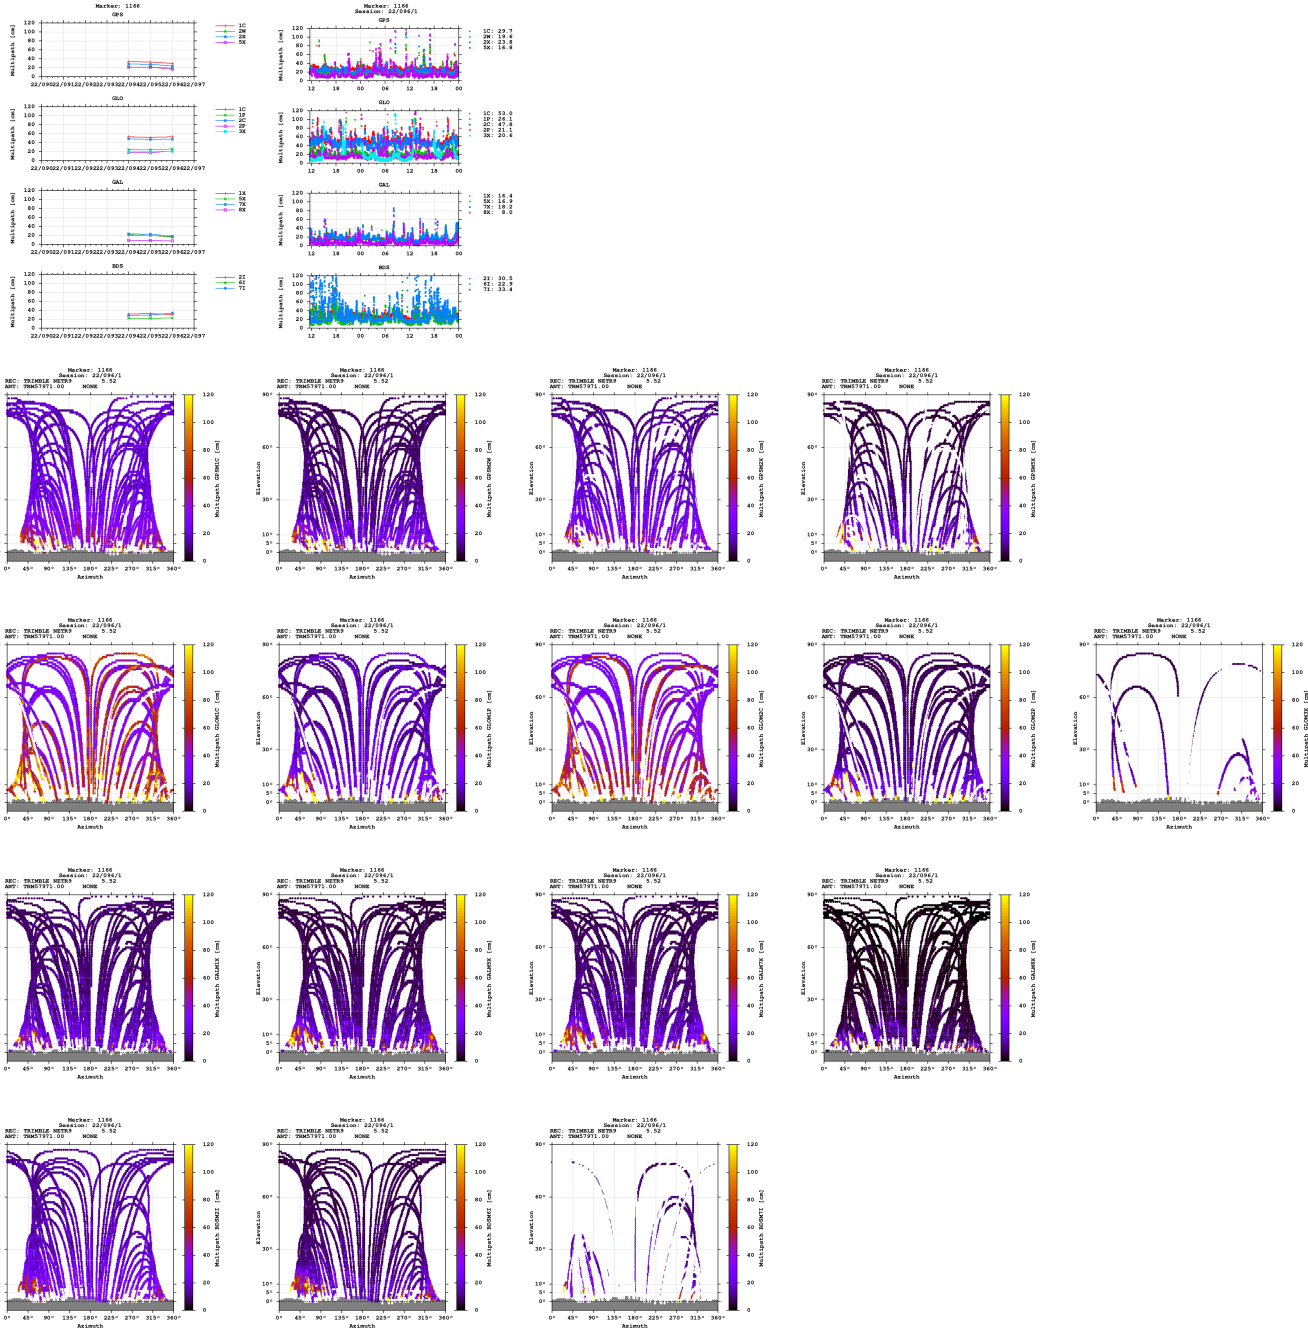




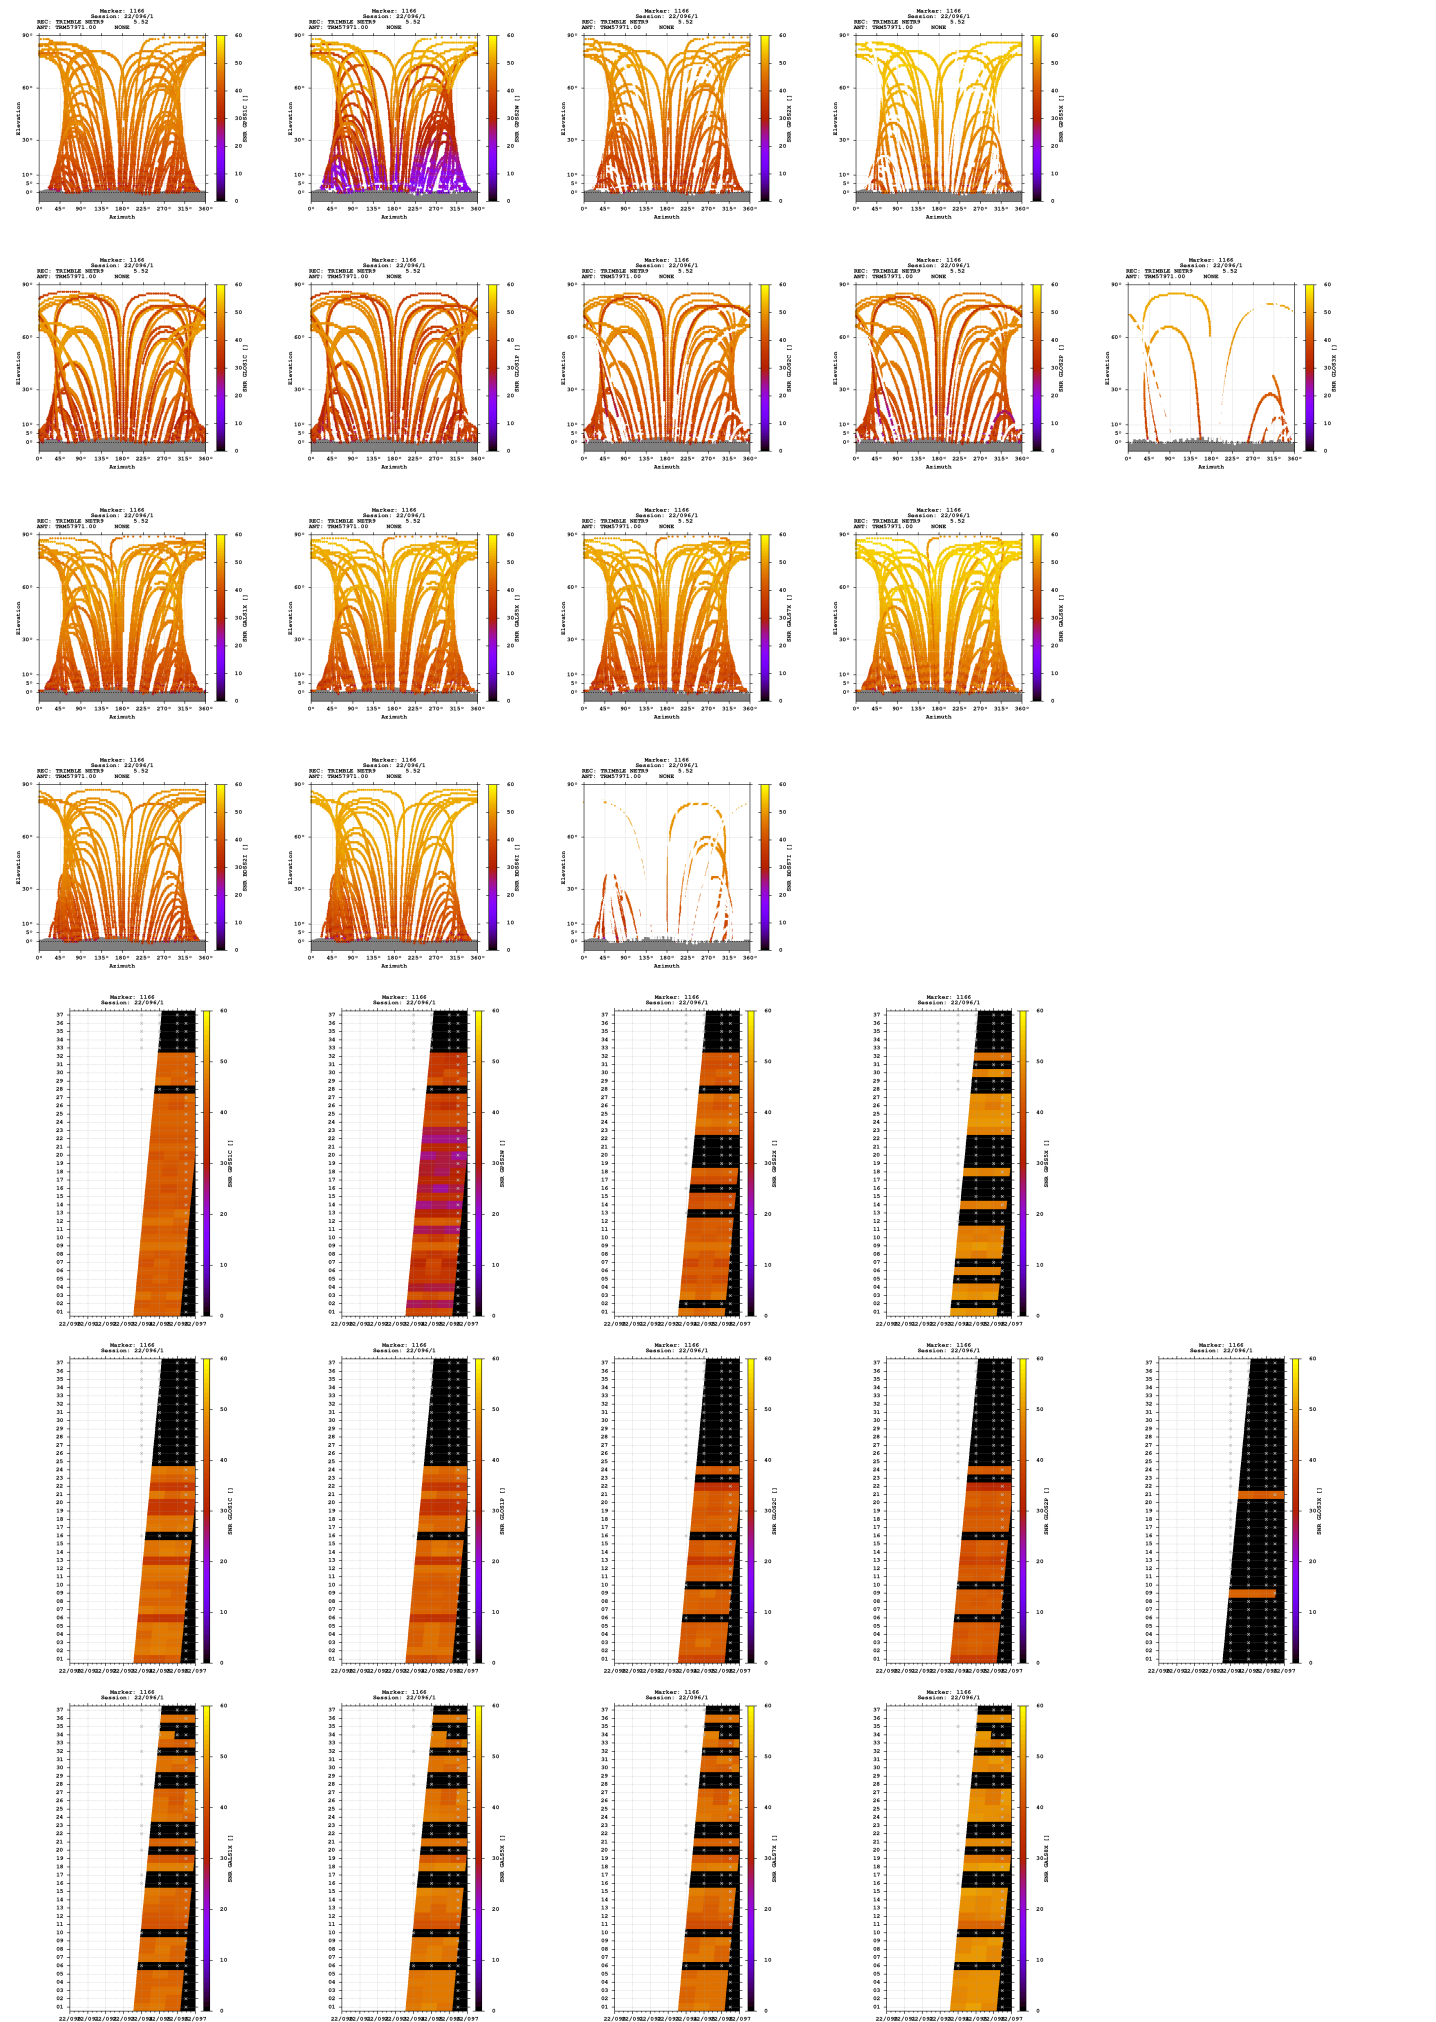

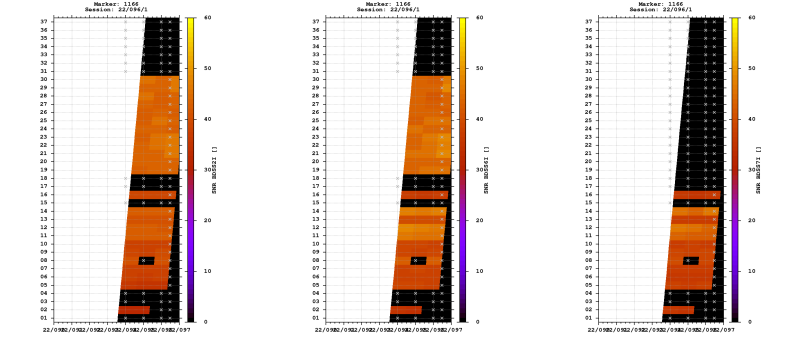


Estimates

2022-04-06 11:38:00	GPS	4328998.8741	552278.1100	4636687.9207	46.926773157	7.270316016	655.5078
2022-04-06 11:38:00	GLO	4328999.3135	552277.6419	4636687.5369	46.926768325	7.270309190	655.4847
2022-04-06 11:38:00	GAL	4328998.9688	552277.8132	4636687.8432	46.926772310	7.270311994	655.4897
2022-04-06 11:38:00	BDS	4328995.6480	552277.8172	4636688.5976	46.926798584	7.270317563	653.7915

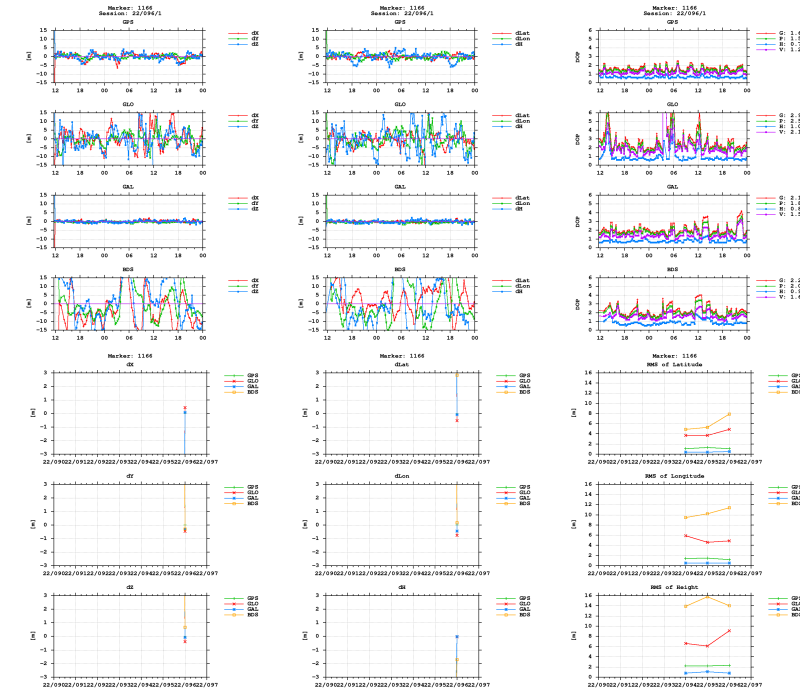

BNC



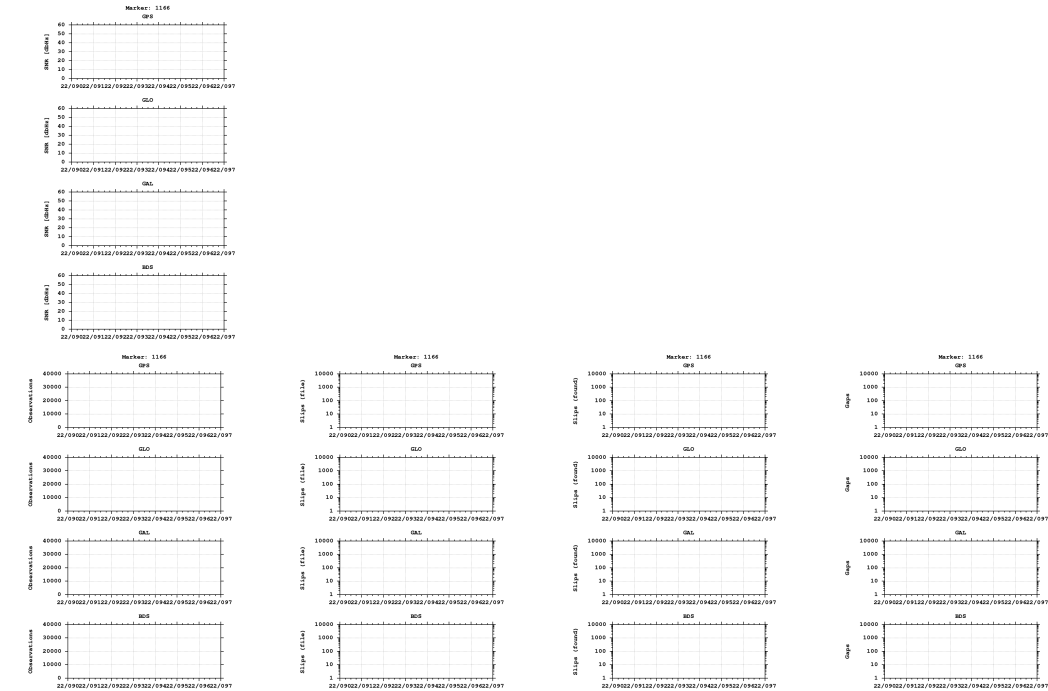

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)