

GNSS observation file monitoring for 0516

Last RINEX file: 05160971.220


RINEX version: 3.02

Marker: 1166

Receiver: 516 TRIMBLE NETR9 5.52


Antenna: 516 TRM57971.00 NONE

Epochs

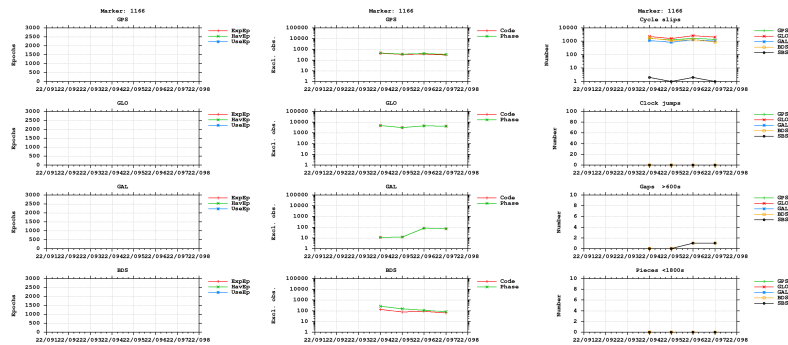



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

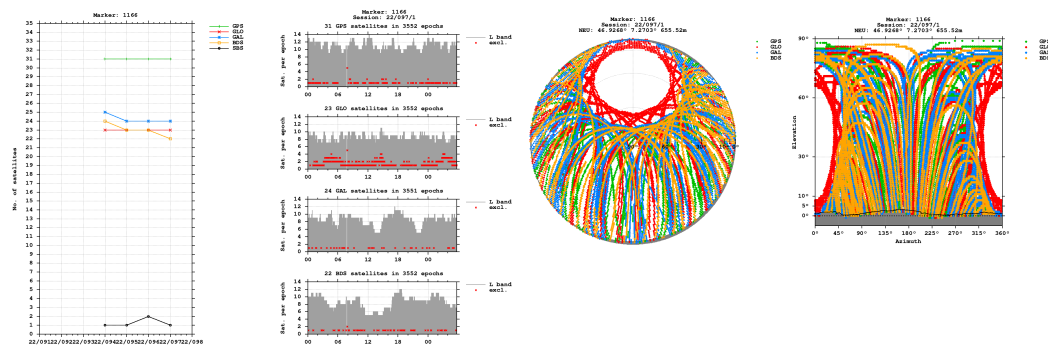


Bands

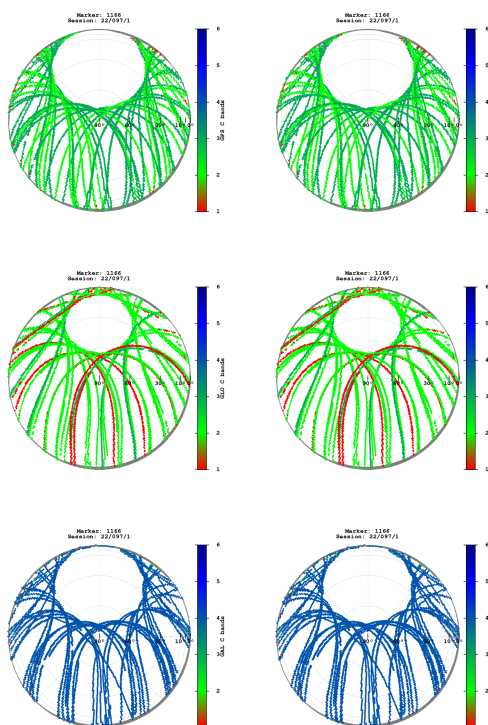


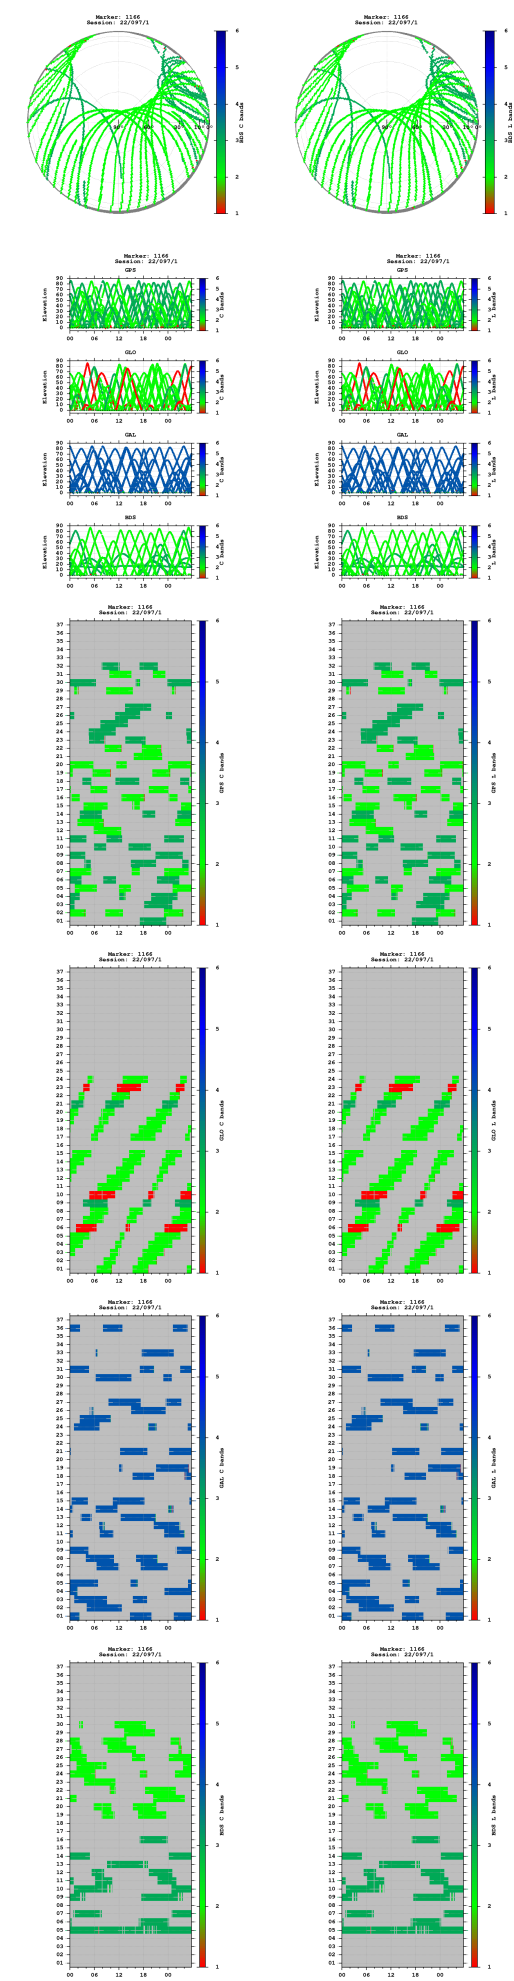


Observations

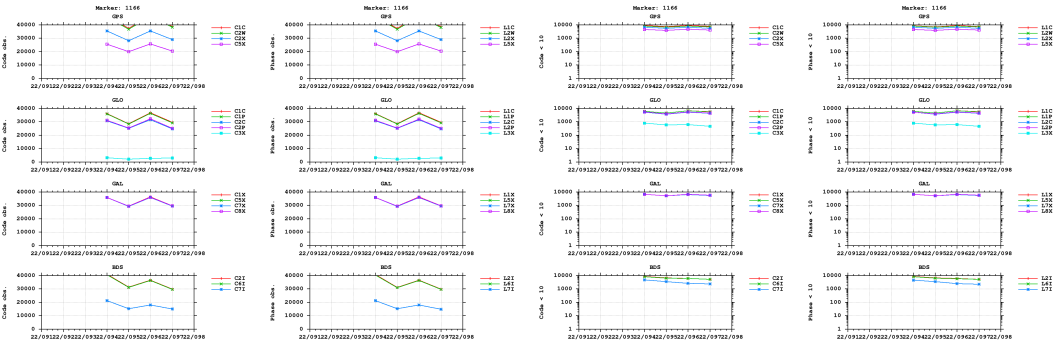


Multipath

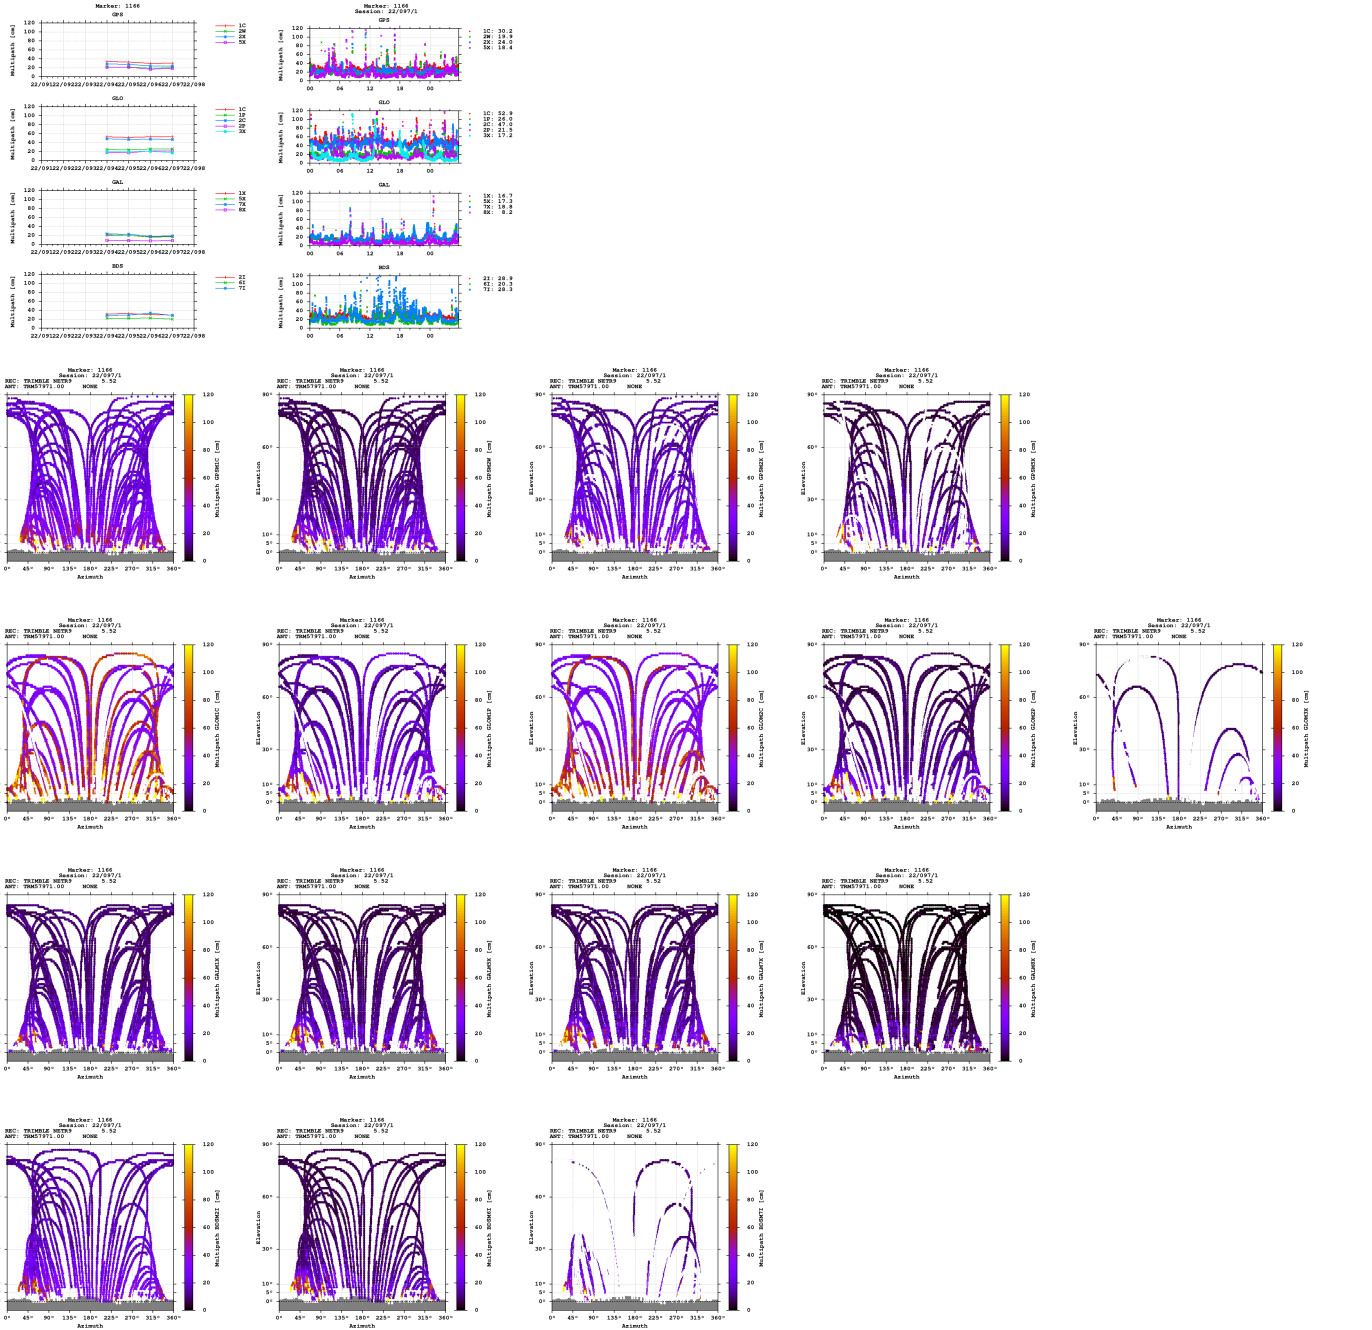


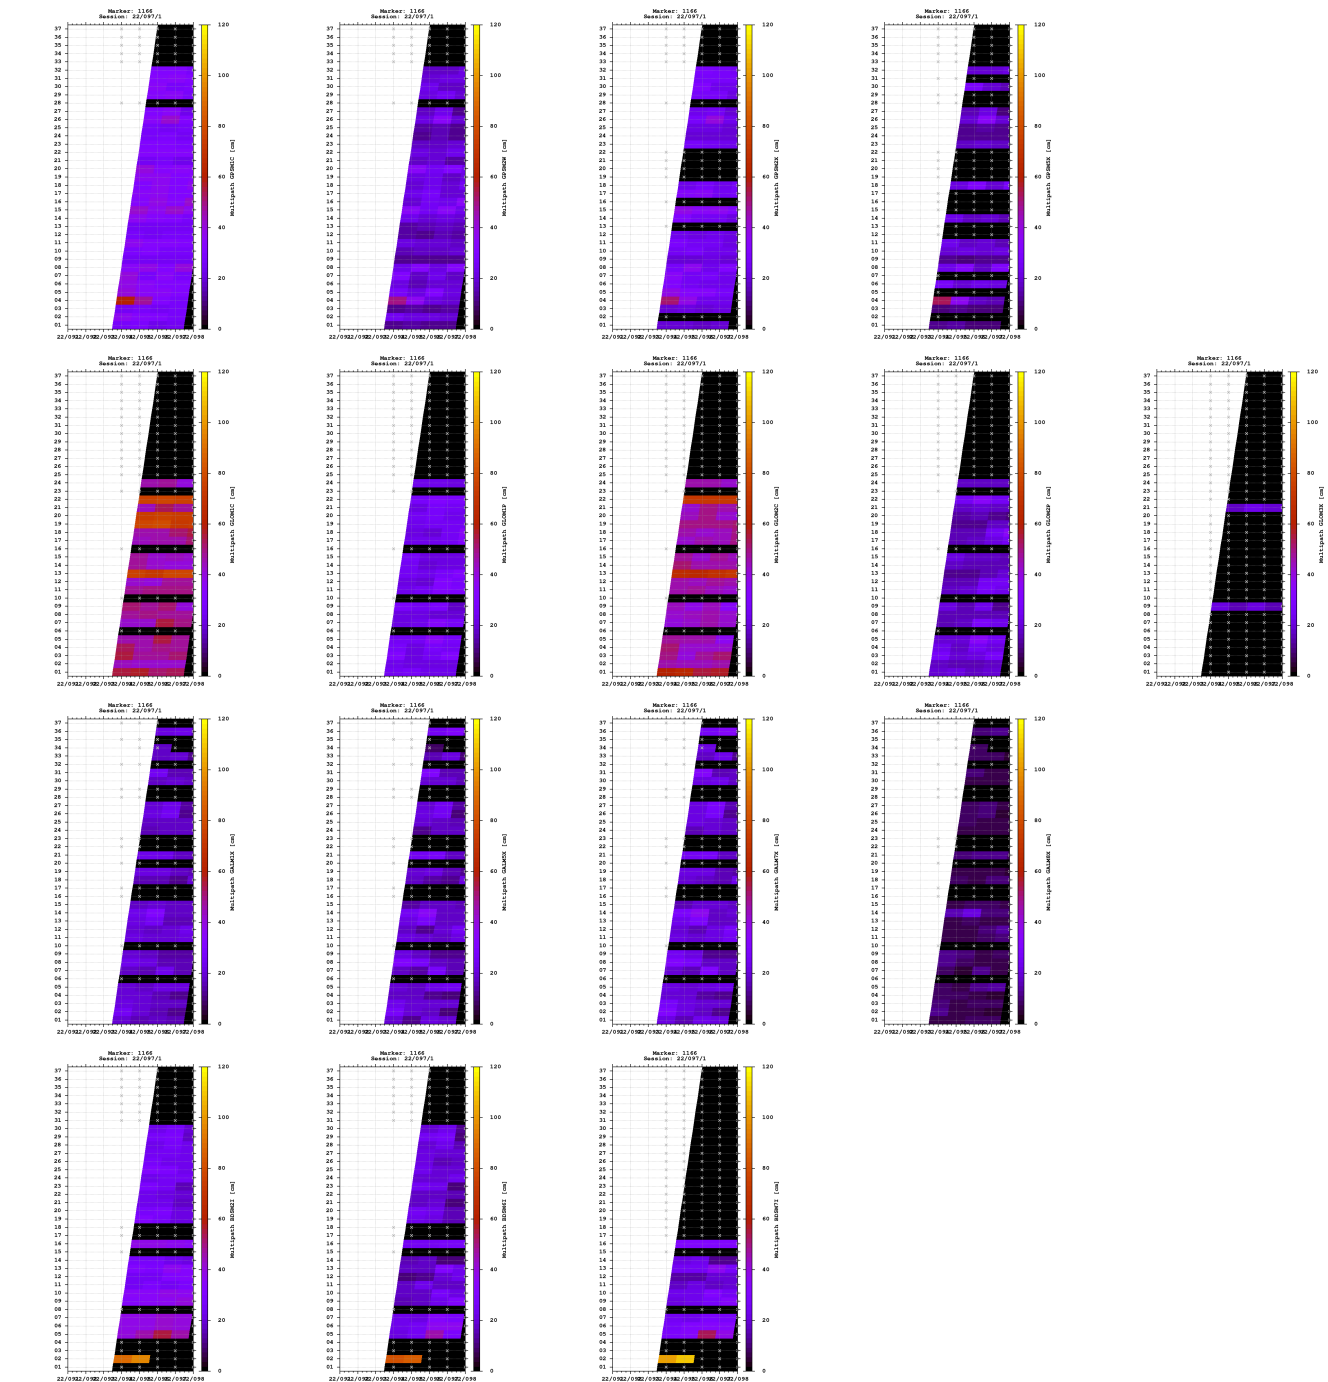


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

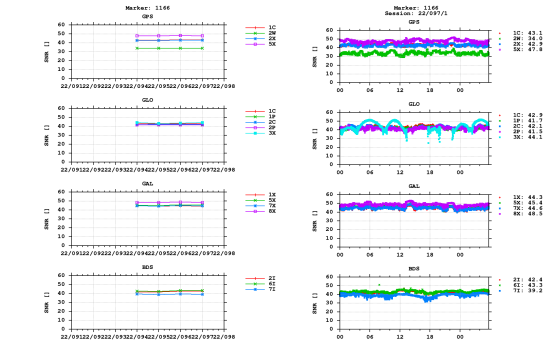


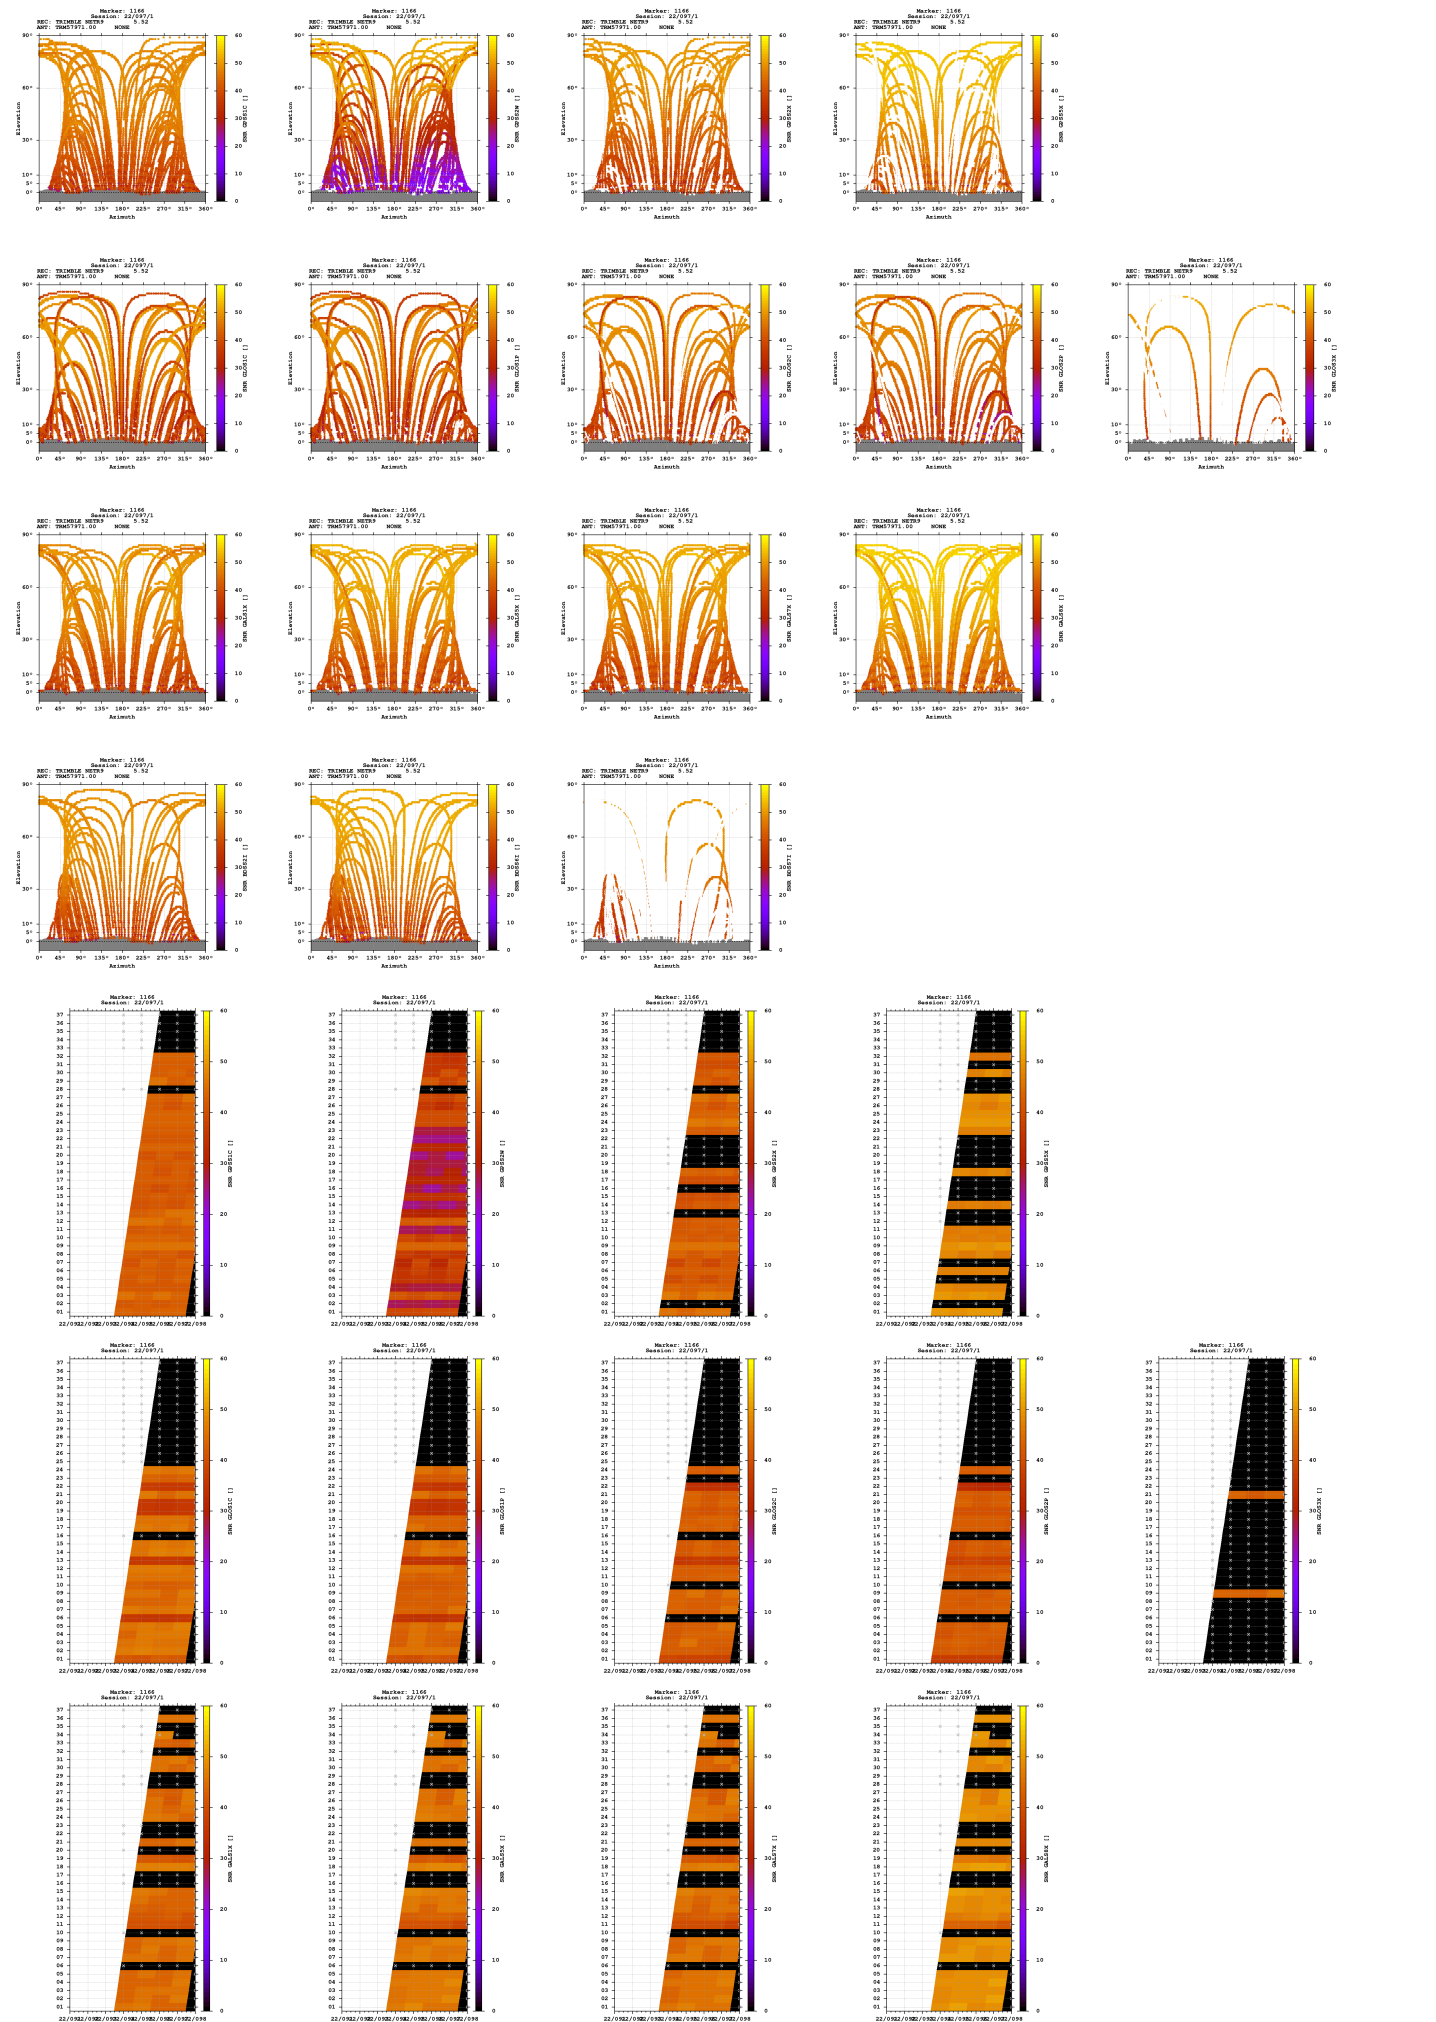

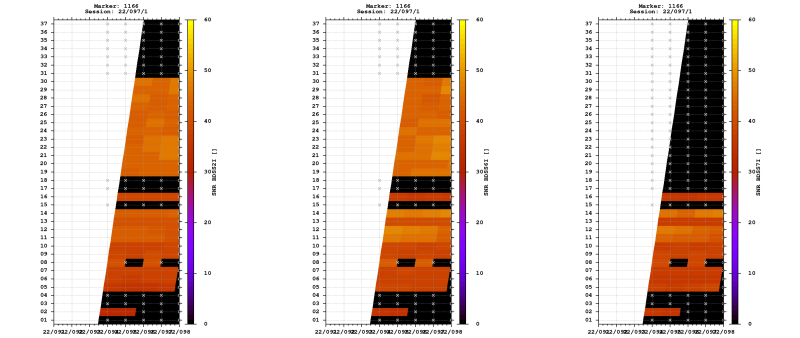


Estimates

2022-04-06 11:38:00	GPS	4328998.8396	552278.0280	4636687.9817	46.926773825	7.270315005	655.5219
2022-04-06 11:38:00	GLO	4328999.2914	552278.1729	4636688.2224	46.926772239	7.270316142	656.0163
2022-04-06 11:38:00	GAL	4328999.0505	552277.8003	4636687.8048	46.926771553	7.270311690	655.5158
2022-04-06 11:38:00	BDS	4328998.4017	552279.4988	4636689.4403	46.926784415	7.270334888	656.4179

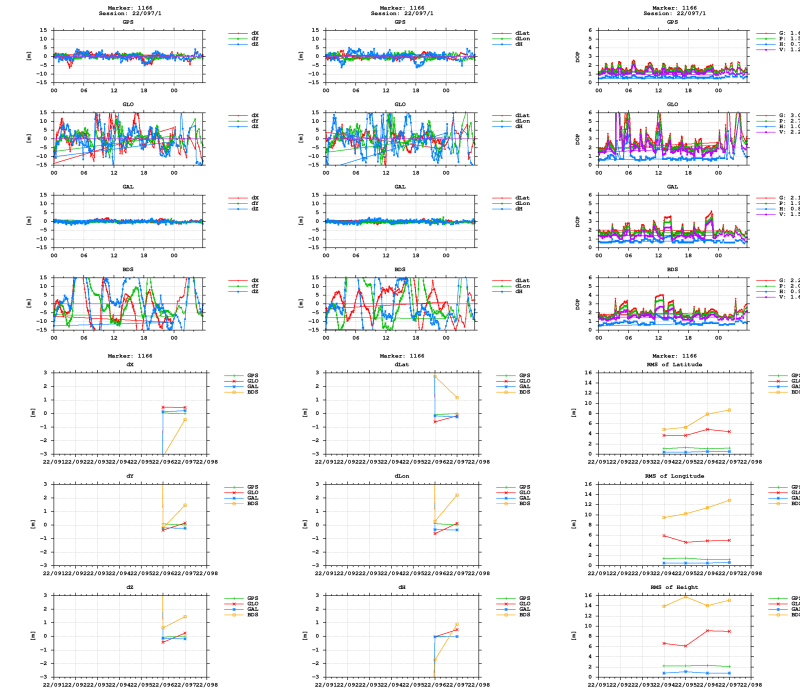

BNC



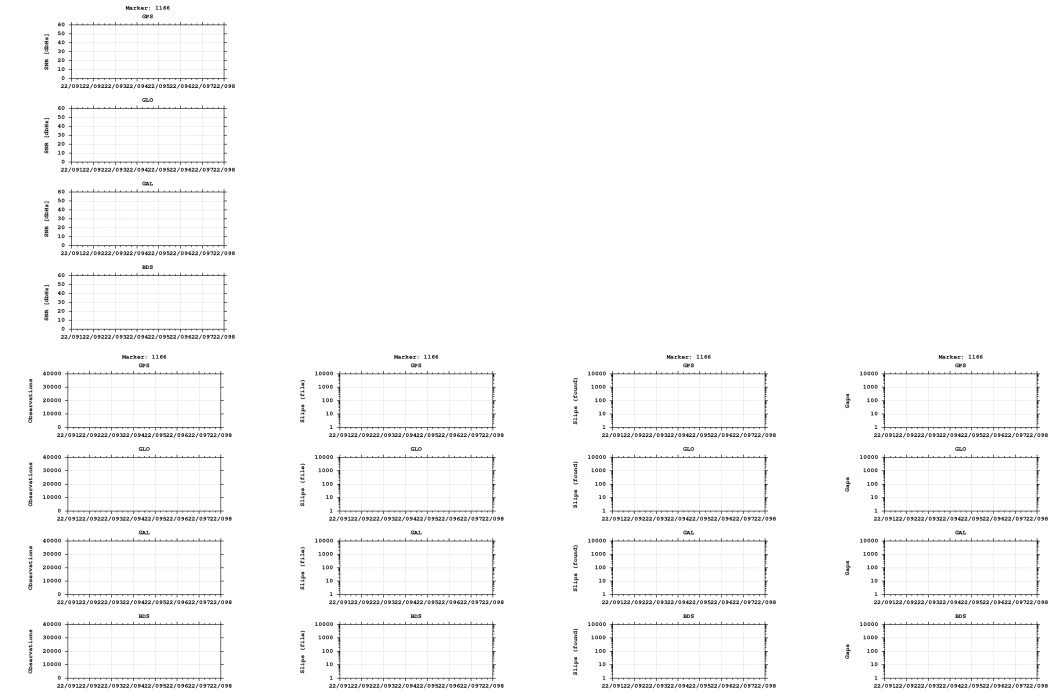

Equipment

2022-04-04 00:00:00 TRIMBLE NETR9 5.52 516 TRM57971.00 NONE 516

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)