

GNSS observation file monitoring for 0517

Last RINEX file: 05170961.220

RINEX version: 3.02

Marker: 1126

Receiver: 517

Antenna: 517


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

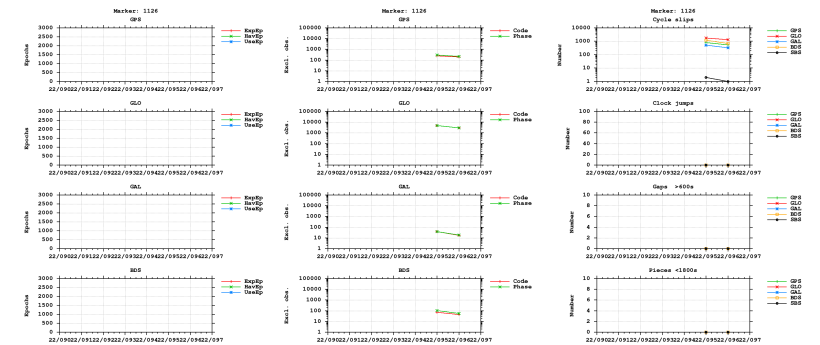



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

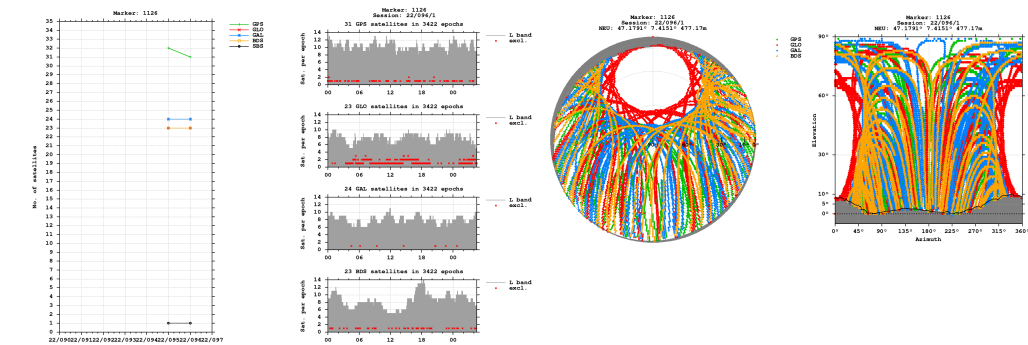


Bands

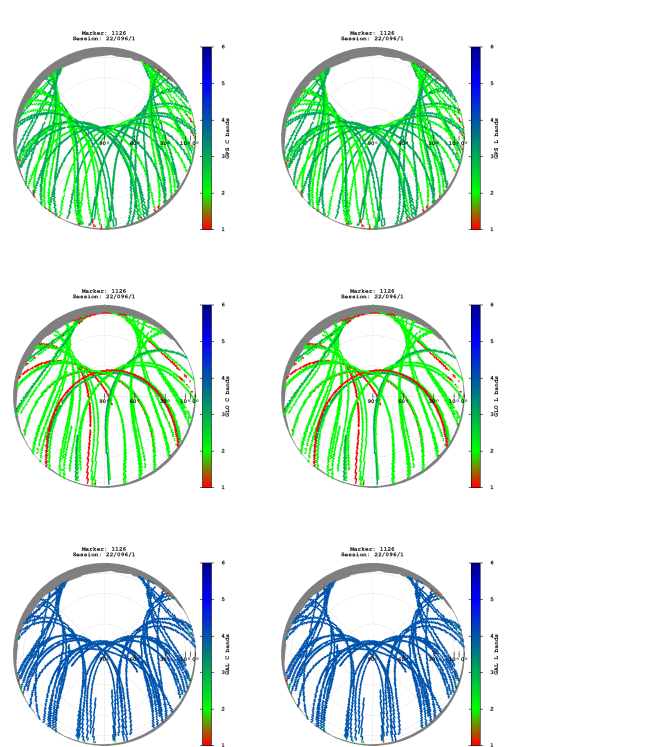


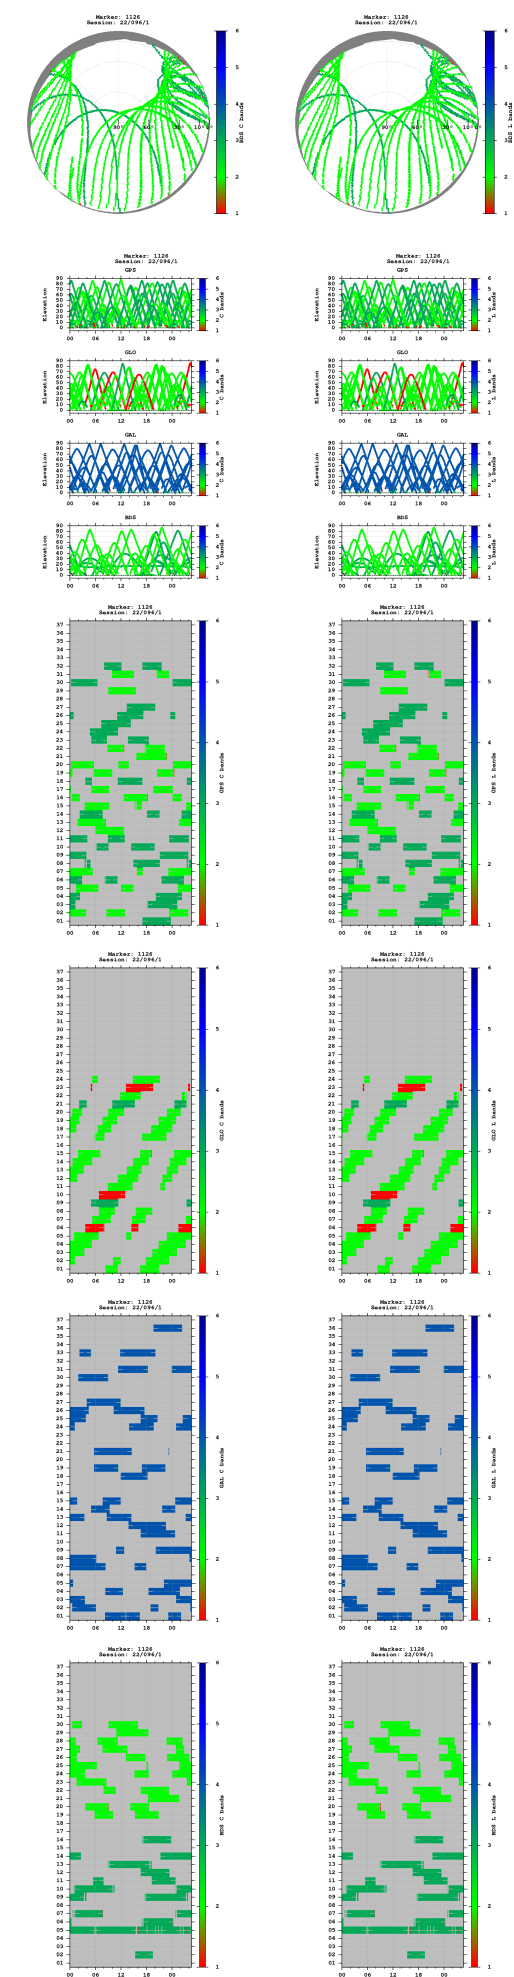


Observations

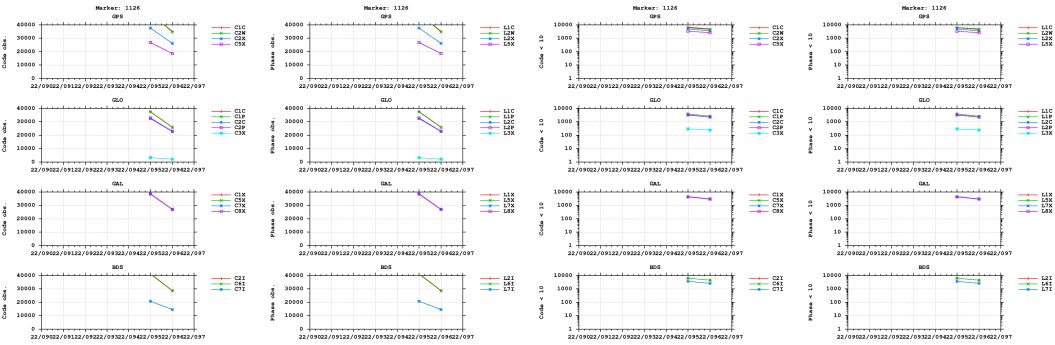



Multipath

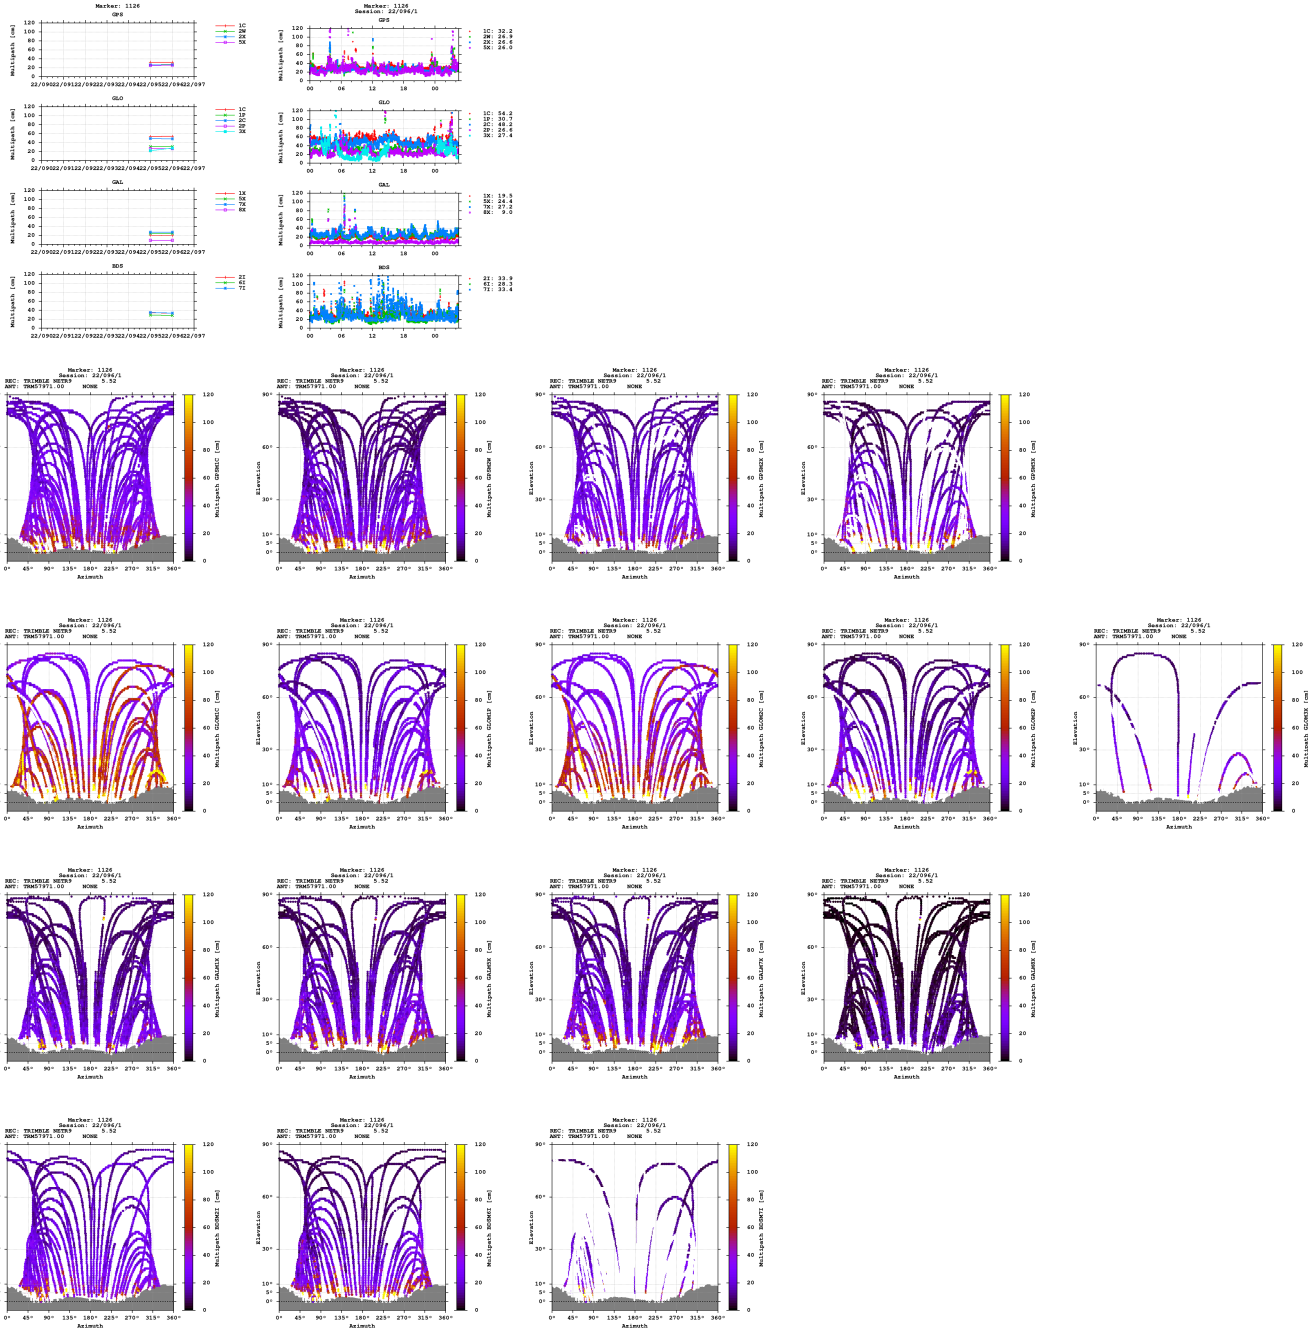


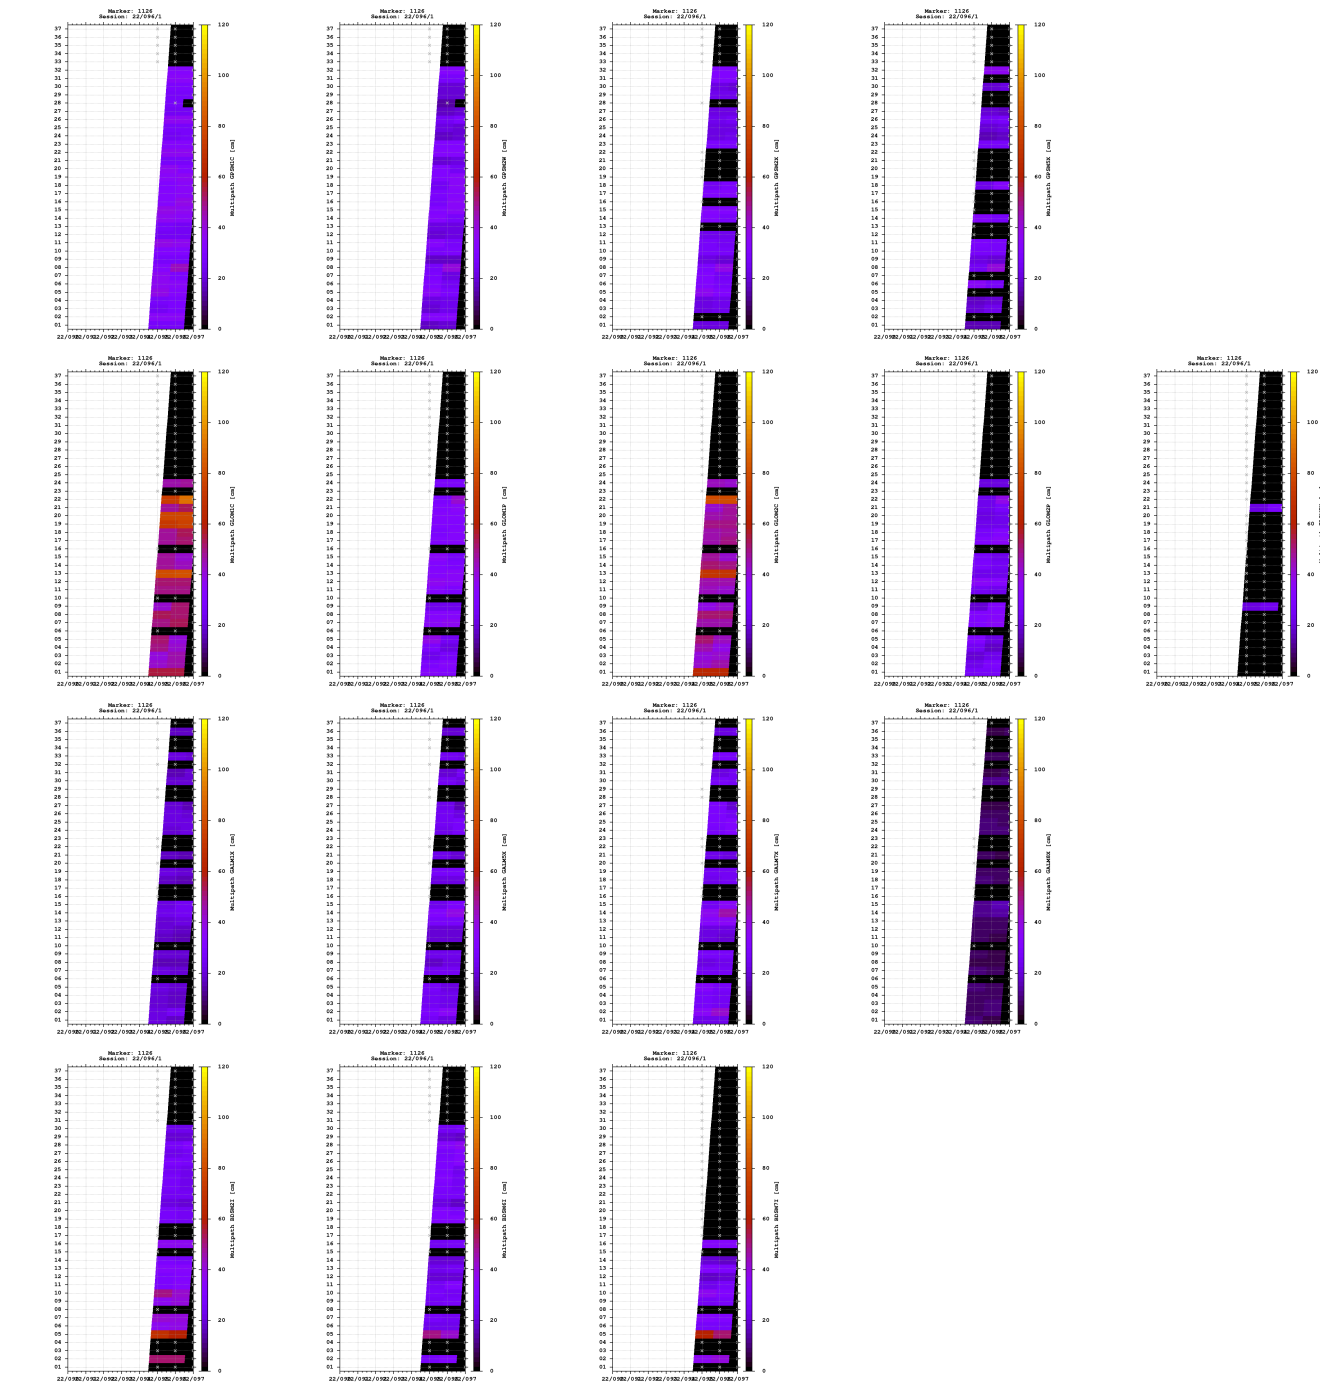

Signal-to-noise ratio

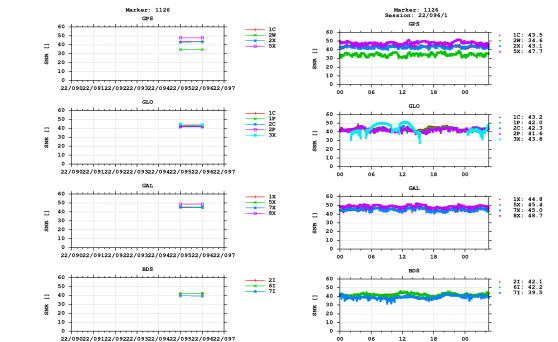


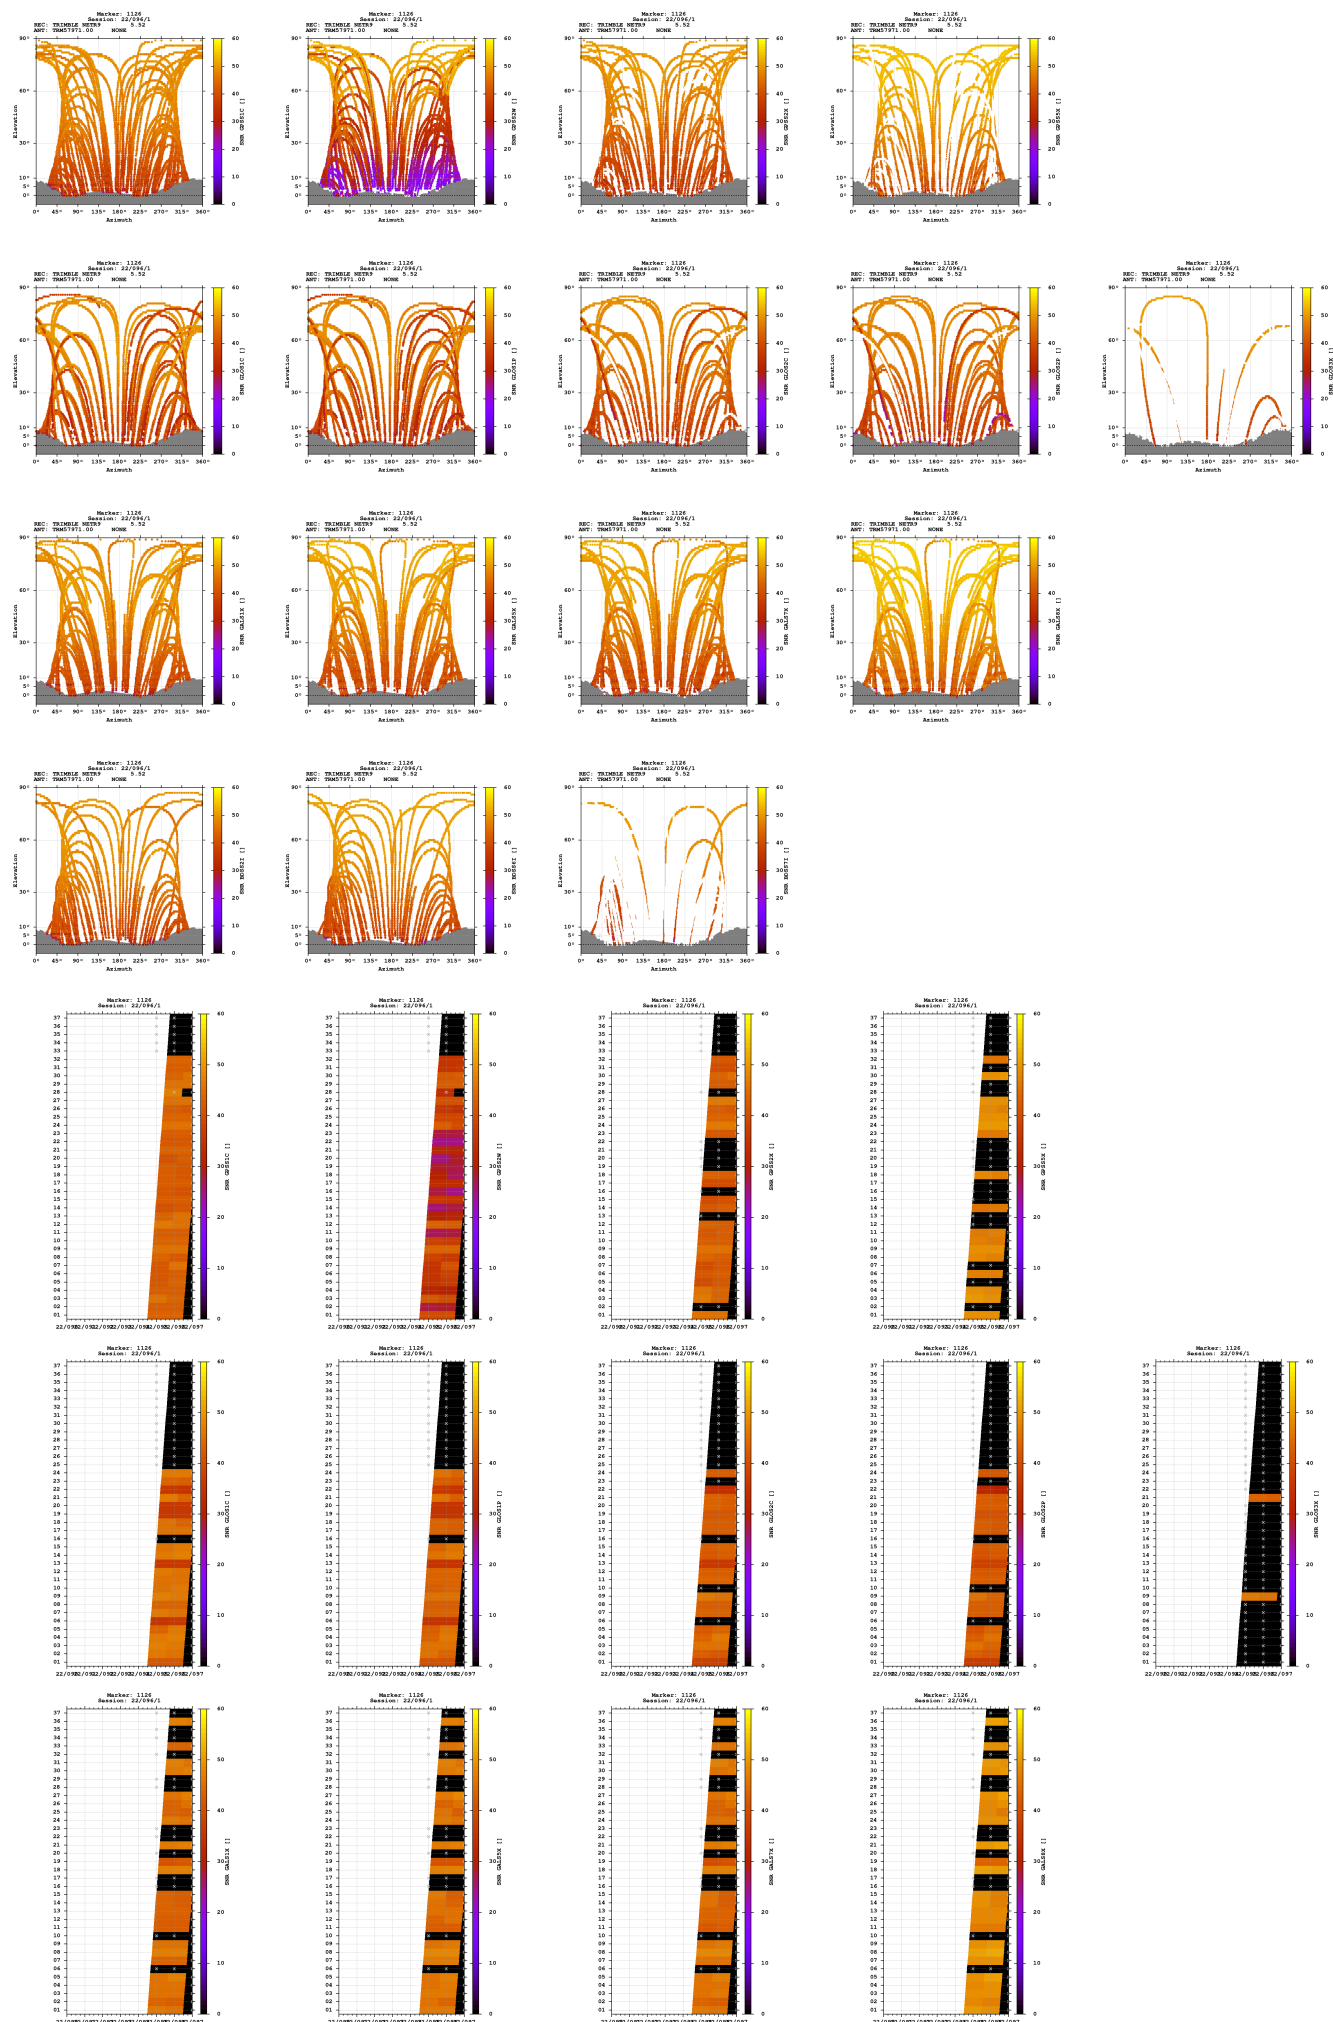

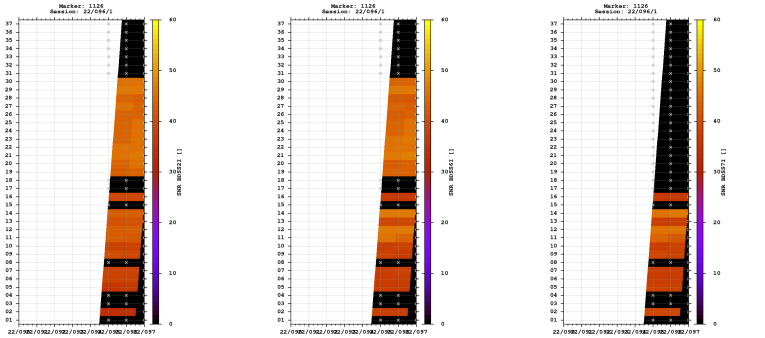



Estimates

2022-04-05 07:10:30	GPS	4307101.3243	560551.6214	4655674.9369	47.179148394	7.415133067	477.1708
2022-04-05 07:10:30	GLO	4307101.4087	560550.8418	4655674.6826	47.179146951	7.415122726	476.9728
2022-04-05 07:10:30	GAL	4307101.1791	560551.5345	4655674.5041	47.179146771	7.415132178	476.7479
2022-04-05 07:10:30	BDS	4307099.9406	560551.5412	4655675.3272	47.179159900	7.415134373	476.5173

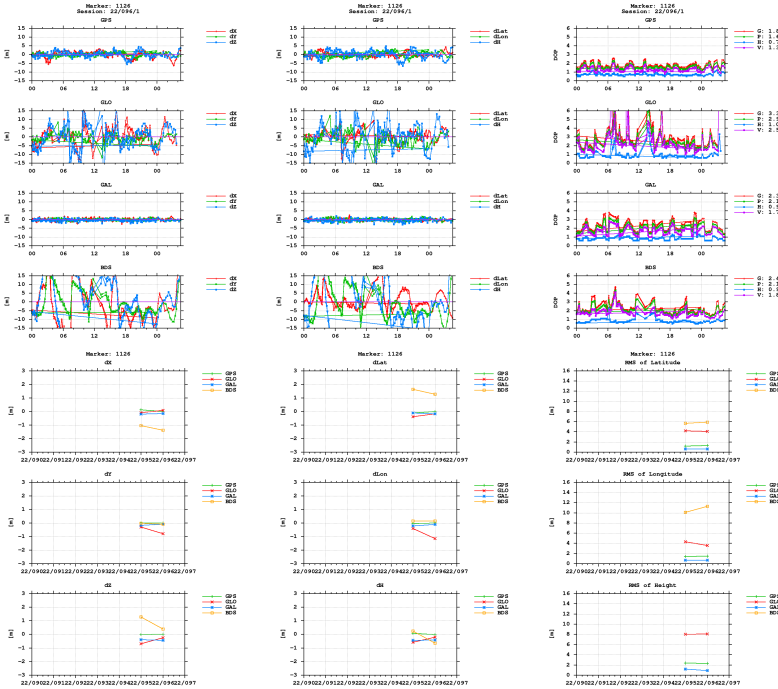

BNC

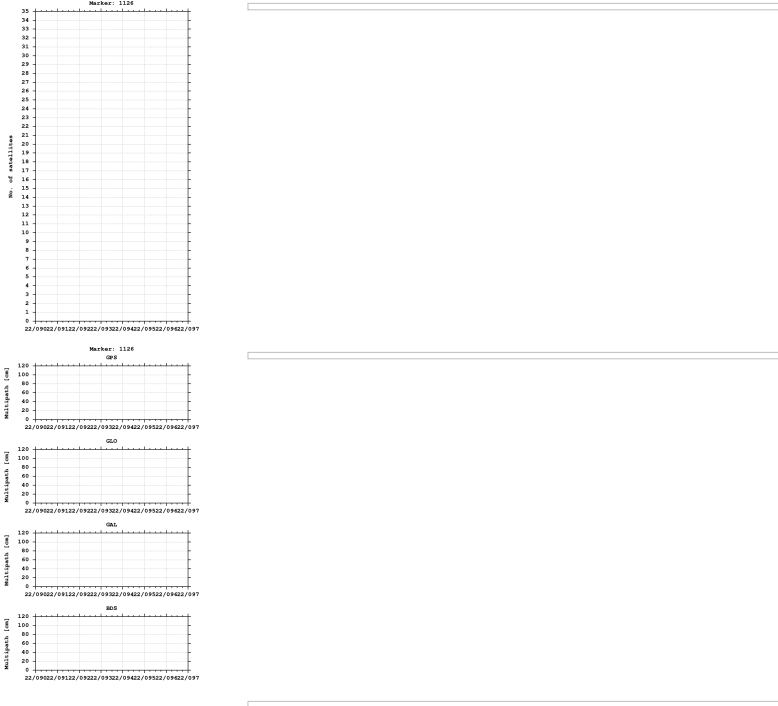

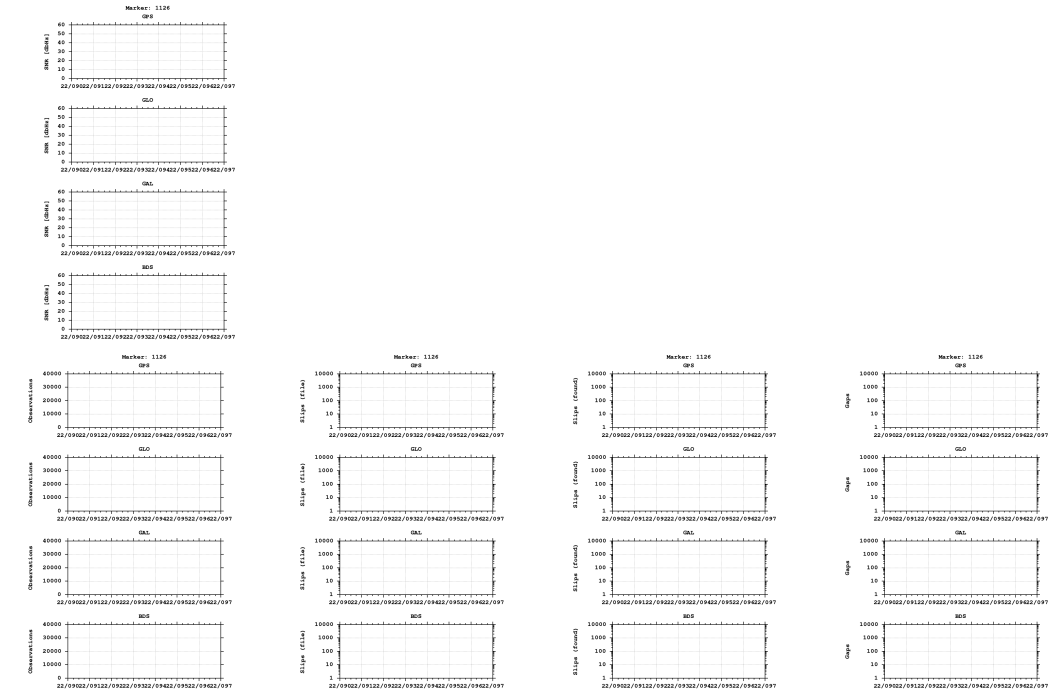

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)