

GNSS observation file monitoring for 0517

Last RINEX file: 05170971.220


RINEX version: 3.02

Marker: 1167

Receiver: 517 TRIMBLE NETR9 5.52

Antenna: 517 TRM57971.00 NONE


Epochs

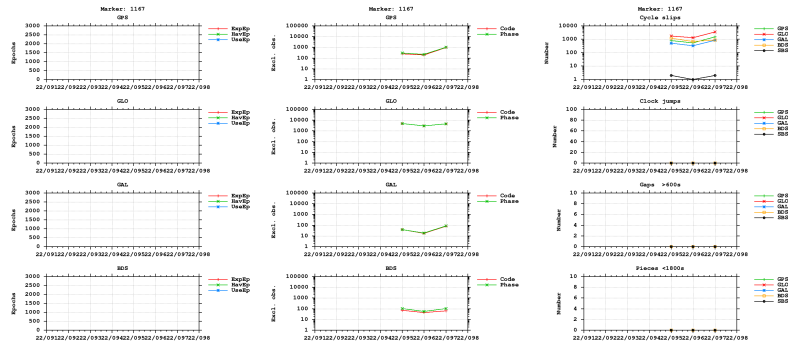


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.


- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

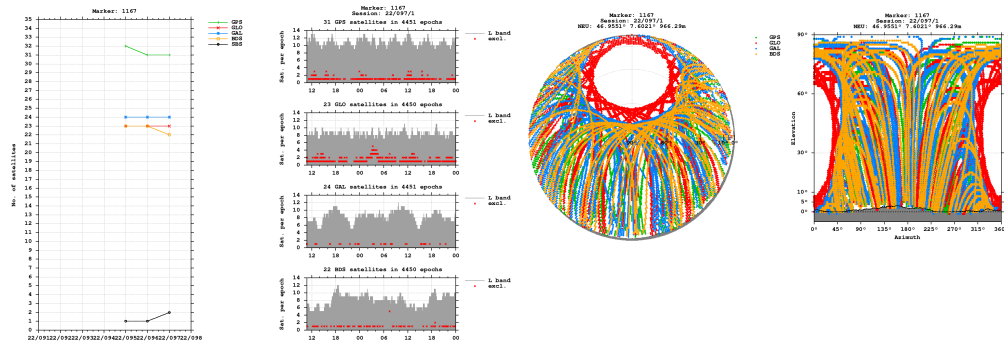


Bands

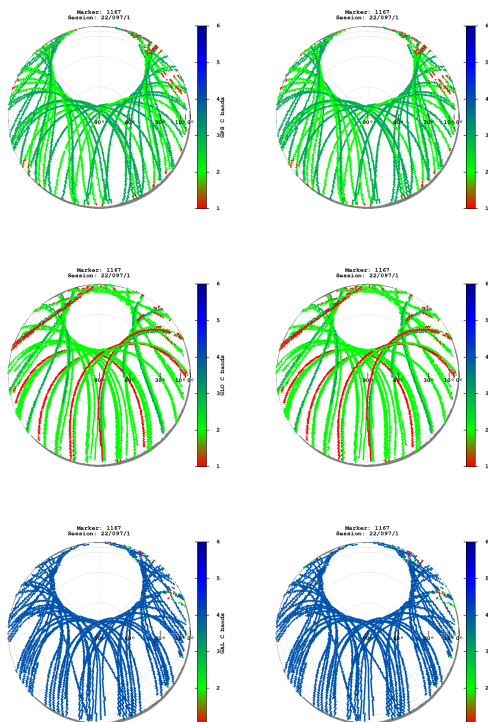


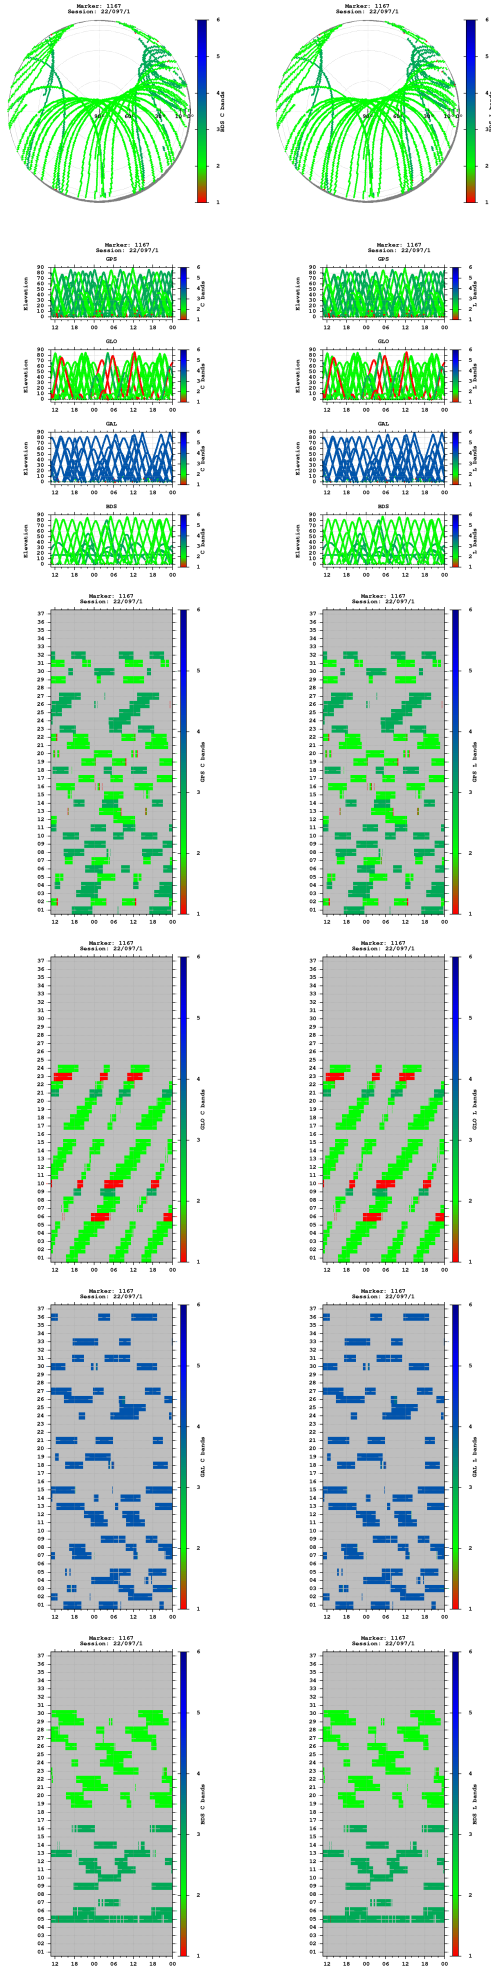


Observations

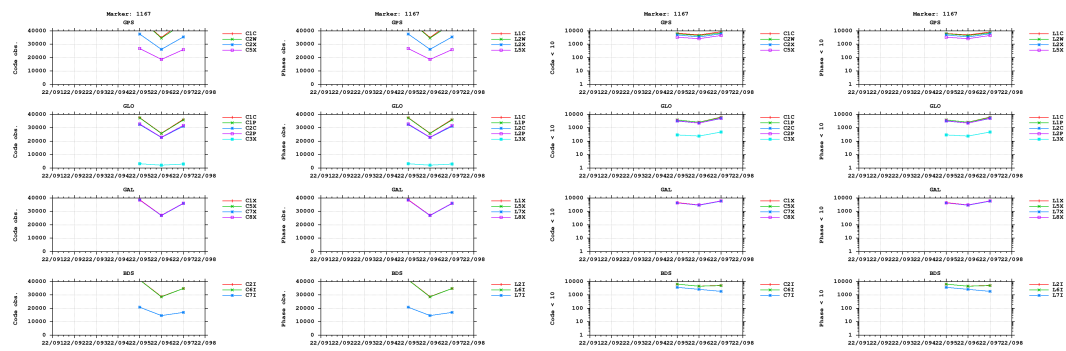


Multipath

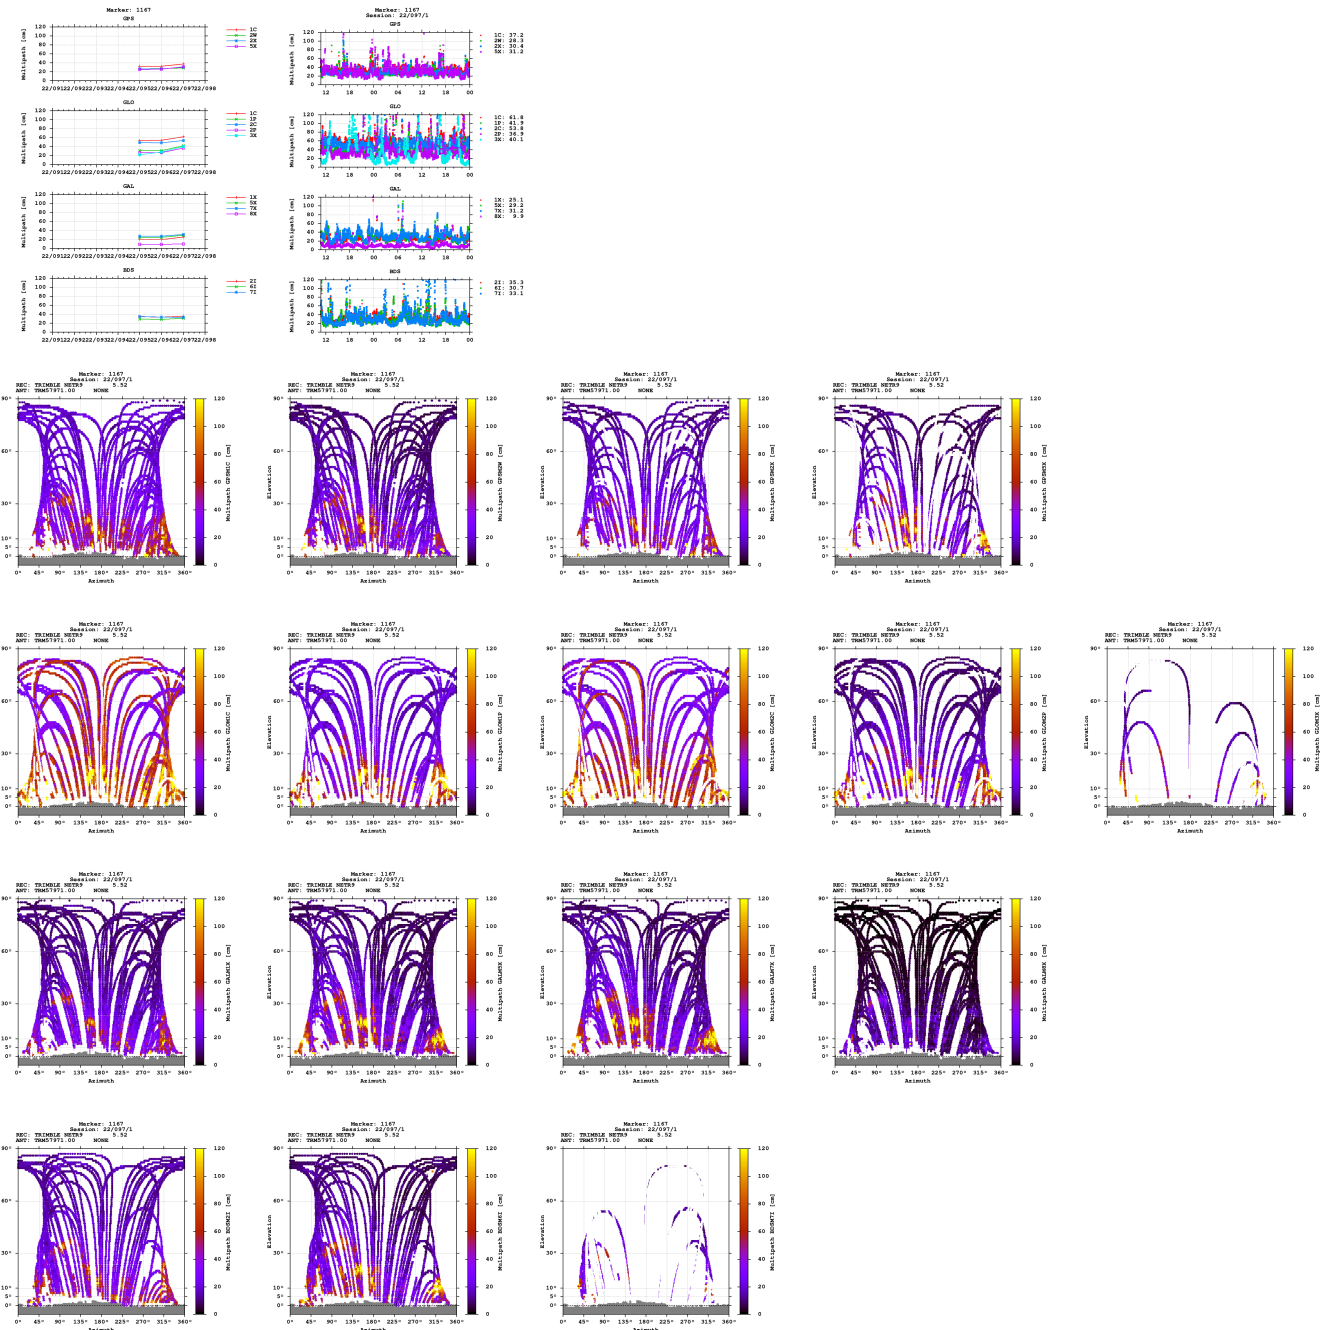


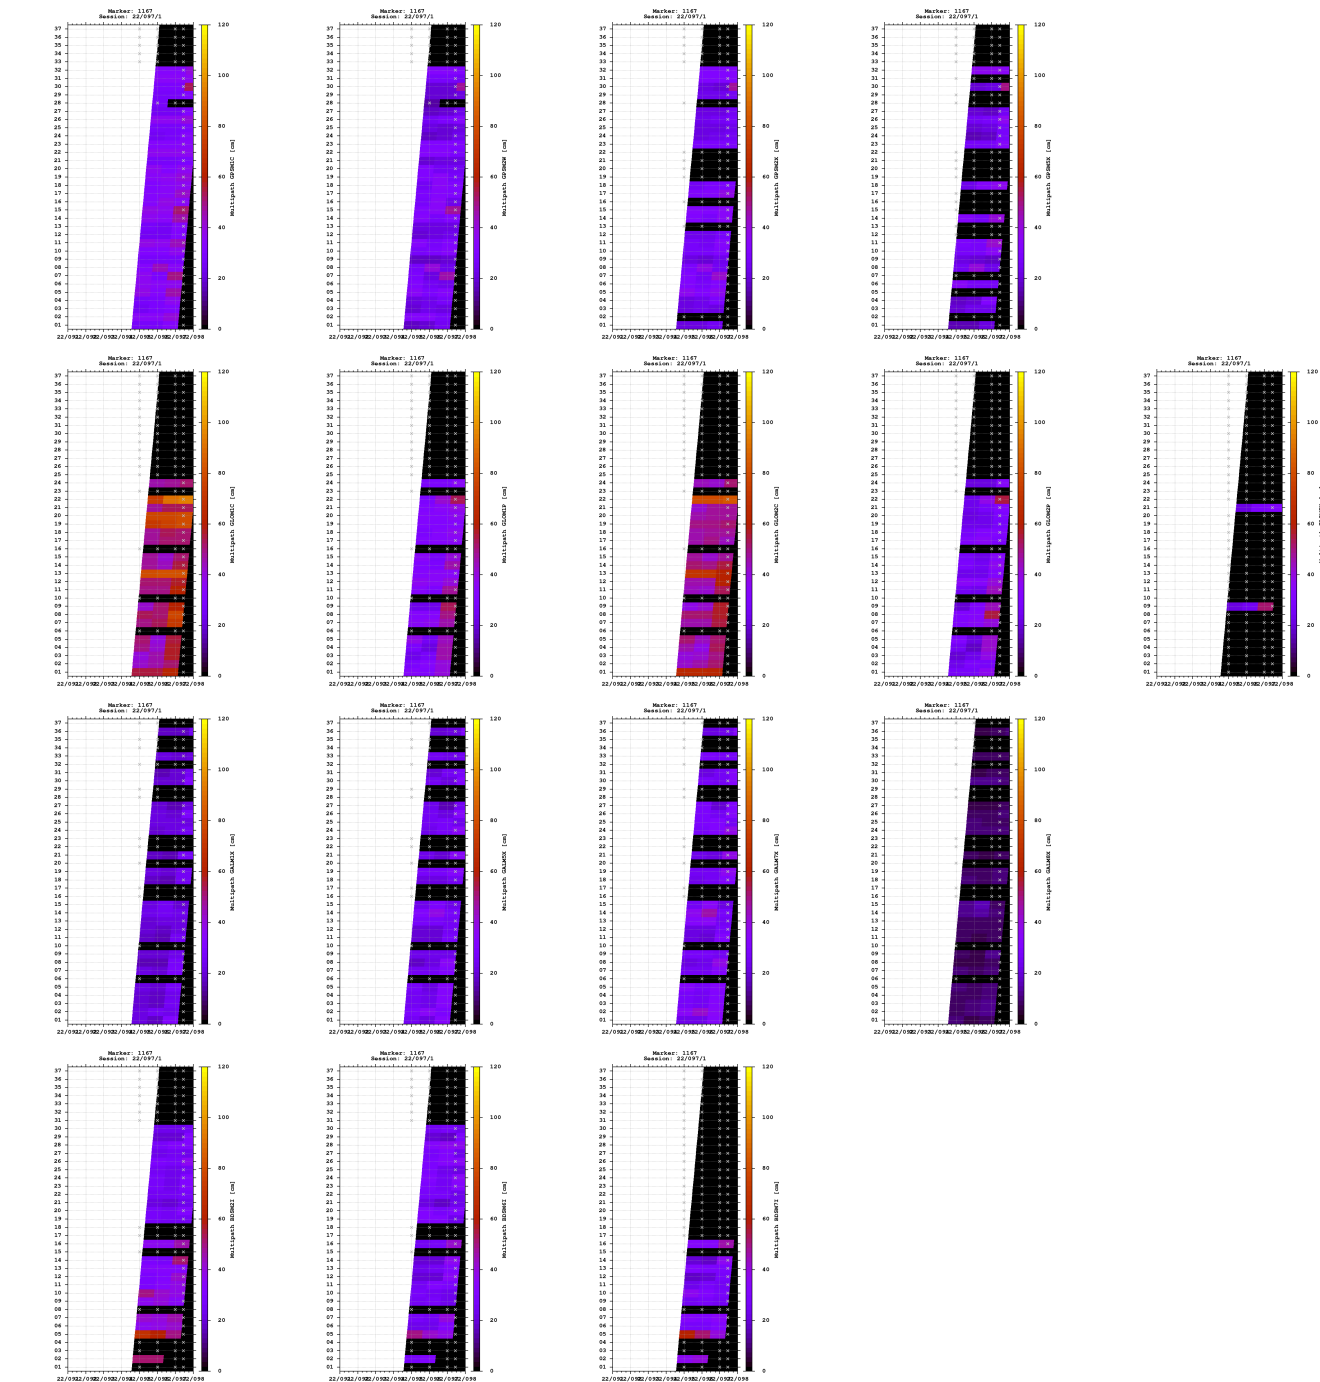


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

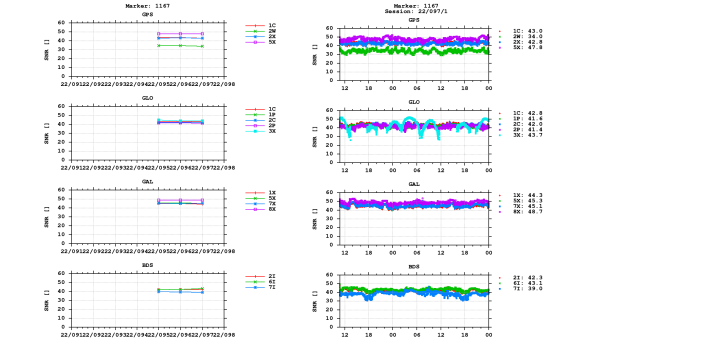


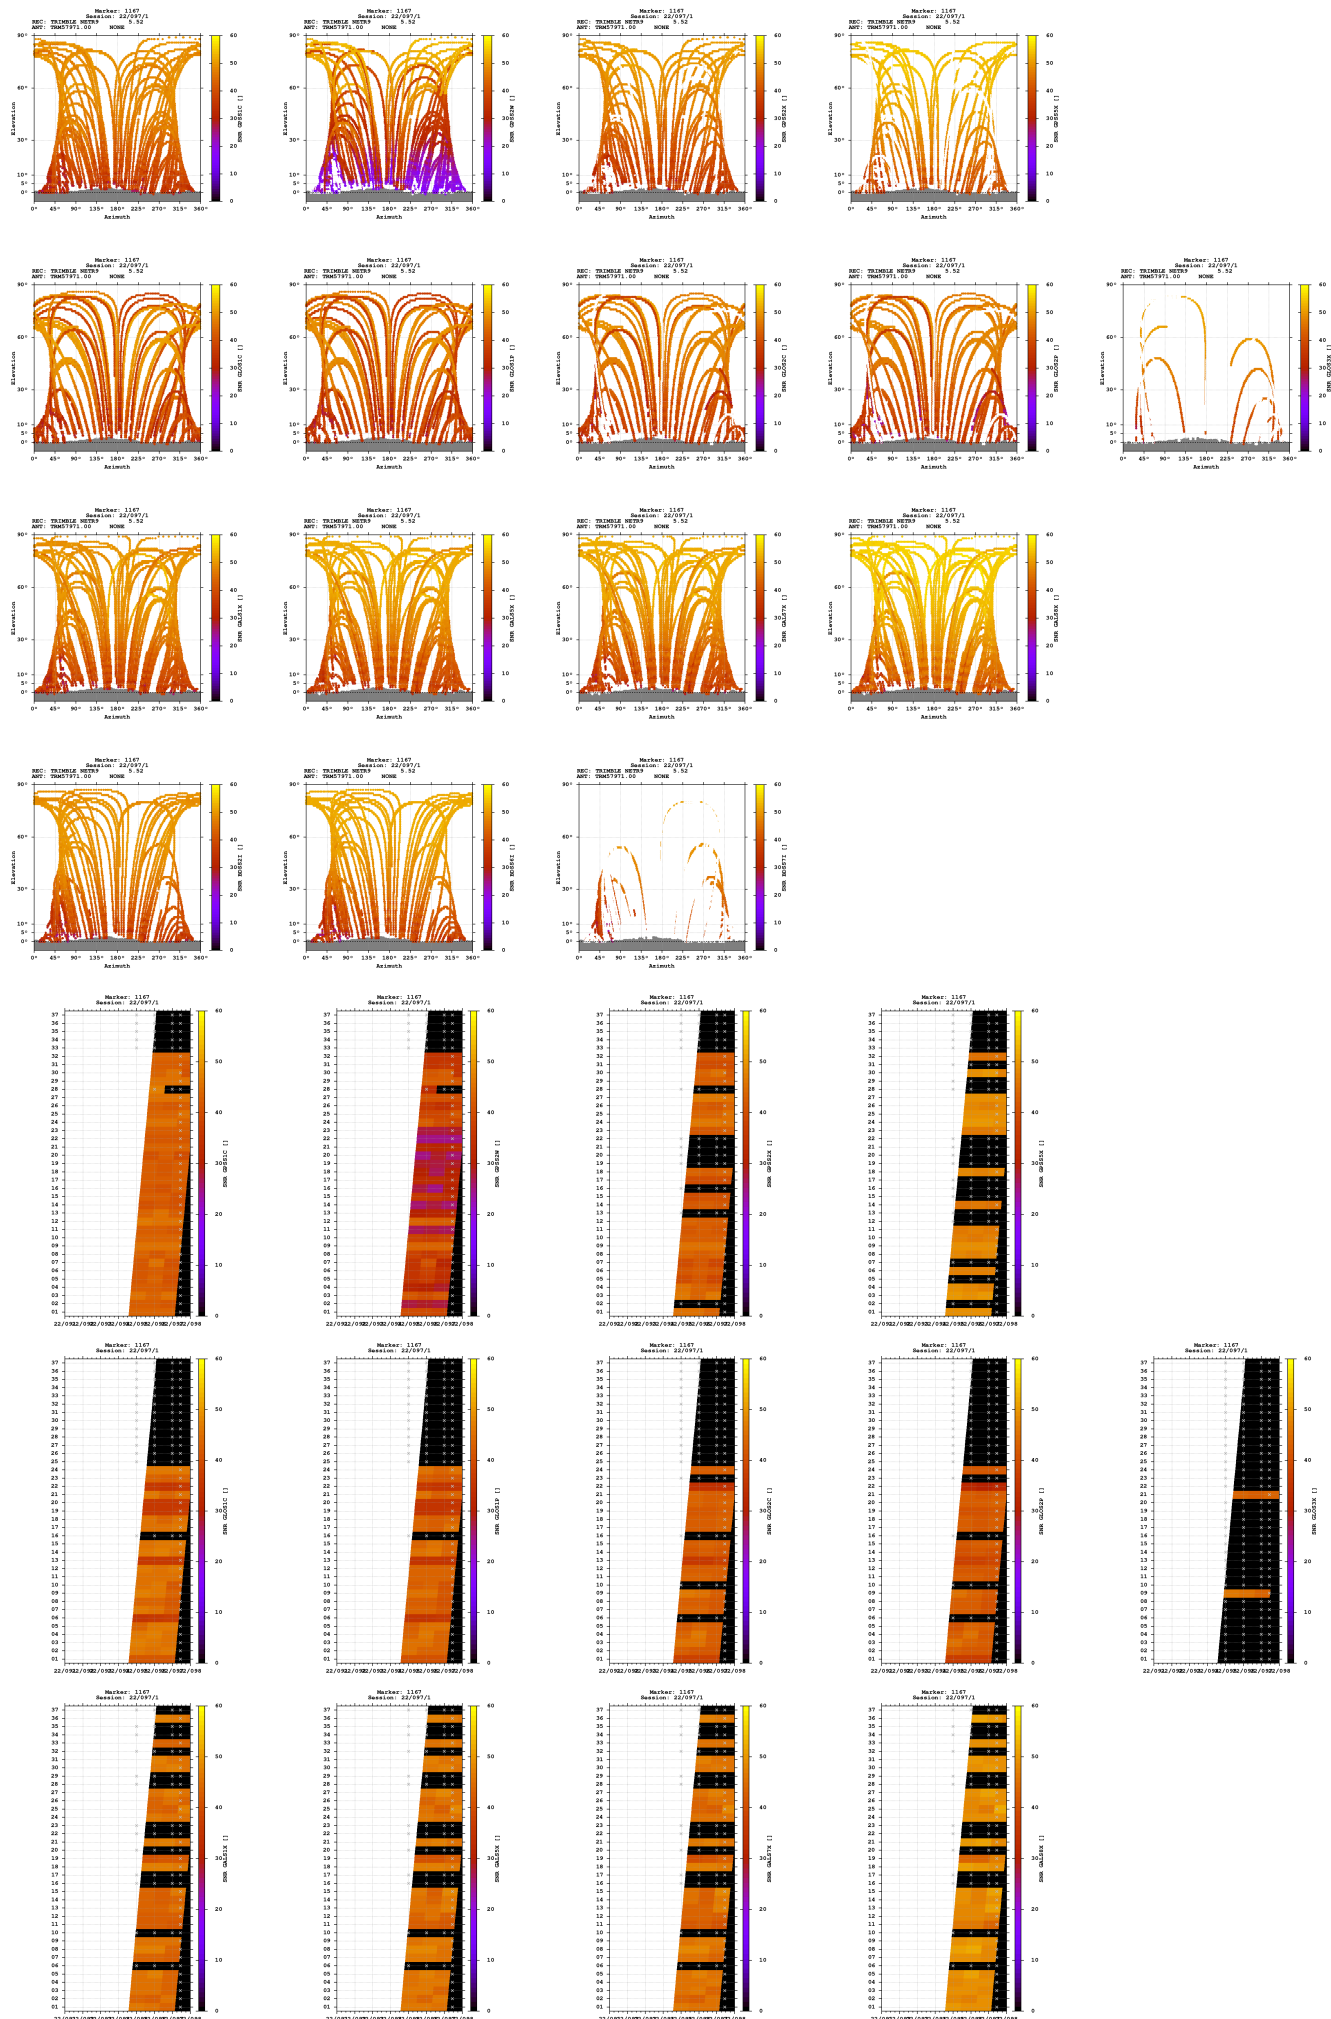

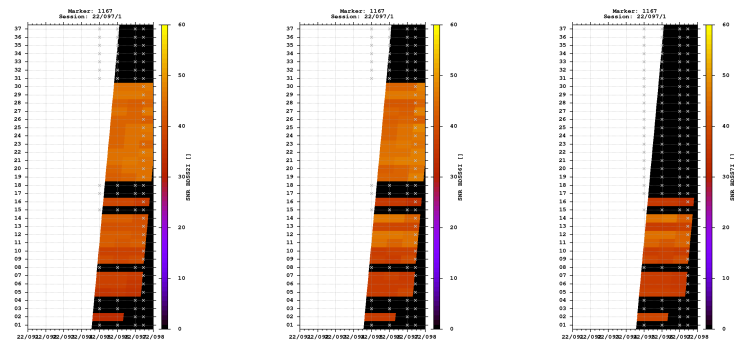


Estimates

2022-04-07 10:48:00	GPS	4323653.7100	577061.4156	4639068.7875	46.955145755	7.602120163	966.2938
2022-04-07 10:48:00	GLO	4323653.9358	577061.1308	4639069.1339	46.955146659	7.602116062	966.6740
2022-04-07 10:48:00	GAL	4323653.5981	577061.1351	4639068.6068	46.955145619	7.602116706	966.0607
2022-04-07 10:48:00	BDS	4323651.5266	577061.8758	4639070.6333	46.955170912	7.602129949	966.2070

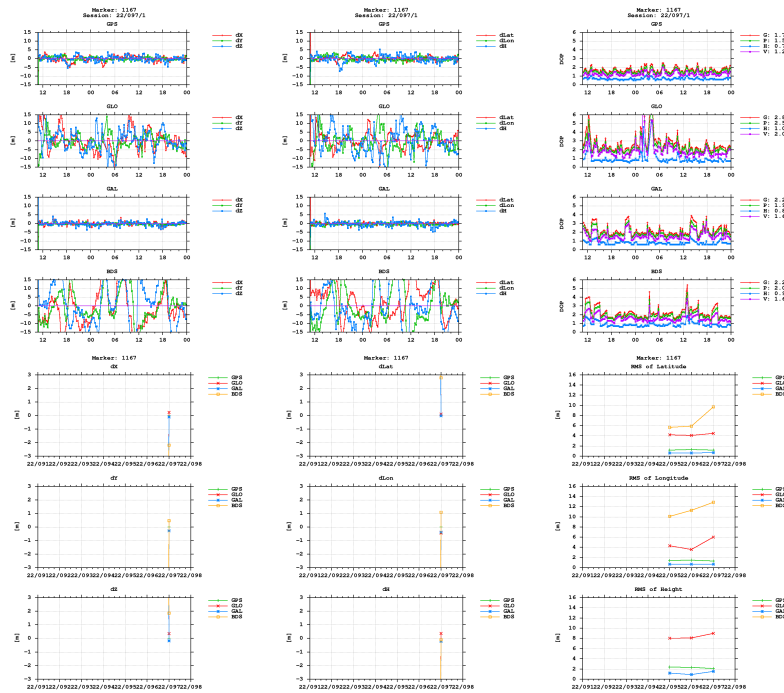

BNC



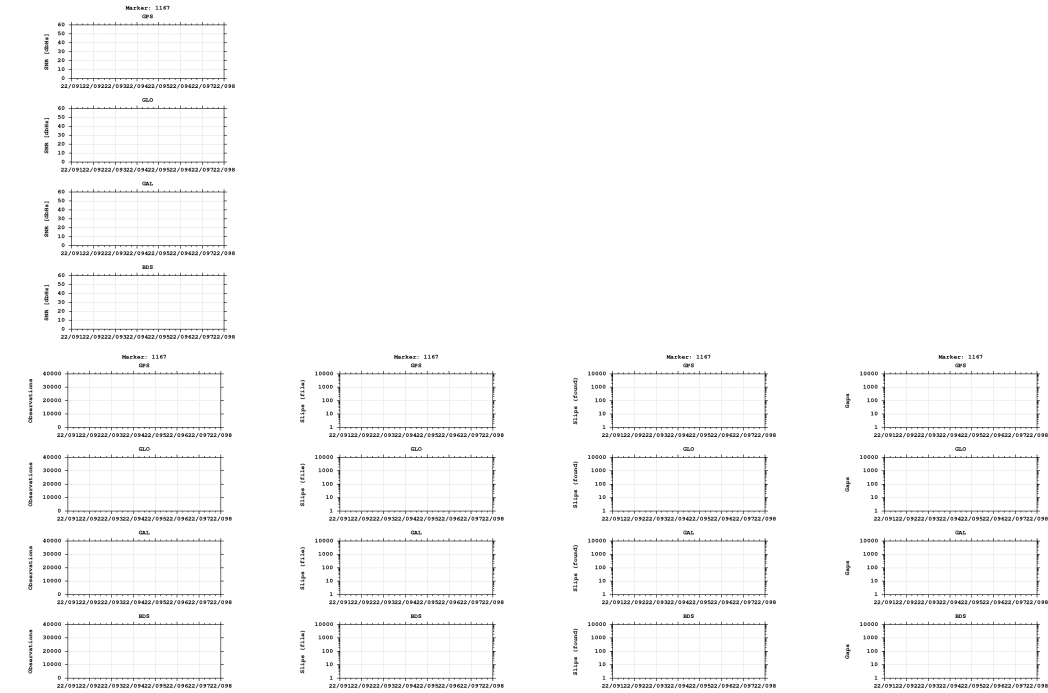

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)