


GNSS observation file monitoring for 0518


Last RINEX file: 05180951.22O
RINEX version: 3.02
Marker: 1145
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

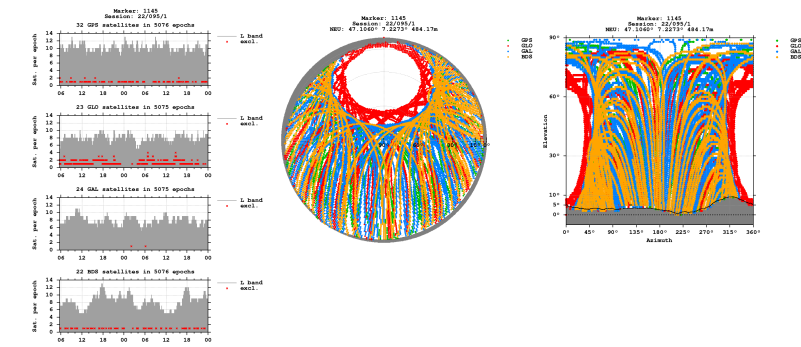


Bands

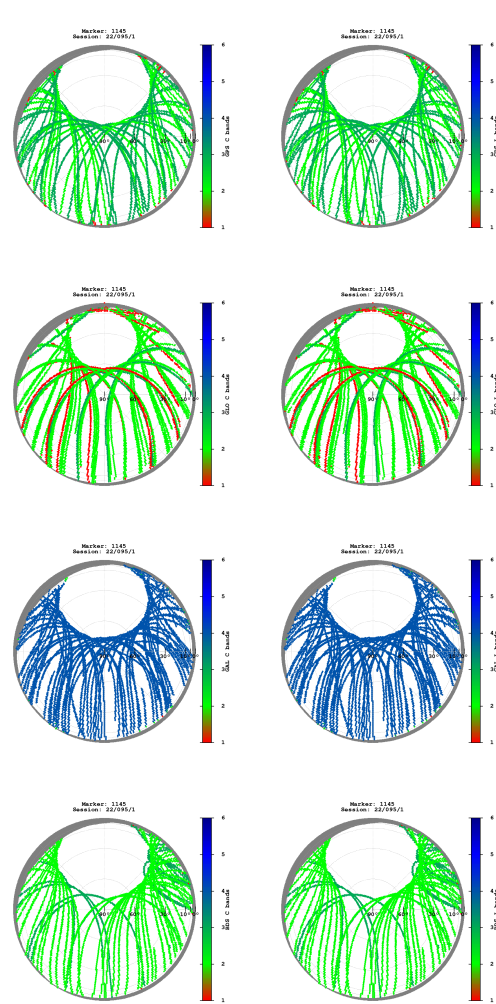

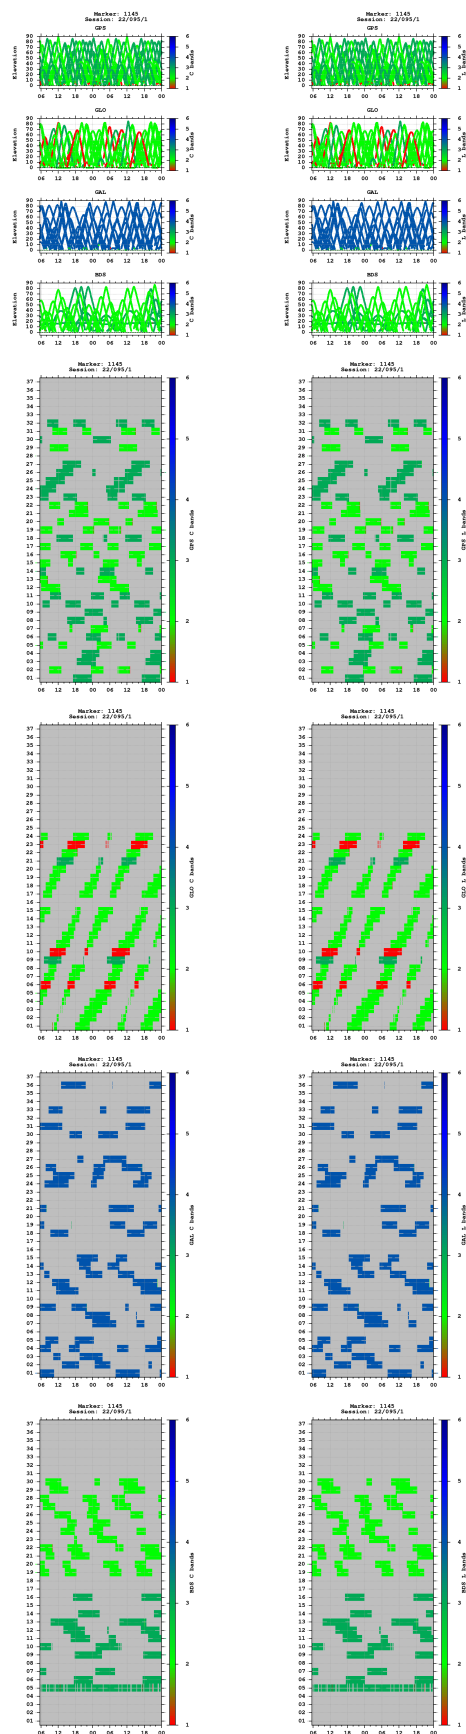


Multipath

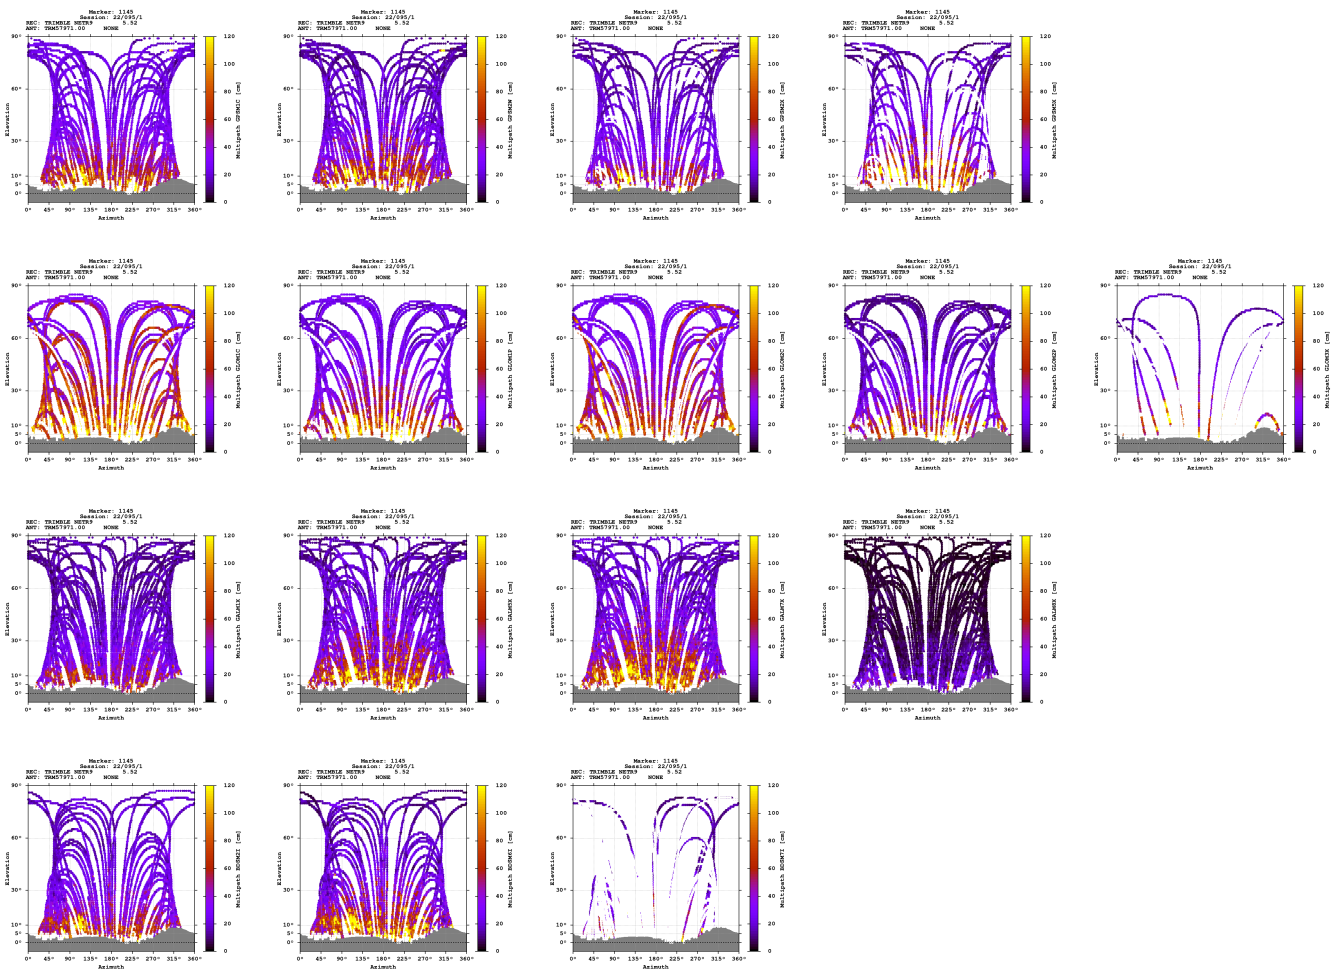


Signal-to-noise ratio



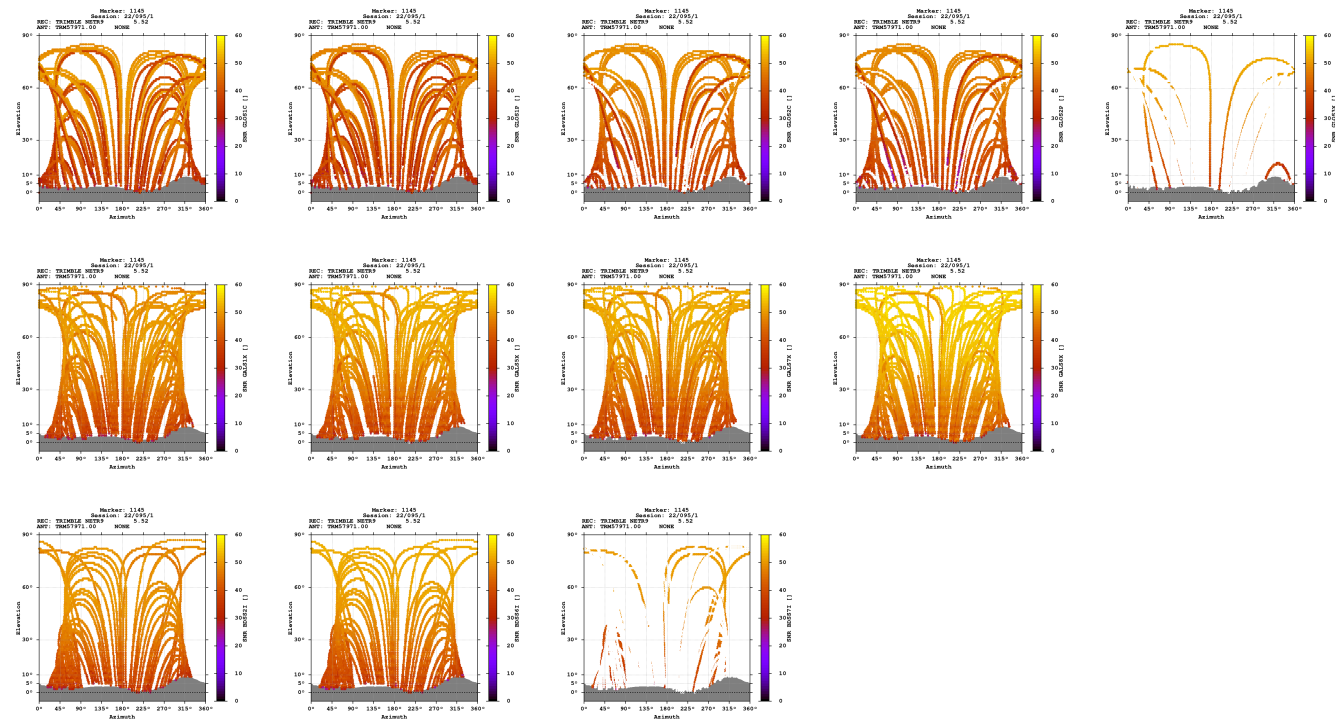

Estimates

2022-04-05 05:38:00	GPS	4314833.8654	547178.4704	4650149.4054	47.106014058	7.227291423	484.1726
2022-04-05 05:38:00	GLO	4314833.7563	547177.9467	4650149.3271	47.106014726	7.227284760	483.9967
2022-04-05 05:38:00	GAL	4314833.6036	547178.2440	4650149.1169	47.106014191	7.227288898	483.7650
2022-04-05 05:38:00	BDS	4314832.6971	547178.4034	4650150.9661	47.106031305	7.227292484	484.5214

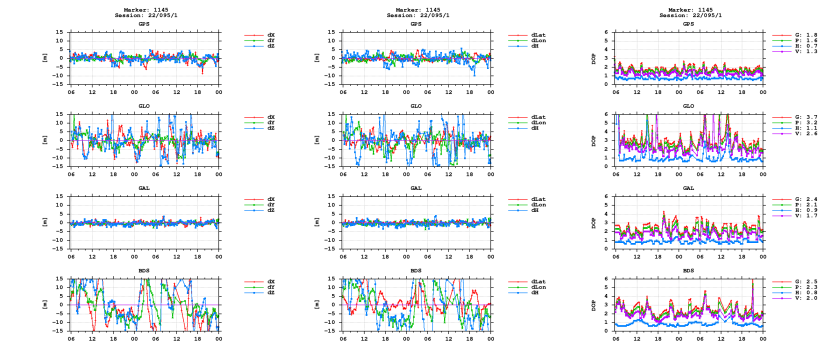

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)