


GNSS observation file monitoring for 0518


Last RINEX file: 05180961.220
RINEX version: 3.02
Marker: 1145
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

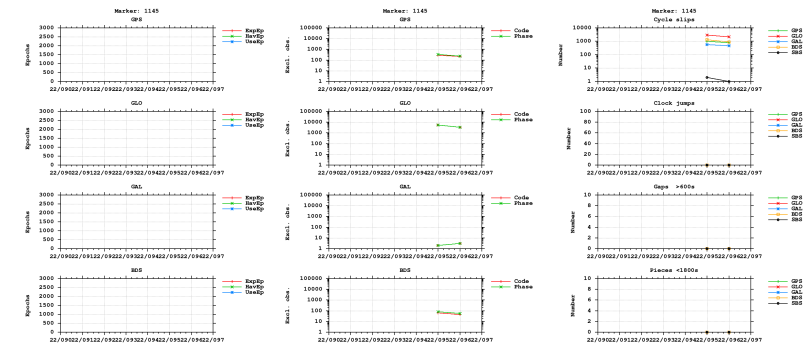



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

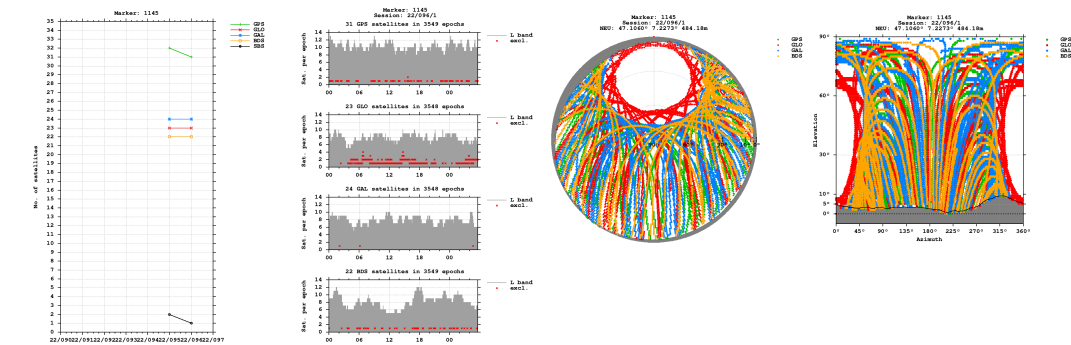


Bands

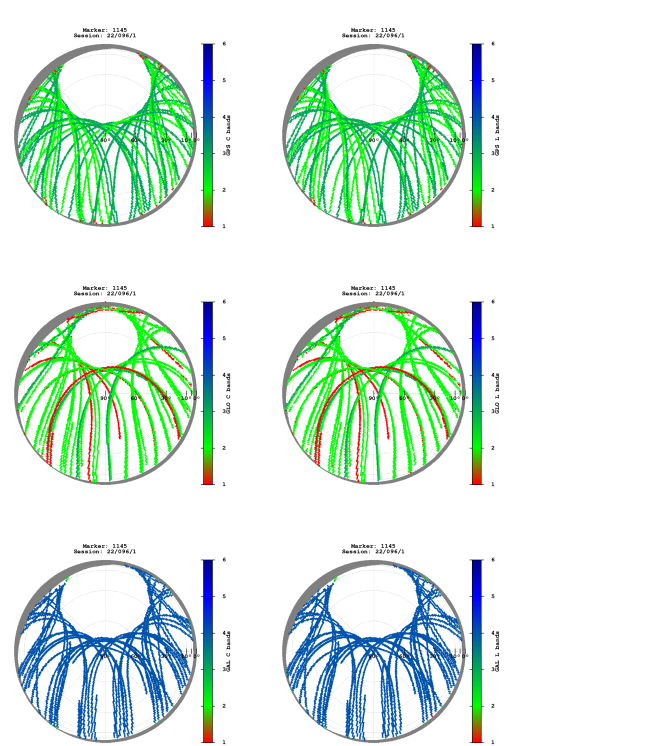


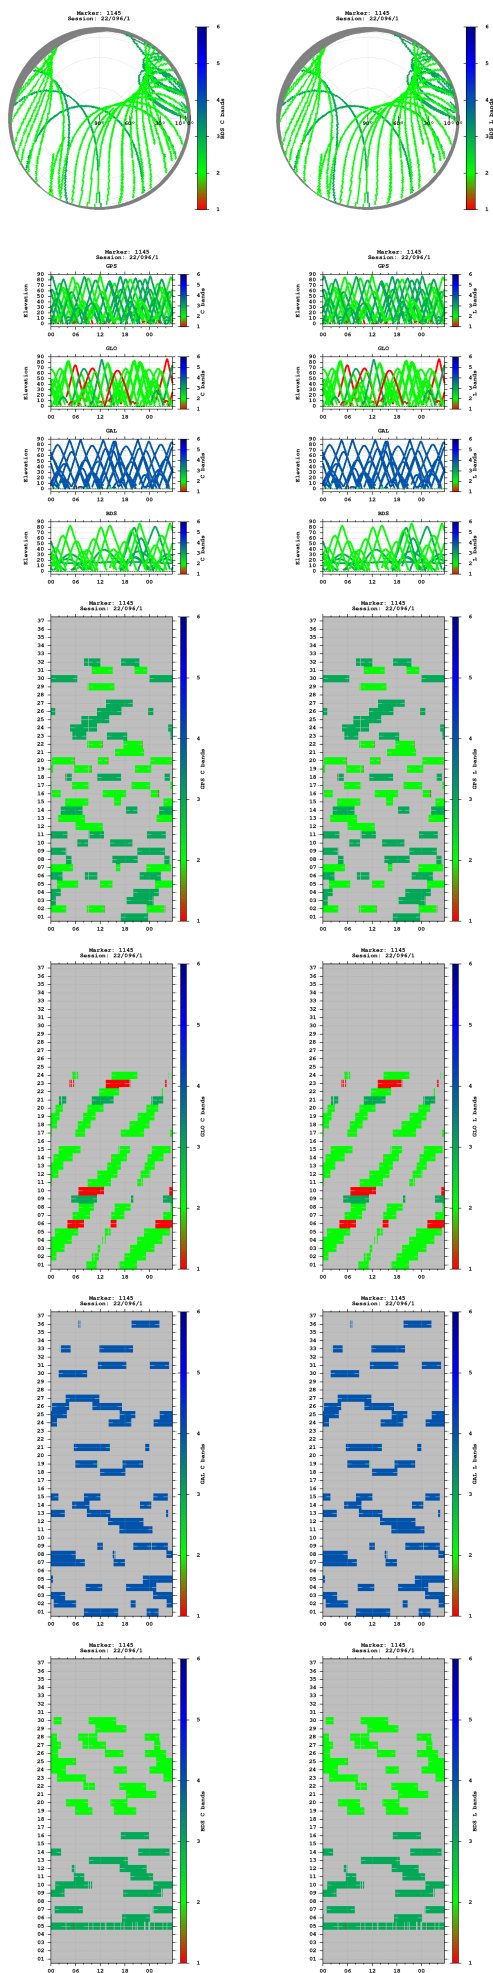


Observations

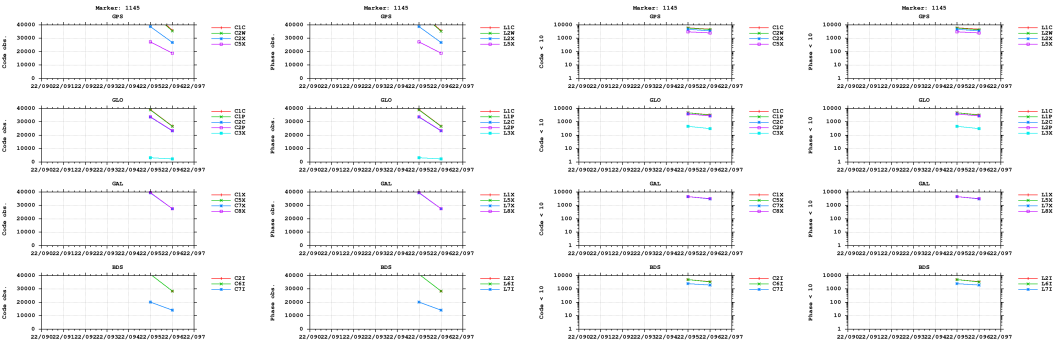


Multipath

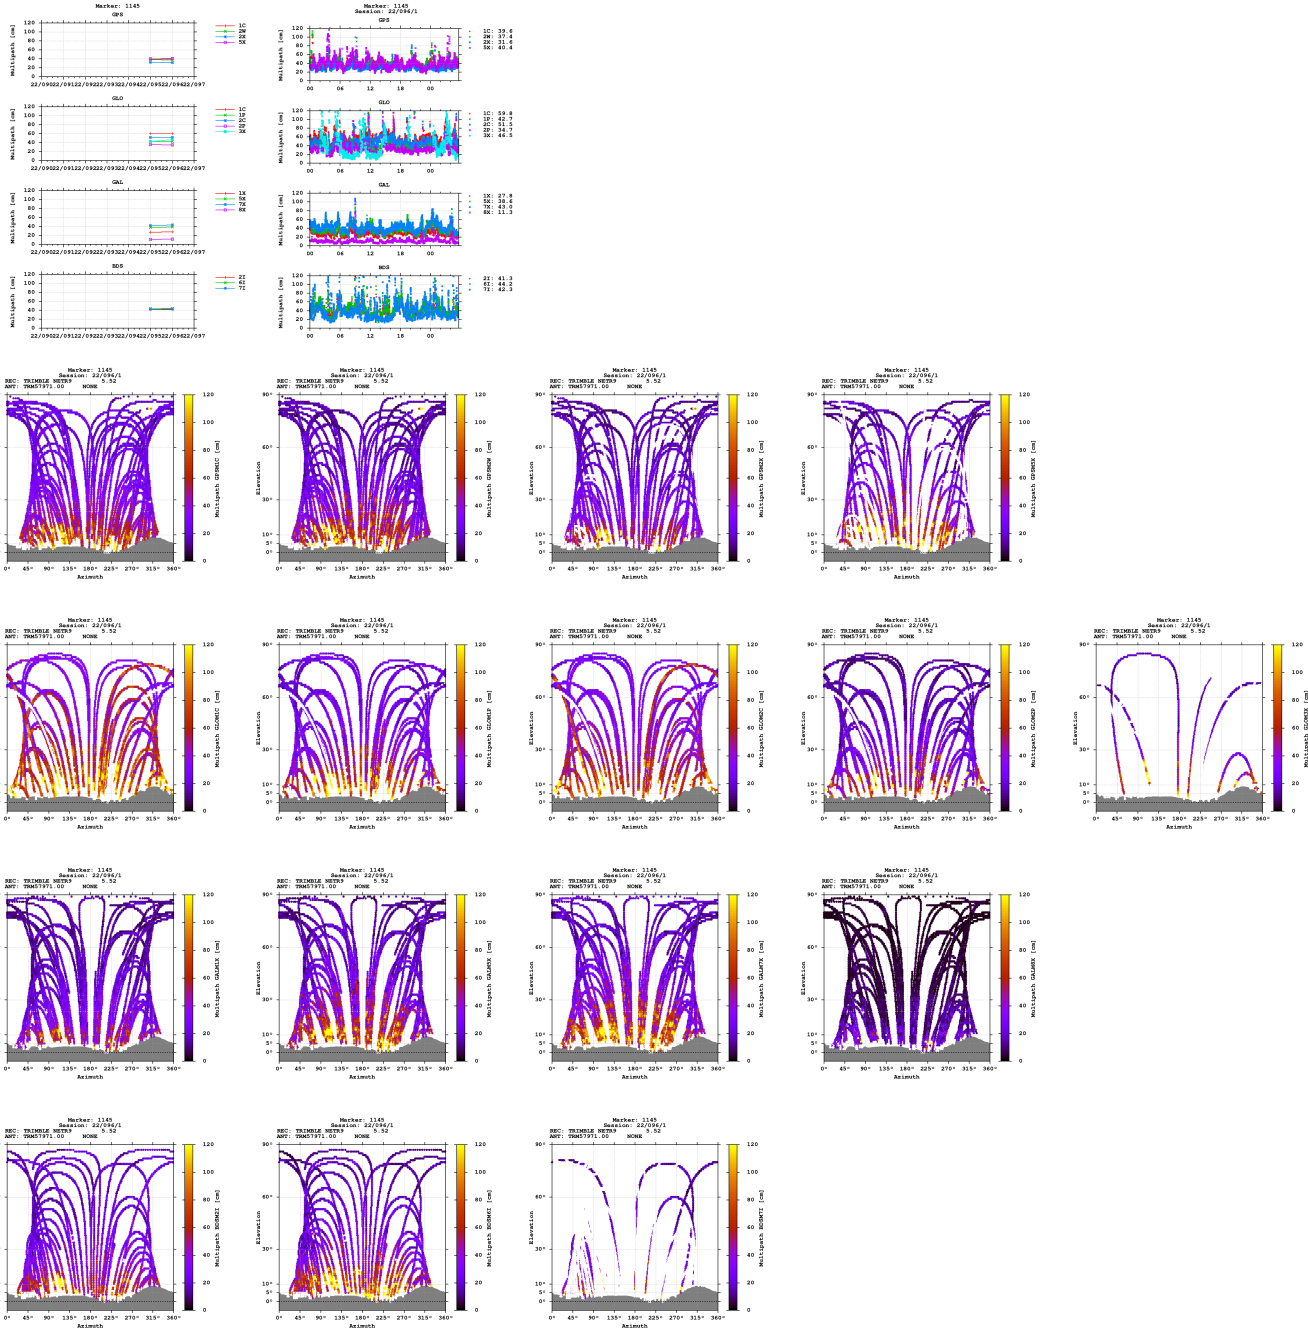


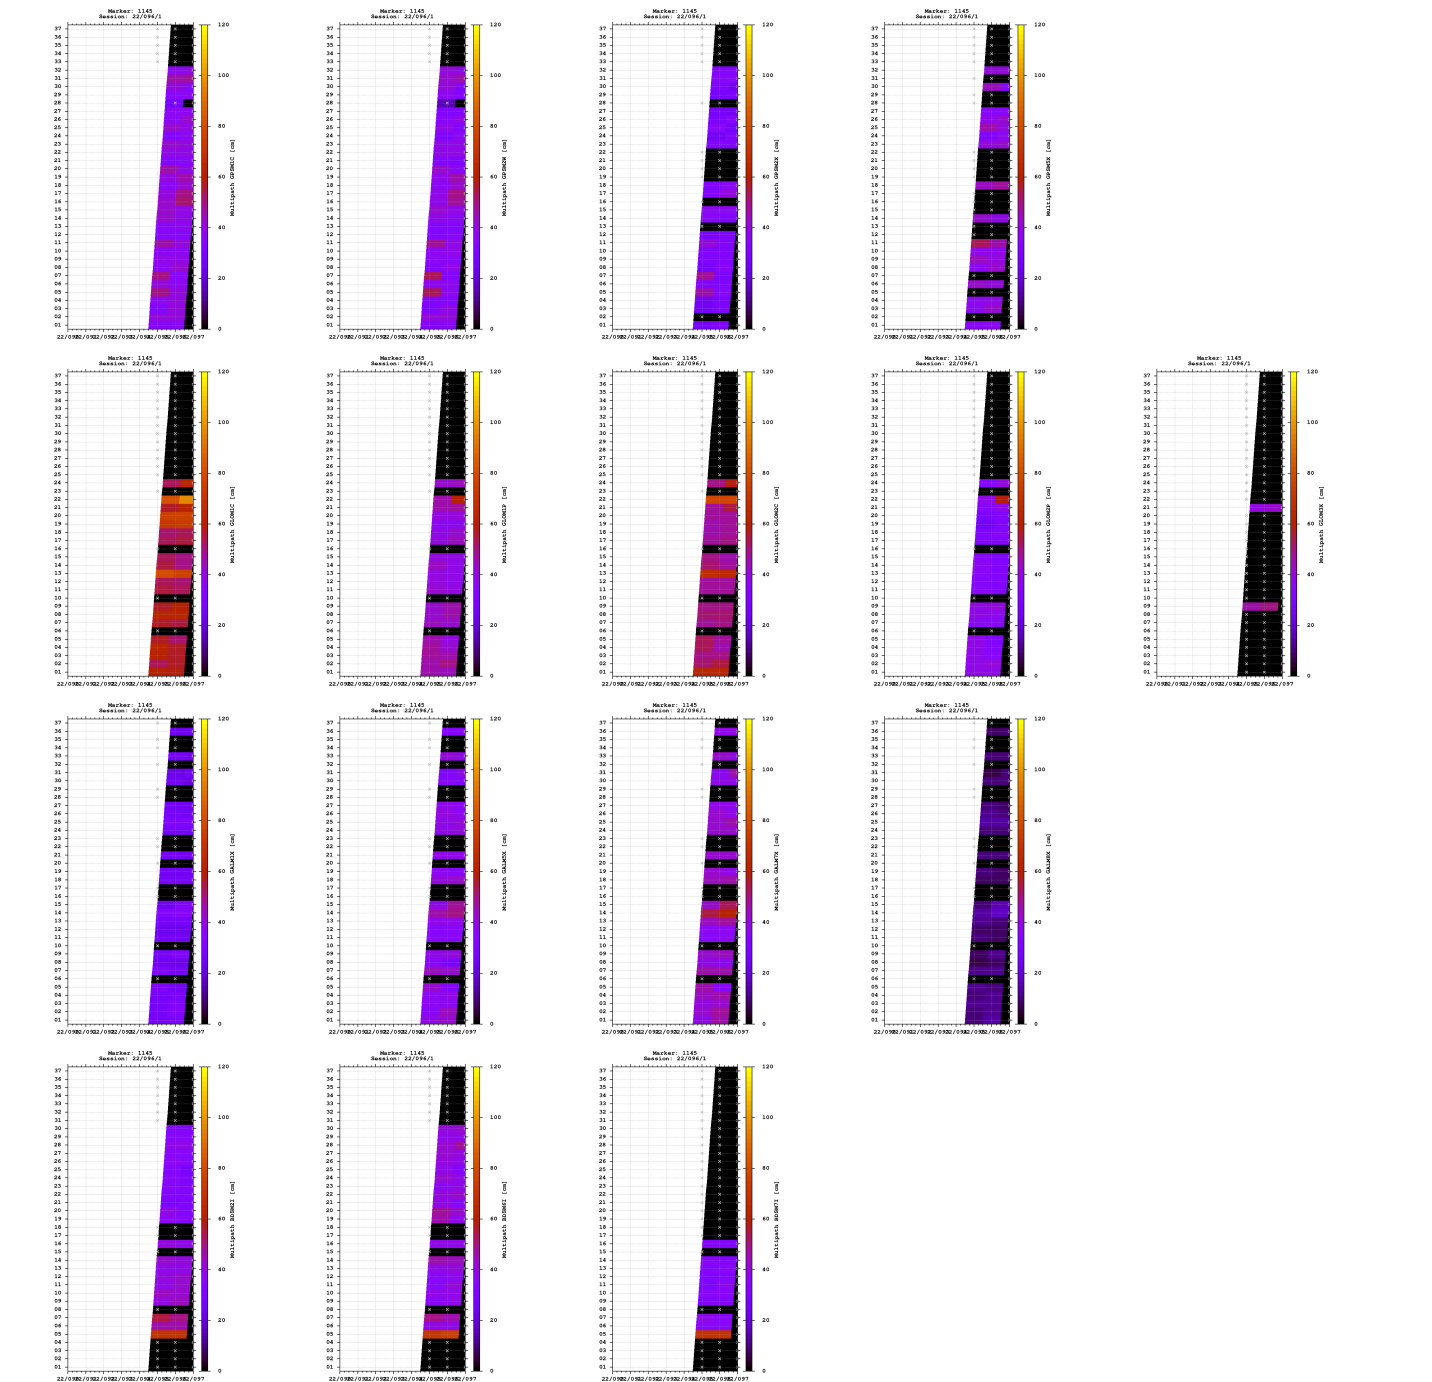

Signal-to-noise ratio




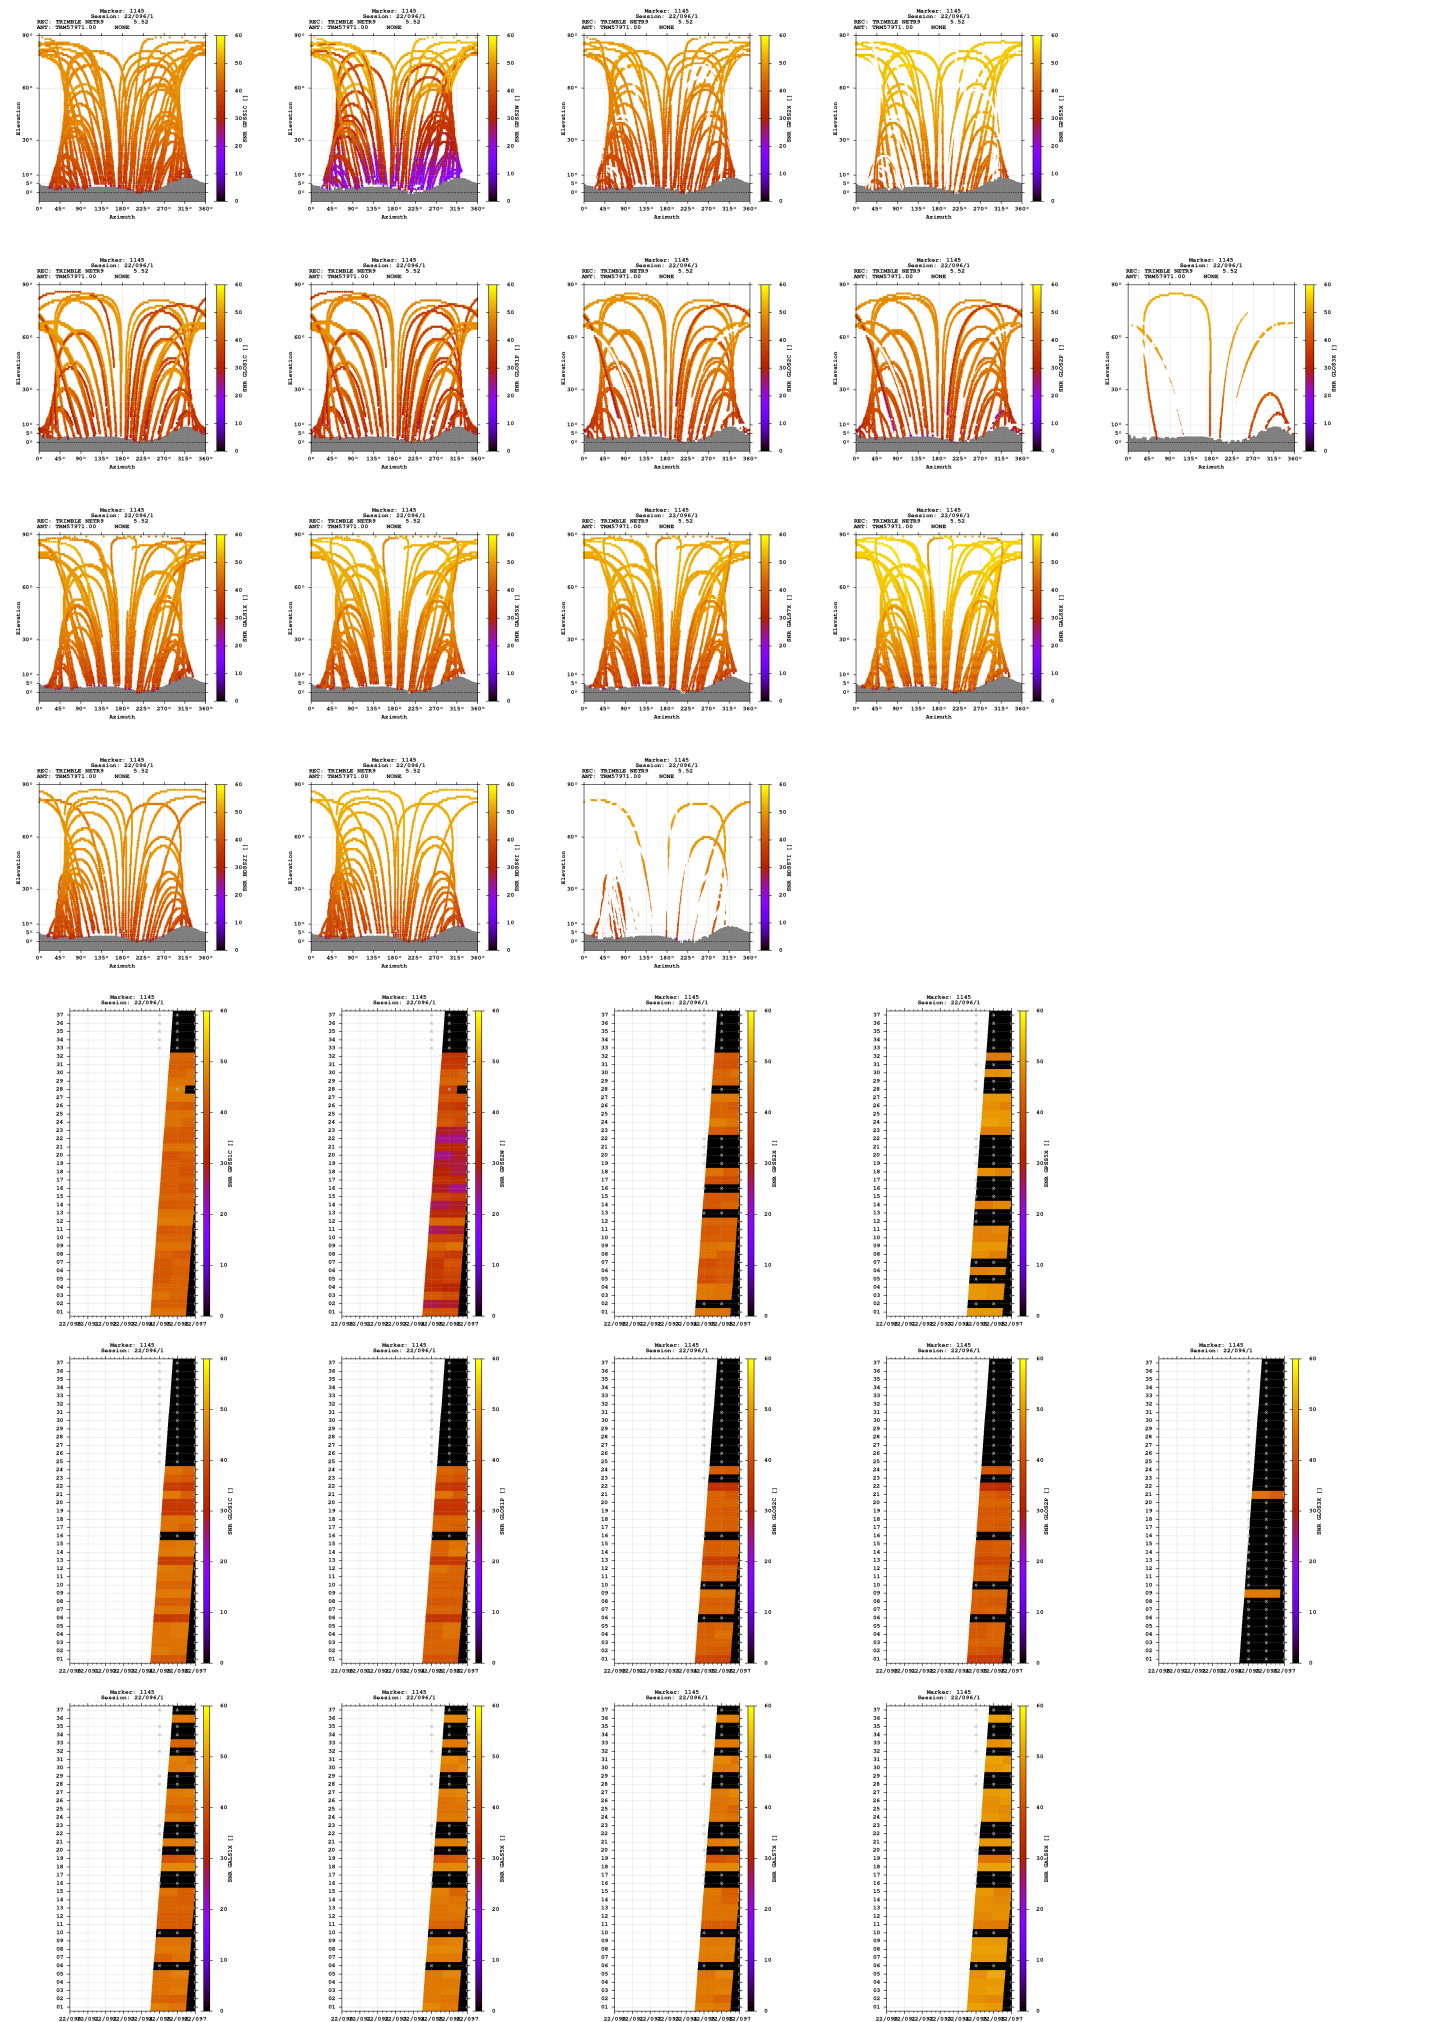

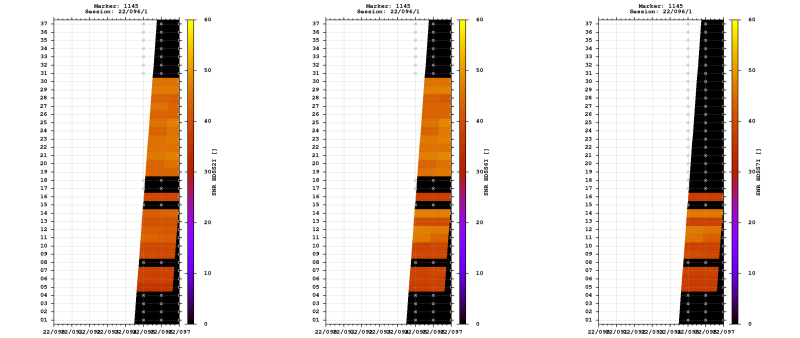


Estimates

2022-04-05 05:38:00	GPS	4314833.8380	547178.3664	4650149.4572	47.106014641	7.227290109	484.1831
2022-04-05 05:38:00	GLO	4314833.6715	547177.8884	4650148.7922	47.106012054	7.227284139	483.5425
2022-04-05 05:38:00	GAL	4314833.3287	547178.3389	4650149.1493	47.106016108	7.227290594	483.6113
2022-04-05 05:38:00	BDS	4314832.7996	547179.0766	4650149.6400	47.106021959	7.227301112	483.6767

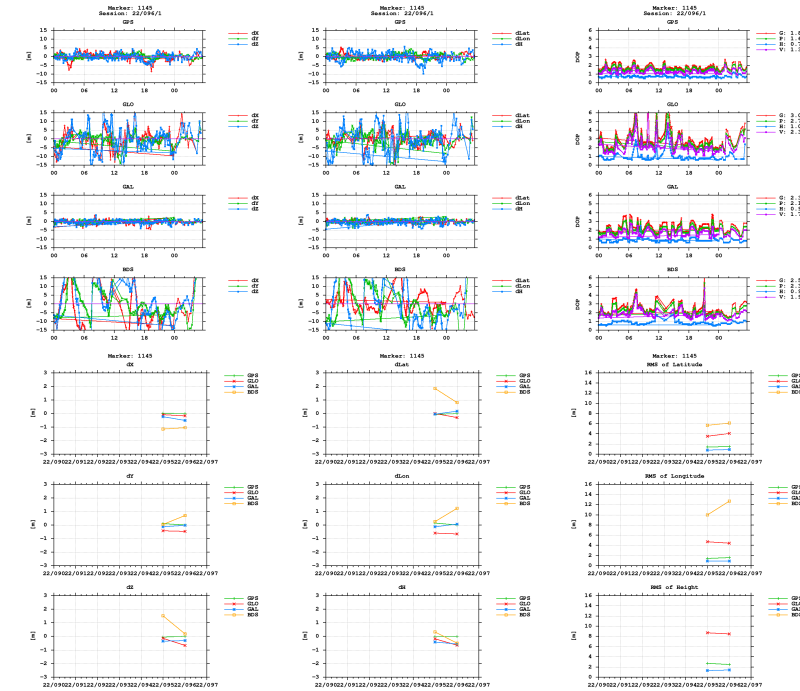

BNC



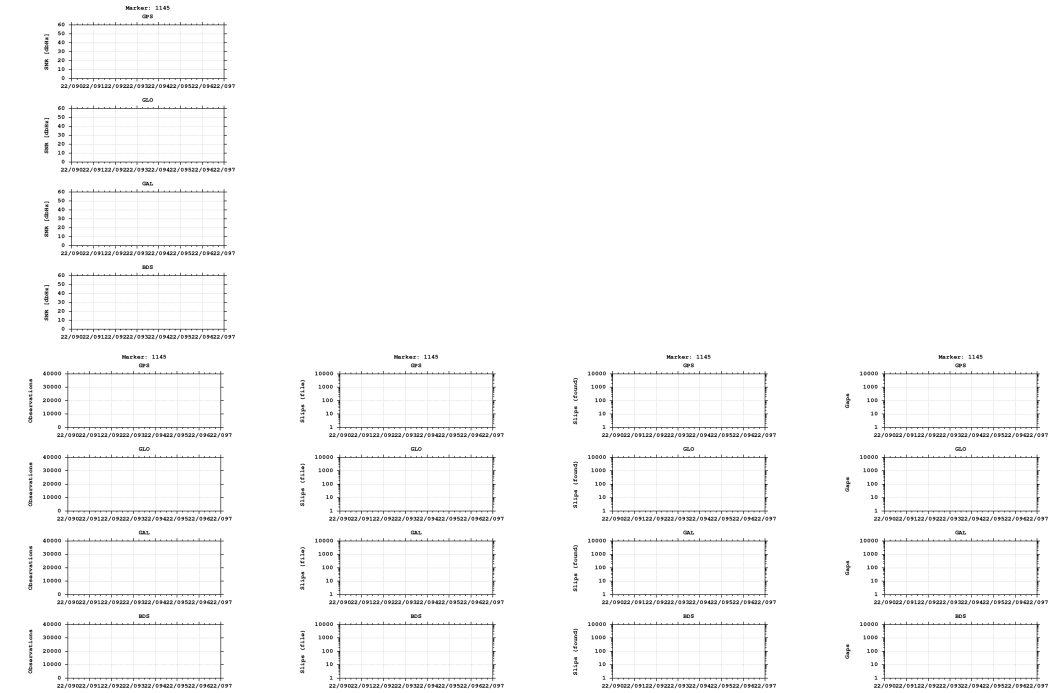

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)