

GNSS observation file monitoring for 0518

Last RINEX file: 05180971.220


RINEX version: 3.02

Marker: 1147

Receiver: 518 TRIMBLE NETR9 5.52


Antenna: 518 TRM57971.00 NONE

Epochs

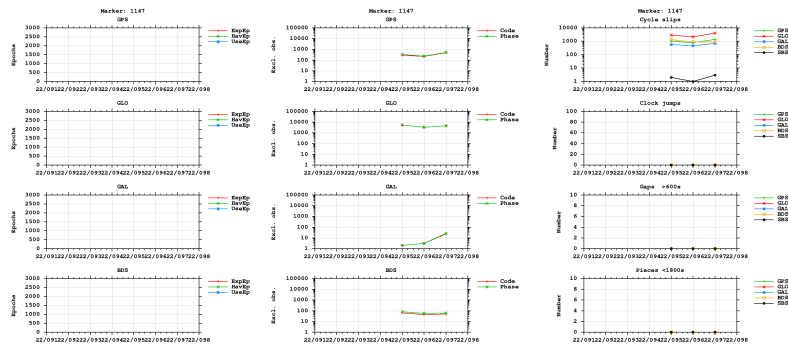



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

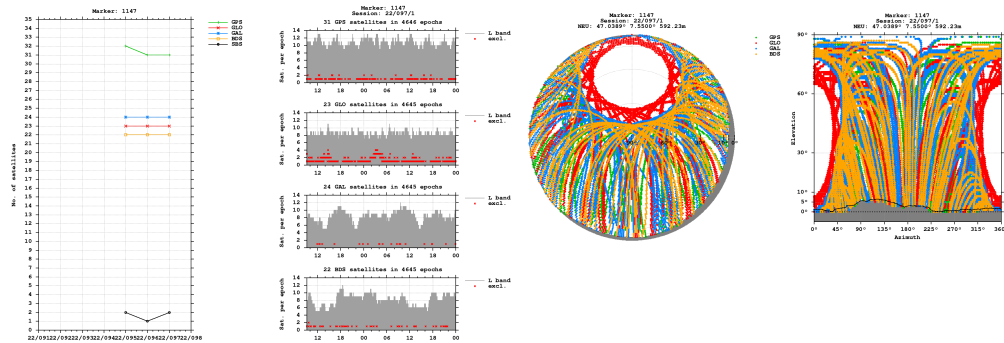


Bands

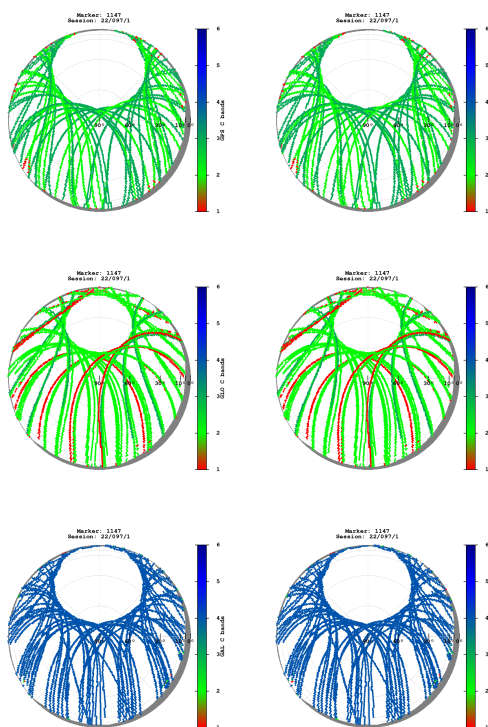


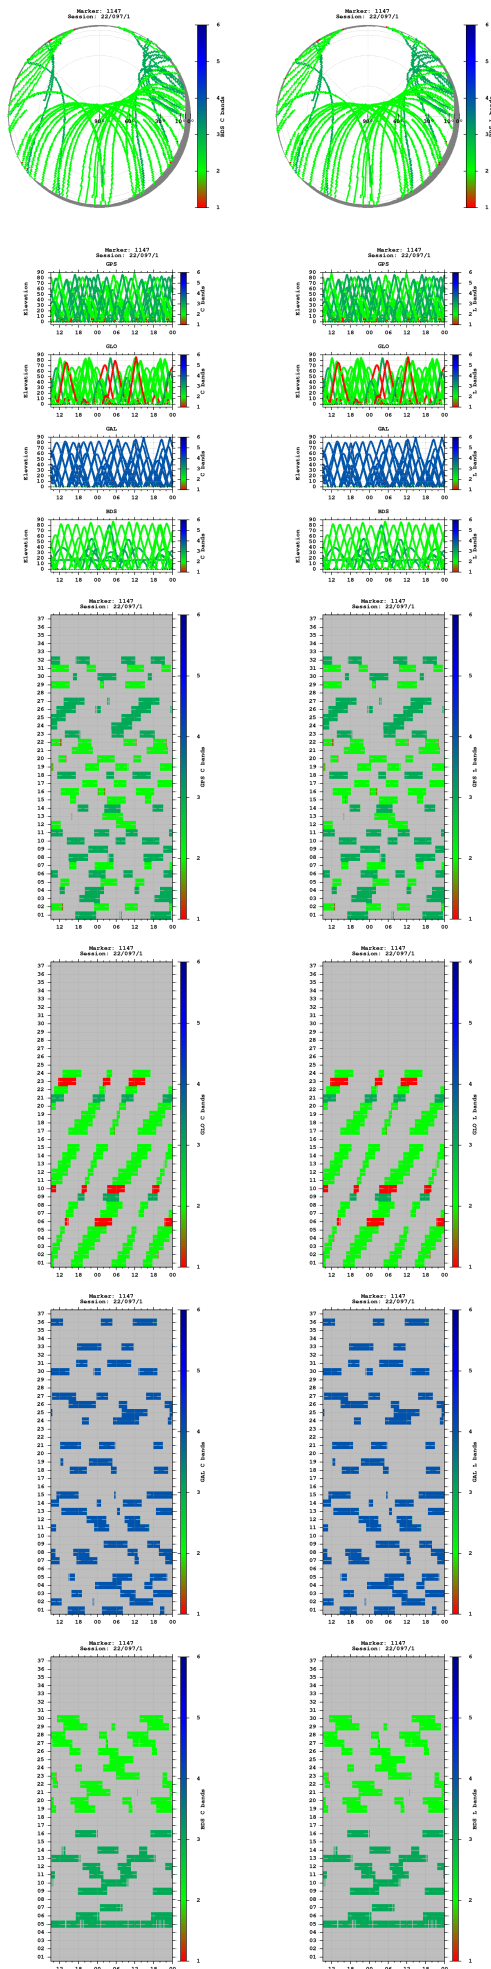


Observations

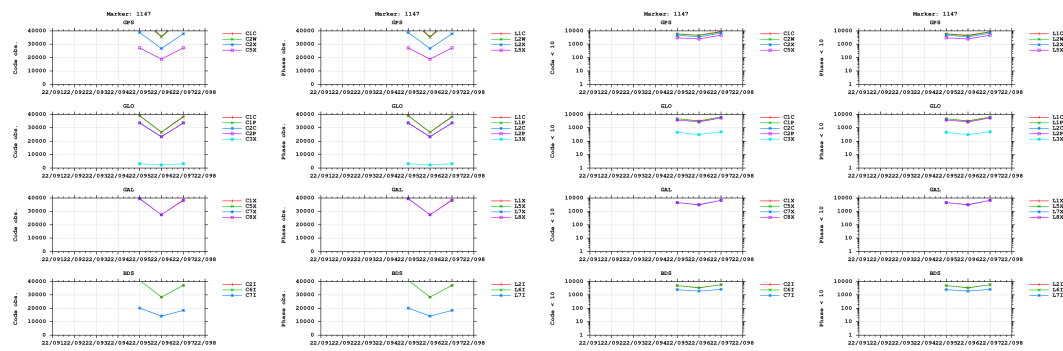


Multipath

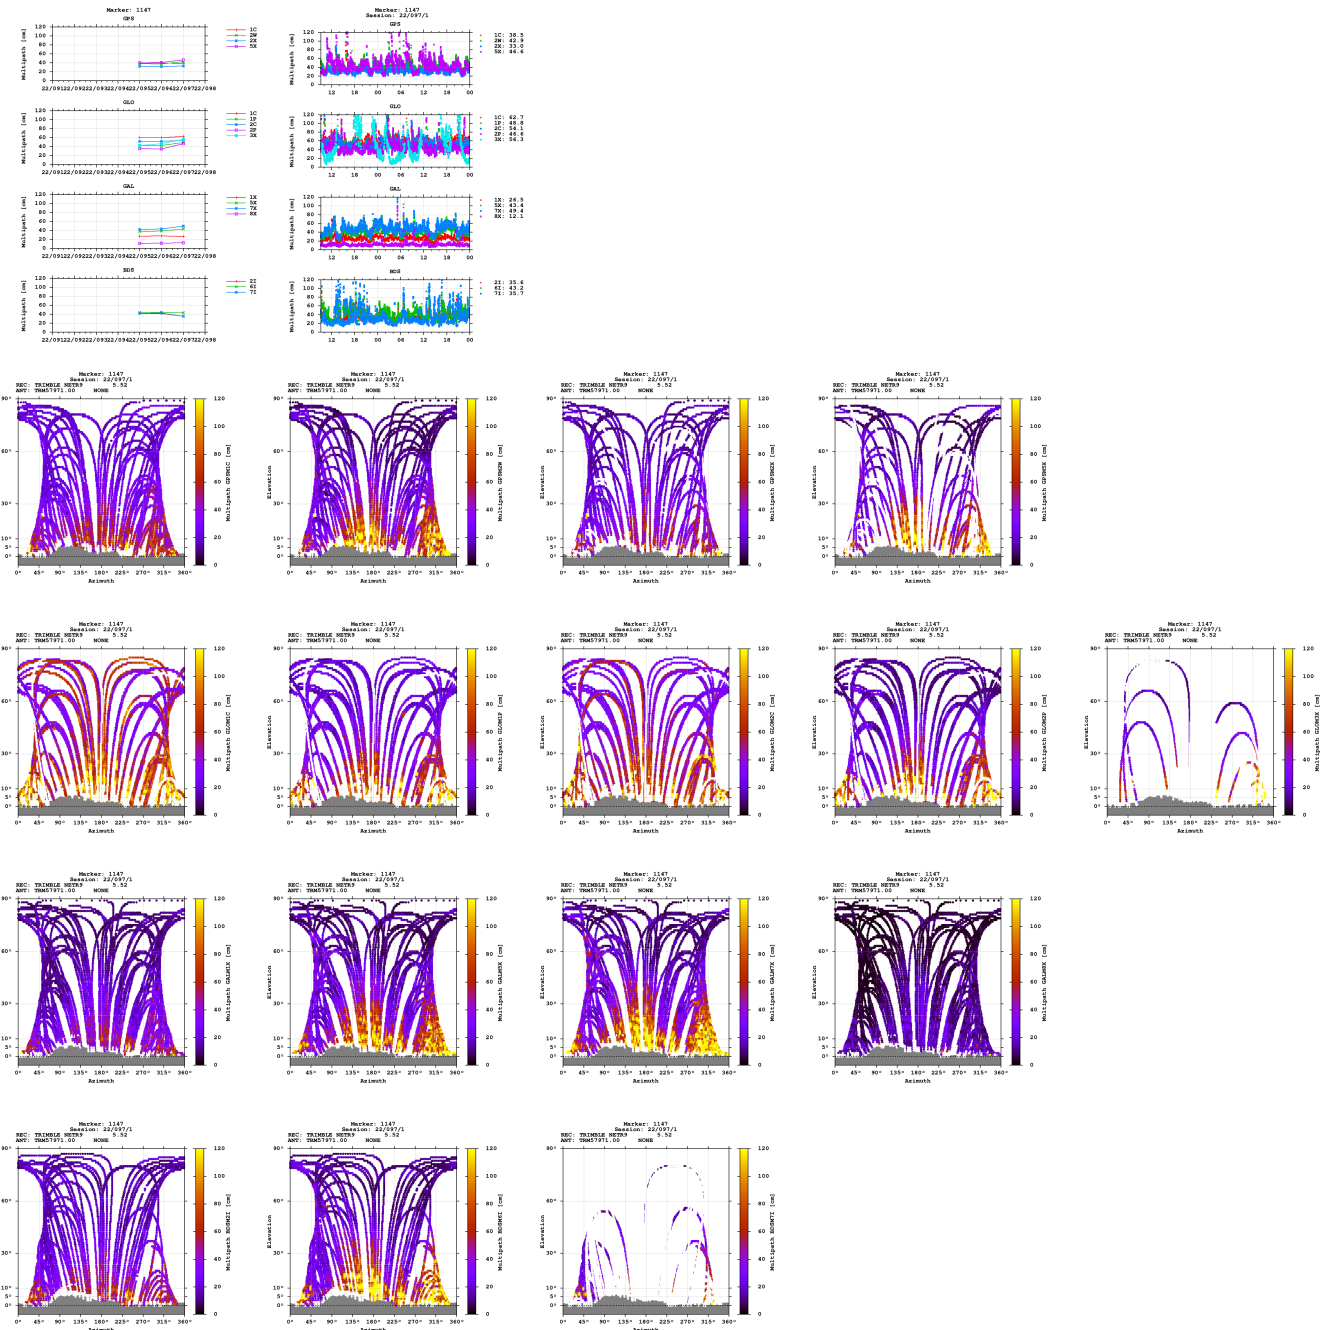


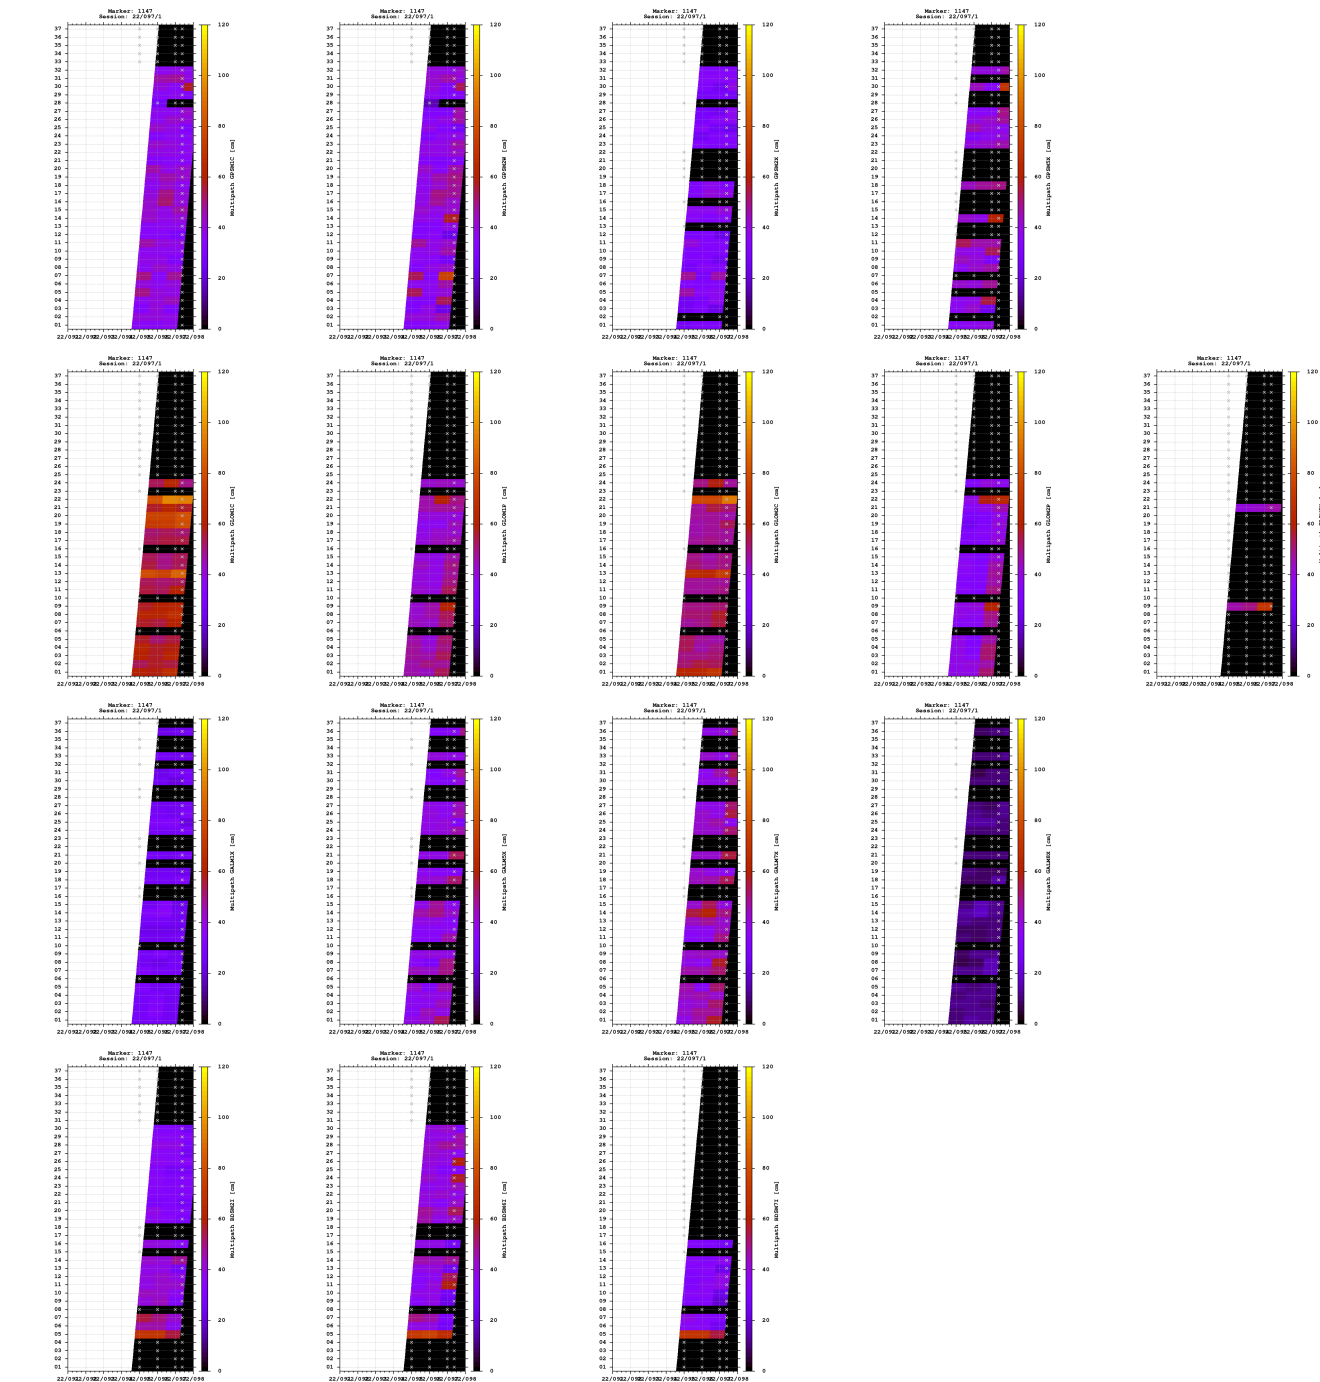


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

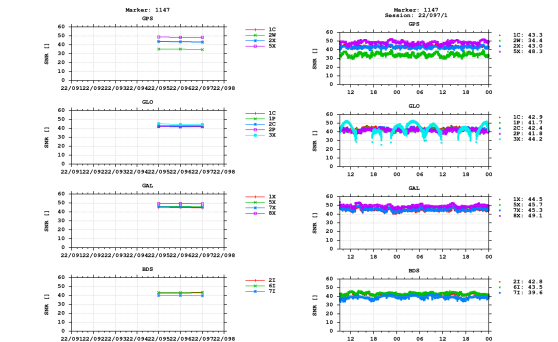


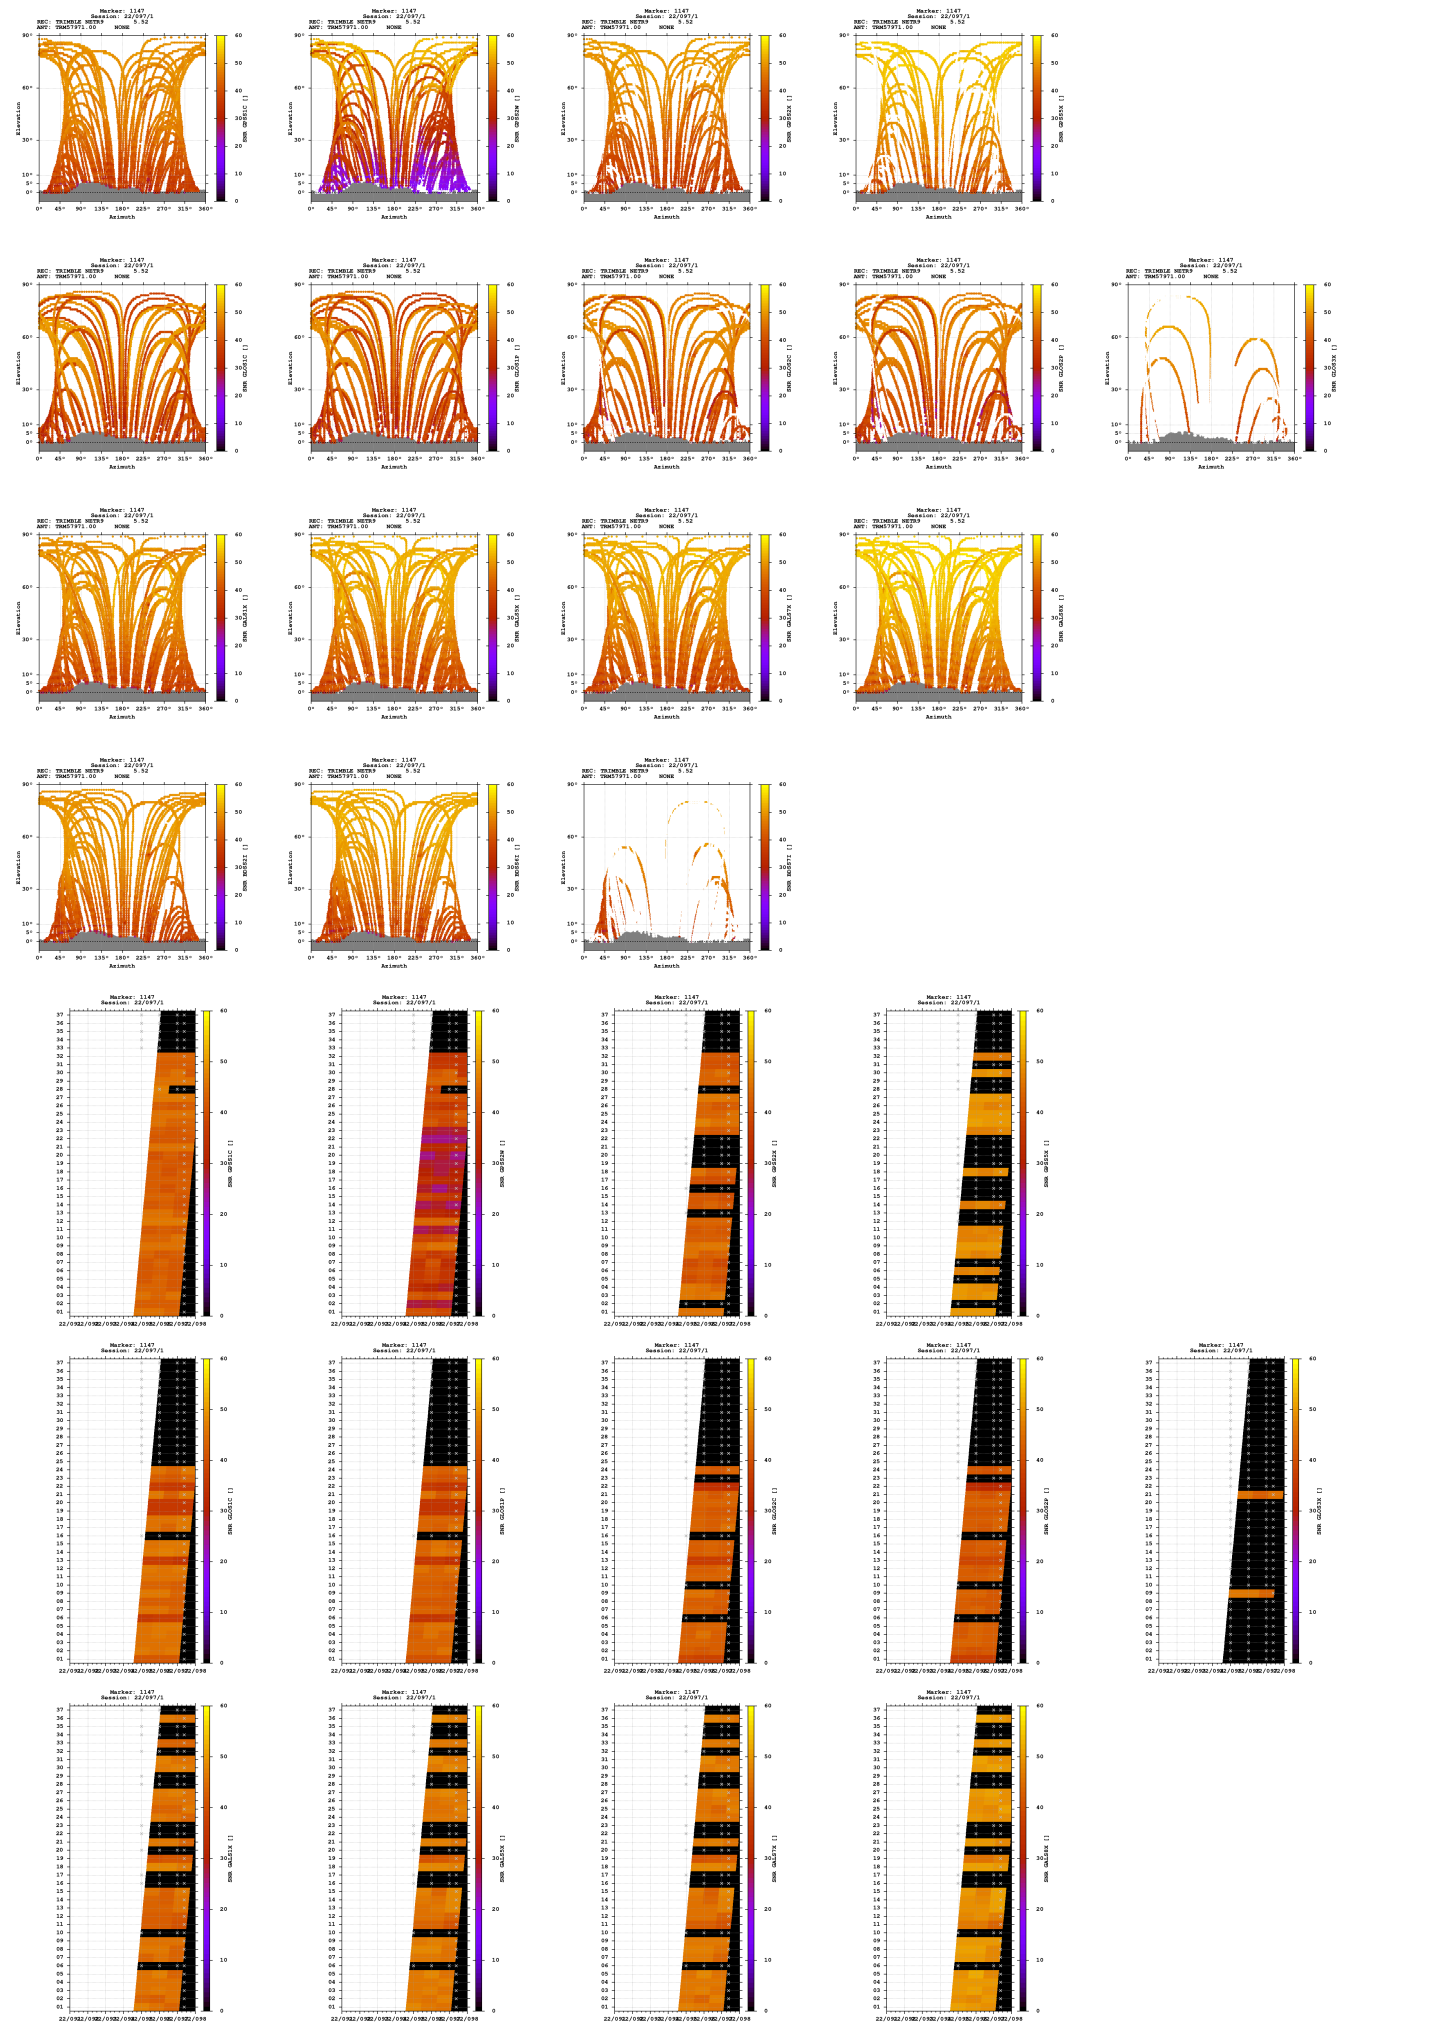

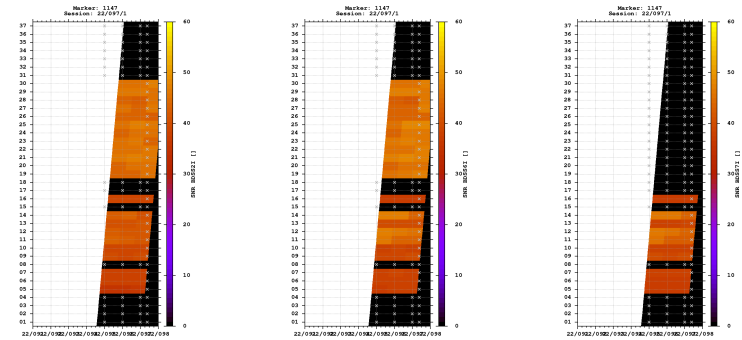



Estimates

2022-04-07 09:12:00	GPS	4317171.7818	572197.0574	4645147.7655	47.038917159	7.549966437	592.2348
2022-04-07 09:12:00	GLO	4317171.9648	572196.8714	4645147.7310	47.038915914	7.549963694	592.3165
2022-04-07 09:12:00	GAL	4317172.0586	572196.9364	4645147.7267	47.038915220	7.549964380	592.3825
2022-04-07 09:12:00	BDS	4317170.7045	572196.8148	4645150.3074	47.038939979	7.549965134	593.3455

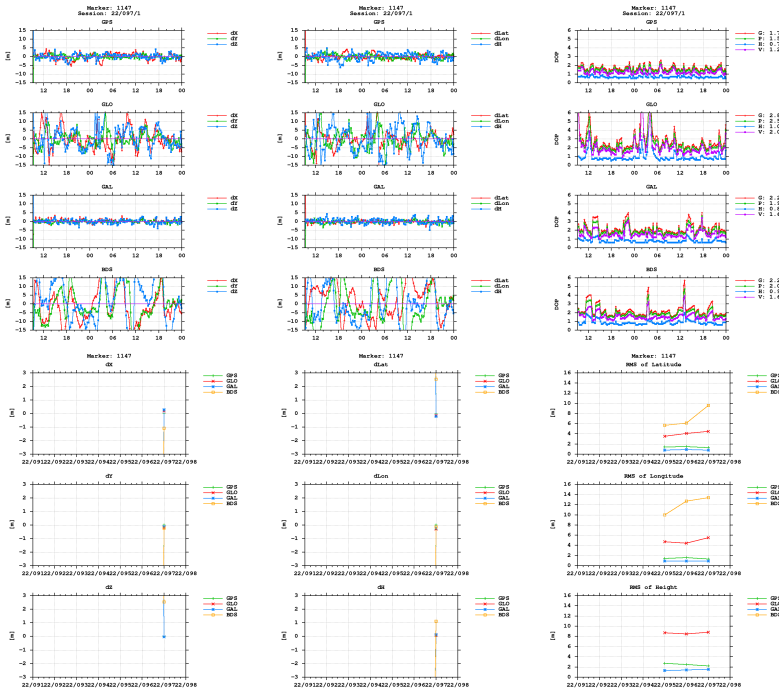

BNC

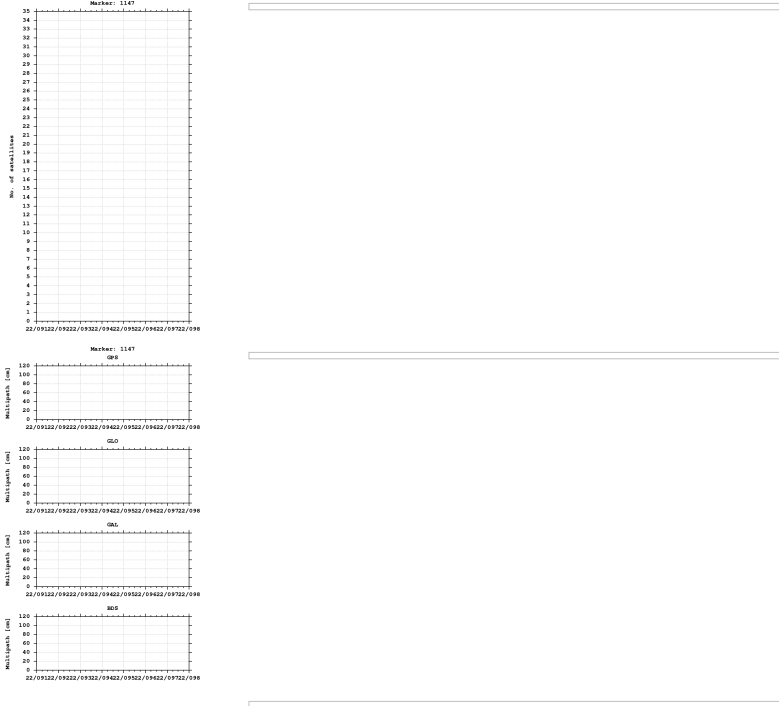

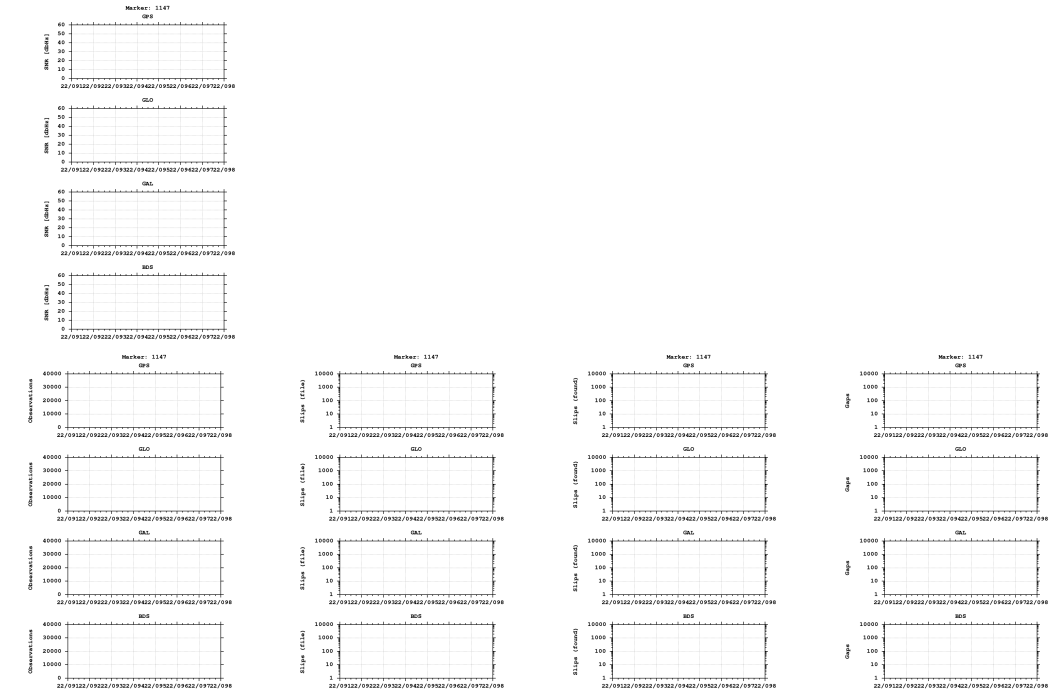

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)