


GNSS observation file monitoring for 0518


Last RINEX file: 05180981.220
RINEX version: 3.02
Marker: 1147
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

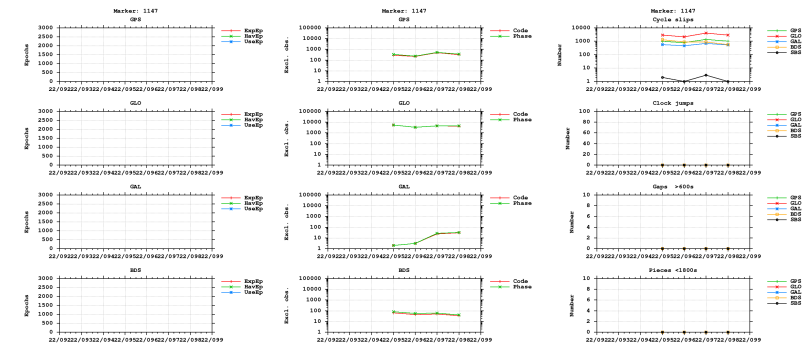



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

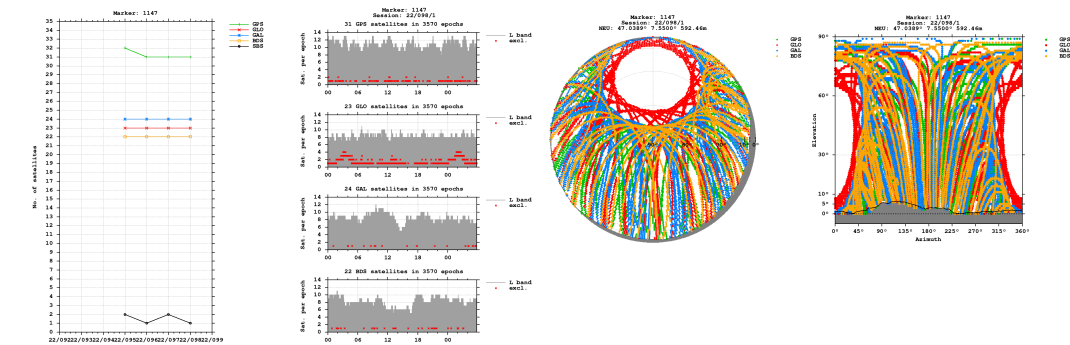


Bands

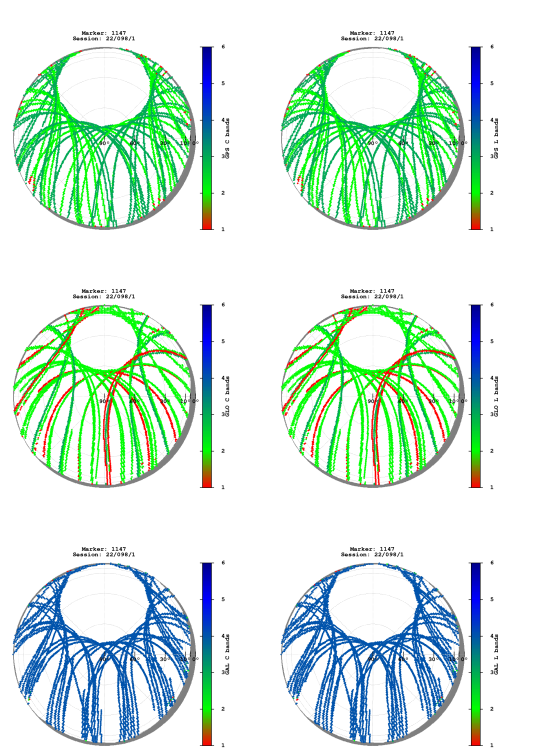


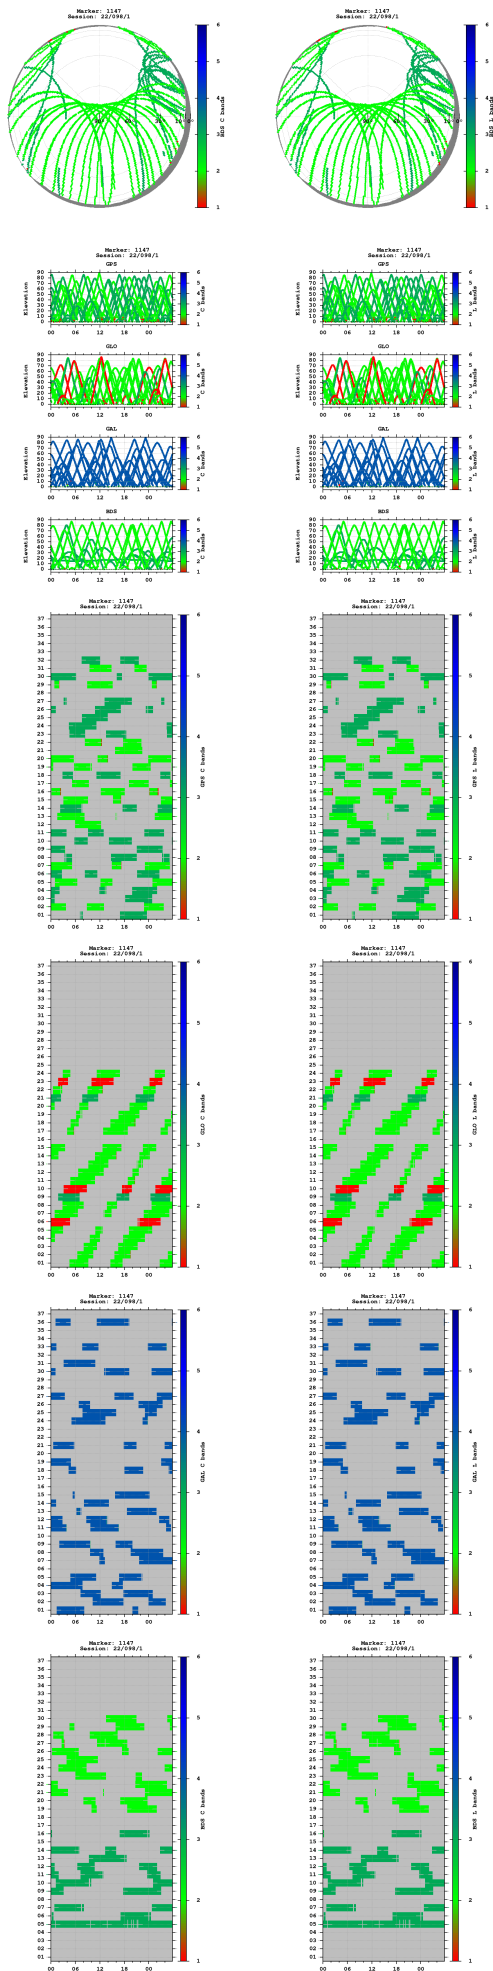


Observations

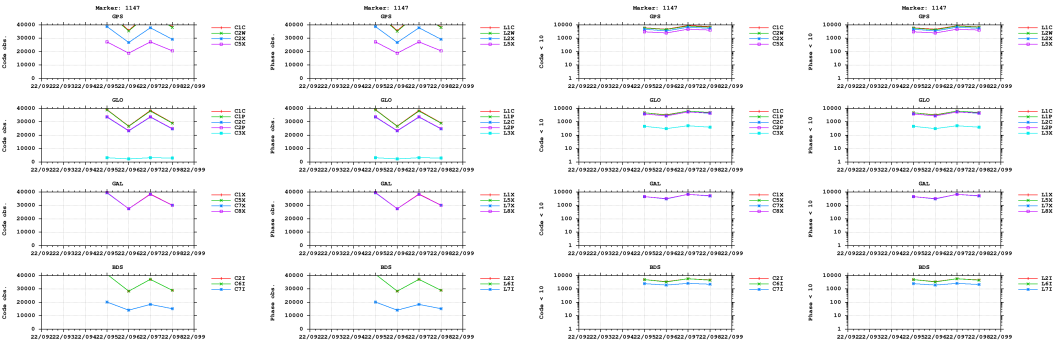



Multipath

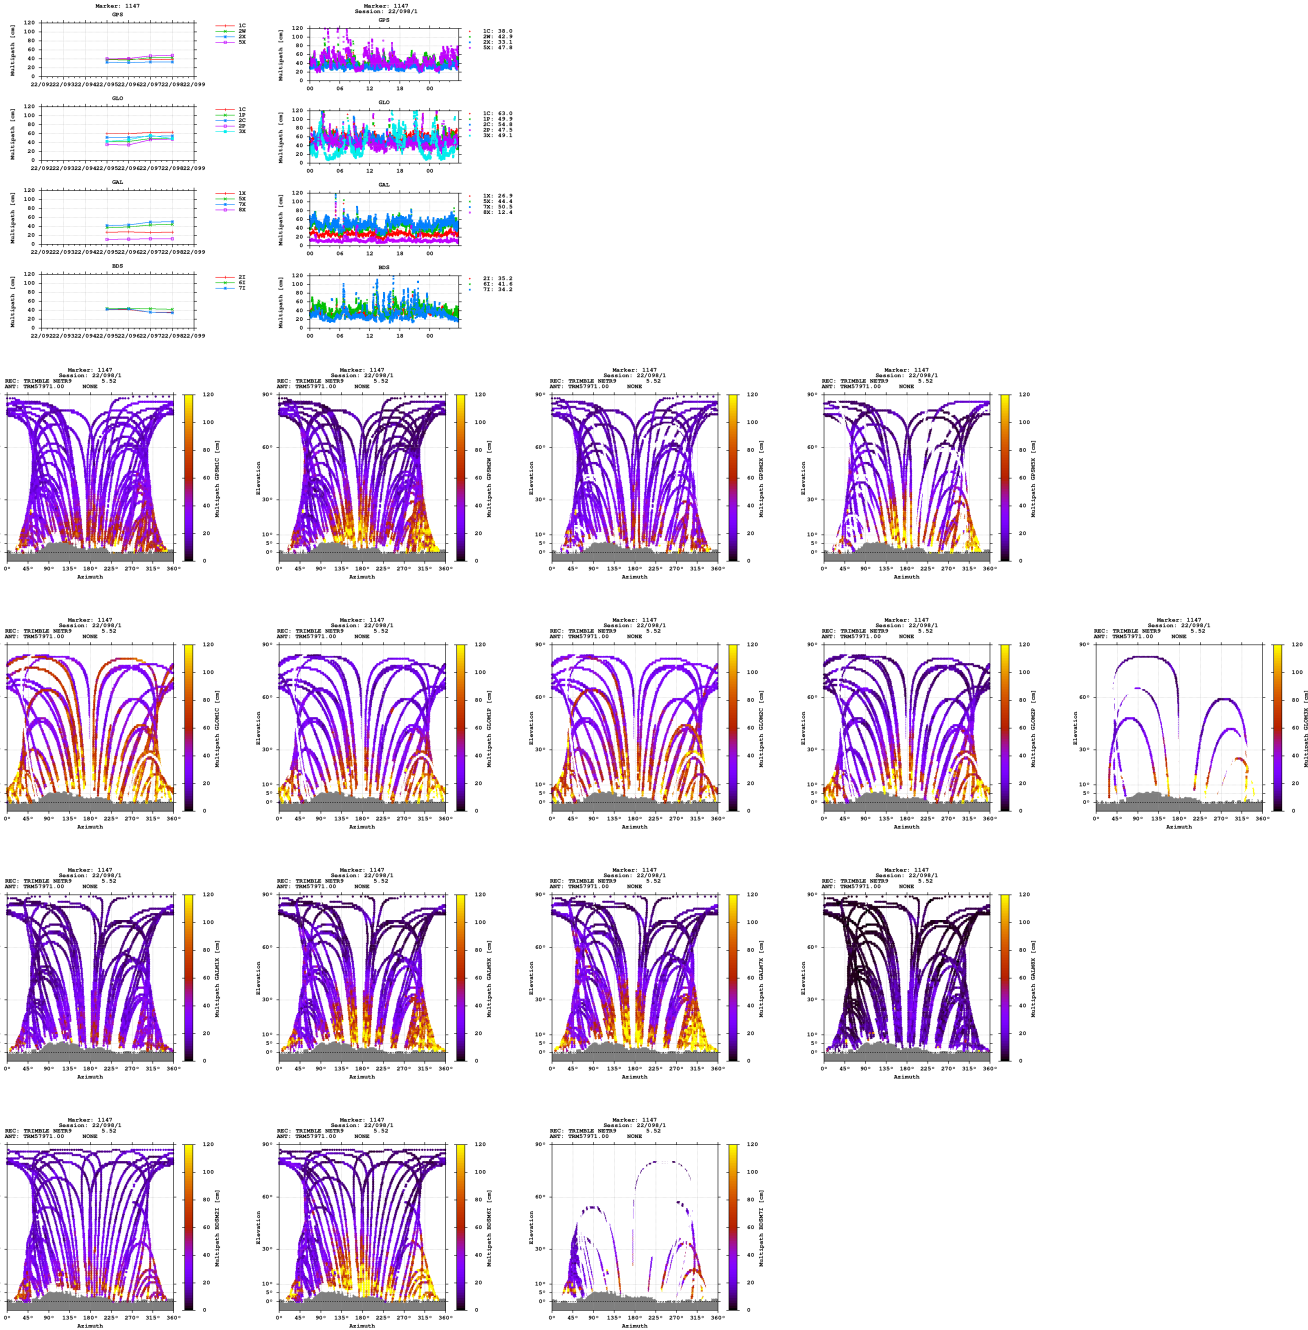


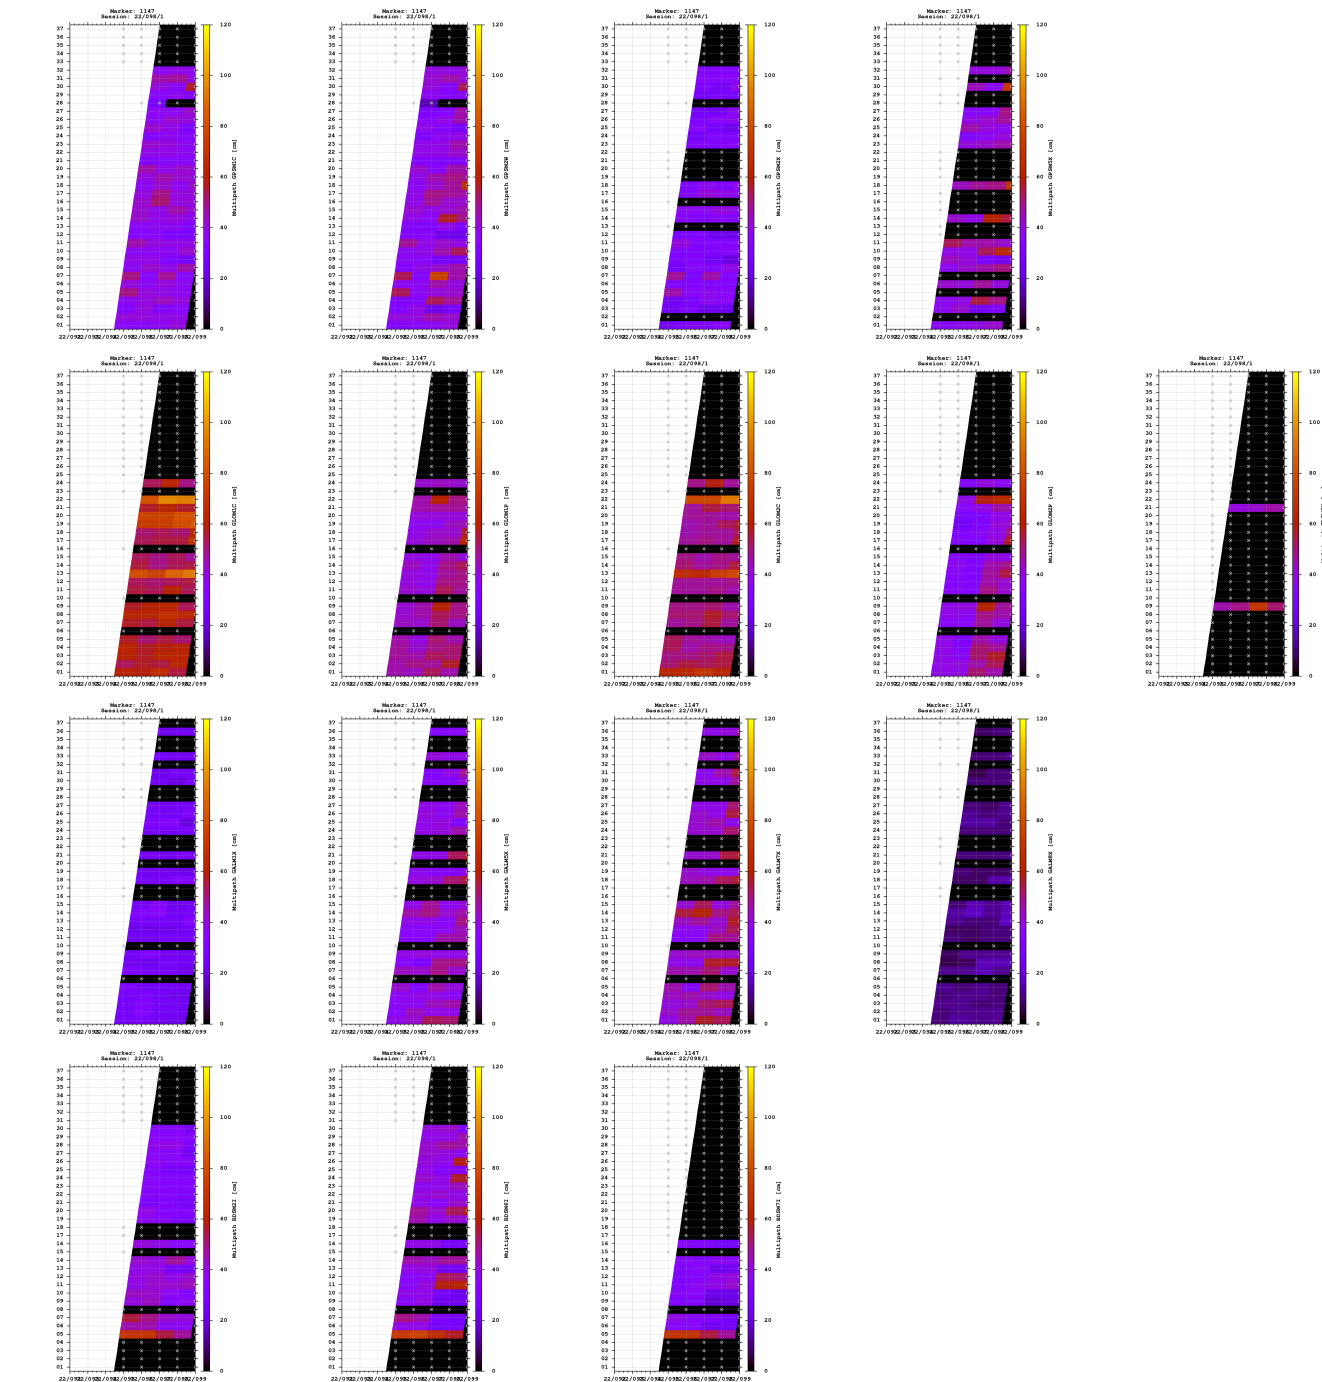


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

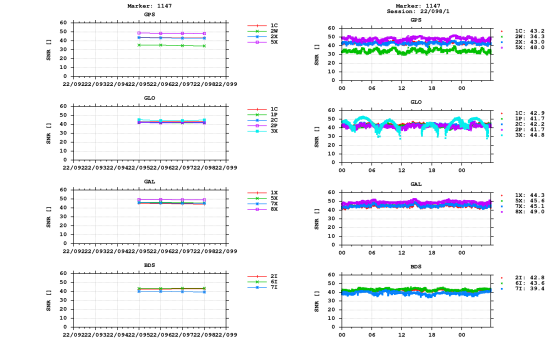


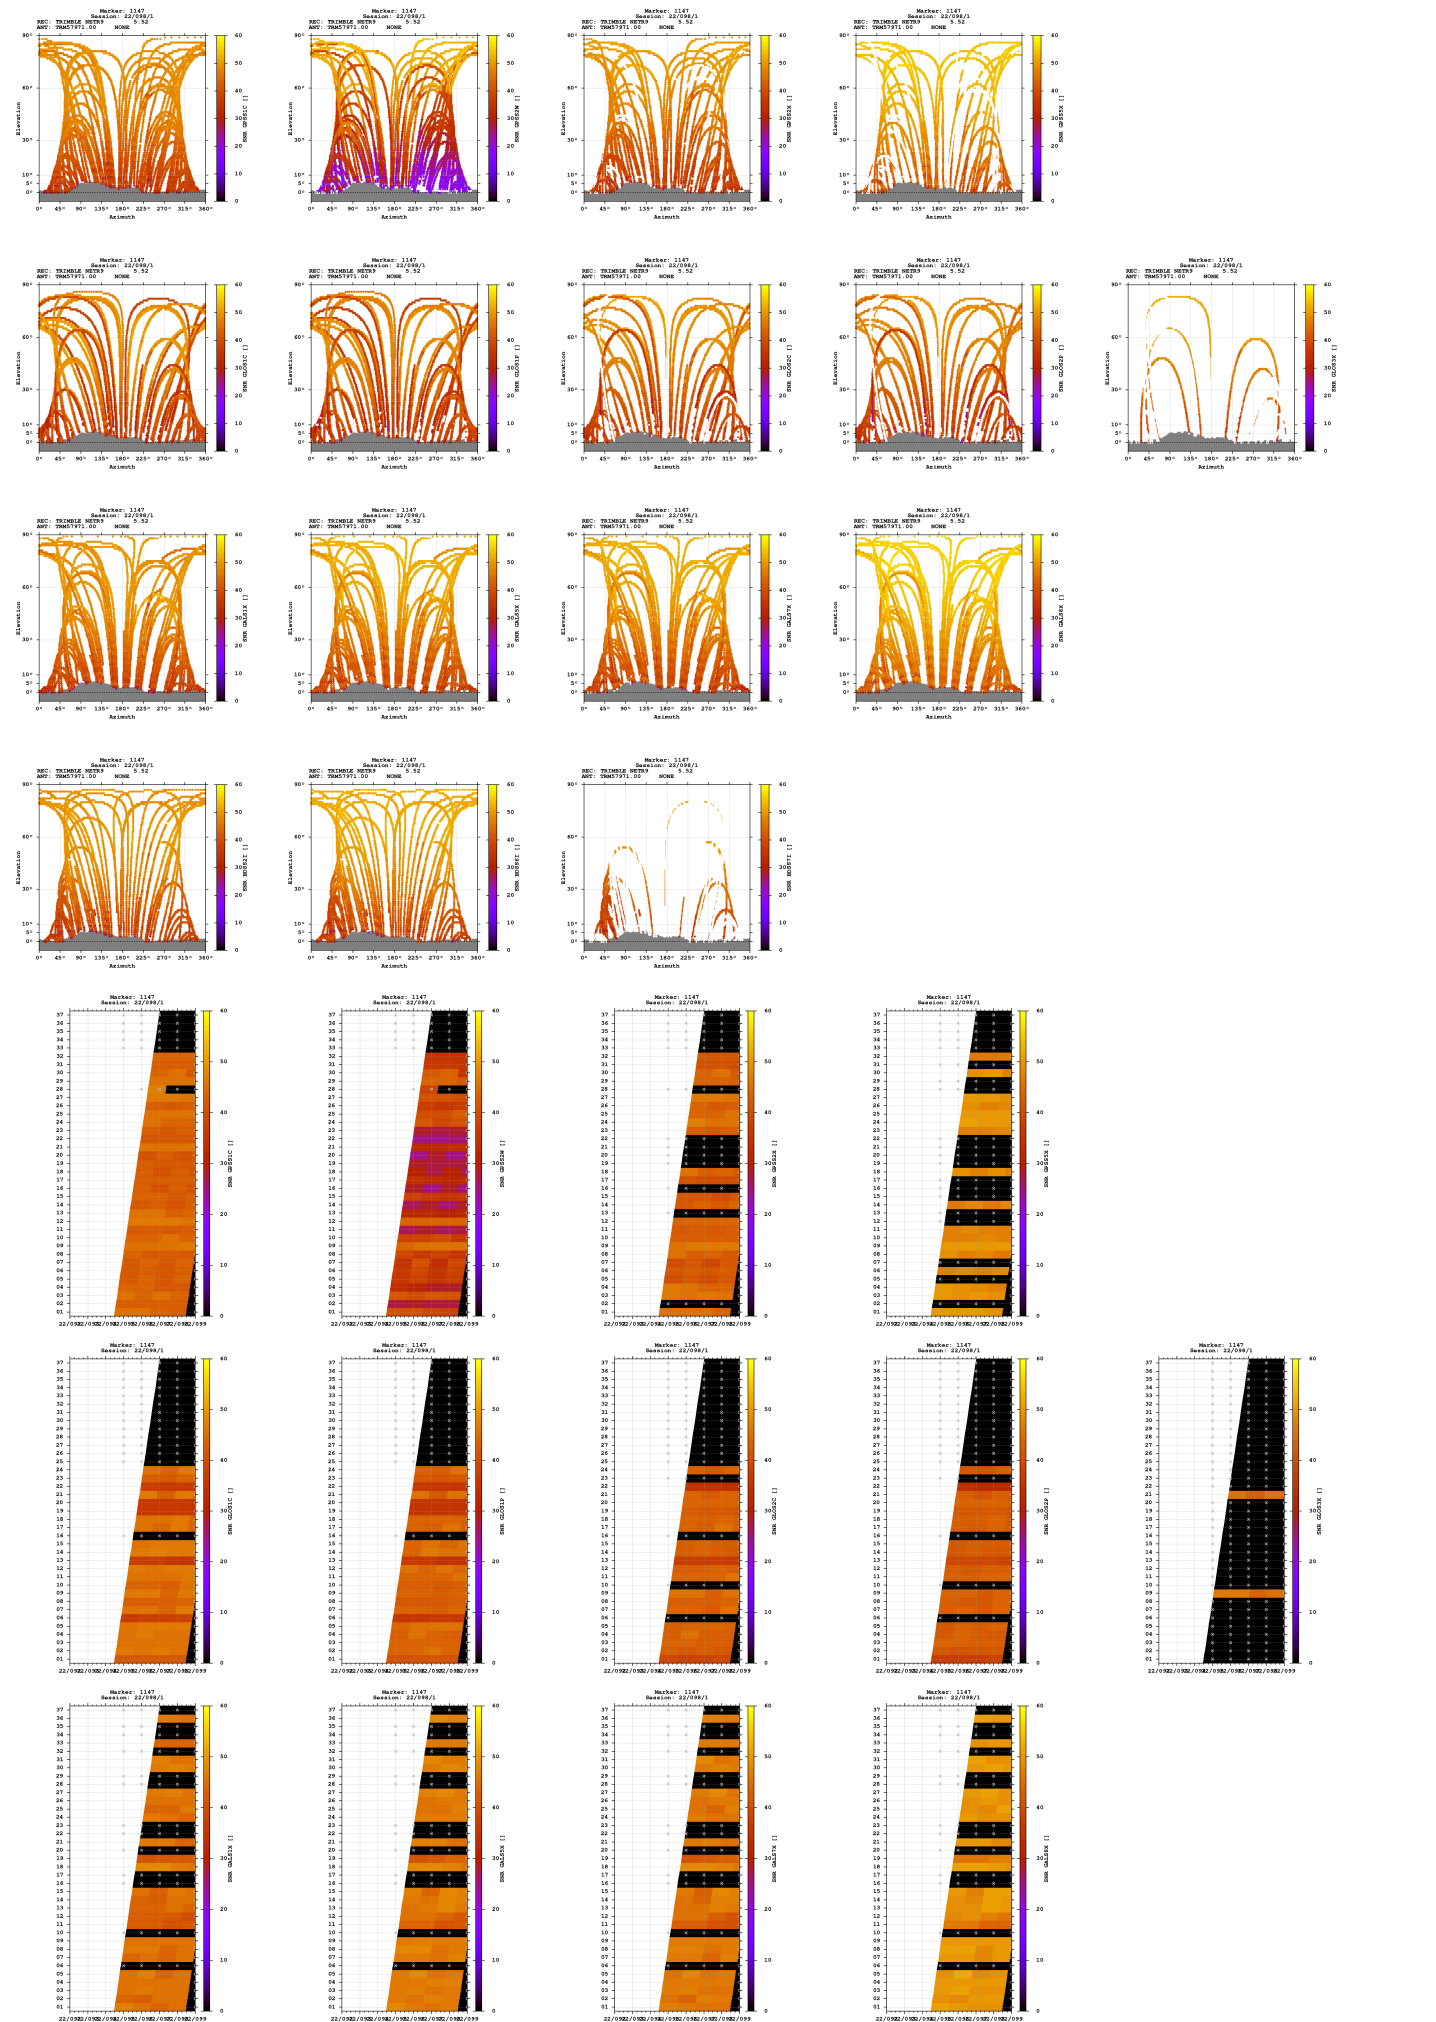

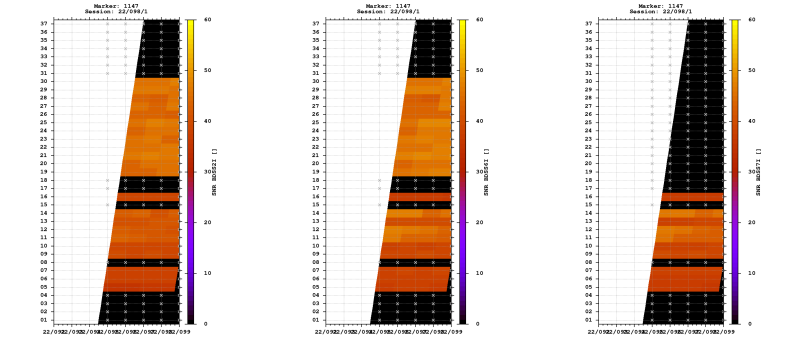


Estimates

2022-04-07 09:12:00	GPS	4317172.0017	572197.1193	4645147.8668	47.038916292	7.549966863	592.4631
2022-04-07 09:12:00	GLO	4317170.4828	572196.1437	4645146.4836	47.038918568	7.549956765	590.3373
2022-04-07 09:12:00	GAL	4317171.7030	572196.9482	4645147.4722	47.038915970	7.549965148	591.9572
2022-04-07 09:12:00	BDS	4317171.9815	572197.0376	4645149.0864	47.038923970	7.549965832	593.3346

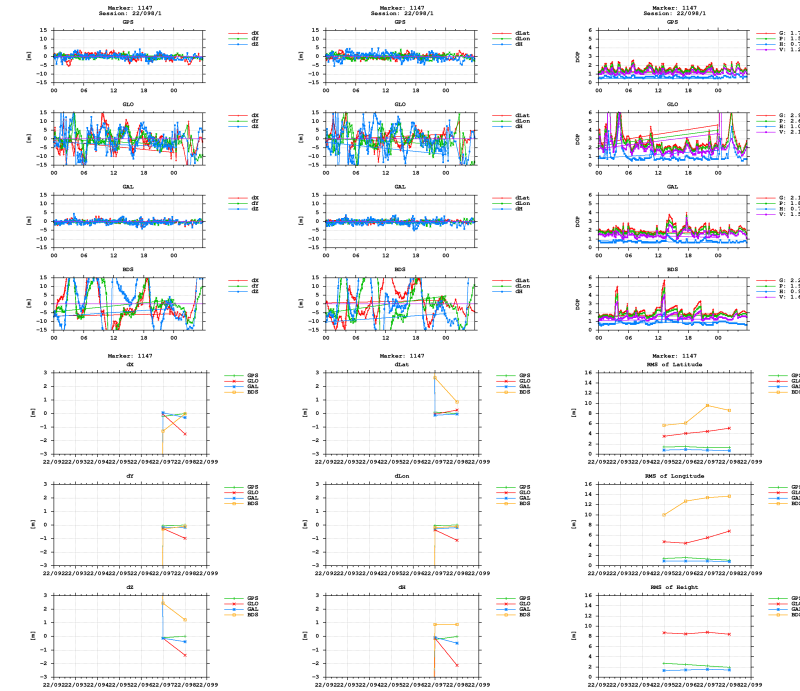

BNC



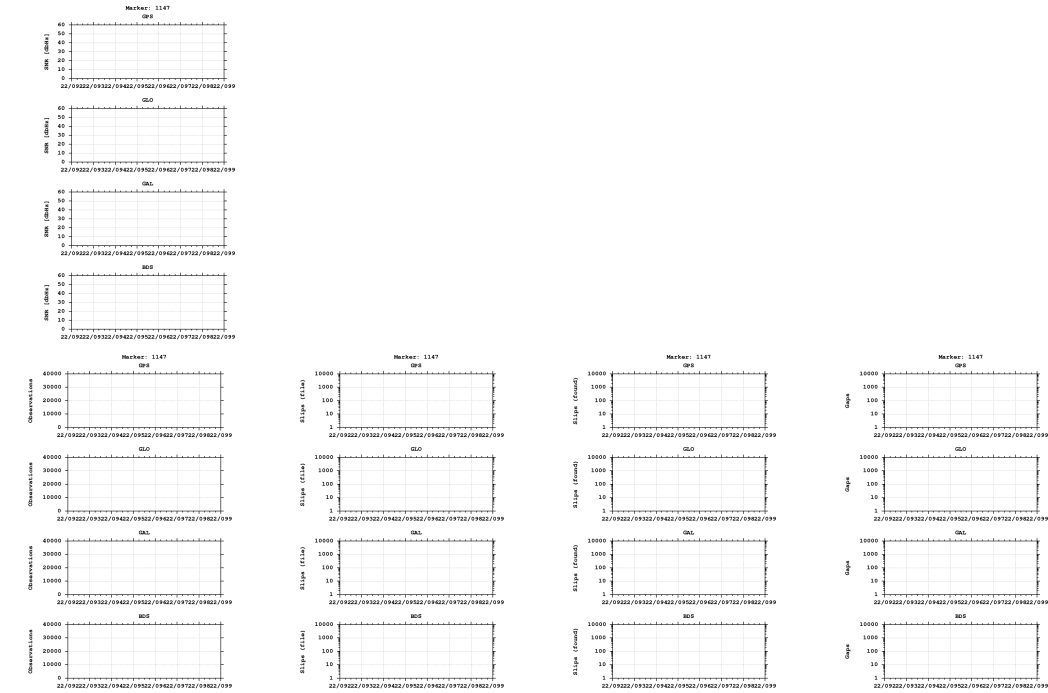

Equipment

2022-04-05 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)