


GNSS observation file monitoring for 0511


Last RINEX file: 05111161.220
RINEX version: 3.02
Marker: 1226
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

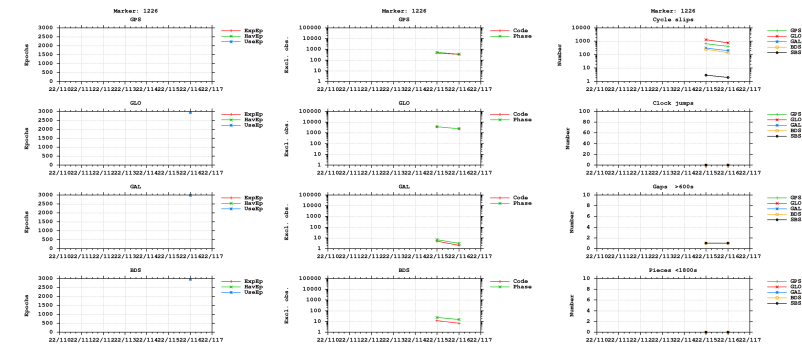



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

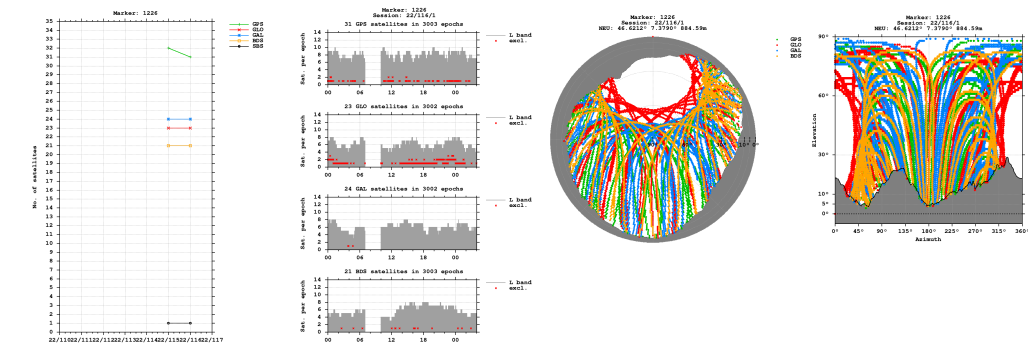


Bands

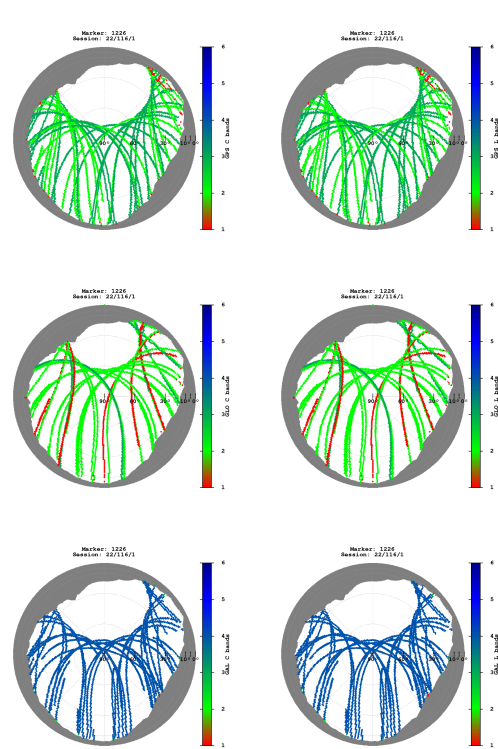


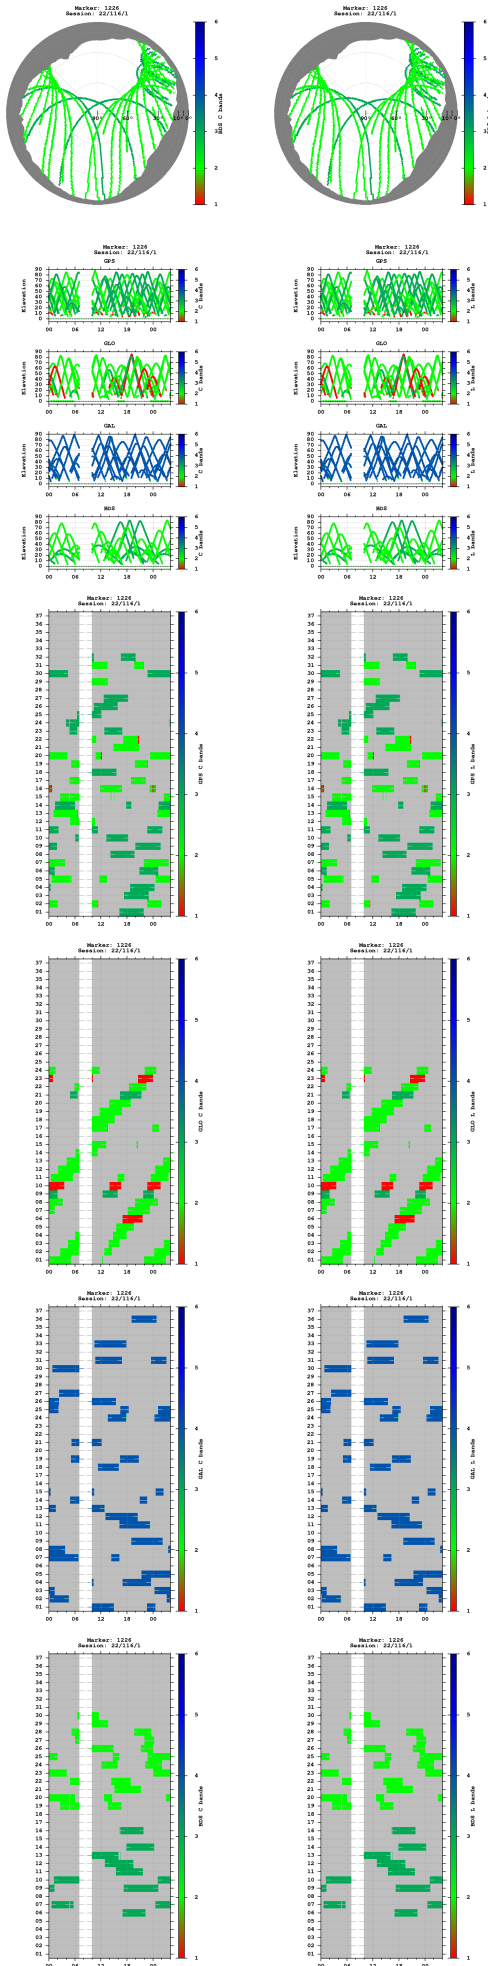


Observations

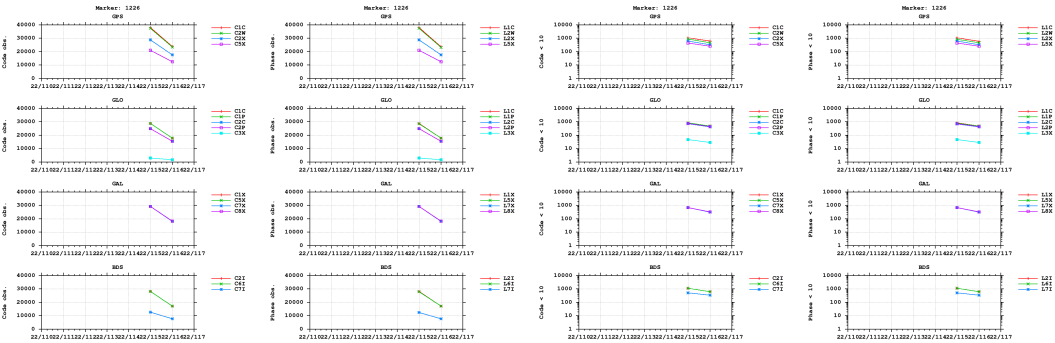


Multipath

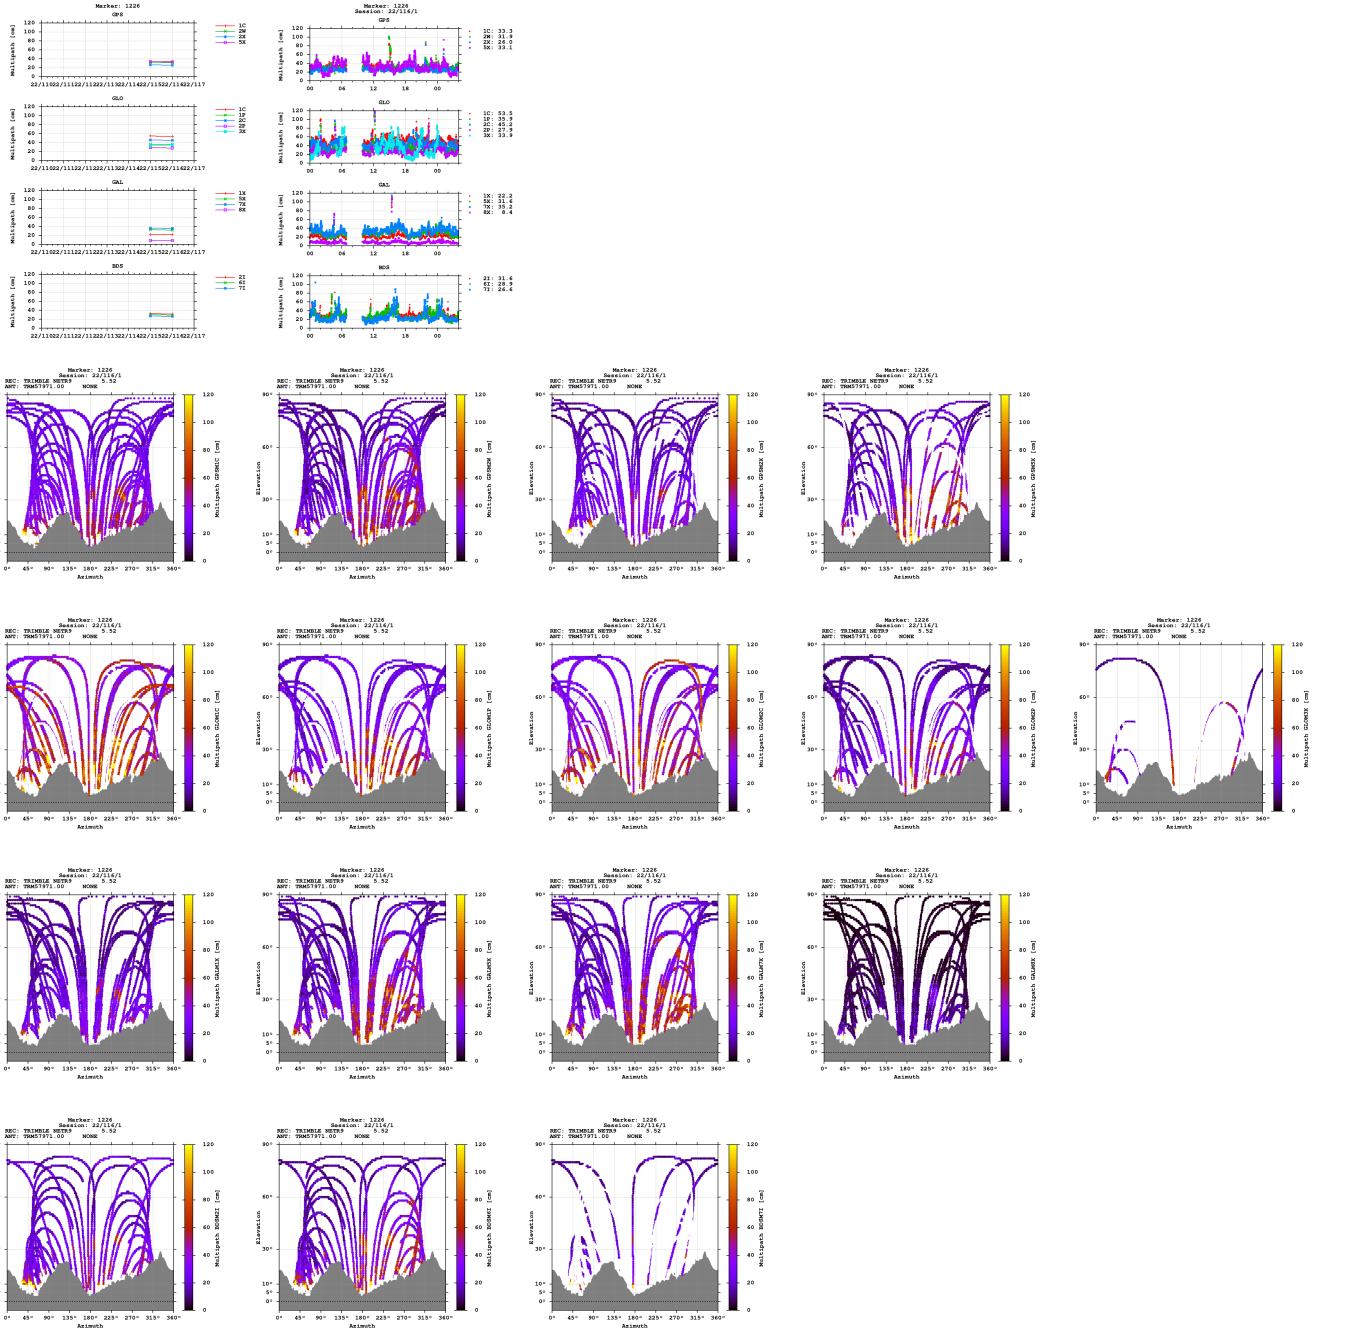


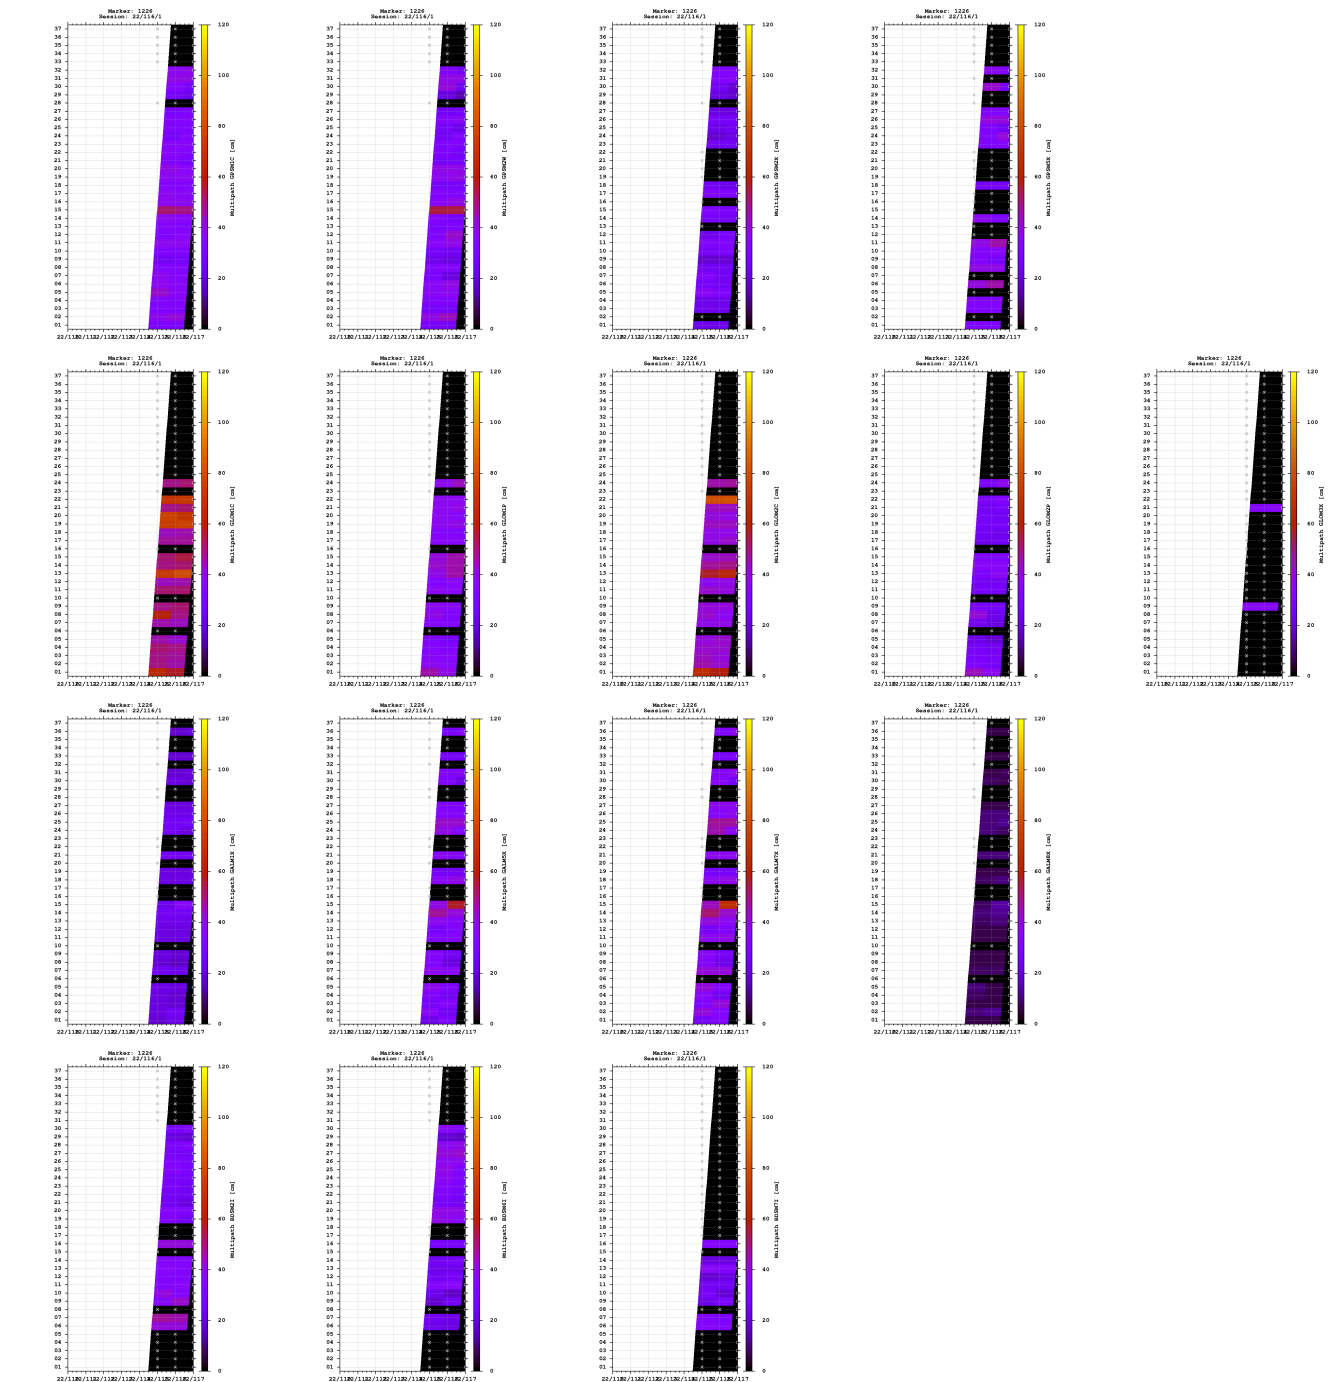


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

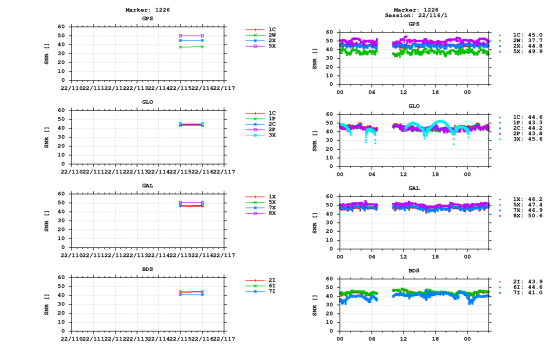


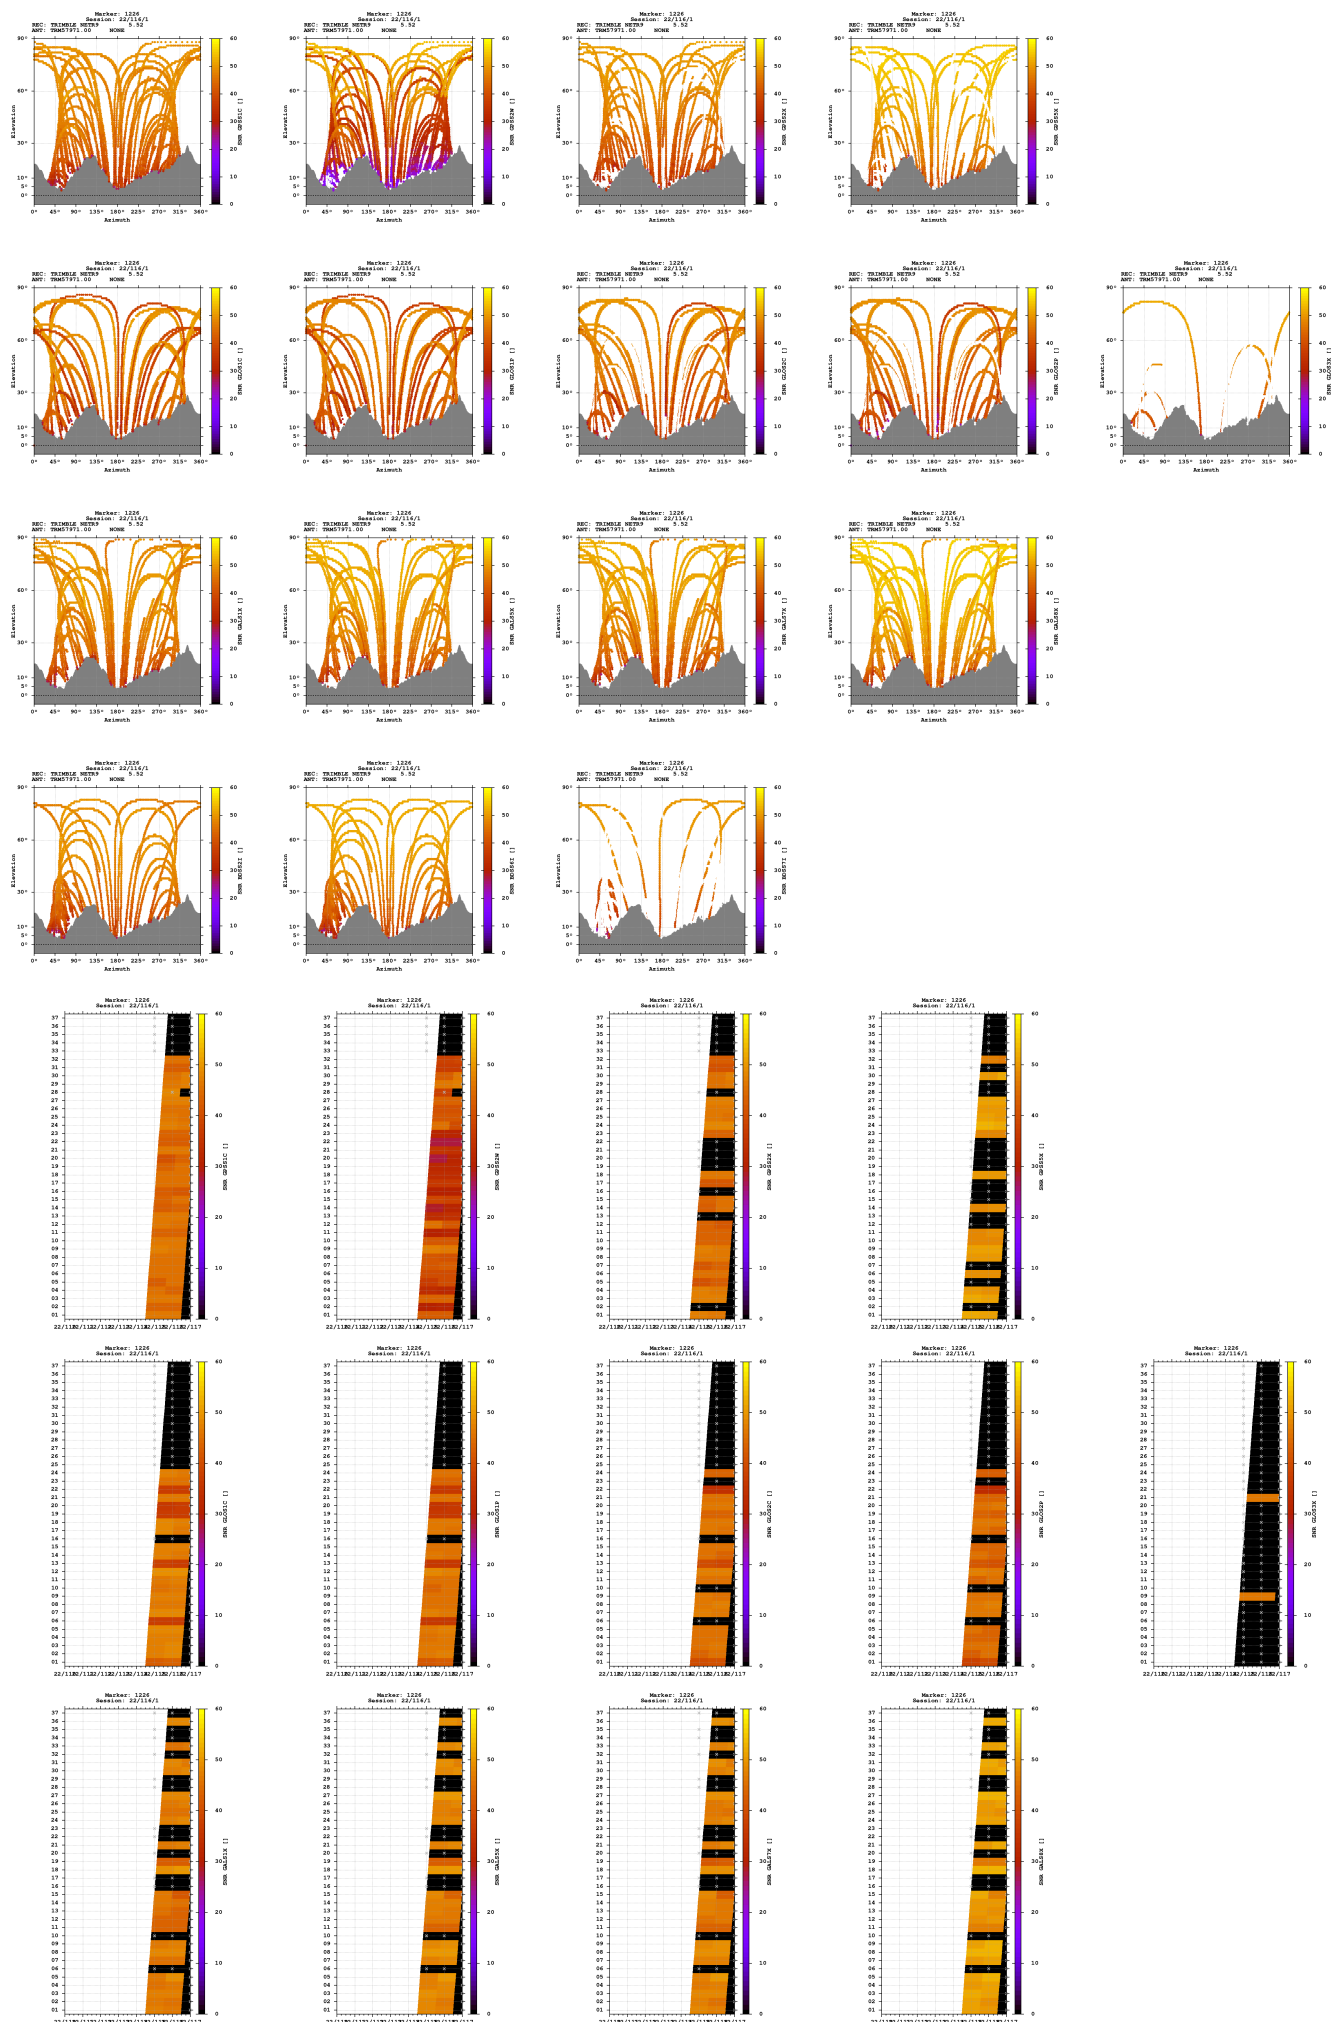

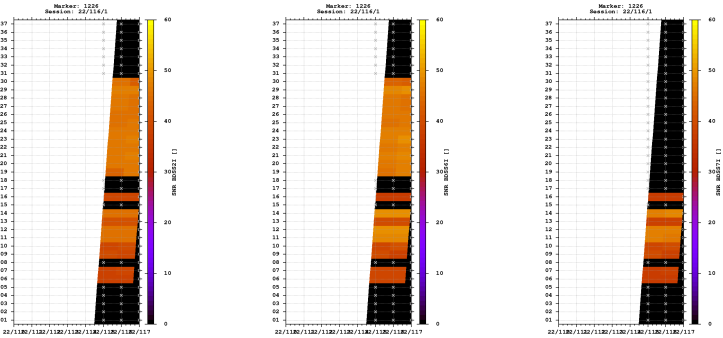



Estimates

2022-04-25 05:14:00	GPS	4352652.4238	563688.7587	4613583.9672	46.621158874	7.379000962	884.5863
2022-04-25 05:14:00	GLO	4352655.1912	563688.8524	4613585.3048	46.621149117	7.378997536	887.4517
2022-04-25 05:14:00	GAL	4352652.7304	563688.7973	4613583.9420	46.621156698	7.379000948	884.7803
2022-04-25 05:14:00	BDS	4352651.4769	563688.8805	4613587.0018	46.621183657	7.379004127	886.1578

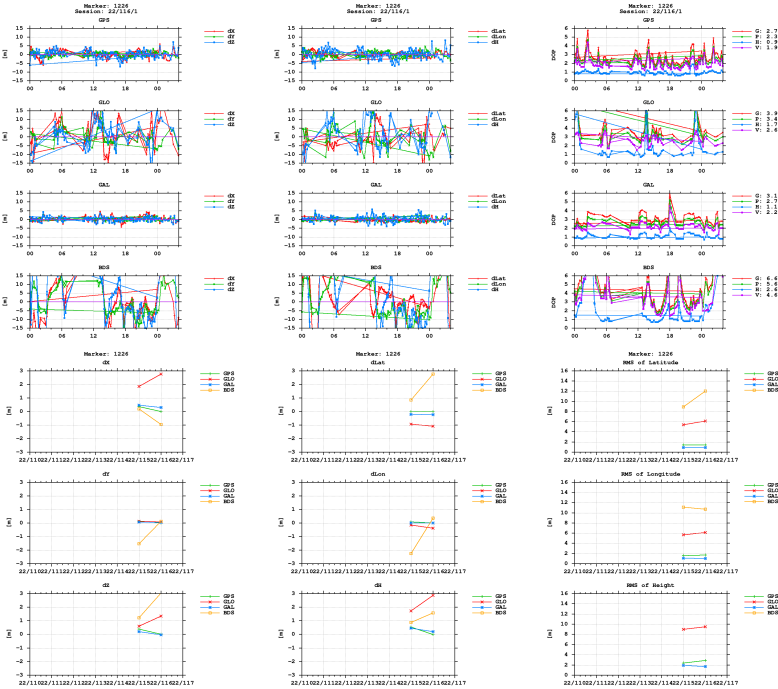

BNC

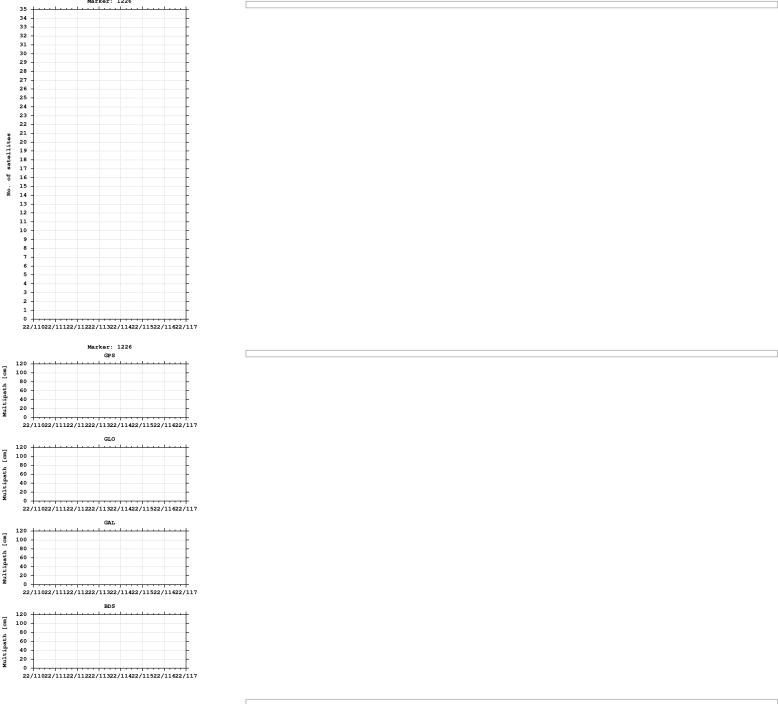

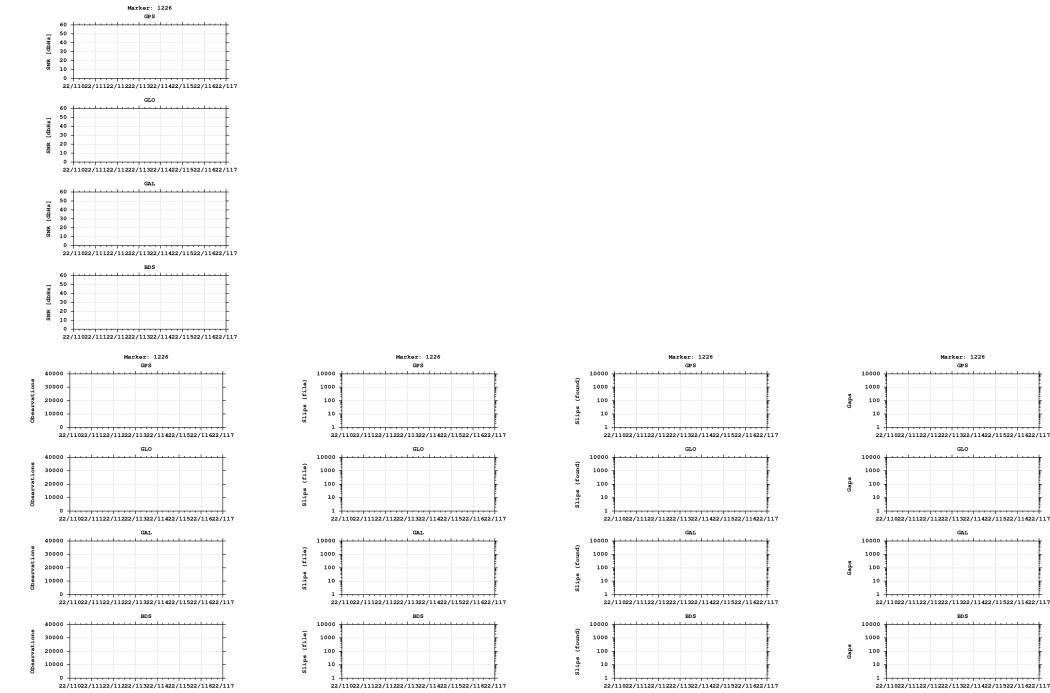

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)