


GNSS observation file monitoring for 0511


Last RINEX file: 05111171.220
RINEX version: 3.02
Marker: 1187
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

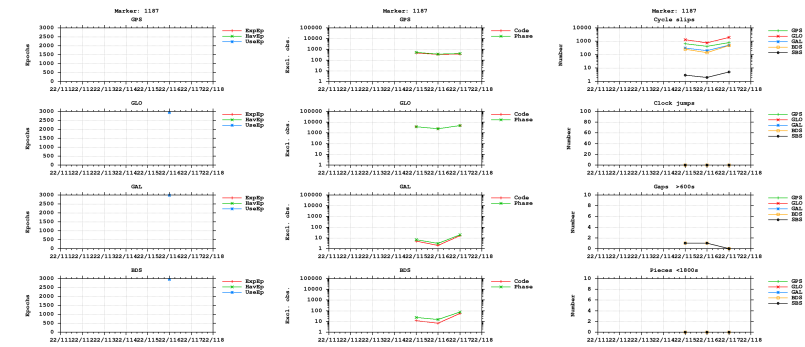



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

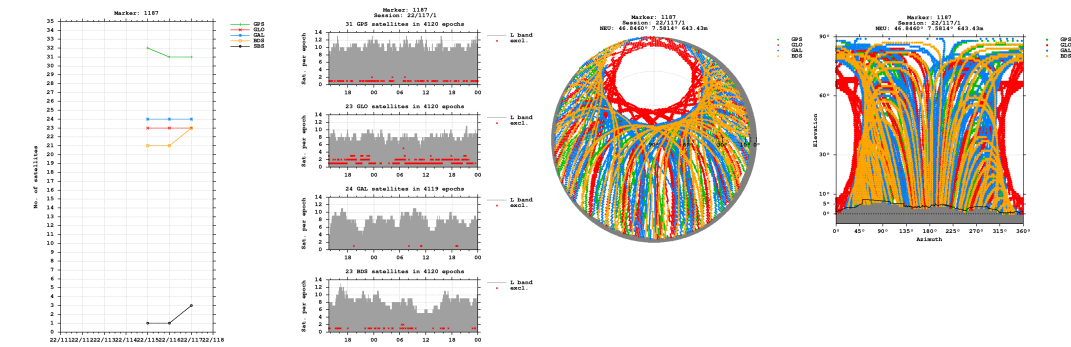


Bands

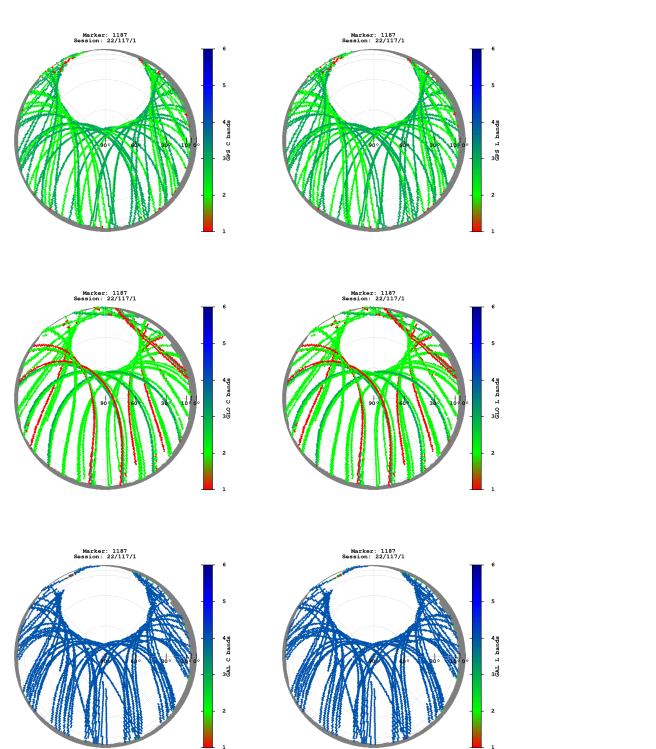


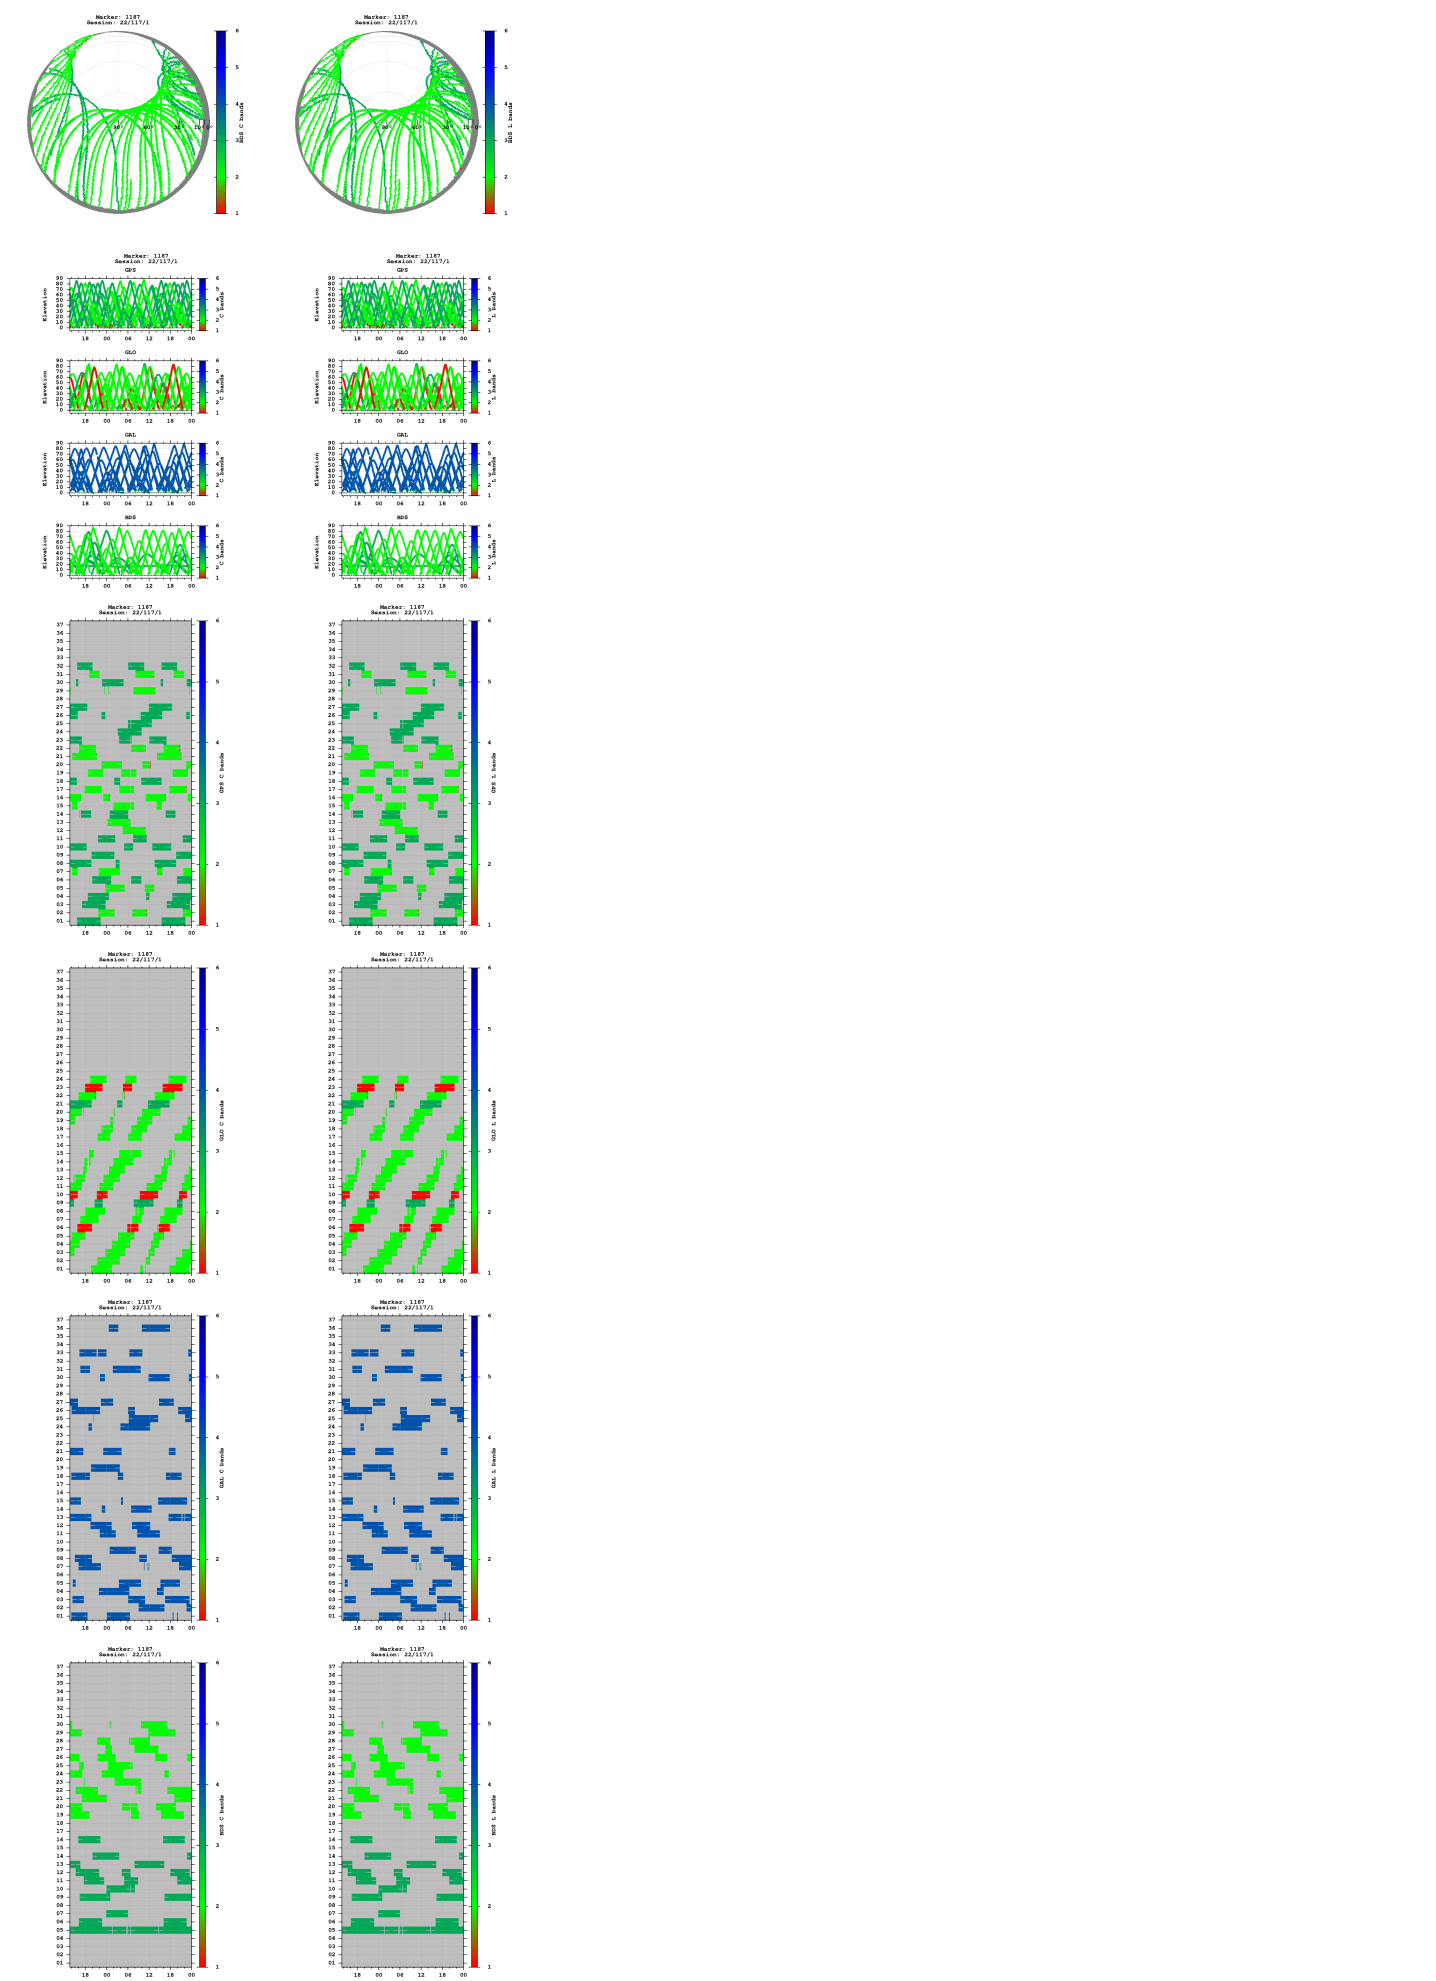

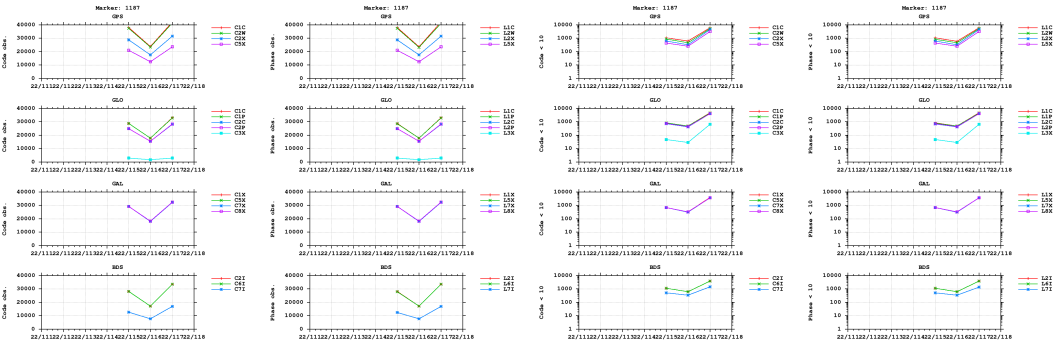


Multipath

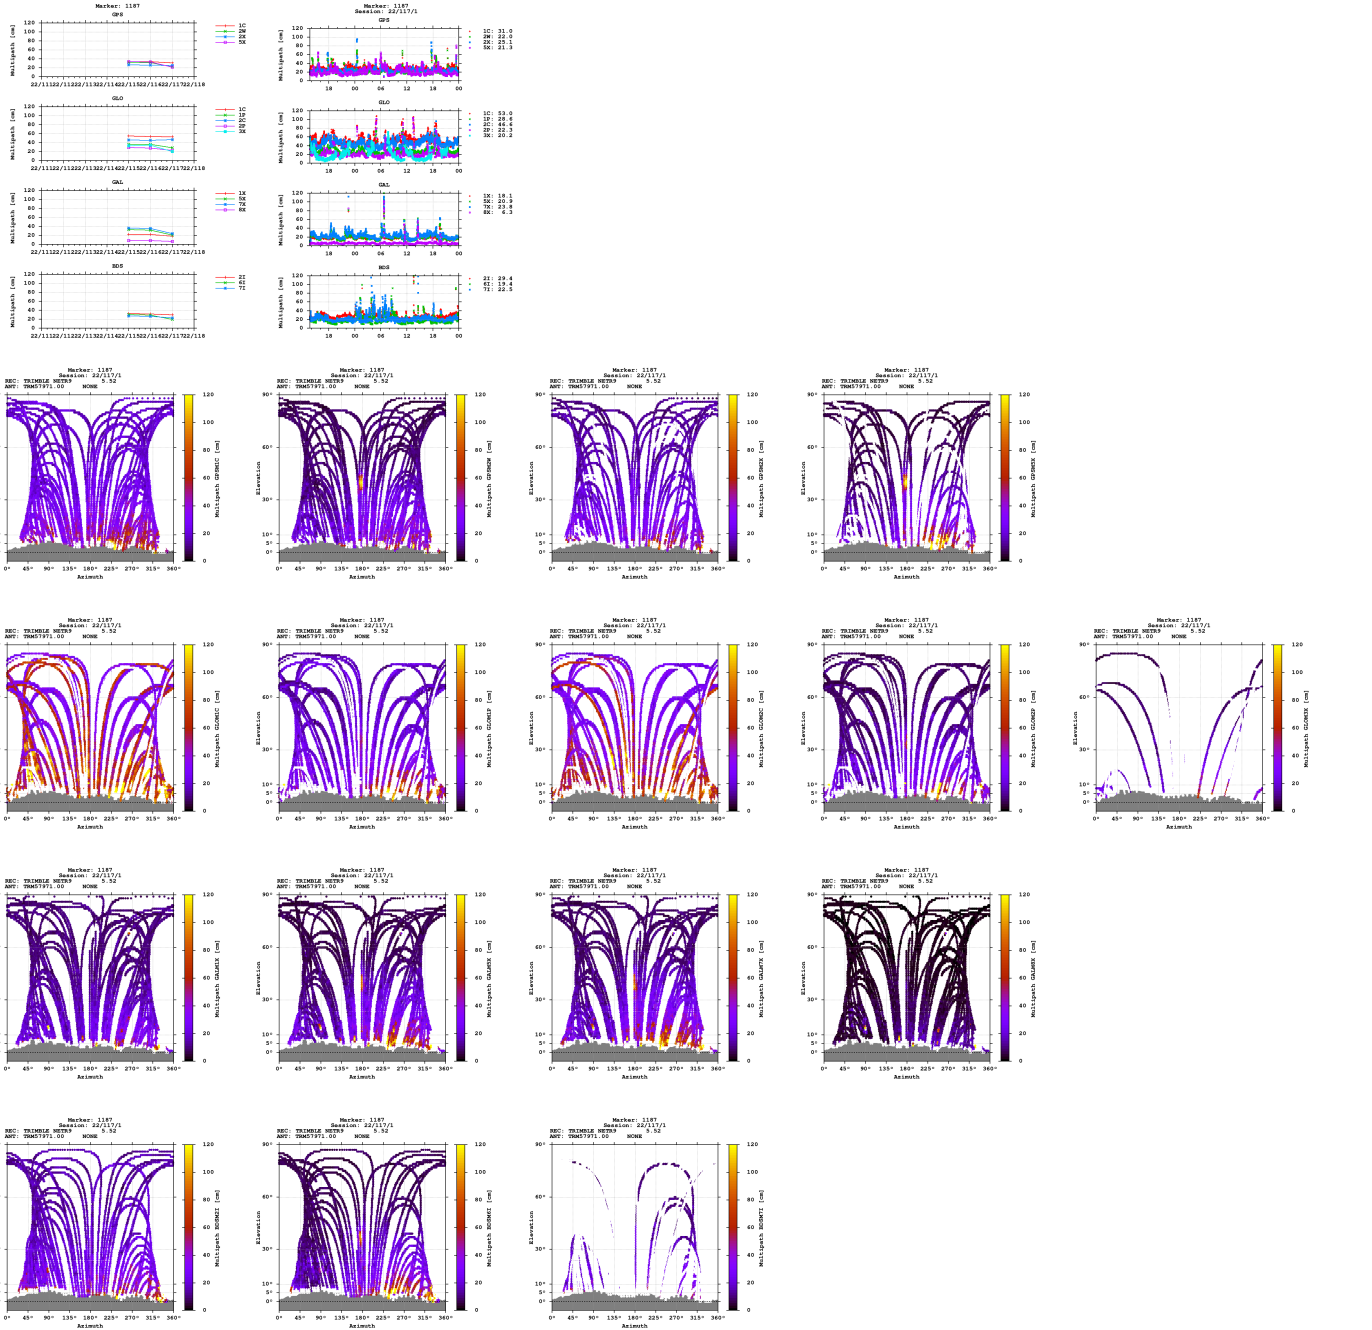


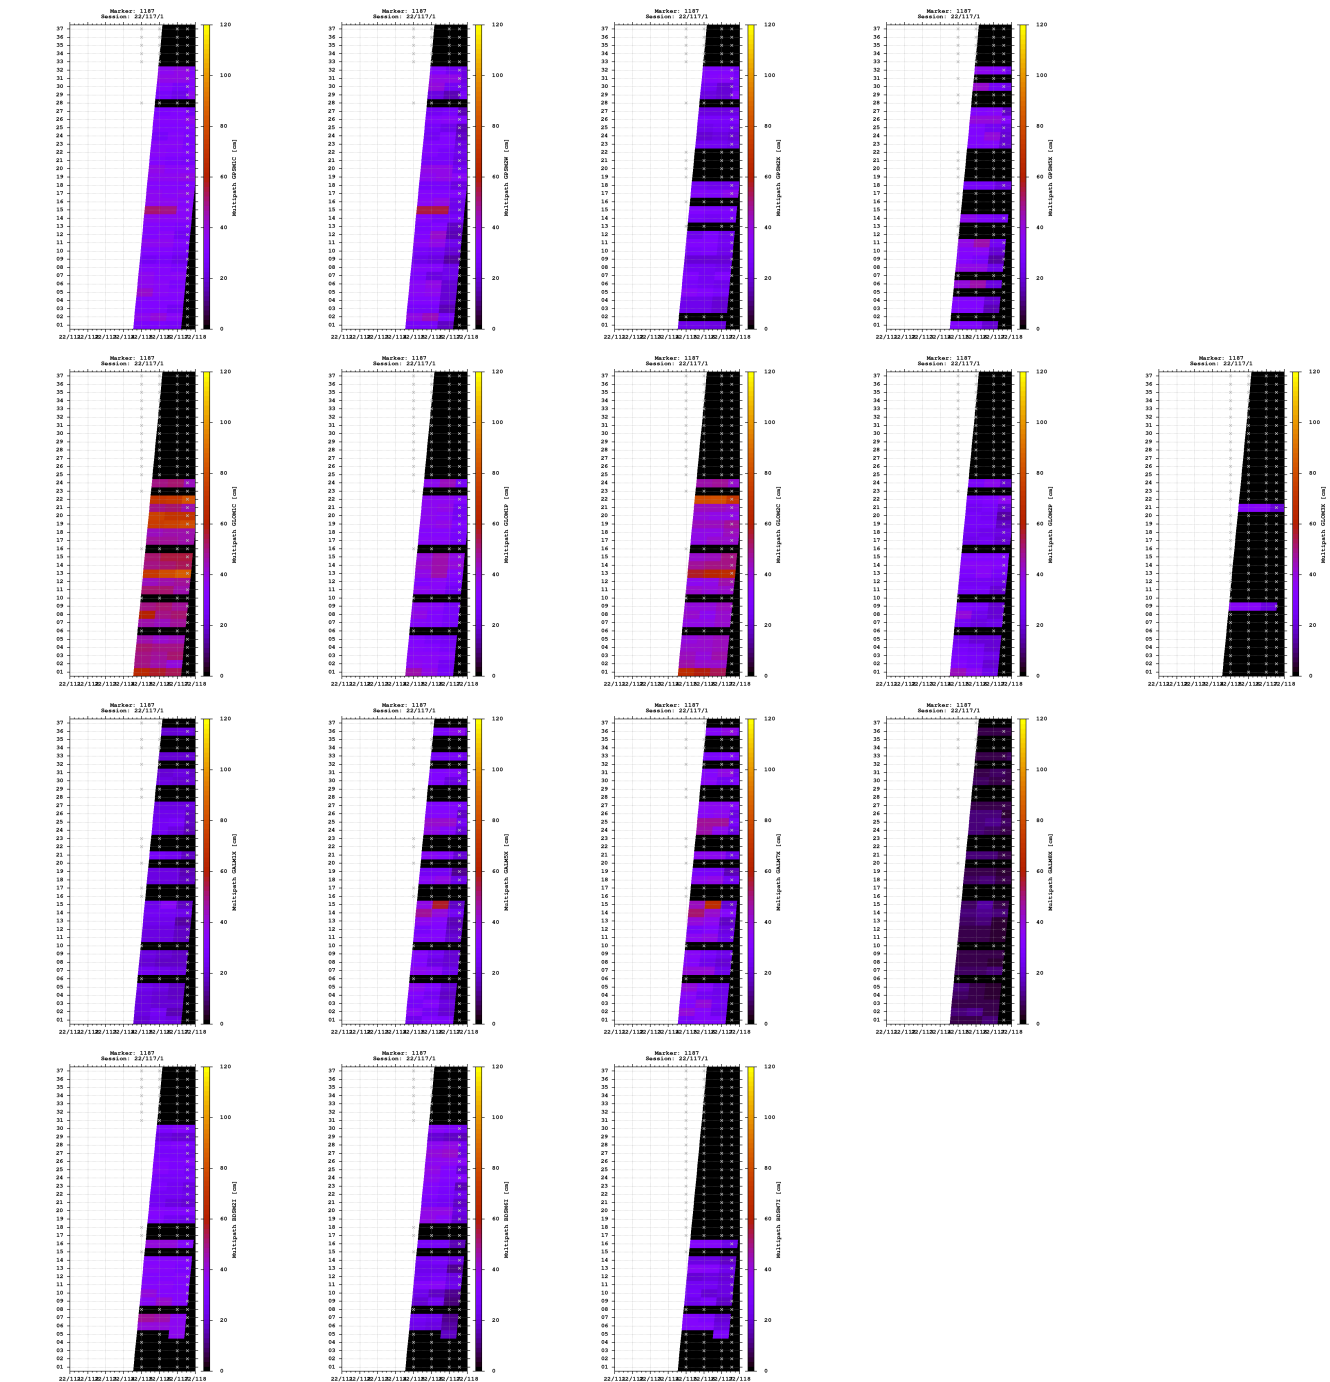


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

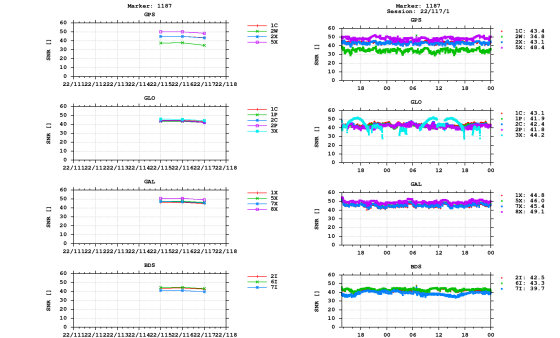


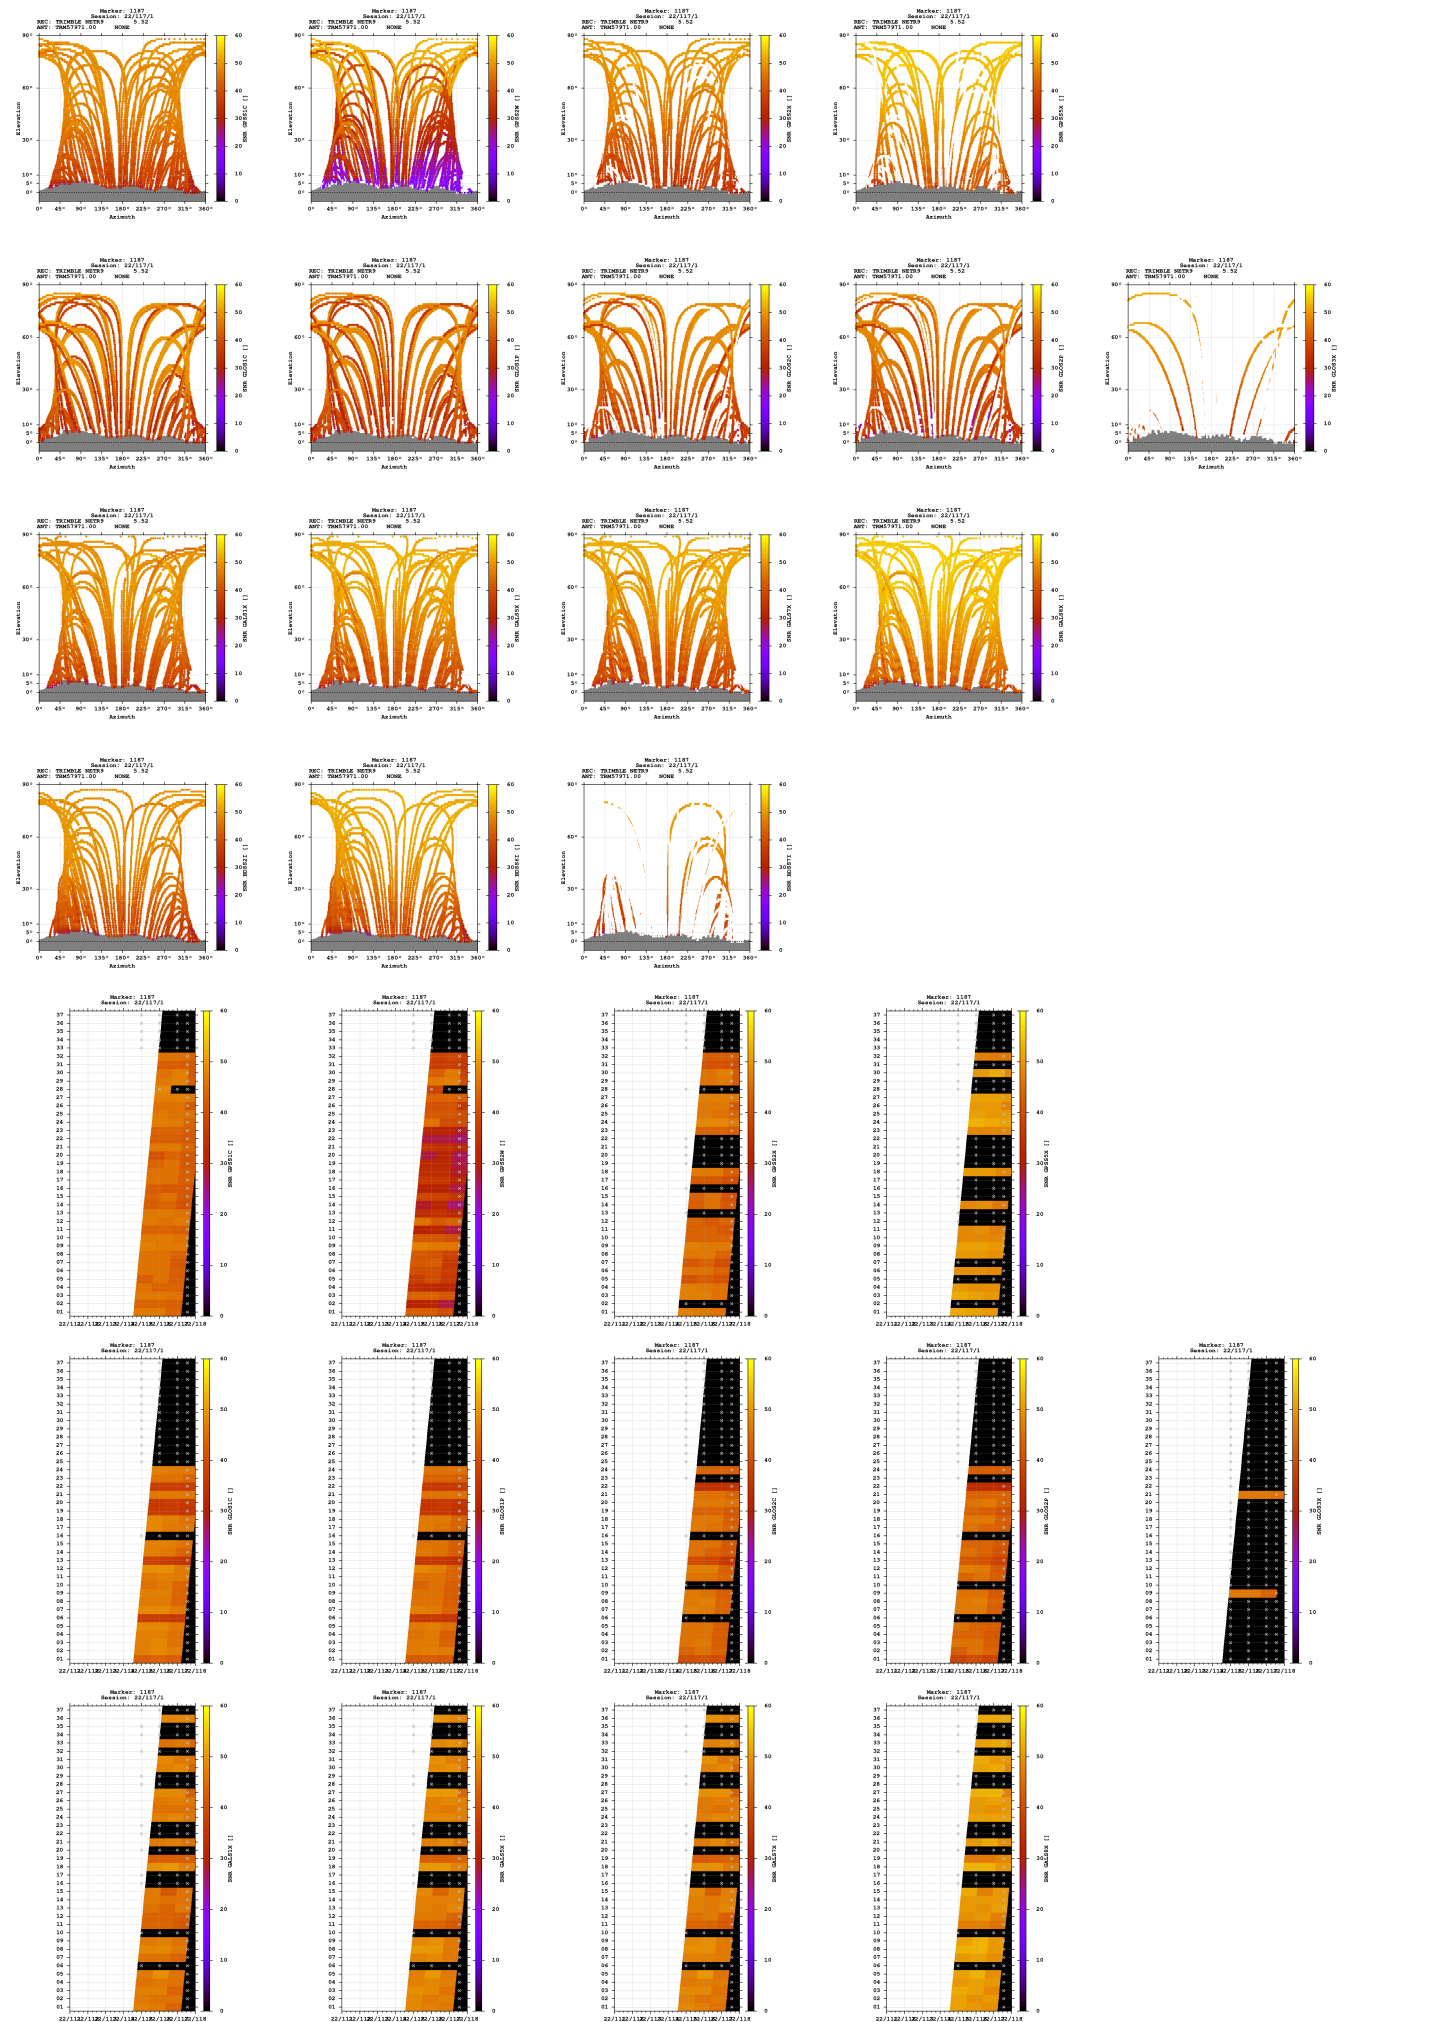

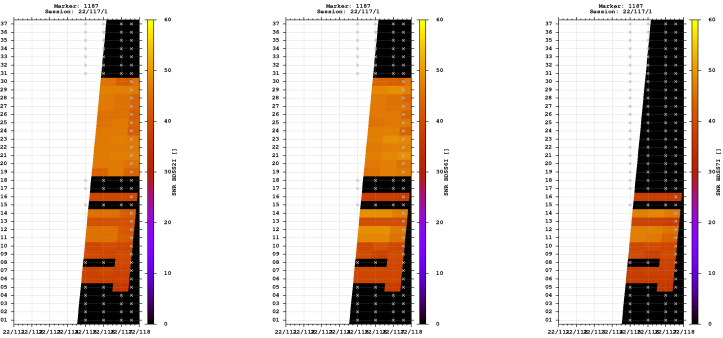



Estimates

2022-04-27 13:37:00	GPS	4332426.4509	576637.8304	4630541.7182	46.846002782	7.581401823	643.4328
2022-04-27 13:37:00	GLO	4332426.6447	576637.1395	4630542.0983	46.846004458	7.581392509	643.7791
2022-04-27 13:37:00	GAL	4332426.2652	576637.4842	4630541.3028	46.846001734	7.581397645	642.9725
2022-04-27 13:37:00	BDS	4332423.1061	576637.4841	4630541.3102	46.846022327	7.581403107	640.8362

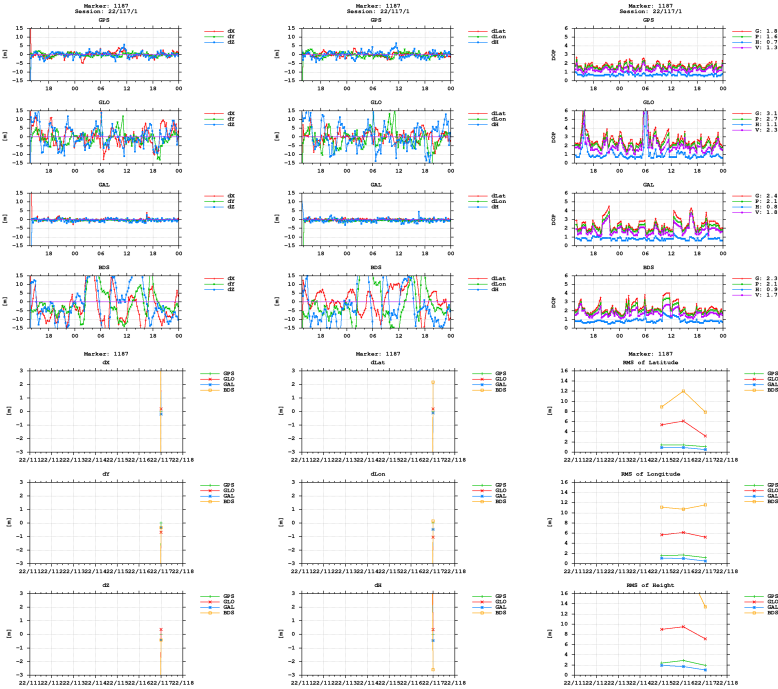

BNC

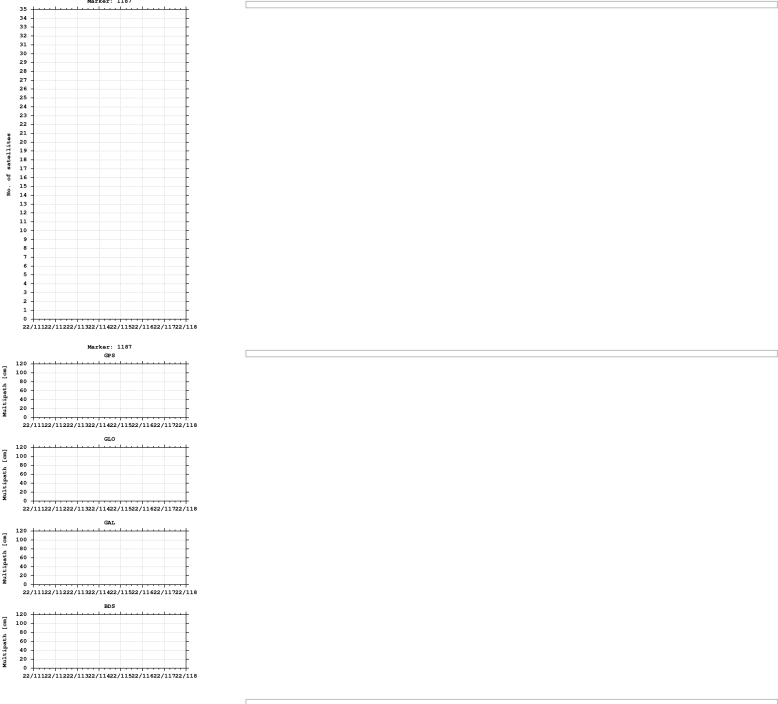

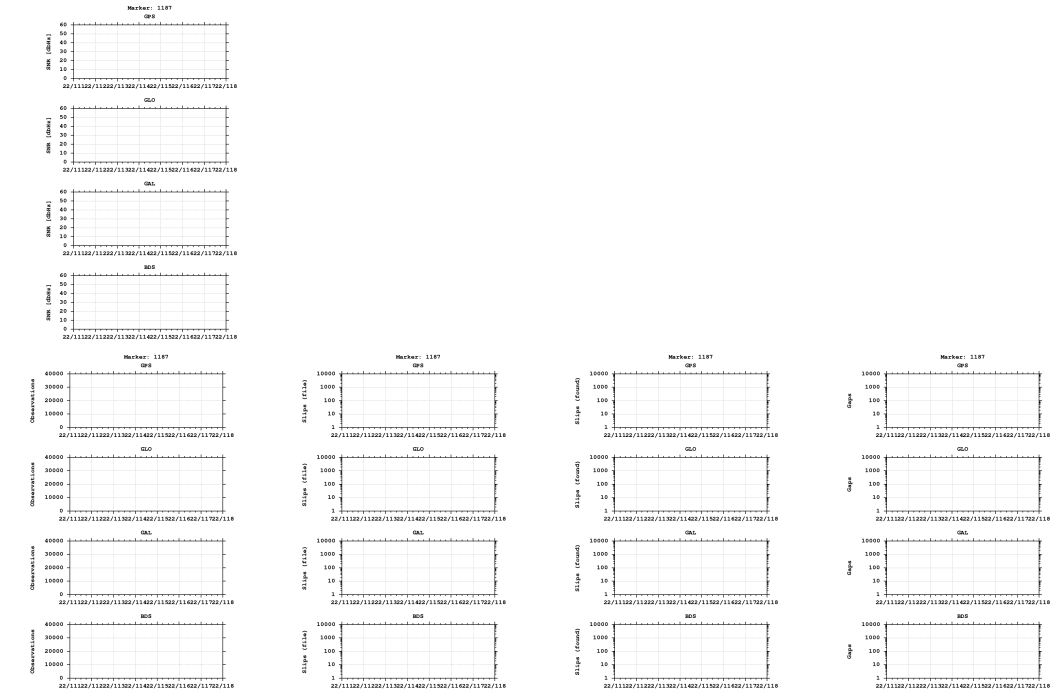

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)