

GNSS observation file monitoring for 0511

Last RINEX file: 05111181.220

RINEX version: 3.02

Marker: 1187

Receiver: 511

Antenna: 511


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

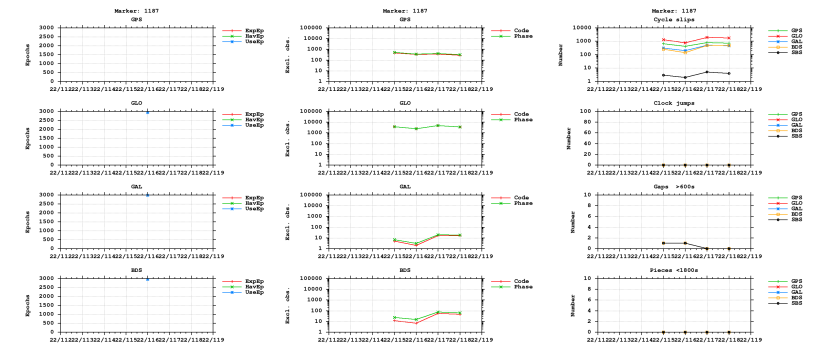



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

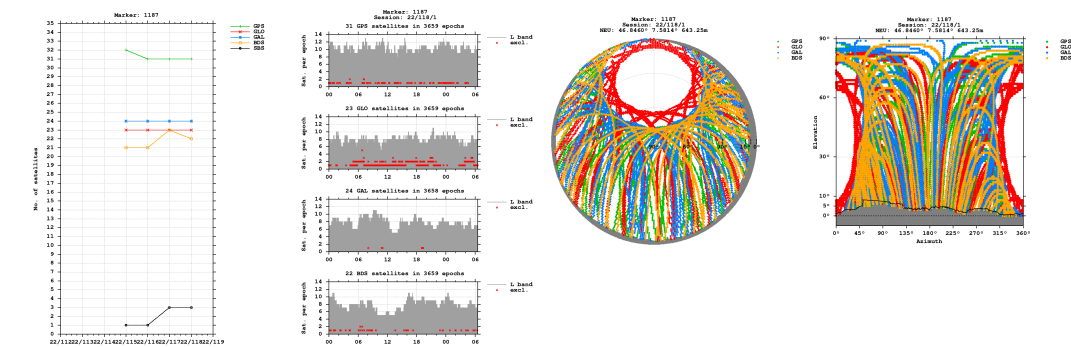


Bands

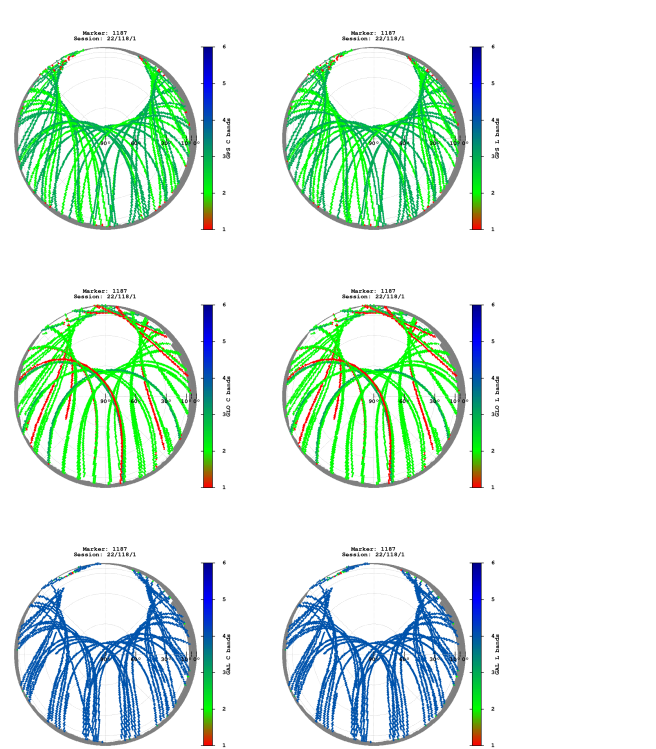


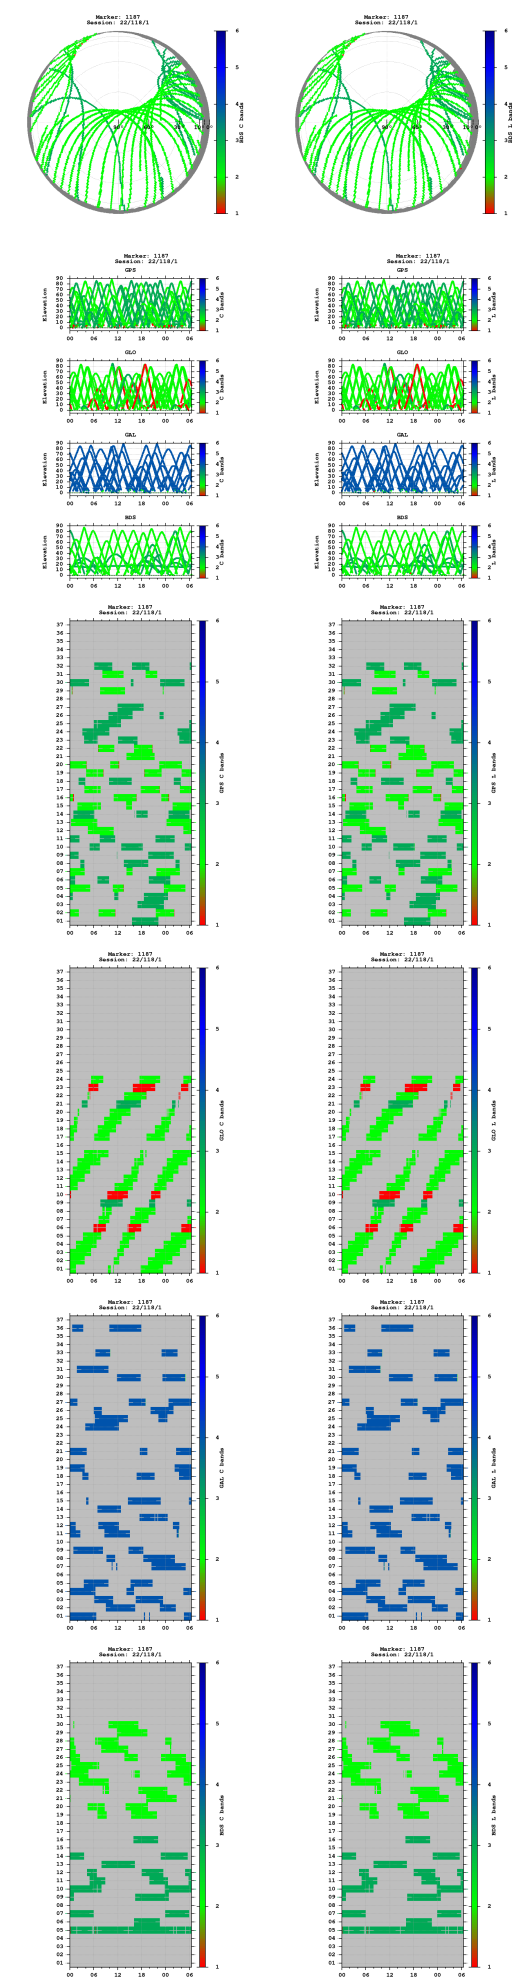


Observations

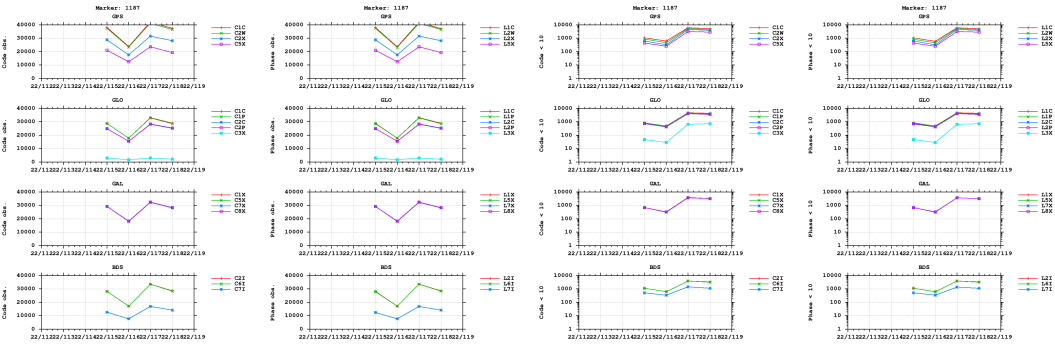


Multipath

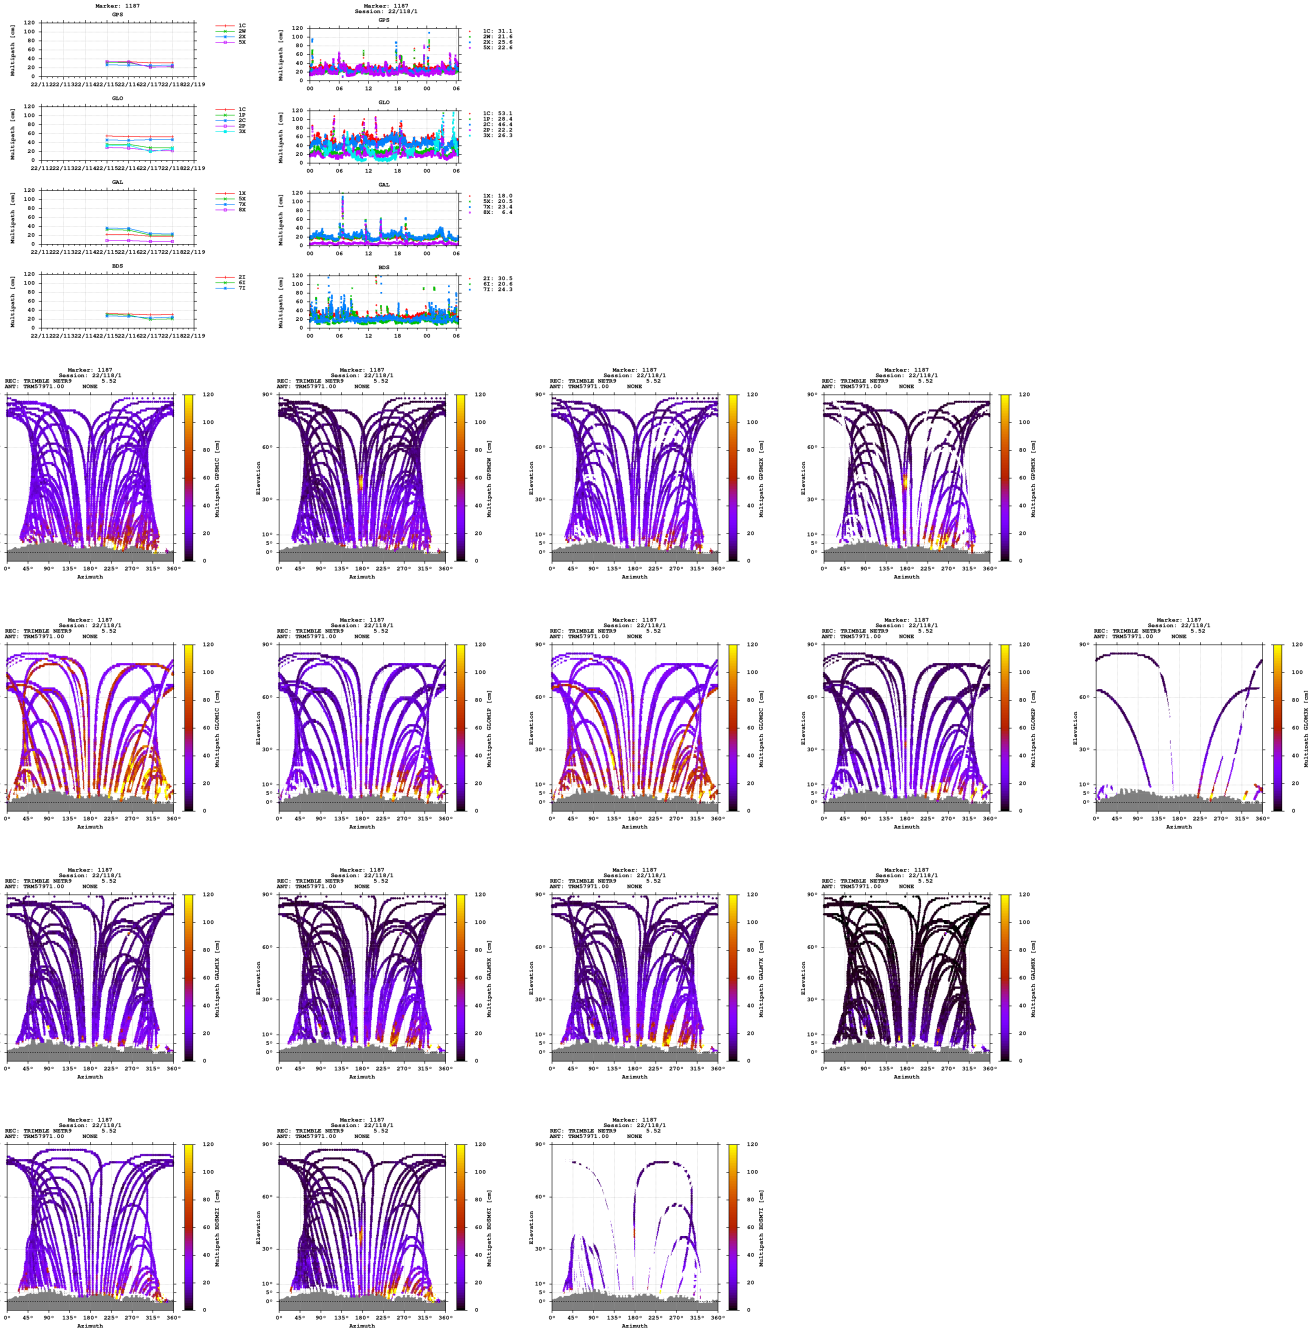


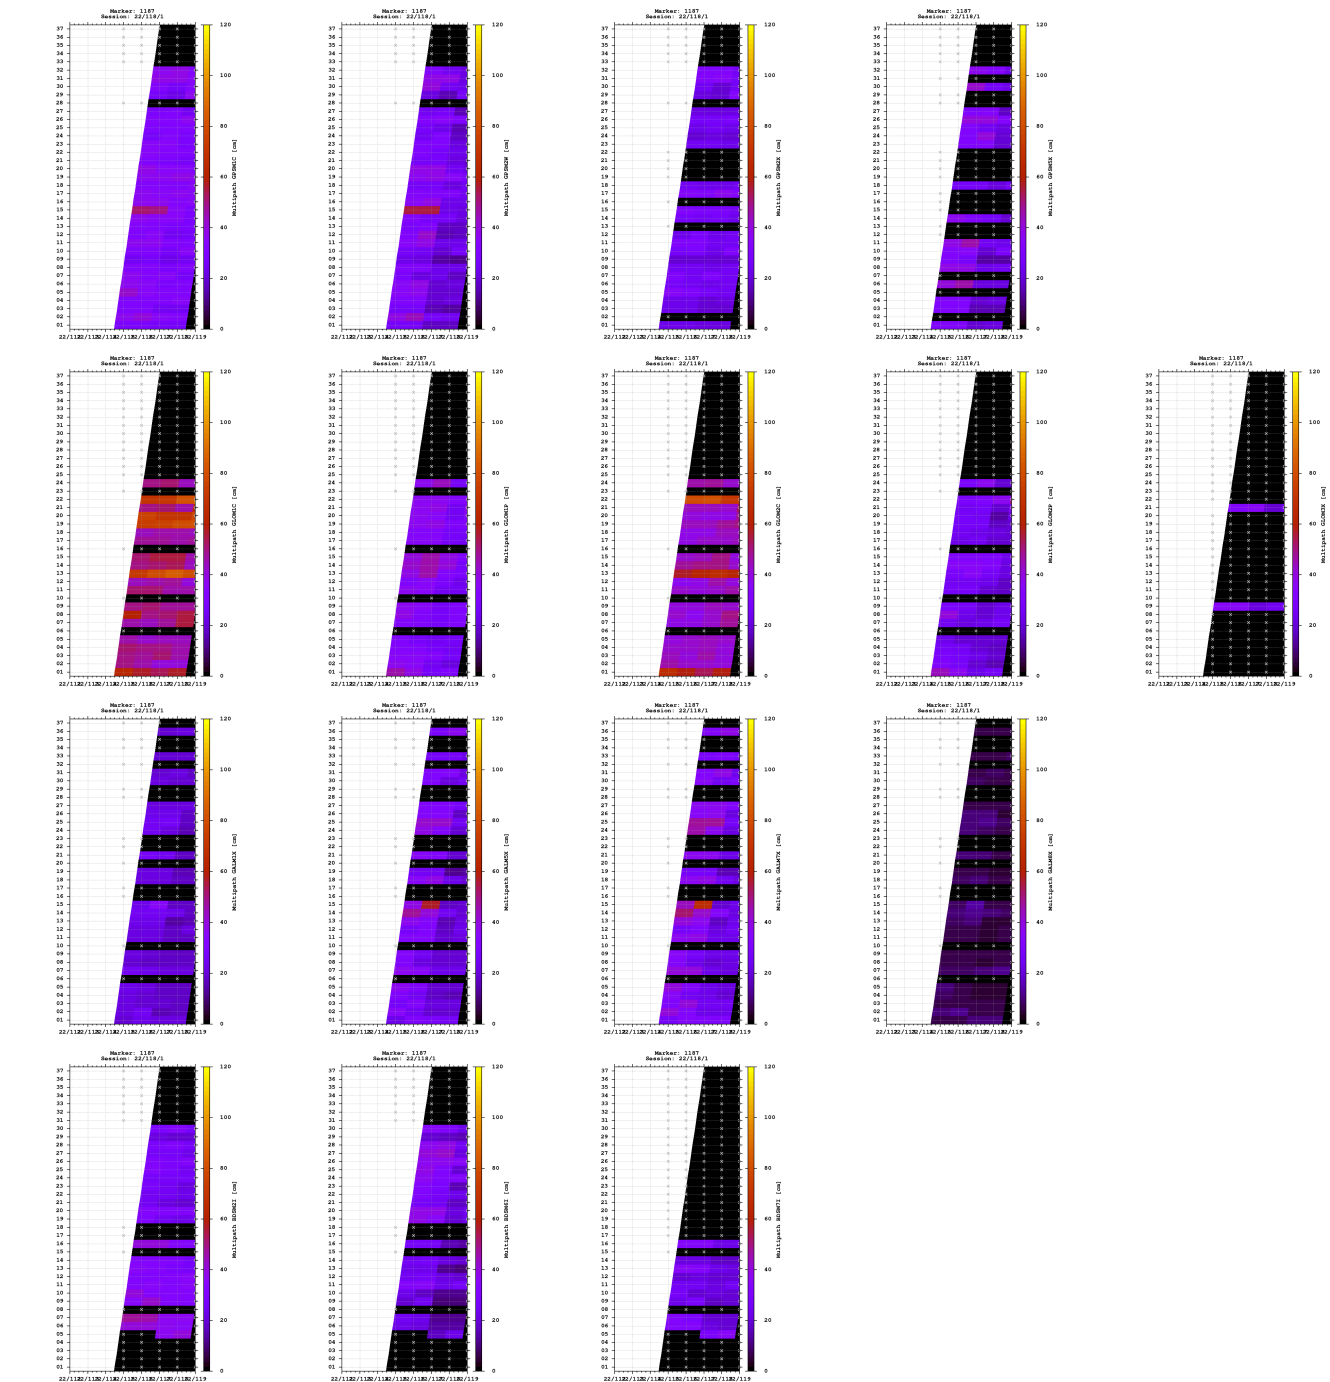


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

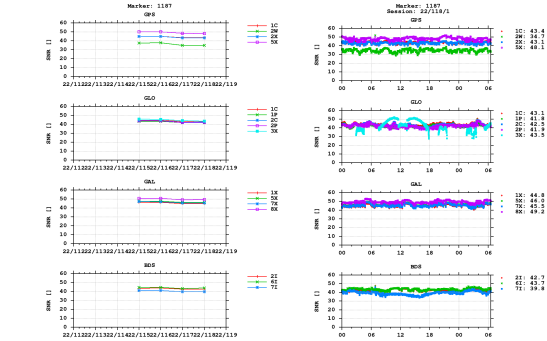

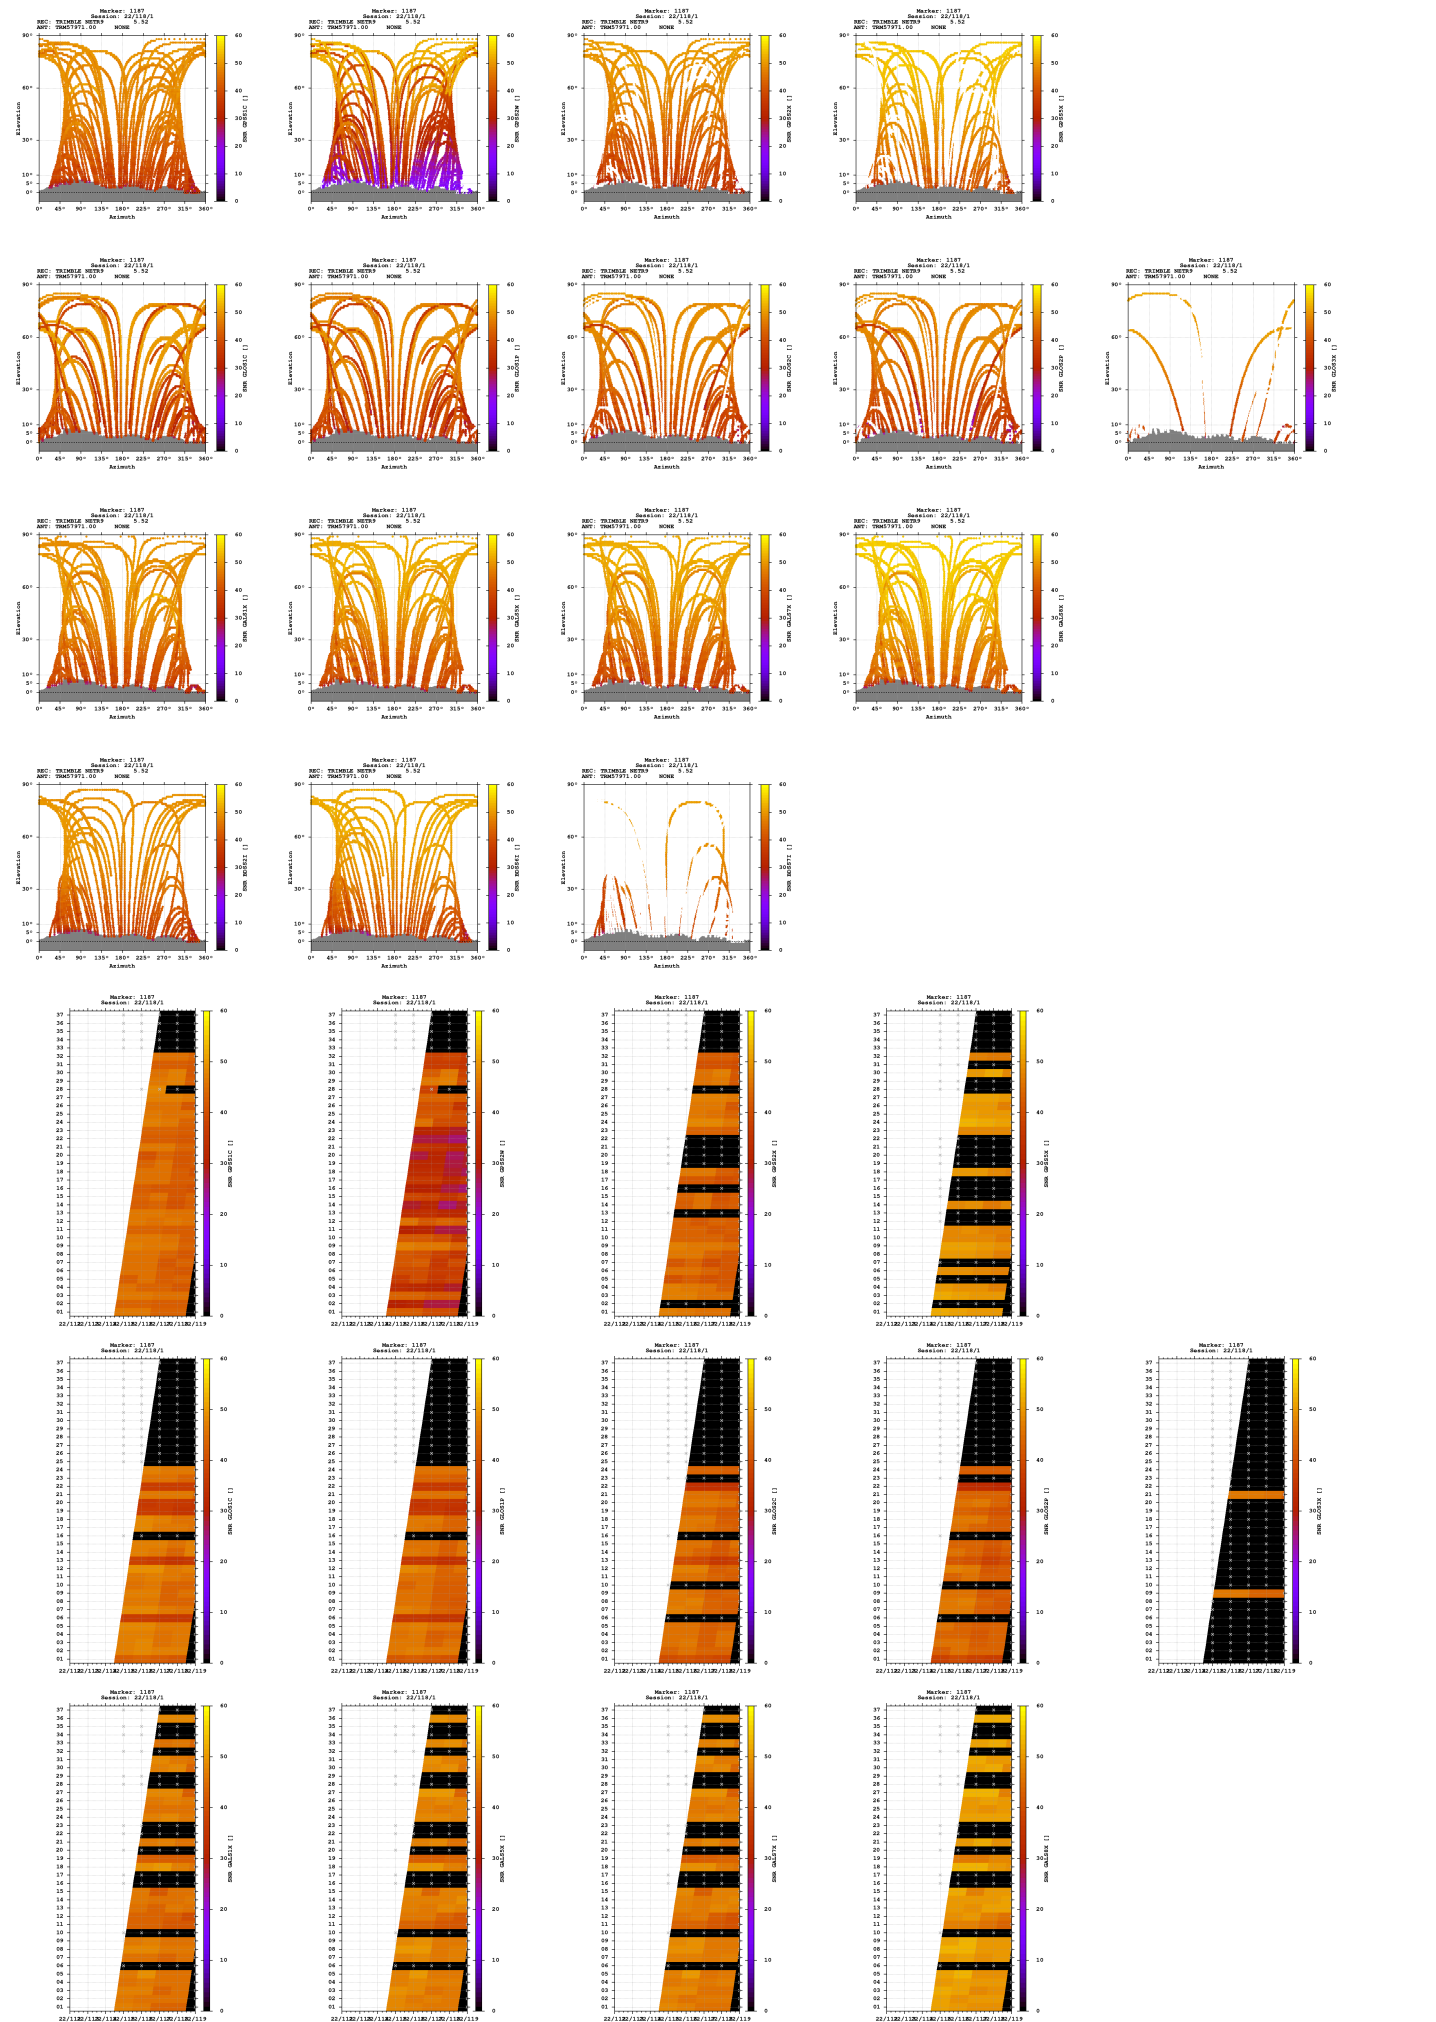

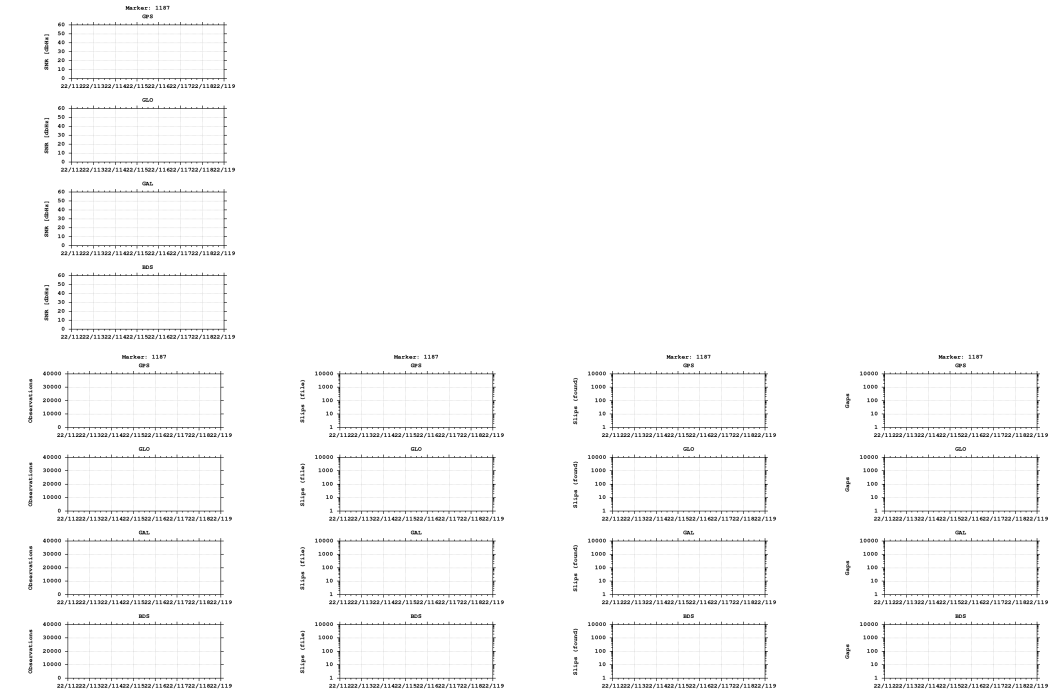

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)