


GNSS observation file monitoring for 0512


Last RINEX file: 05121151.22O
RINEX version: 3.02
Marker: 1227
Receiver: 512 TRIMBLE NETR9 5.52
Antenna: 512 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


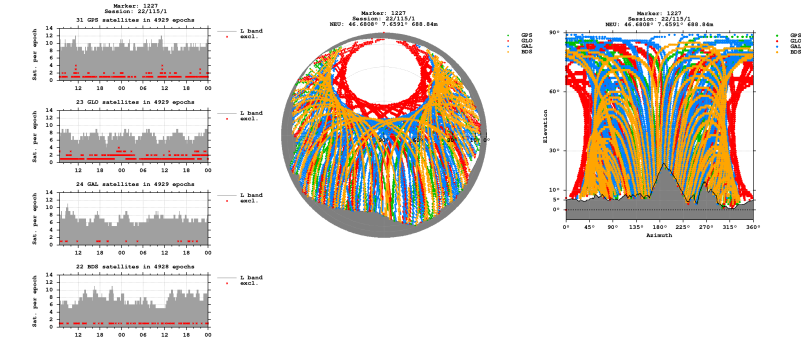


Bands

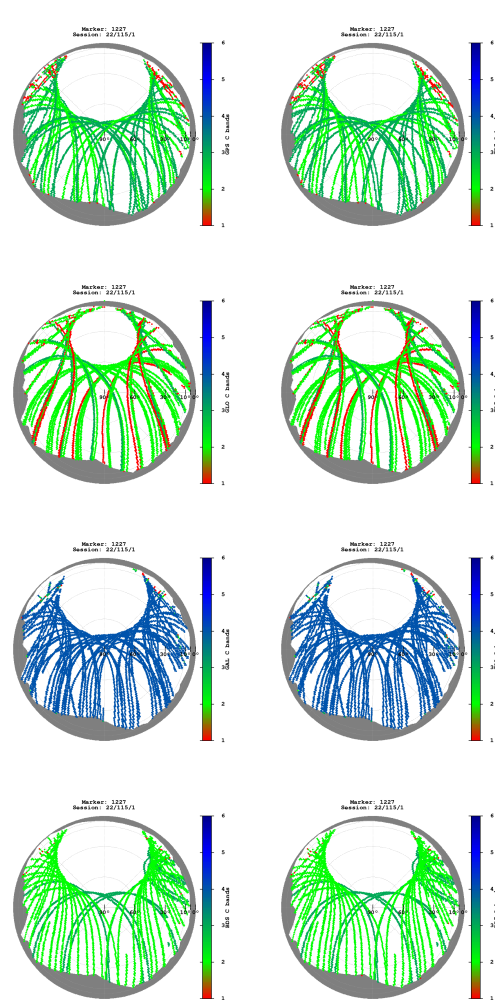

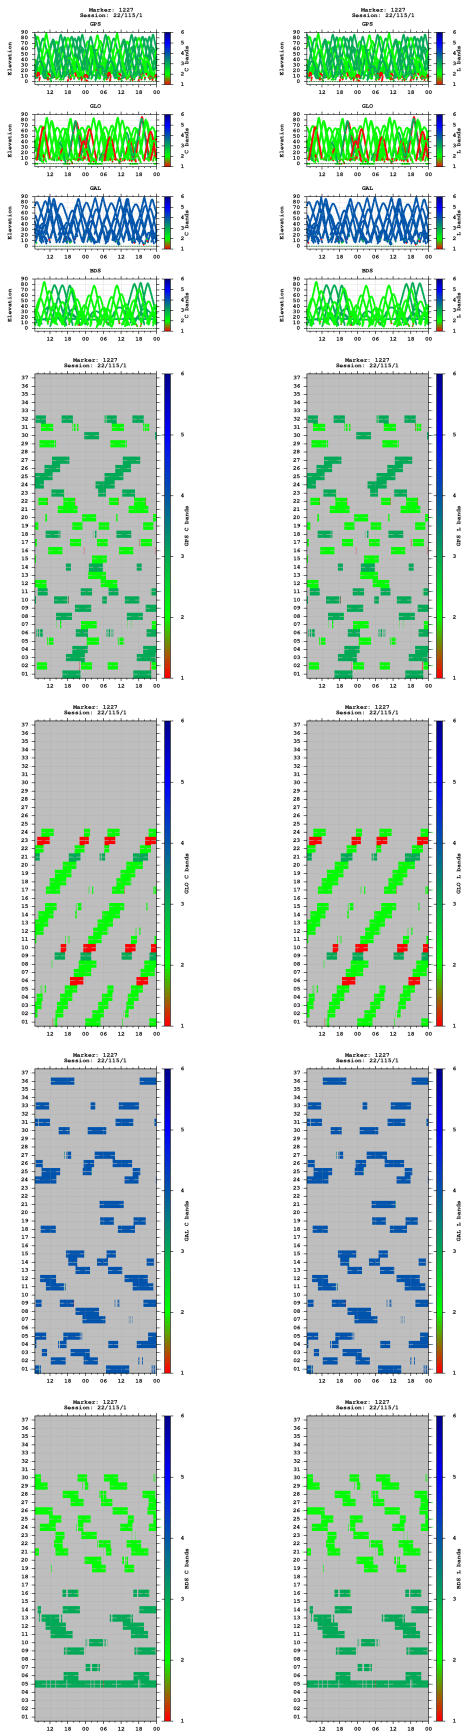



Multipath

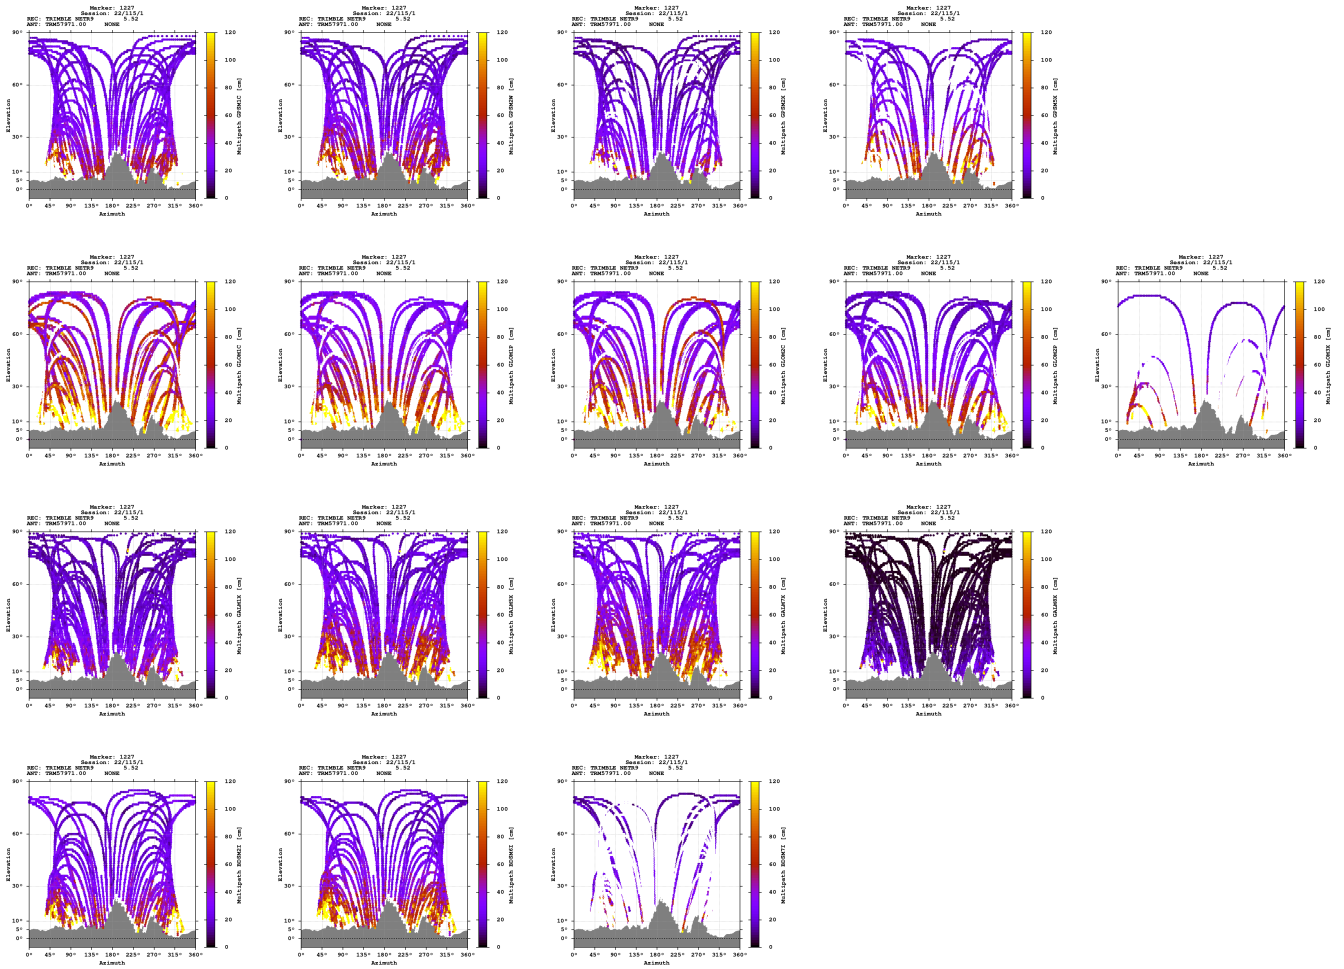

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

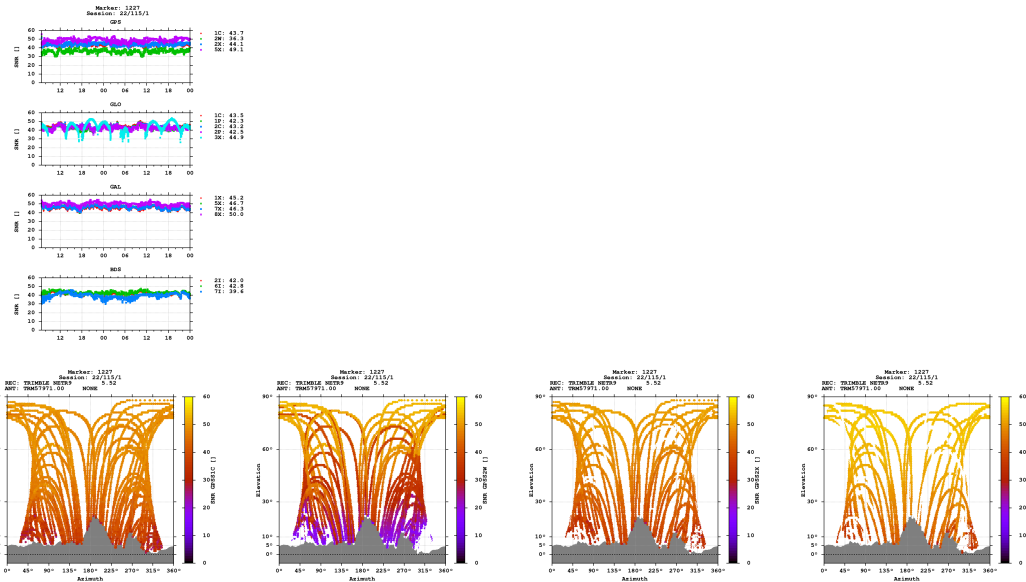

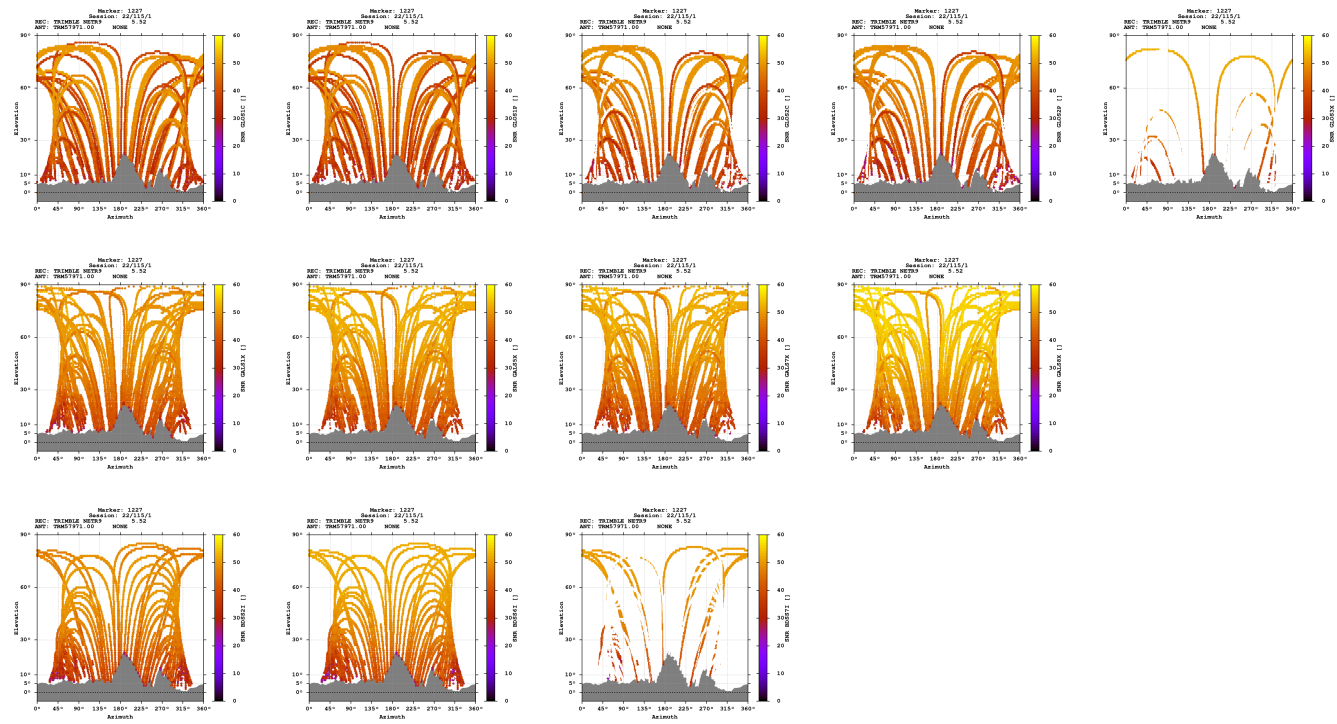

Estimates

2022-04-25 06:53:00	GPS	4344933.2705	584303.3291	4617992.3835	46.680788637	7.659142517	688.8378
2022-04-25 06:53:00	GLO	4344934.3668	584303.4480	4617992.8801	46.680784488	7.659142148	689.9554
2022-04-25 06:53:00	GAL	4344933.0508	584303.1089	4617991.9054	46.680787304	7.659140048	688.3204
2022-04-25 06:53:00	BDS	4344932.4050	584302.6668	4617994.0591	46.680805169	7.659135446	689.4078

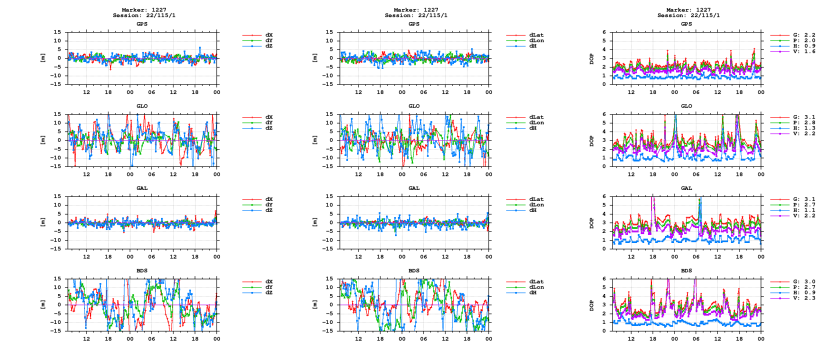

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)