


GNSS observation file monitoring for 0513


Last RINEX file: 05131151.22O
RINEX version: 3.02
Marker: 1207
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

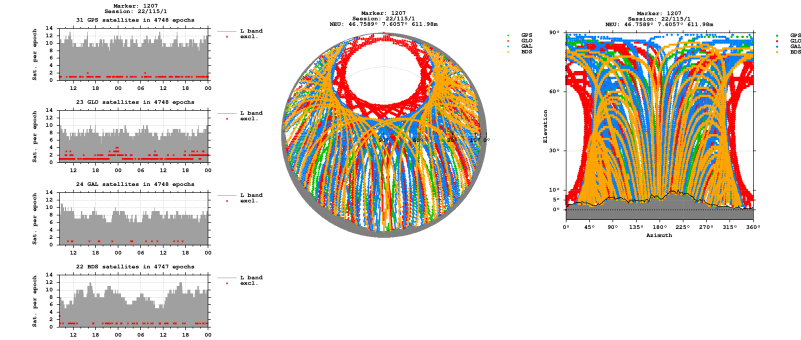


Bands

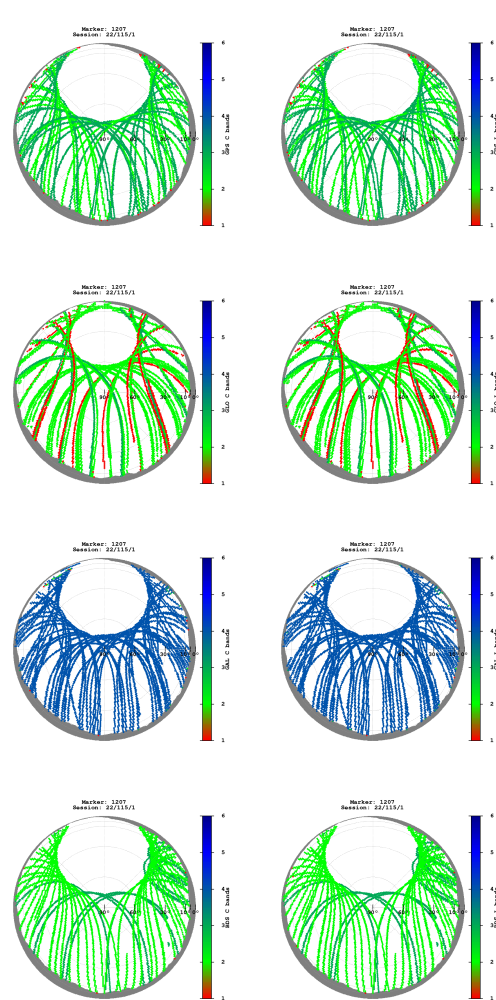

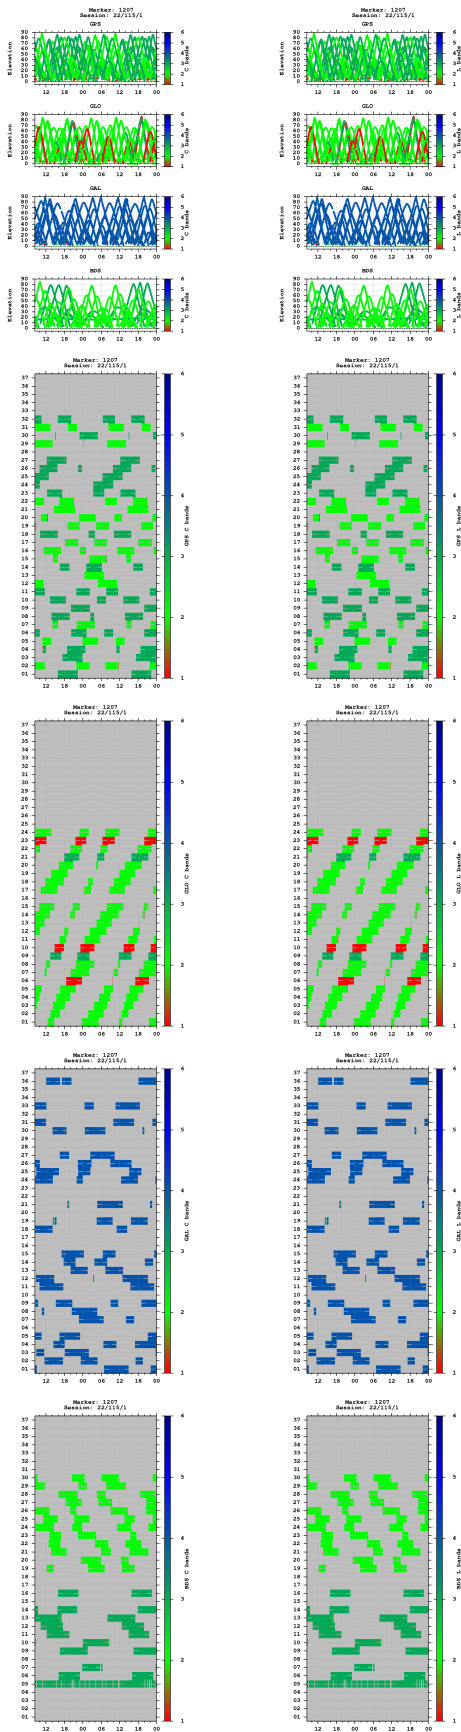



Multipath

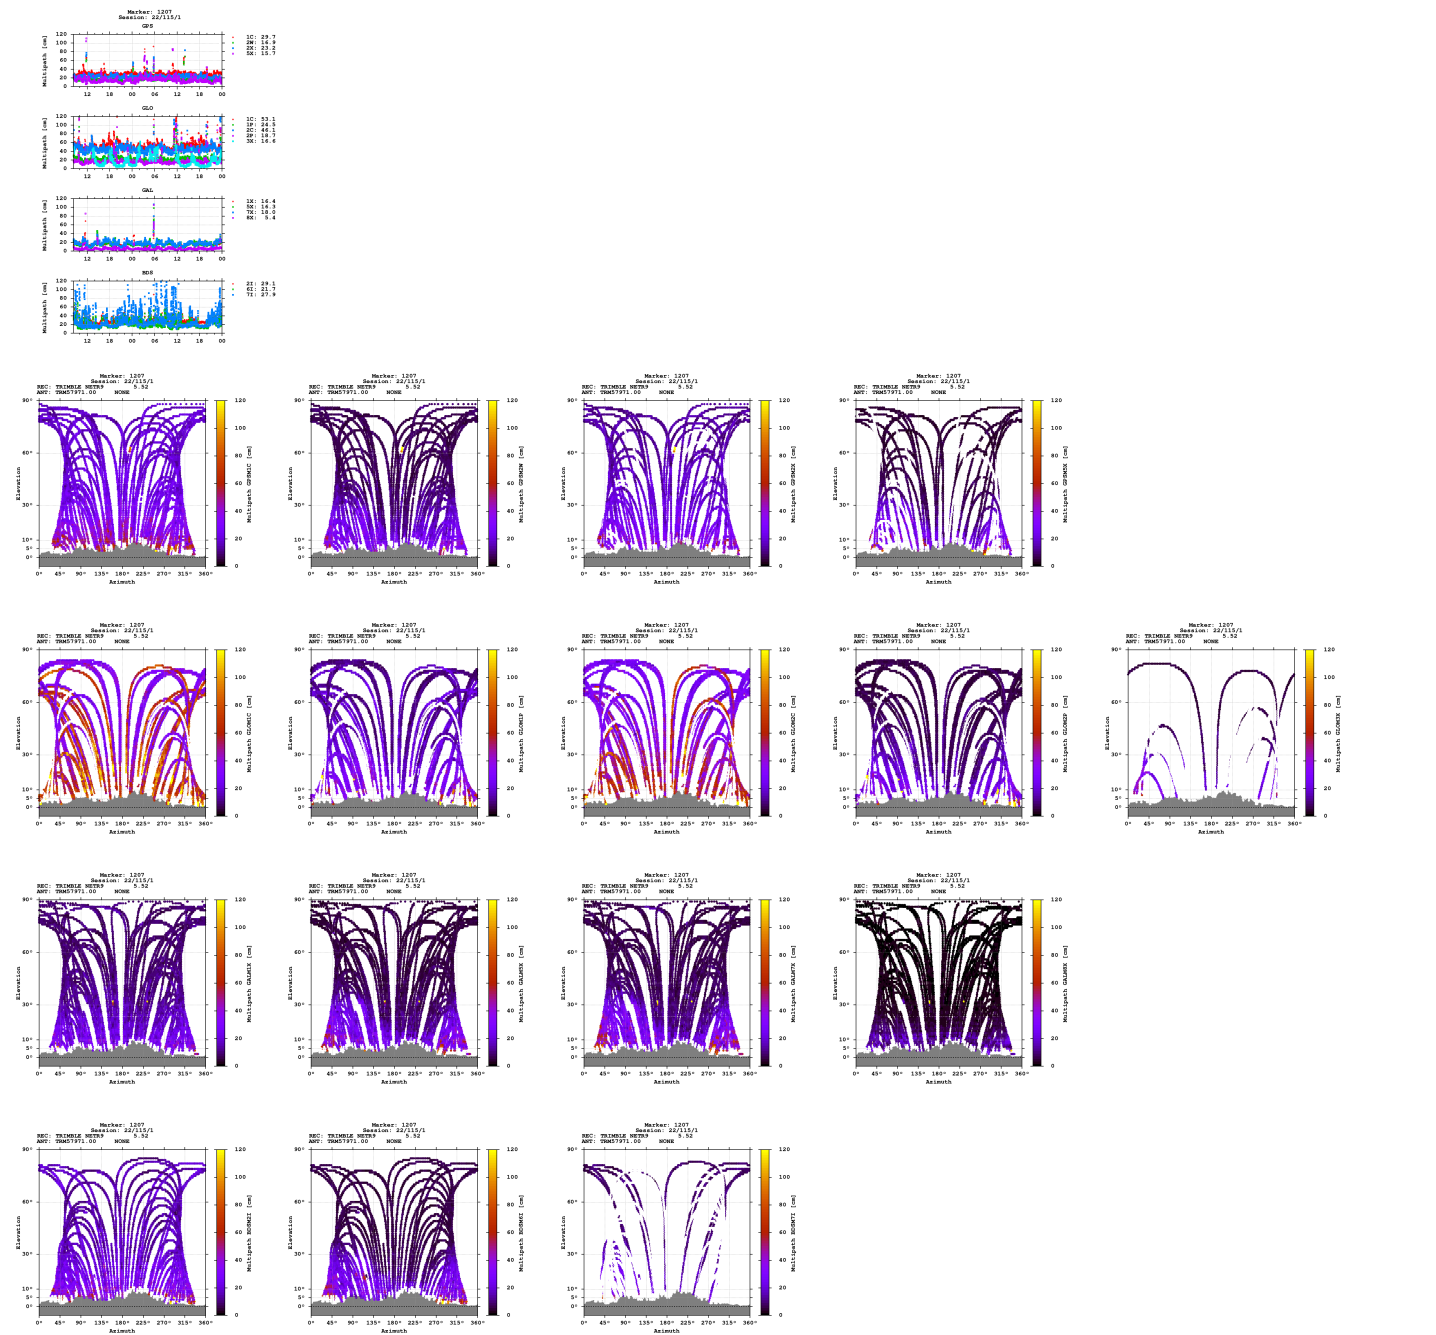

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

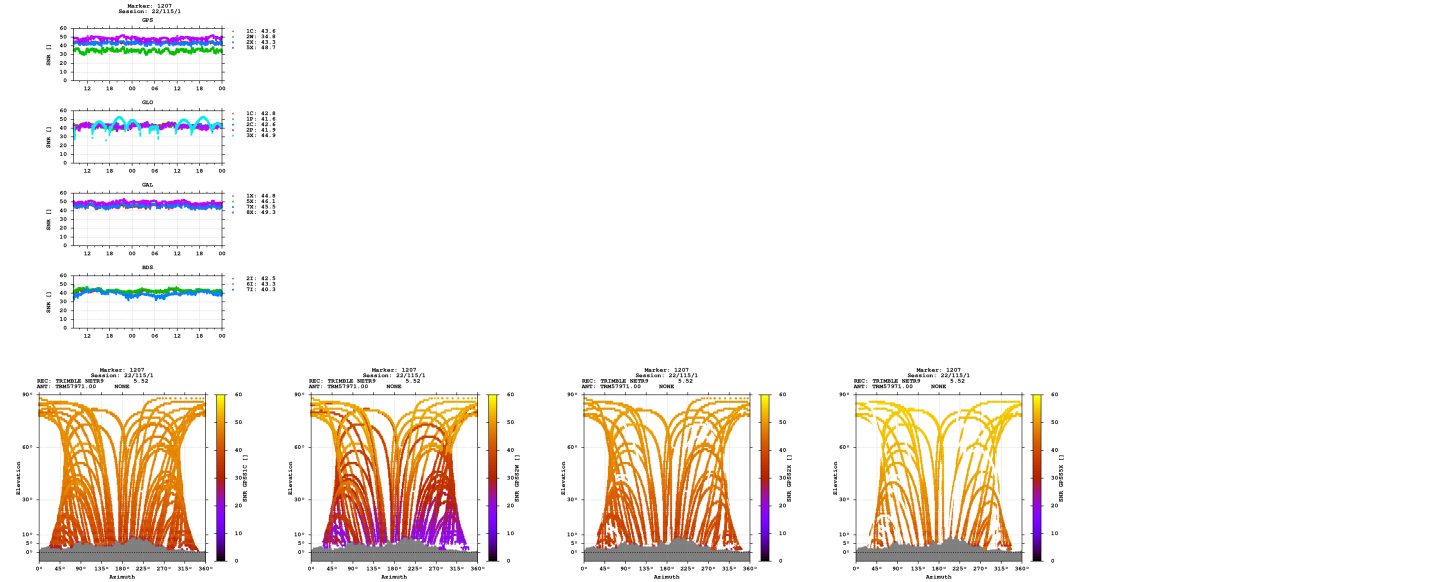

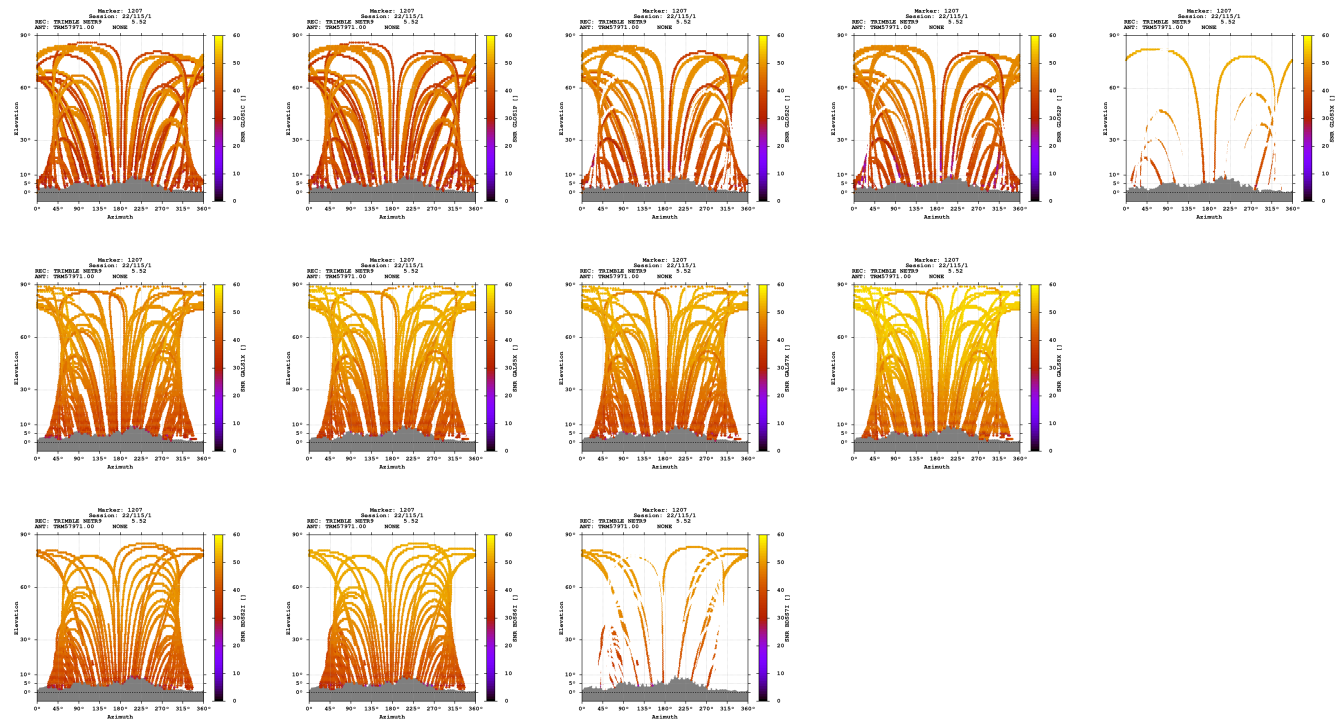

Estimates

2022-04-25 08:23:30	GPS	4339156.2783	579406.2615	4623891.2975	46.758916999	7.605697871	611.9830
2022-04-25 08:23:30	GLO	4339156.6111	579406.0998	4623891.6629	46.758917229	7.605695197	612.4605
2022-04-25 08:23:30	GAL	4339156.4620	579405.9739	4623891.2992	46.758916065	7.605693822	612.0829
2022-04-25 08:23:30	BDS	4339155.7848	579405.2754	4623892.6252	46.758929241	7.605685934	612.5257

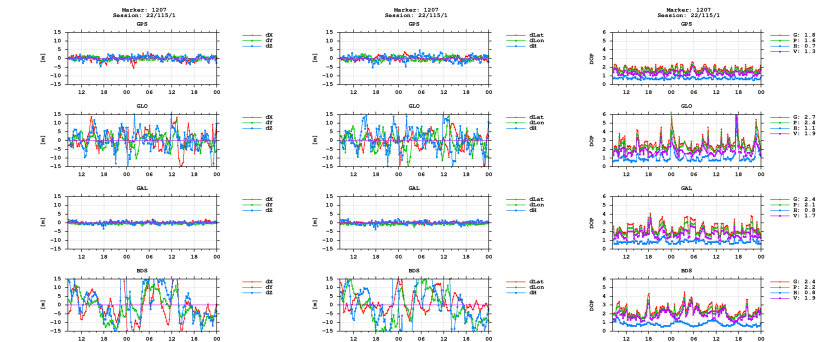

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)