


GNSS observation file monitoring for 0513


Last RINEX file: 05131171.220
RINEX version: 3.02
Marker: 1168
Receiver: 513 TRIMBLE NETR9 5.52
Antenna: 513 TRM57971.00 NONE

Epochs

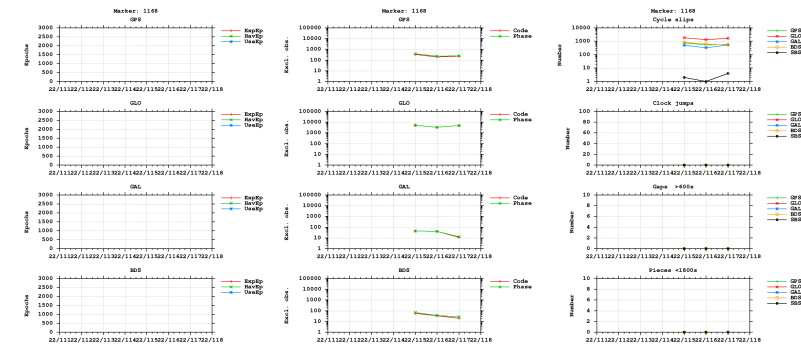


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.


Satellites

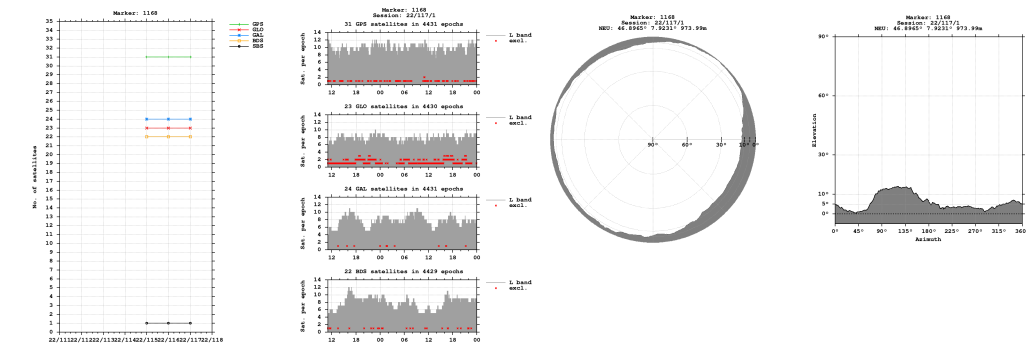


Bands

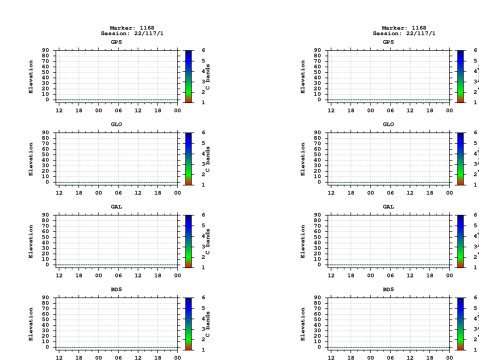

Observations


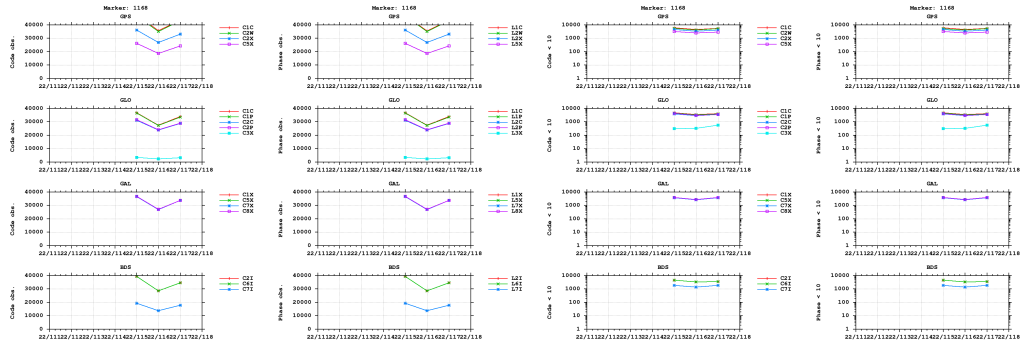


Multipath

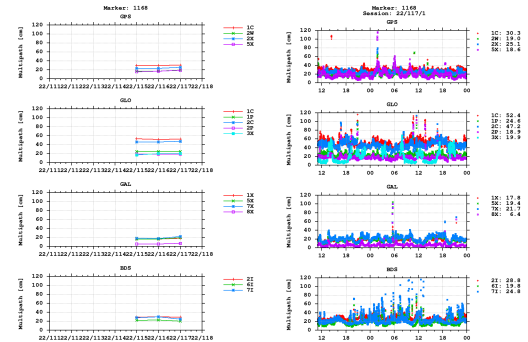


- The Multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

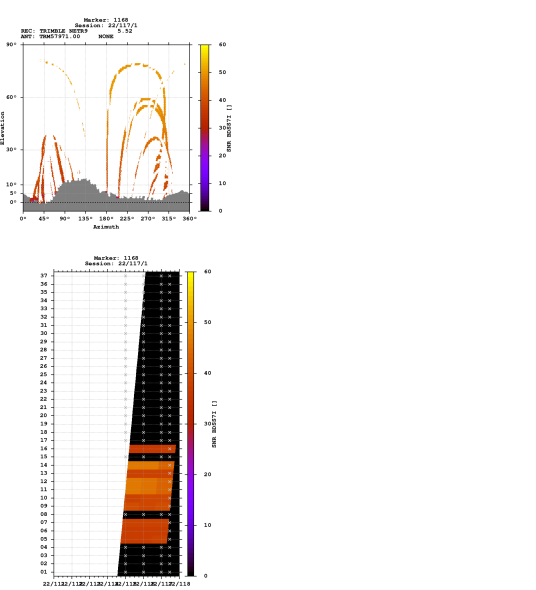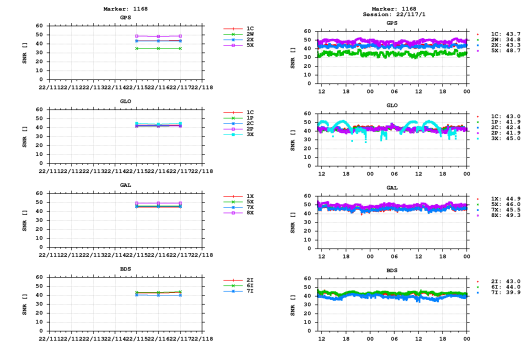


Estimates

2022-04-27 11:02:00	GPS	4325075.2524	601931.9499	4634621.7501	46.896507271	7.923109664	973.9913
2022-04-27 11:02:00	GLO	4325075.1549	601931.0278	4634621.4854	46.896507113	7.923097857	973.6452
2022-04-27 11:02:00	GAL	4325075.0965	601931.4648	4634621.3450	46.896506235	7.923103642	973.5444
2022-04-27 11:02:00	BDS	4325071.5275	601931.6567	4634621.7954	46.896532042	7.923112590	971.4758

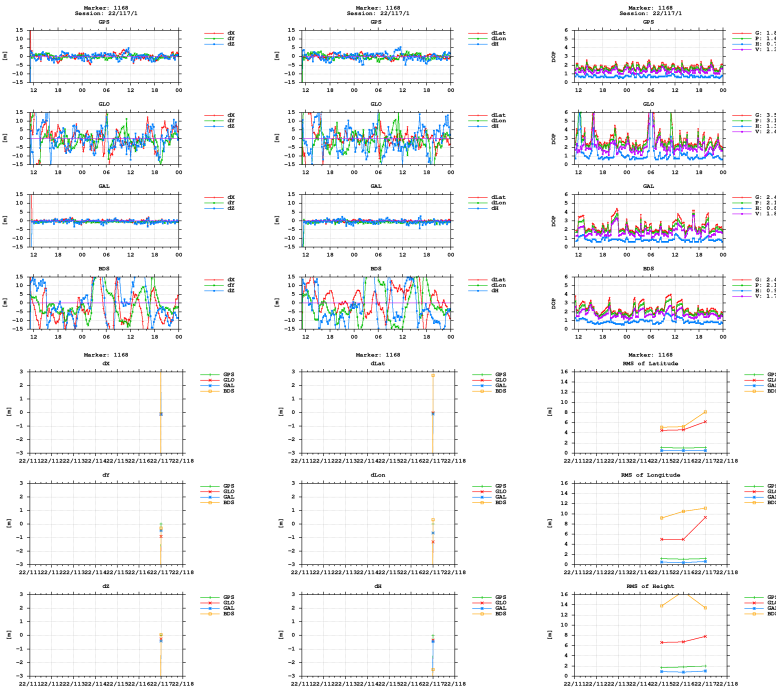

BNC



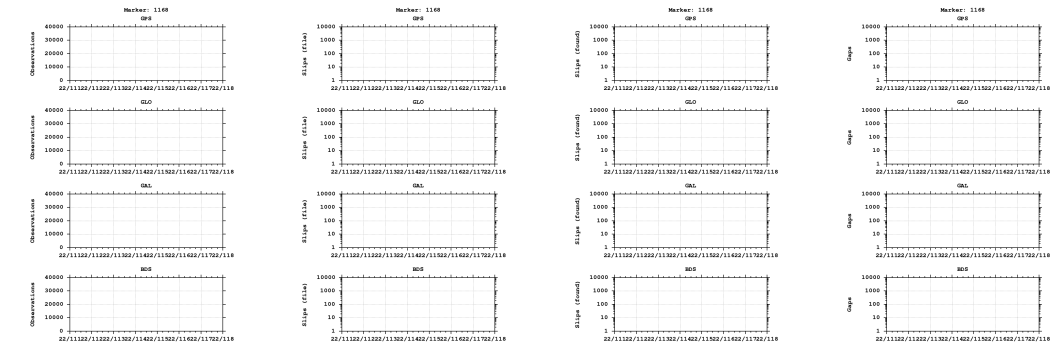

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 513 TRM57971.00 NONE 513

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)