


GNSS observation file monitoring for 0514


Last RINEX file: 05141151.22O
RINEX version: 3.02
Marker: 1206
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites


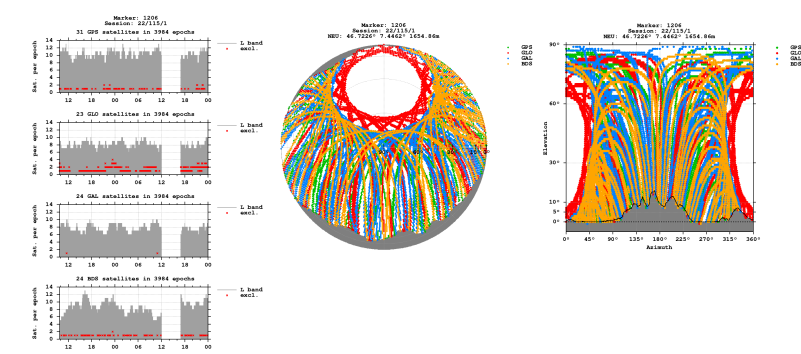


Bands

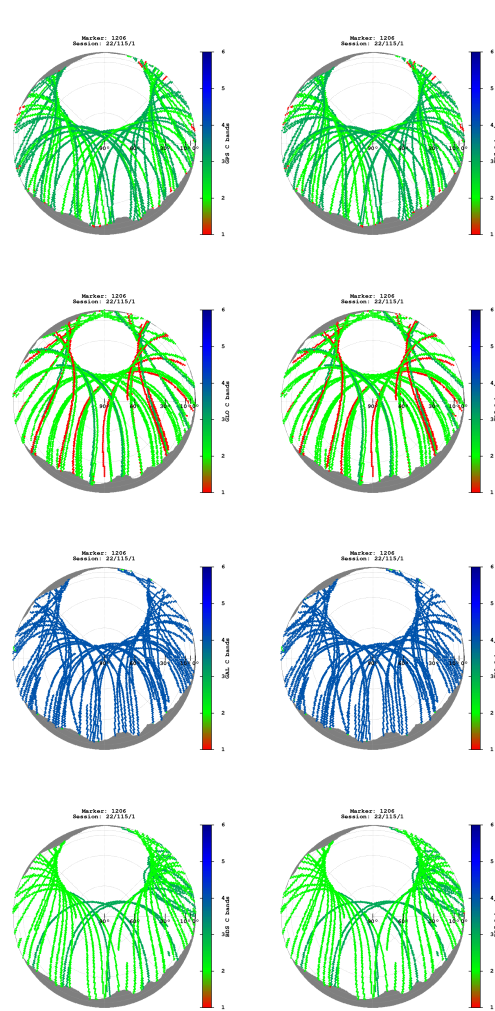


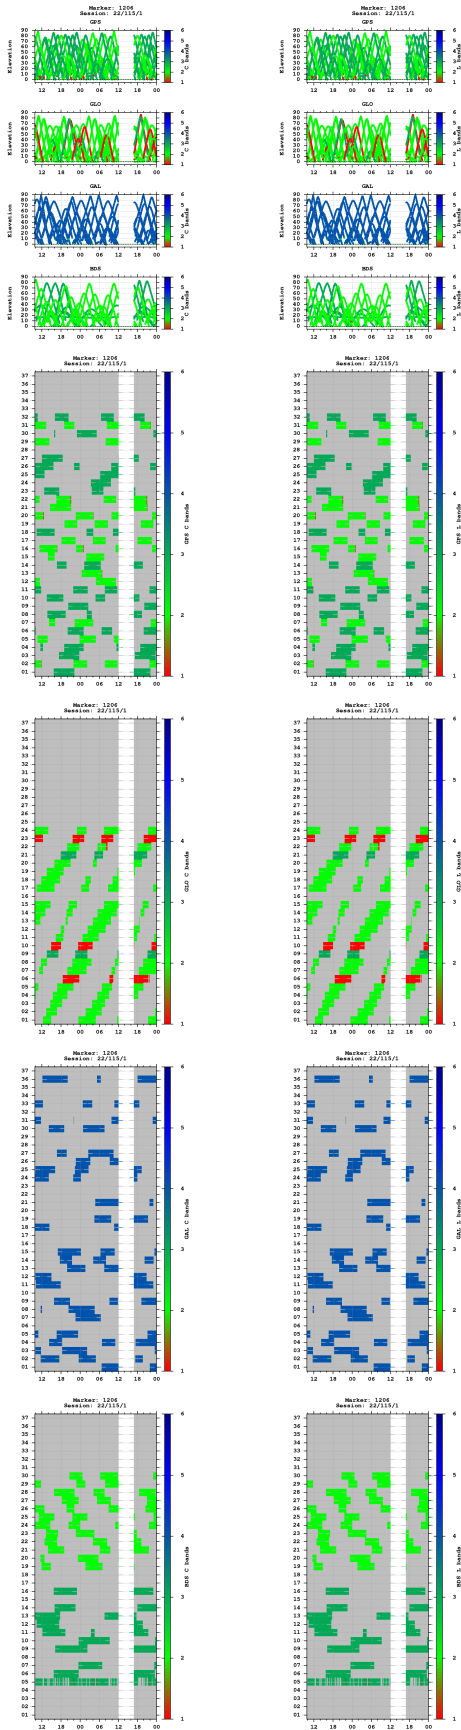



Multipath

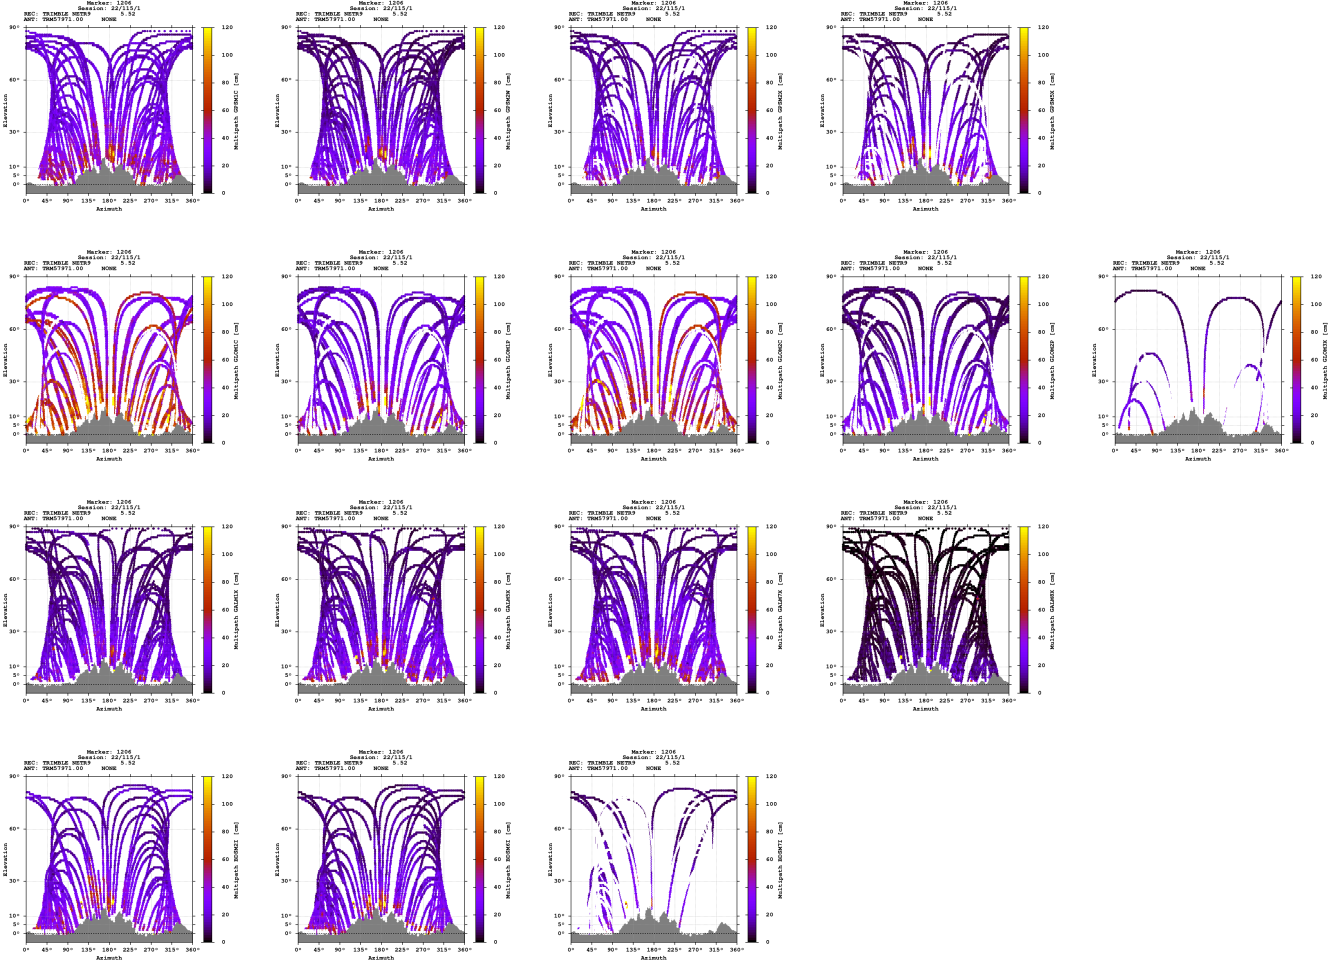

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

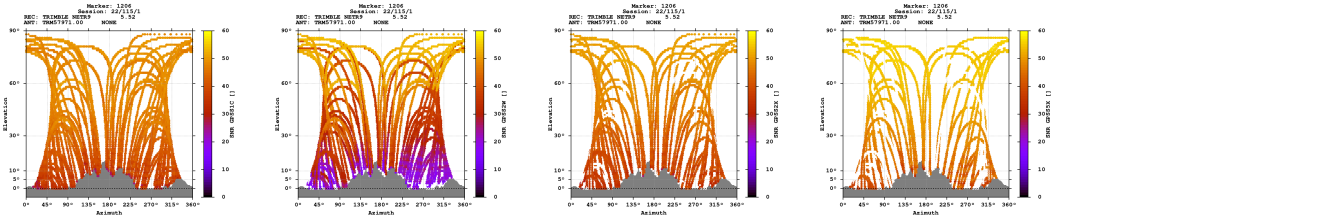

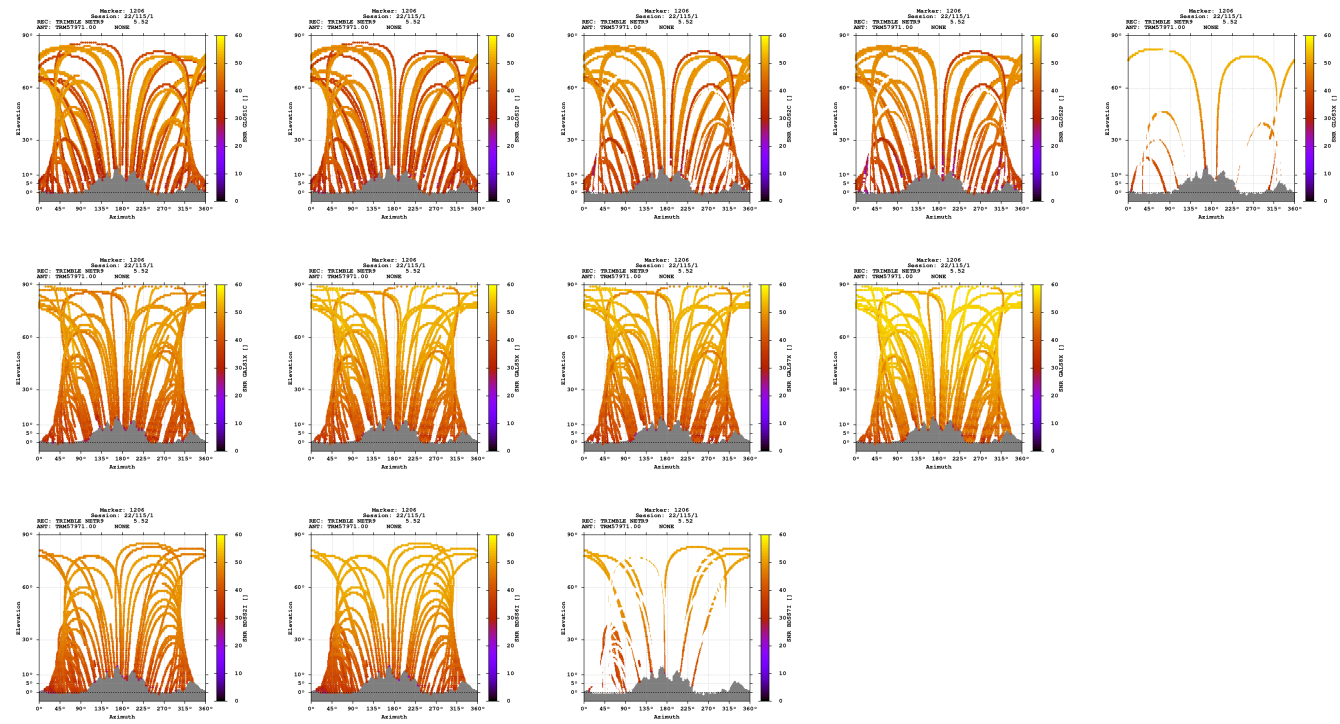

Estimates

2022-04-25 09:46:30	GPS	4344381.0712	567795.9572	4621880.0207	46.722553207	7.446159144	1654.8553
2022-04-25 09:46:30	GLO	4344381.7387	567795.8500	4621879.9246	46.722548372	7.446156622	1655.2296
2022-04-25 09:46:30	GAL	4344380.7790	567795.8872	4621879.6649	46.722552970	7.446158731	1654.3914
2022-04-25 09:46:30	BDS	4344379.5922	567794.8486	4621879.6626	46.722561542	7.446147275	1653.4908

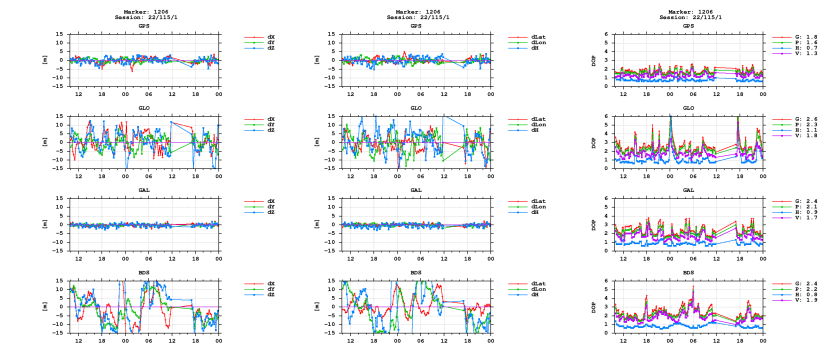

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)