


GNSS observation file monitoring for 0514


Last RINEX file: 05141161.220
RINEX version: 3.02
Marker: 1206
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

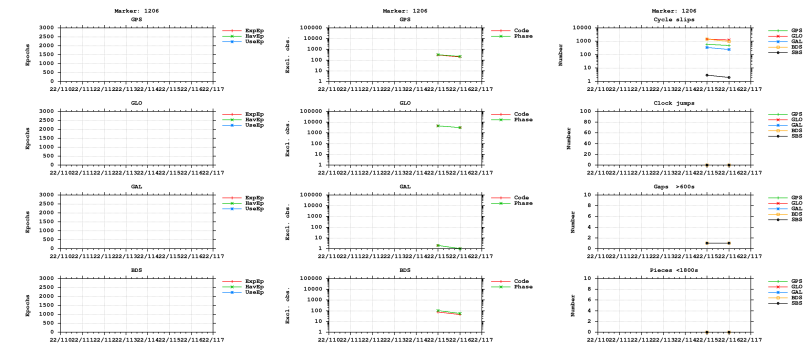



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

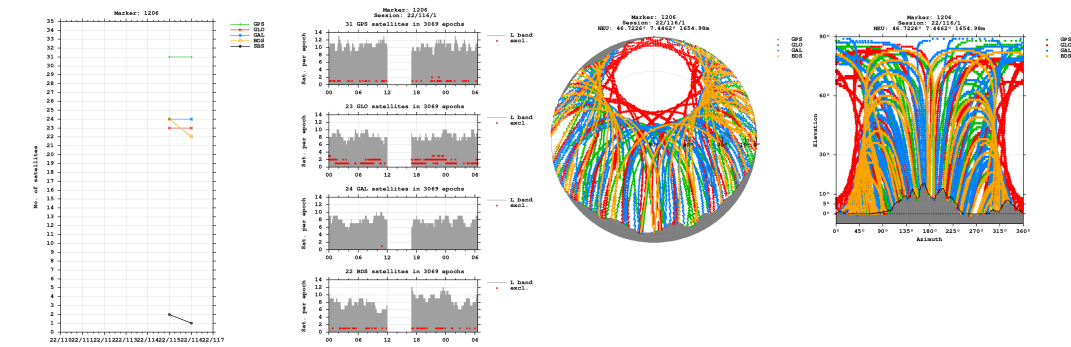


Bands

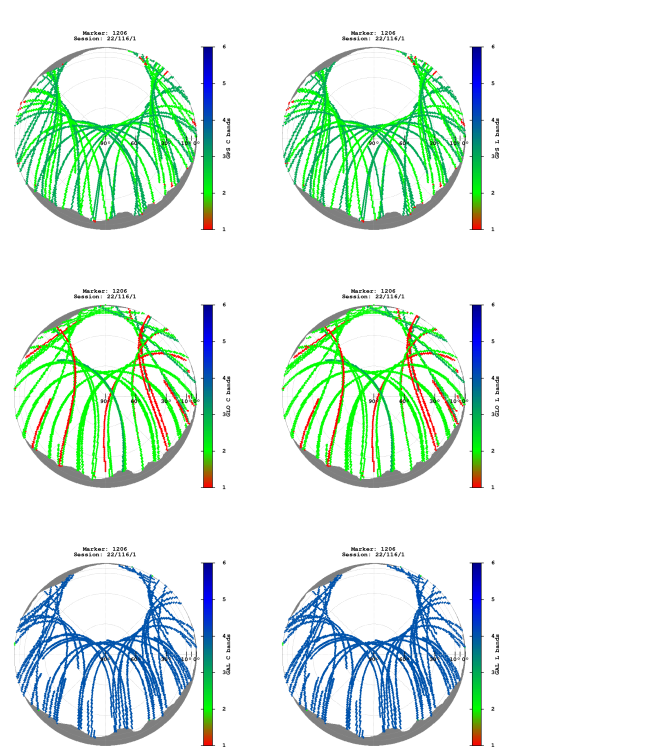


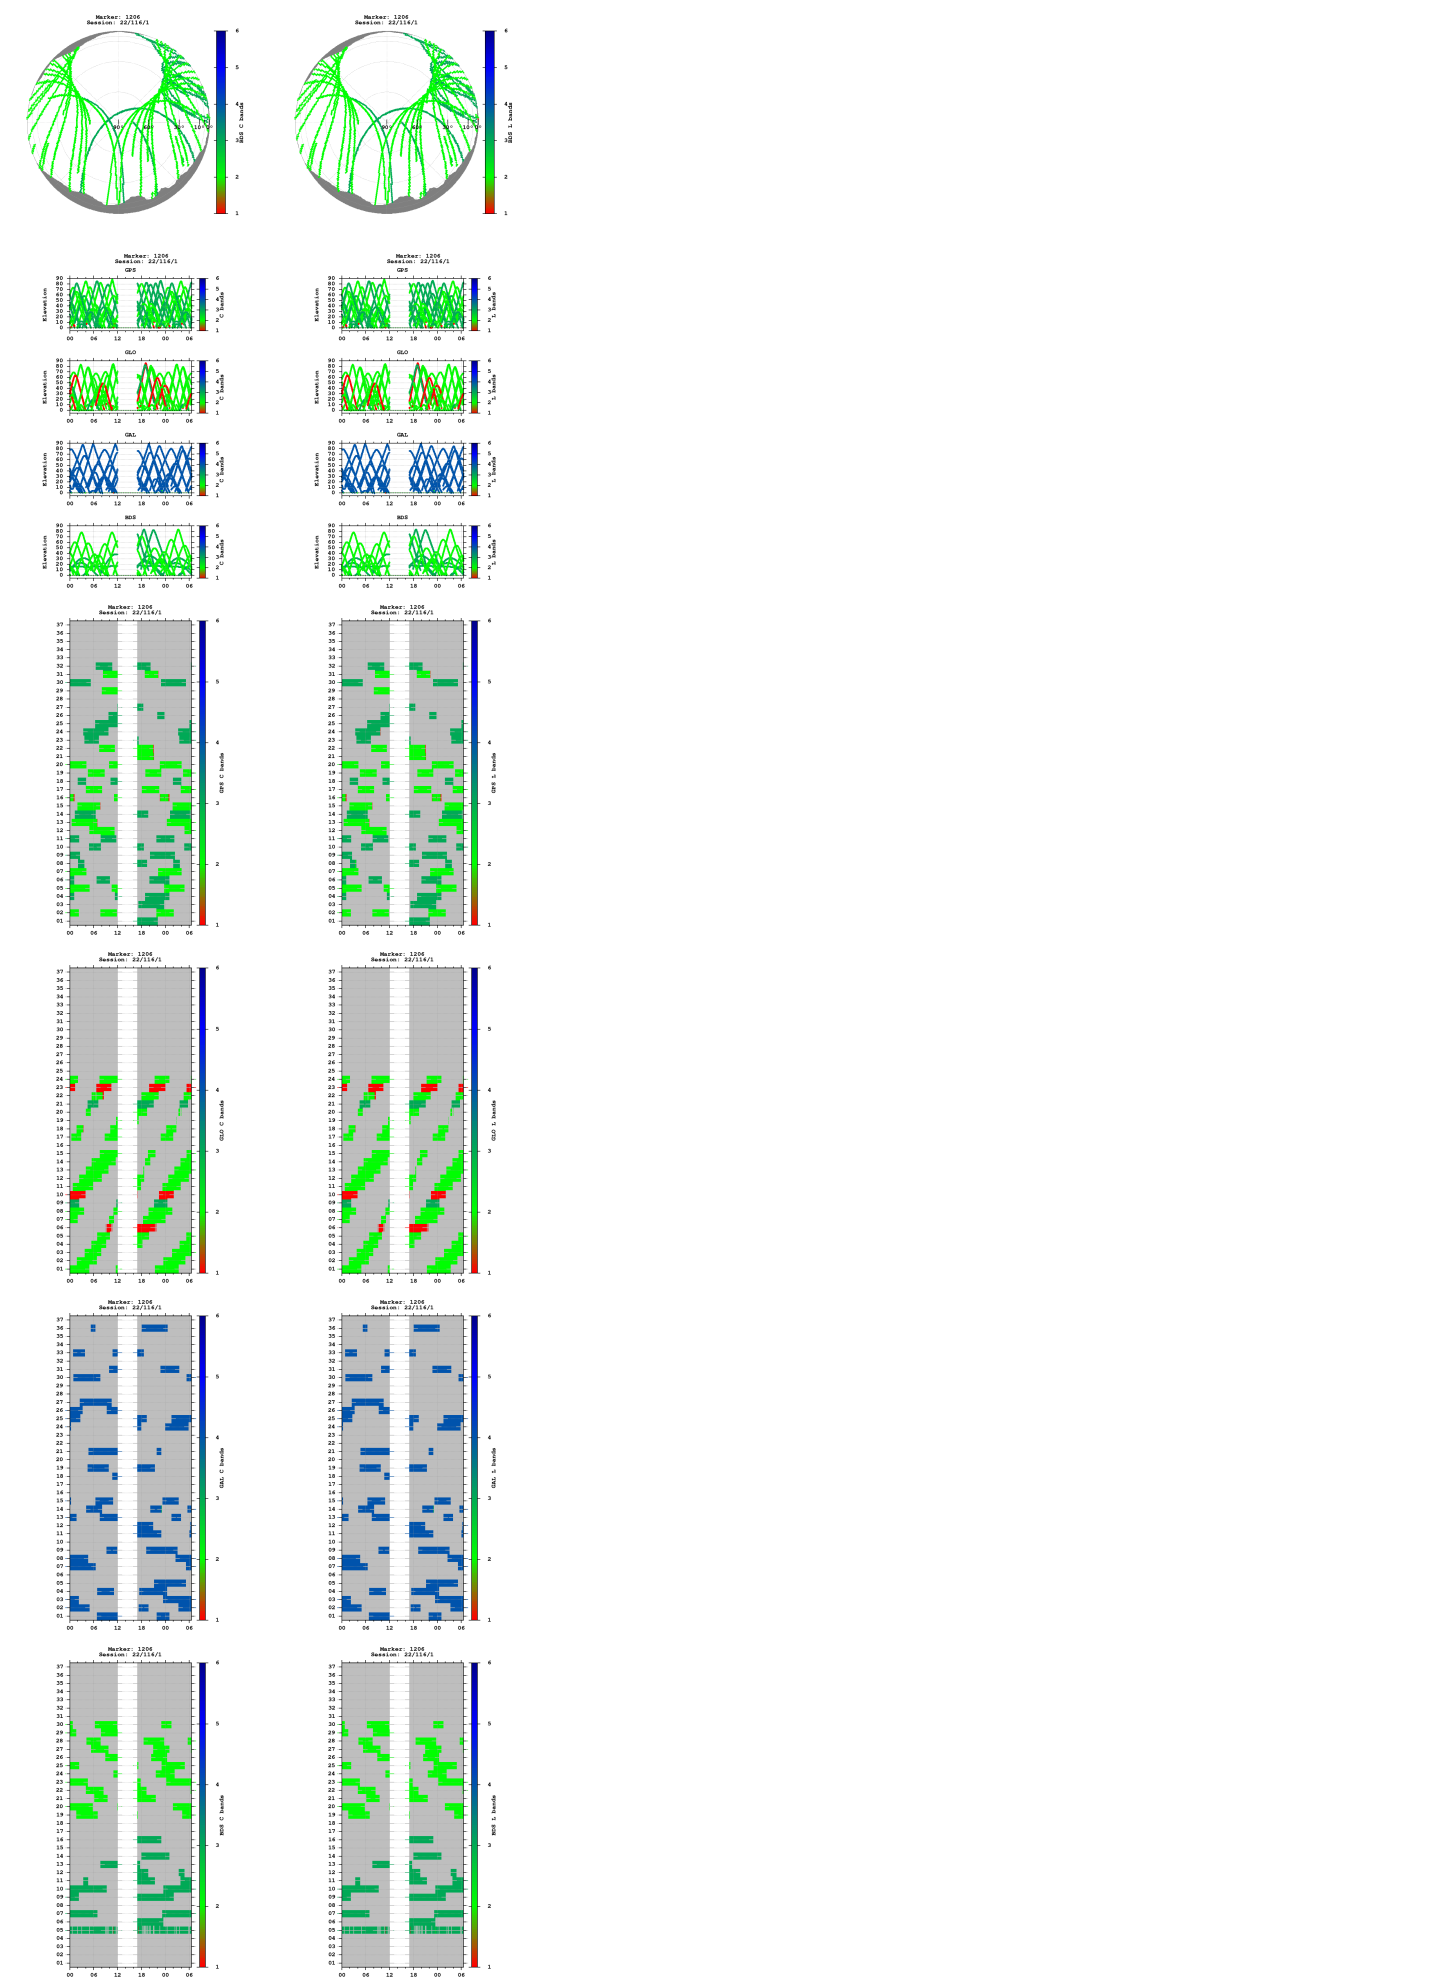


Observations

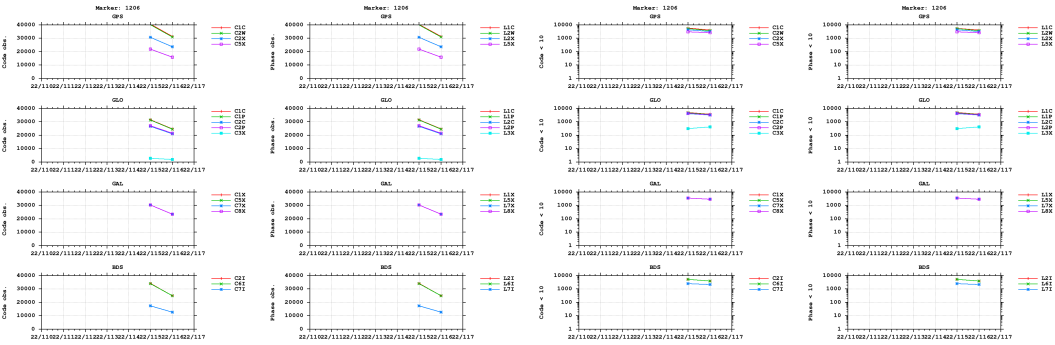



Multipath

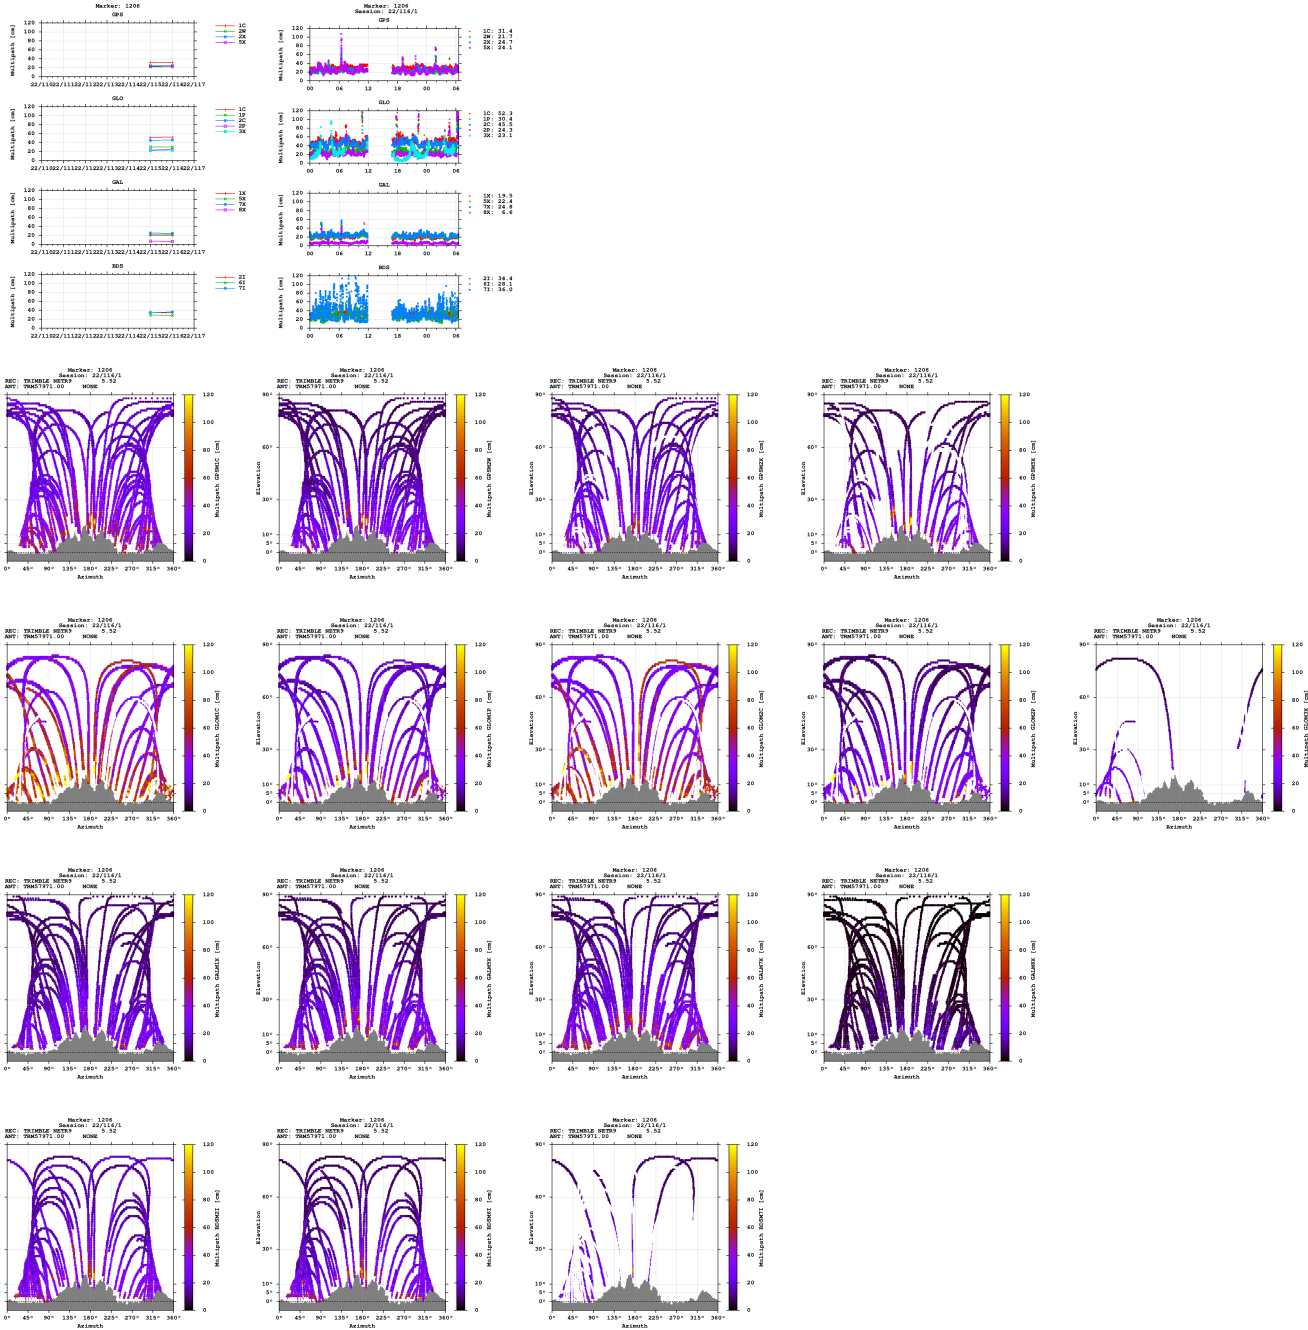


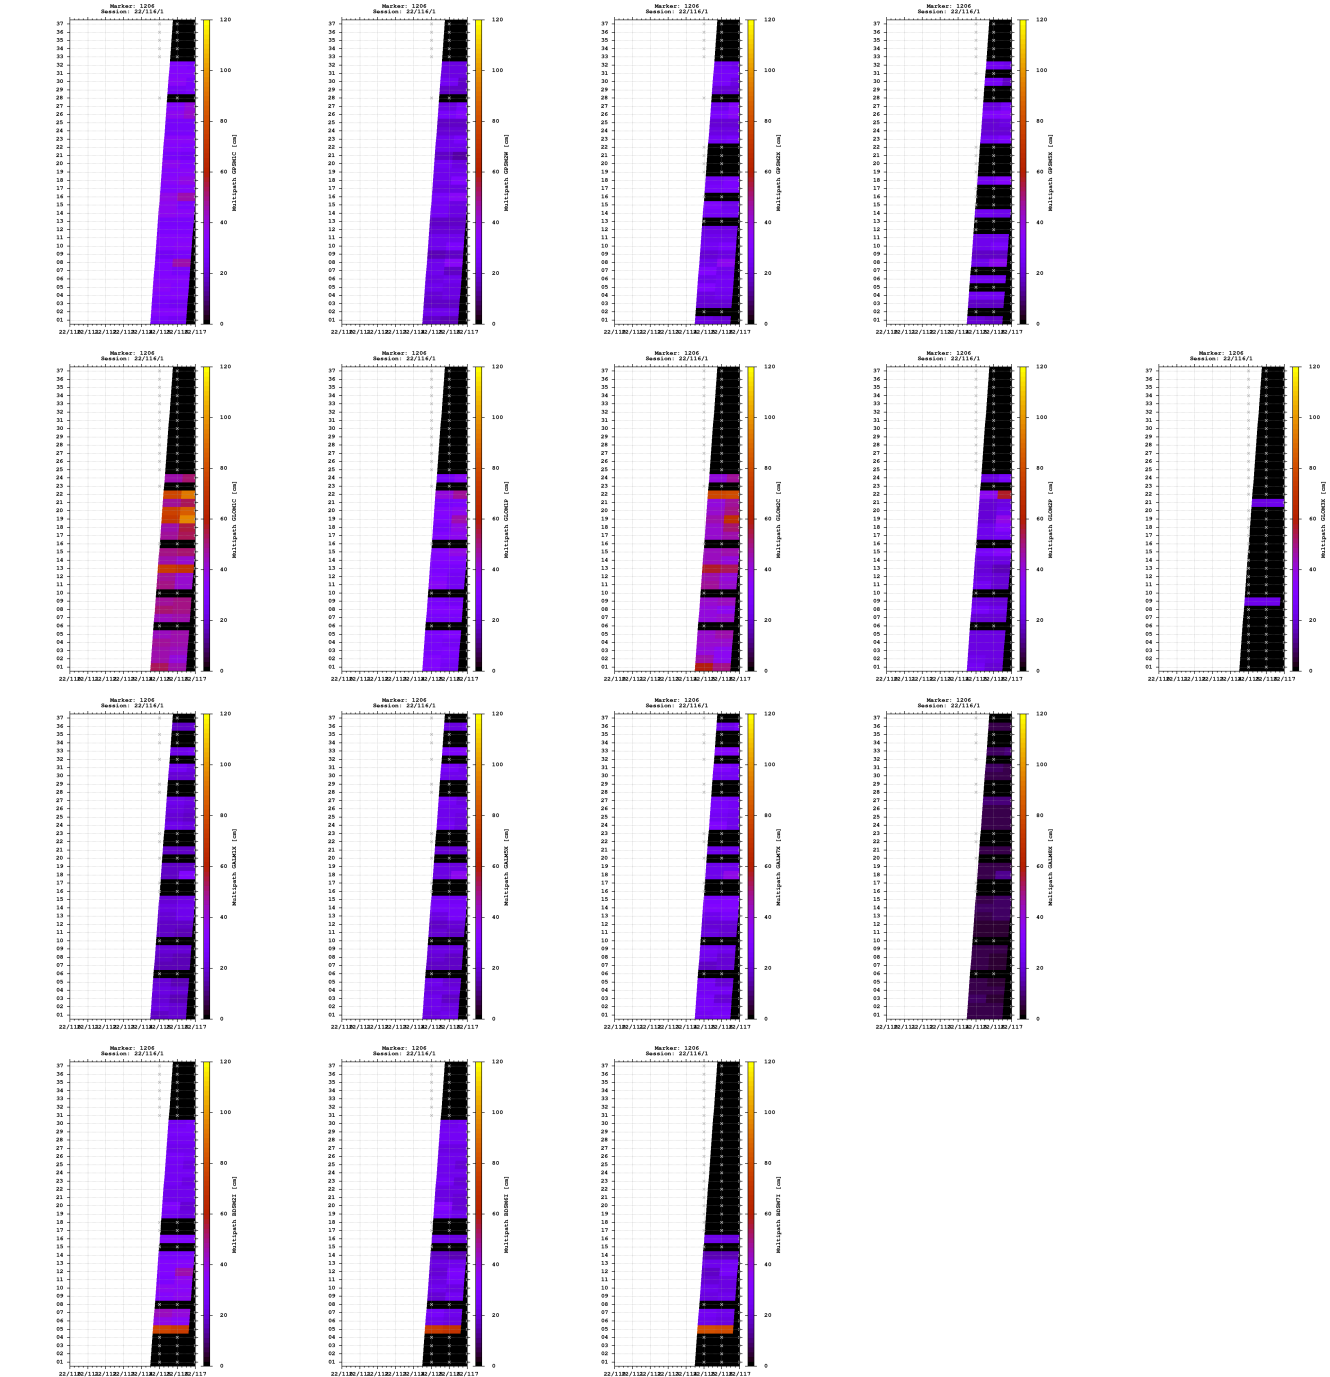

Signal-to-noise ratio

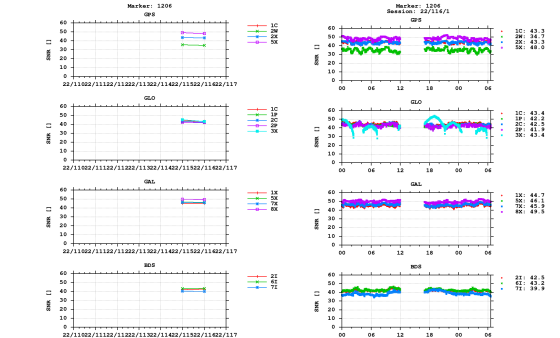


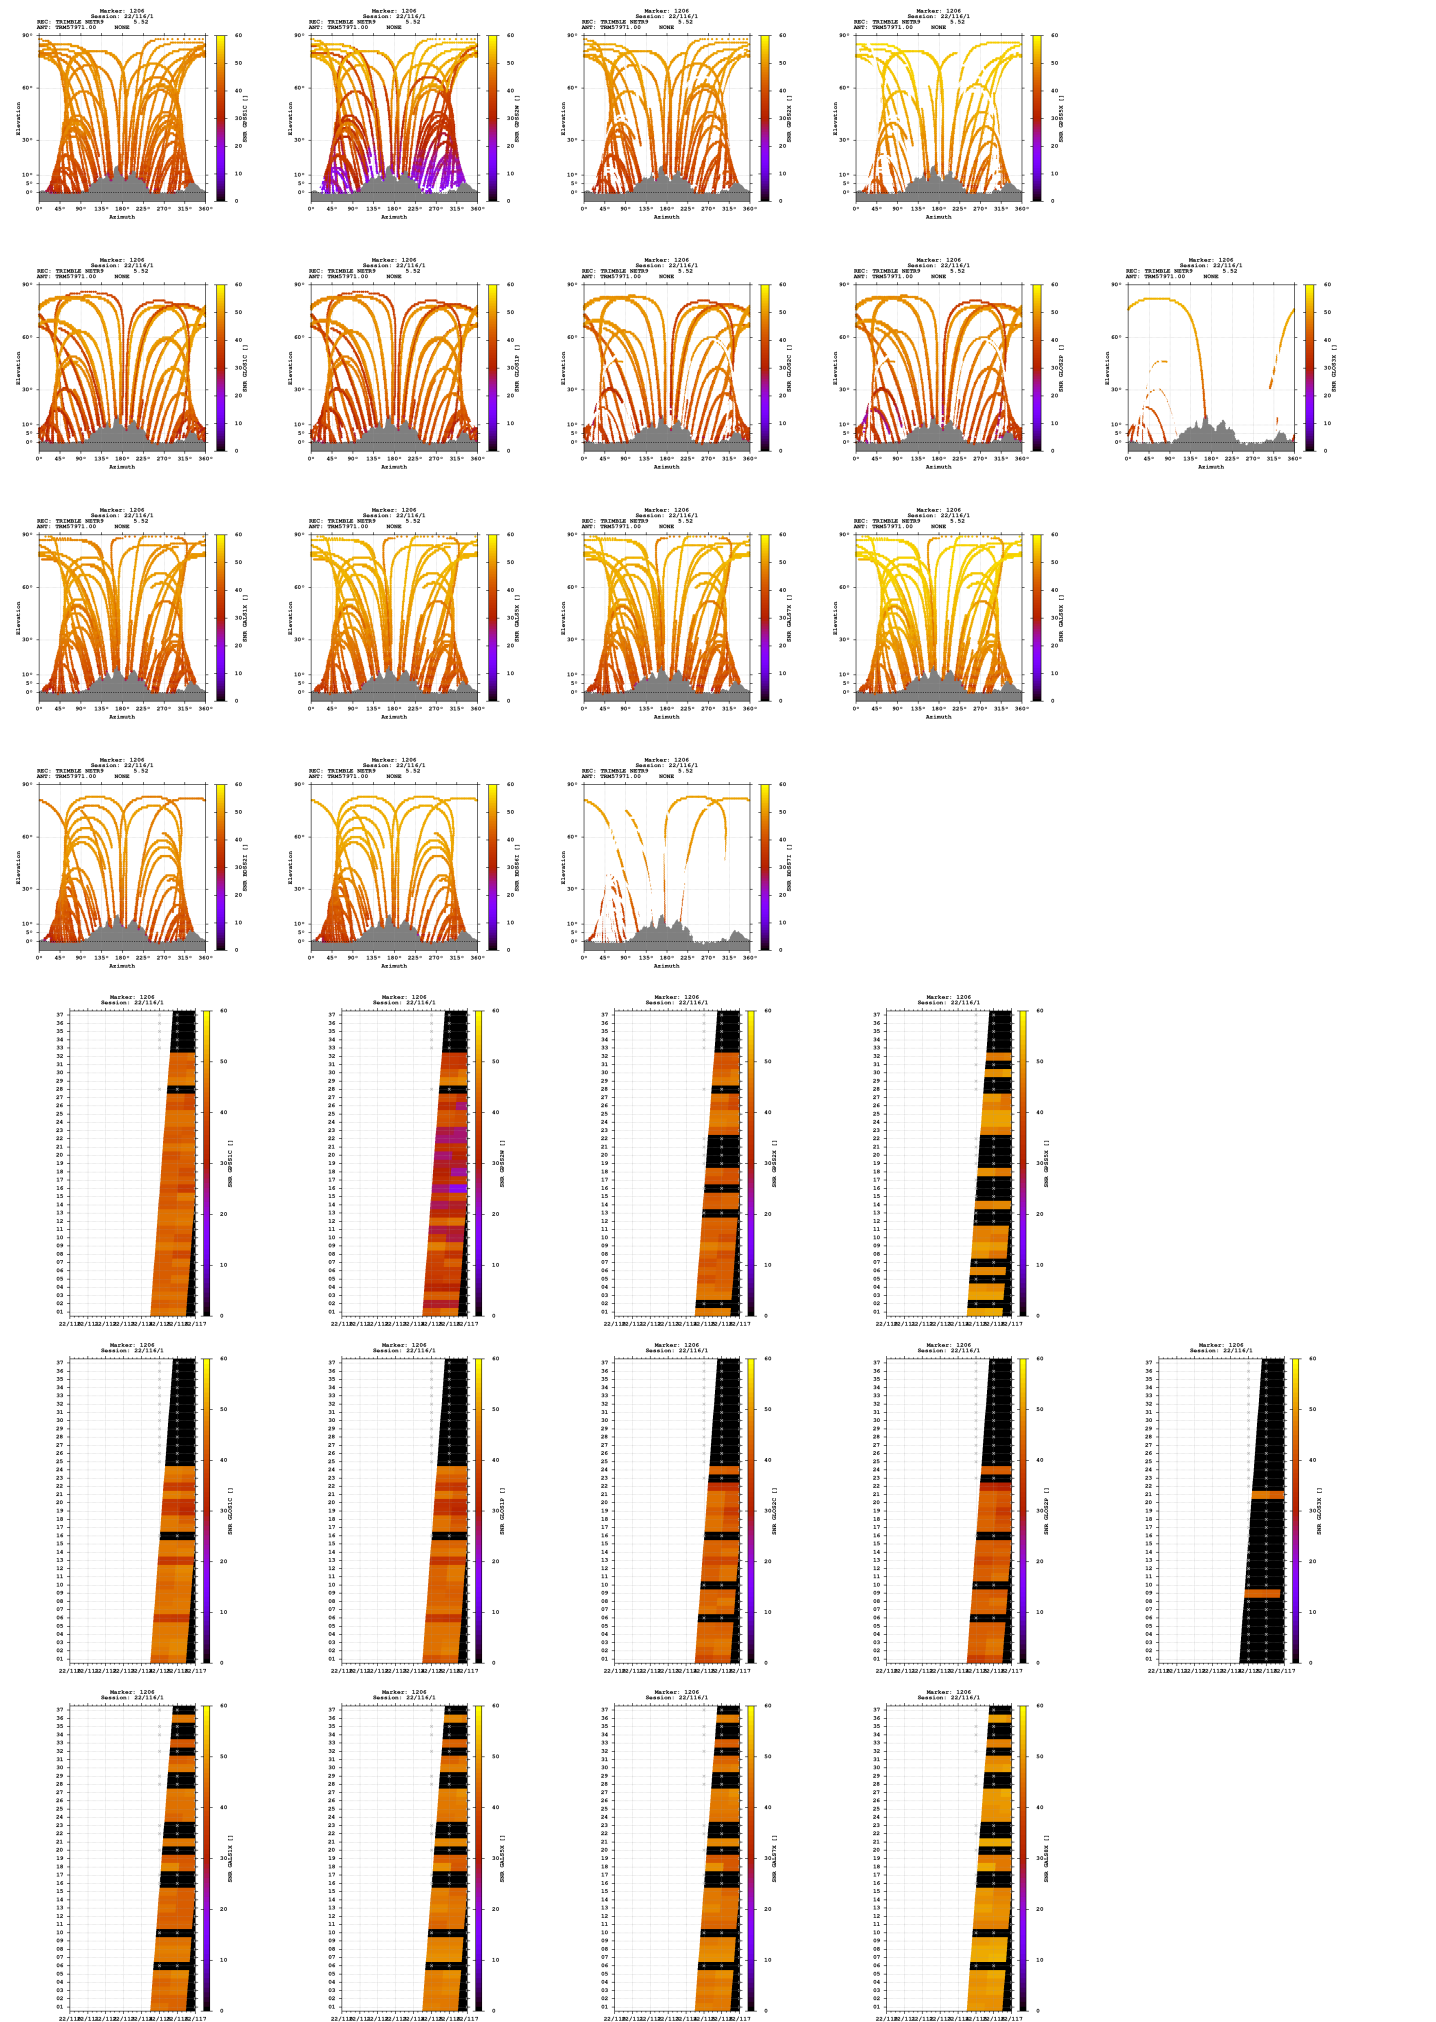

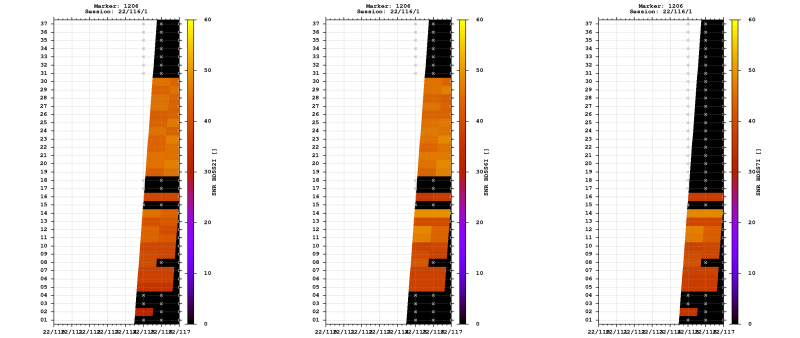


Estimates

2022-04-25 09:46:30	GPS	4344381.0041	567795.9024	4621880.2646	46.722555193	7.446158546	1654.9825
2022-04-25 09:46:30	GLO	4344380.9647	567795.8792	4621880.0533	46.722554166	7.446158312	1654.7997
2022-04-25 09:46:30	GAL	4344380.8900	567795.9806	4621879.7013	46.722552395	7.446159754	1654.5017
2022-04-25 09:46:30	BDS	4344377.4426	567797.3362	4621879.7589	46.722573981	7.446183174	1652.3206

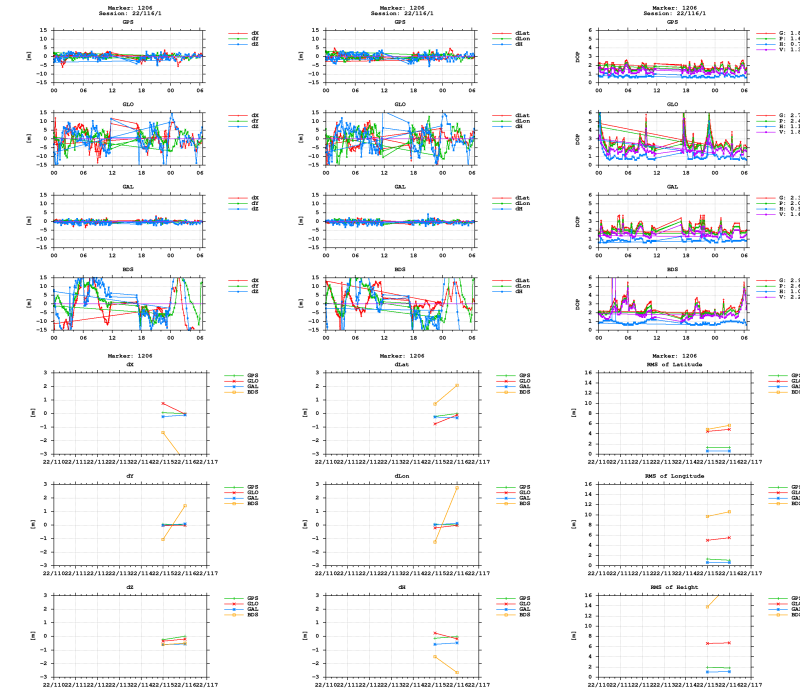

BNC



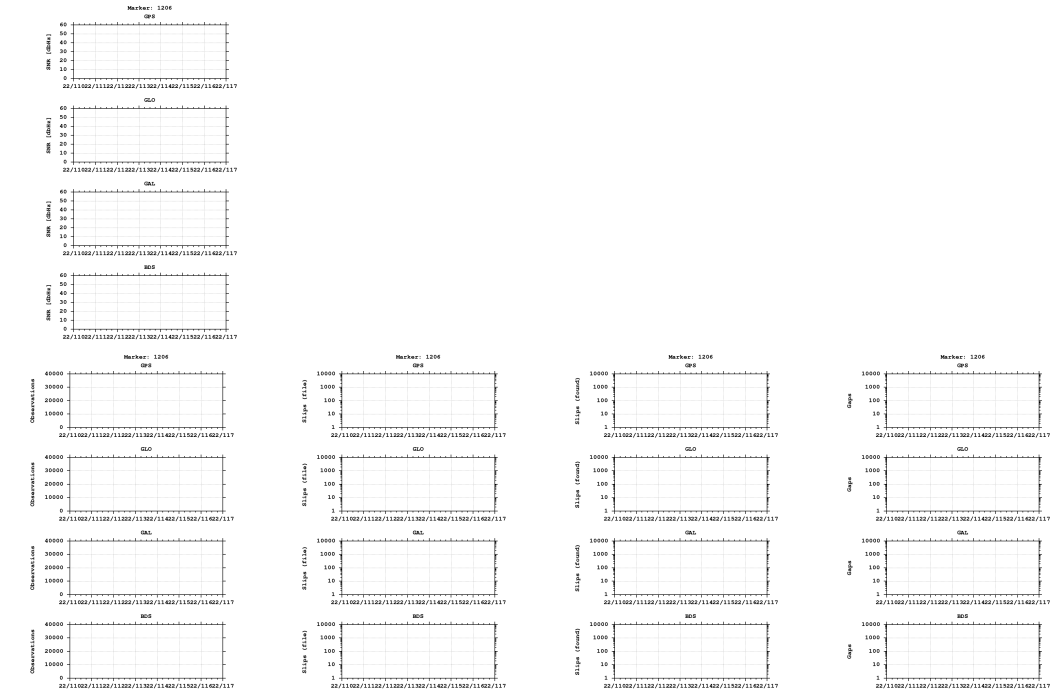

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)