


GNSS observation file monitoring for 0514


Last RINEX file: 05141171.220
RINEX version: 3.02
Marker: 1188
Receiver: 514 TRIMBLE NETR9 5.52
Antenna: 514 TRM57971.00 NONE

Epochs

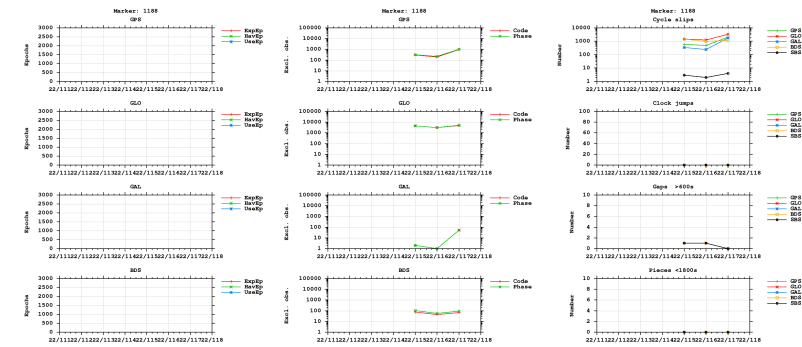



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

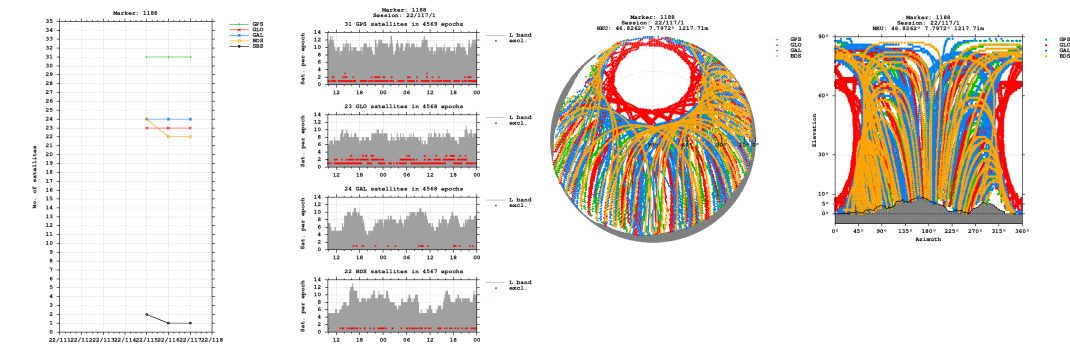


Bands

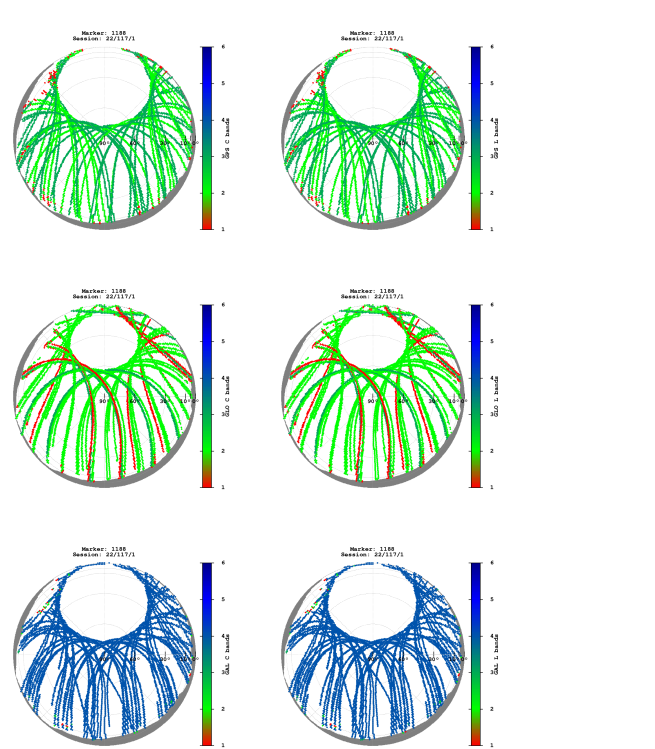


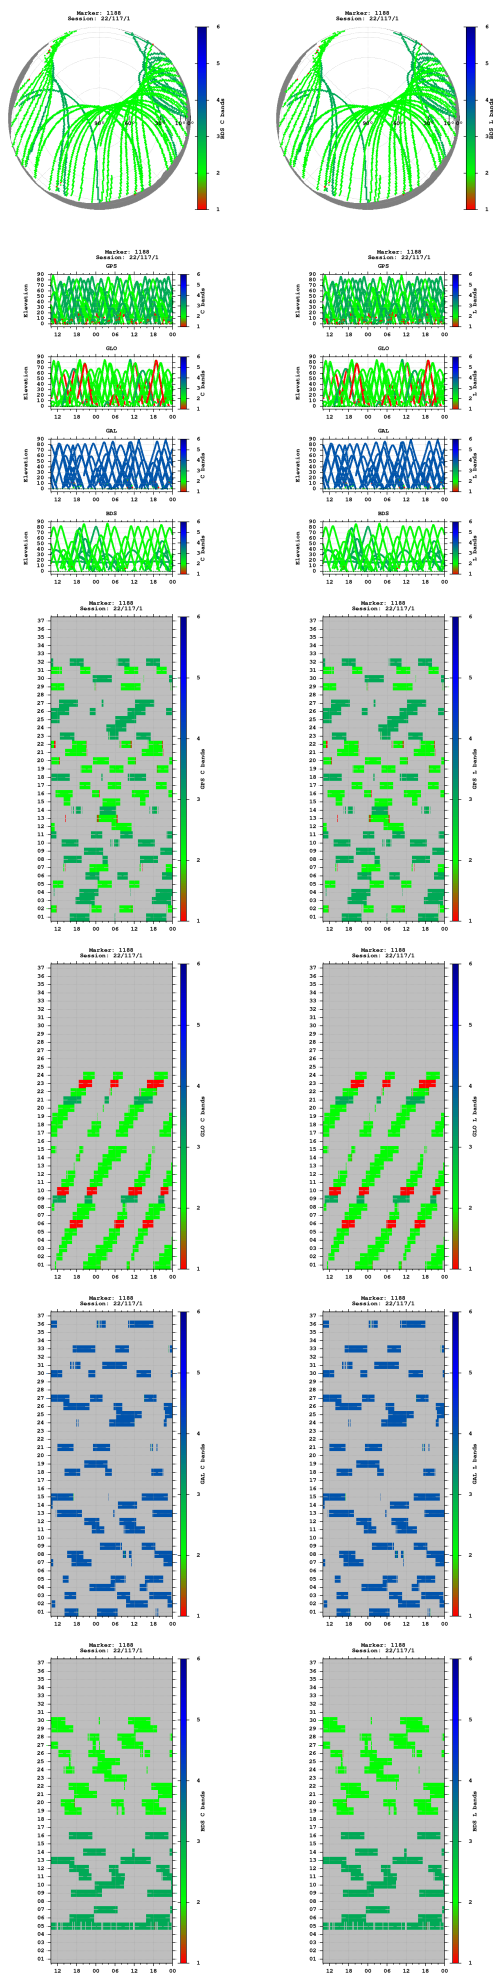


Observations

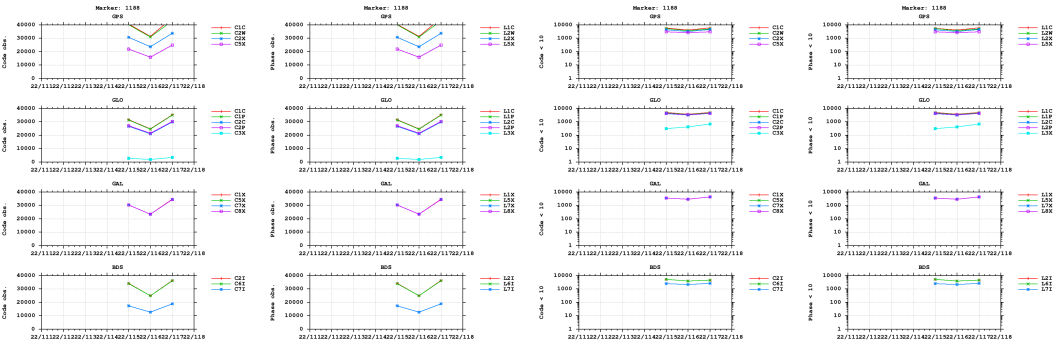



Multipath

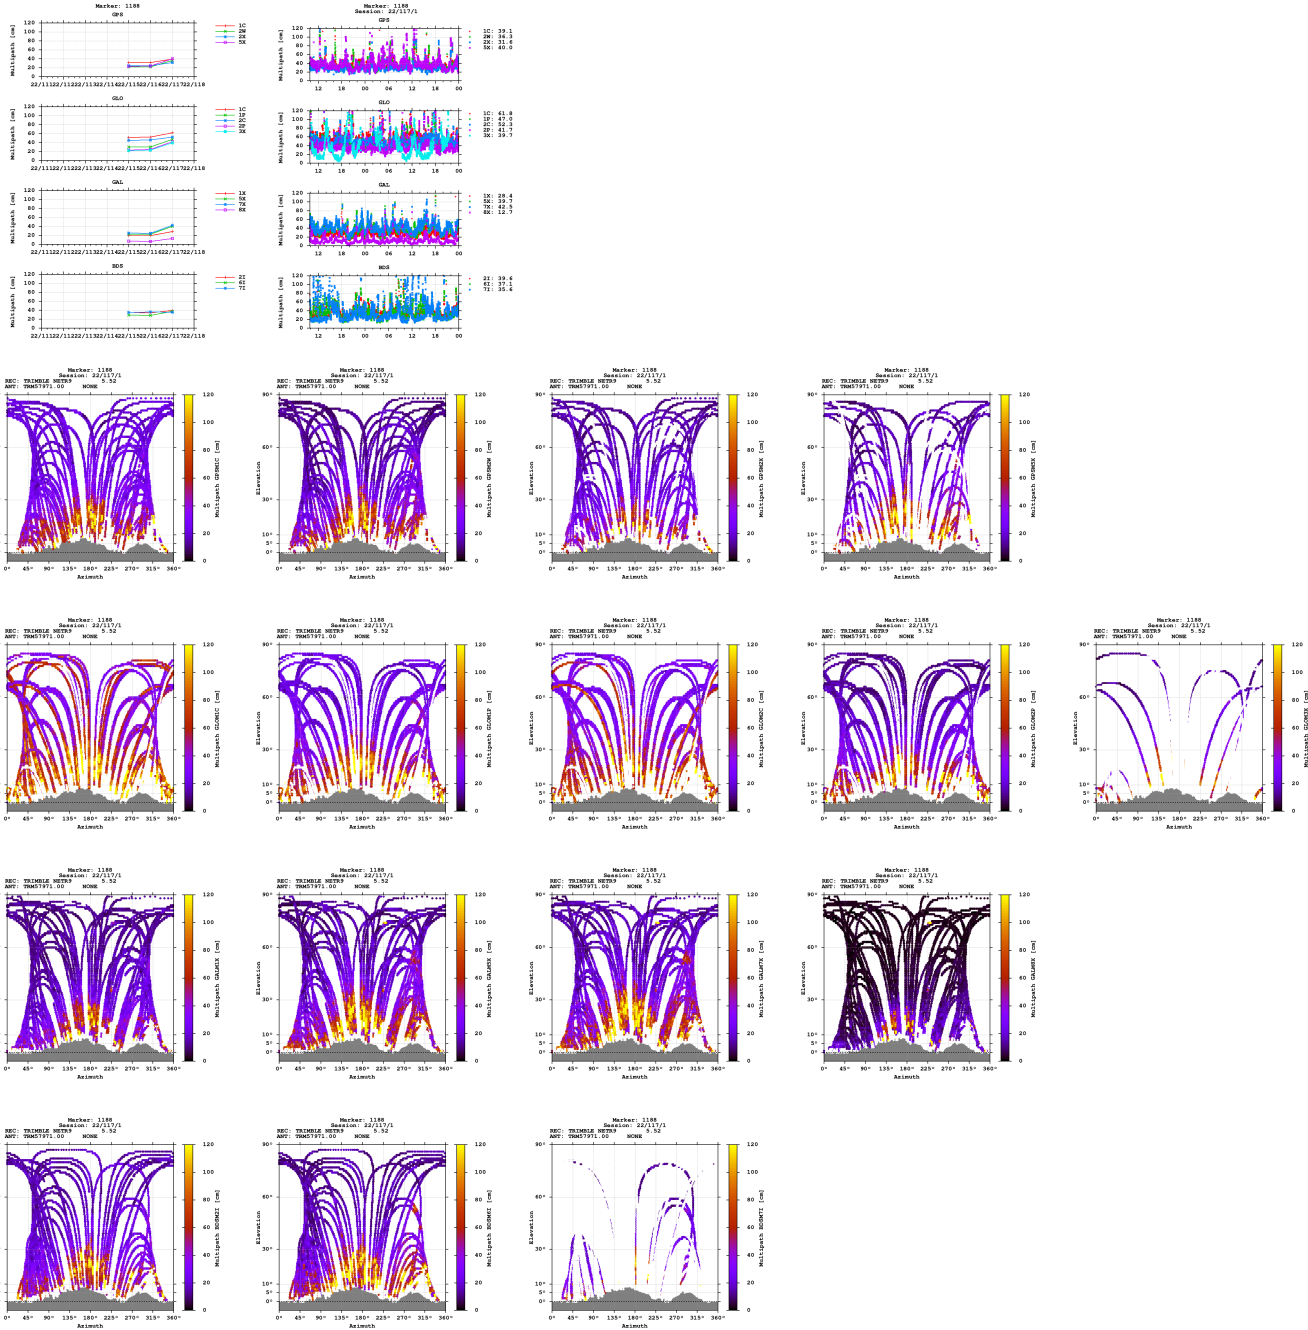


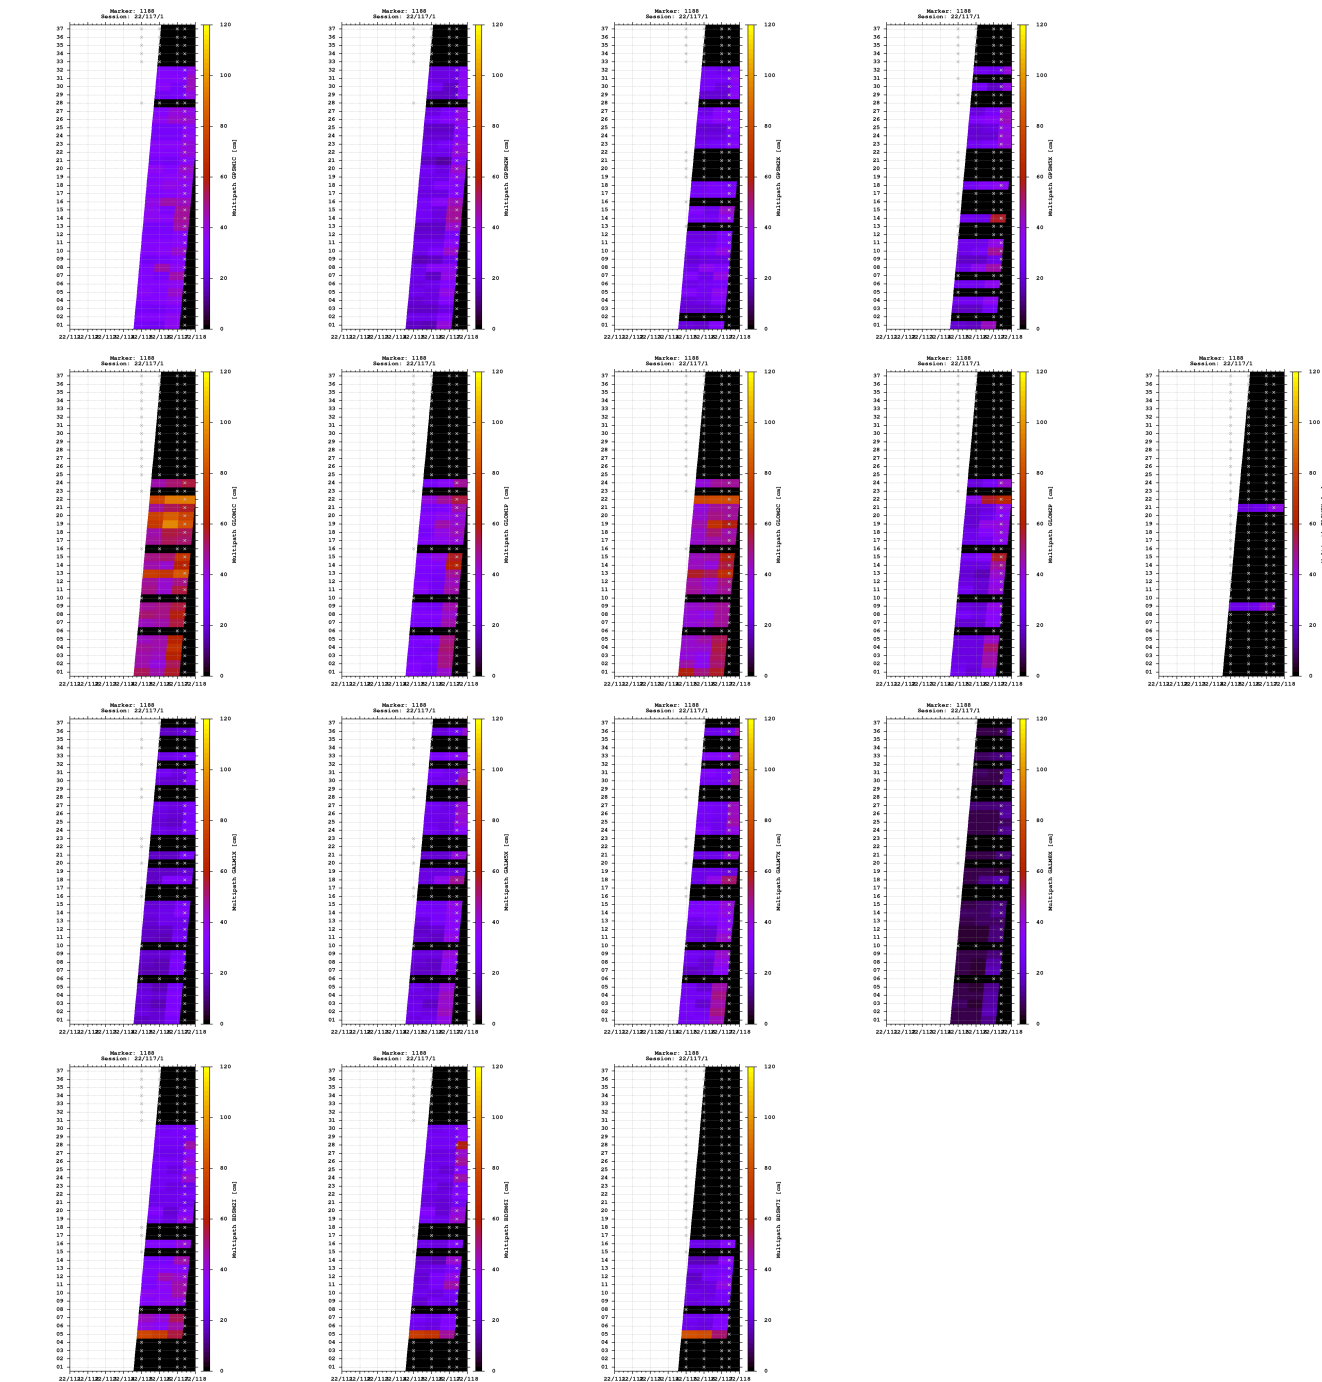

Signal-to-noise ratio

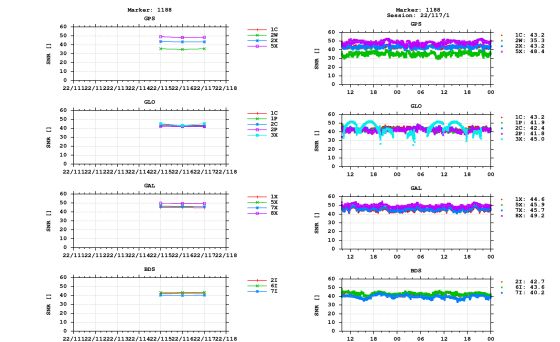


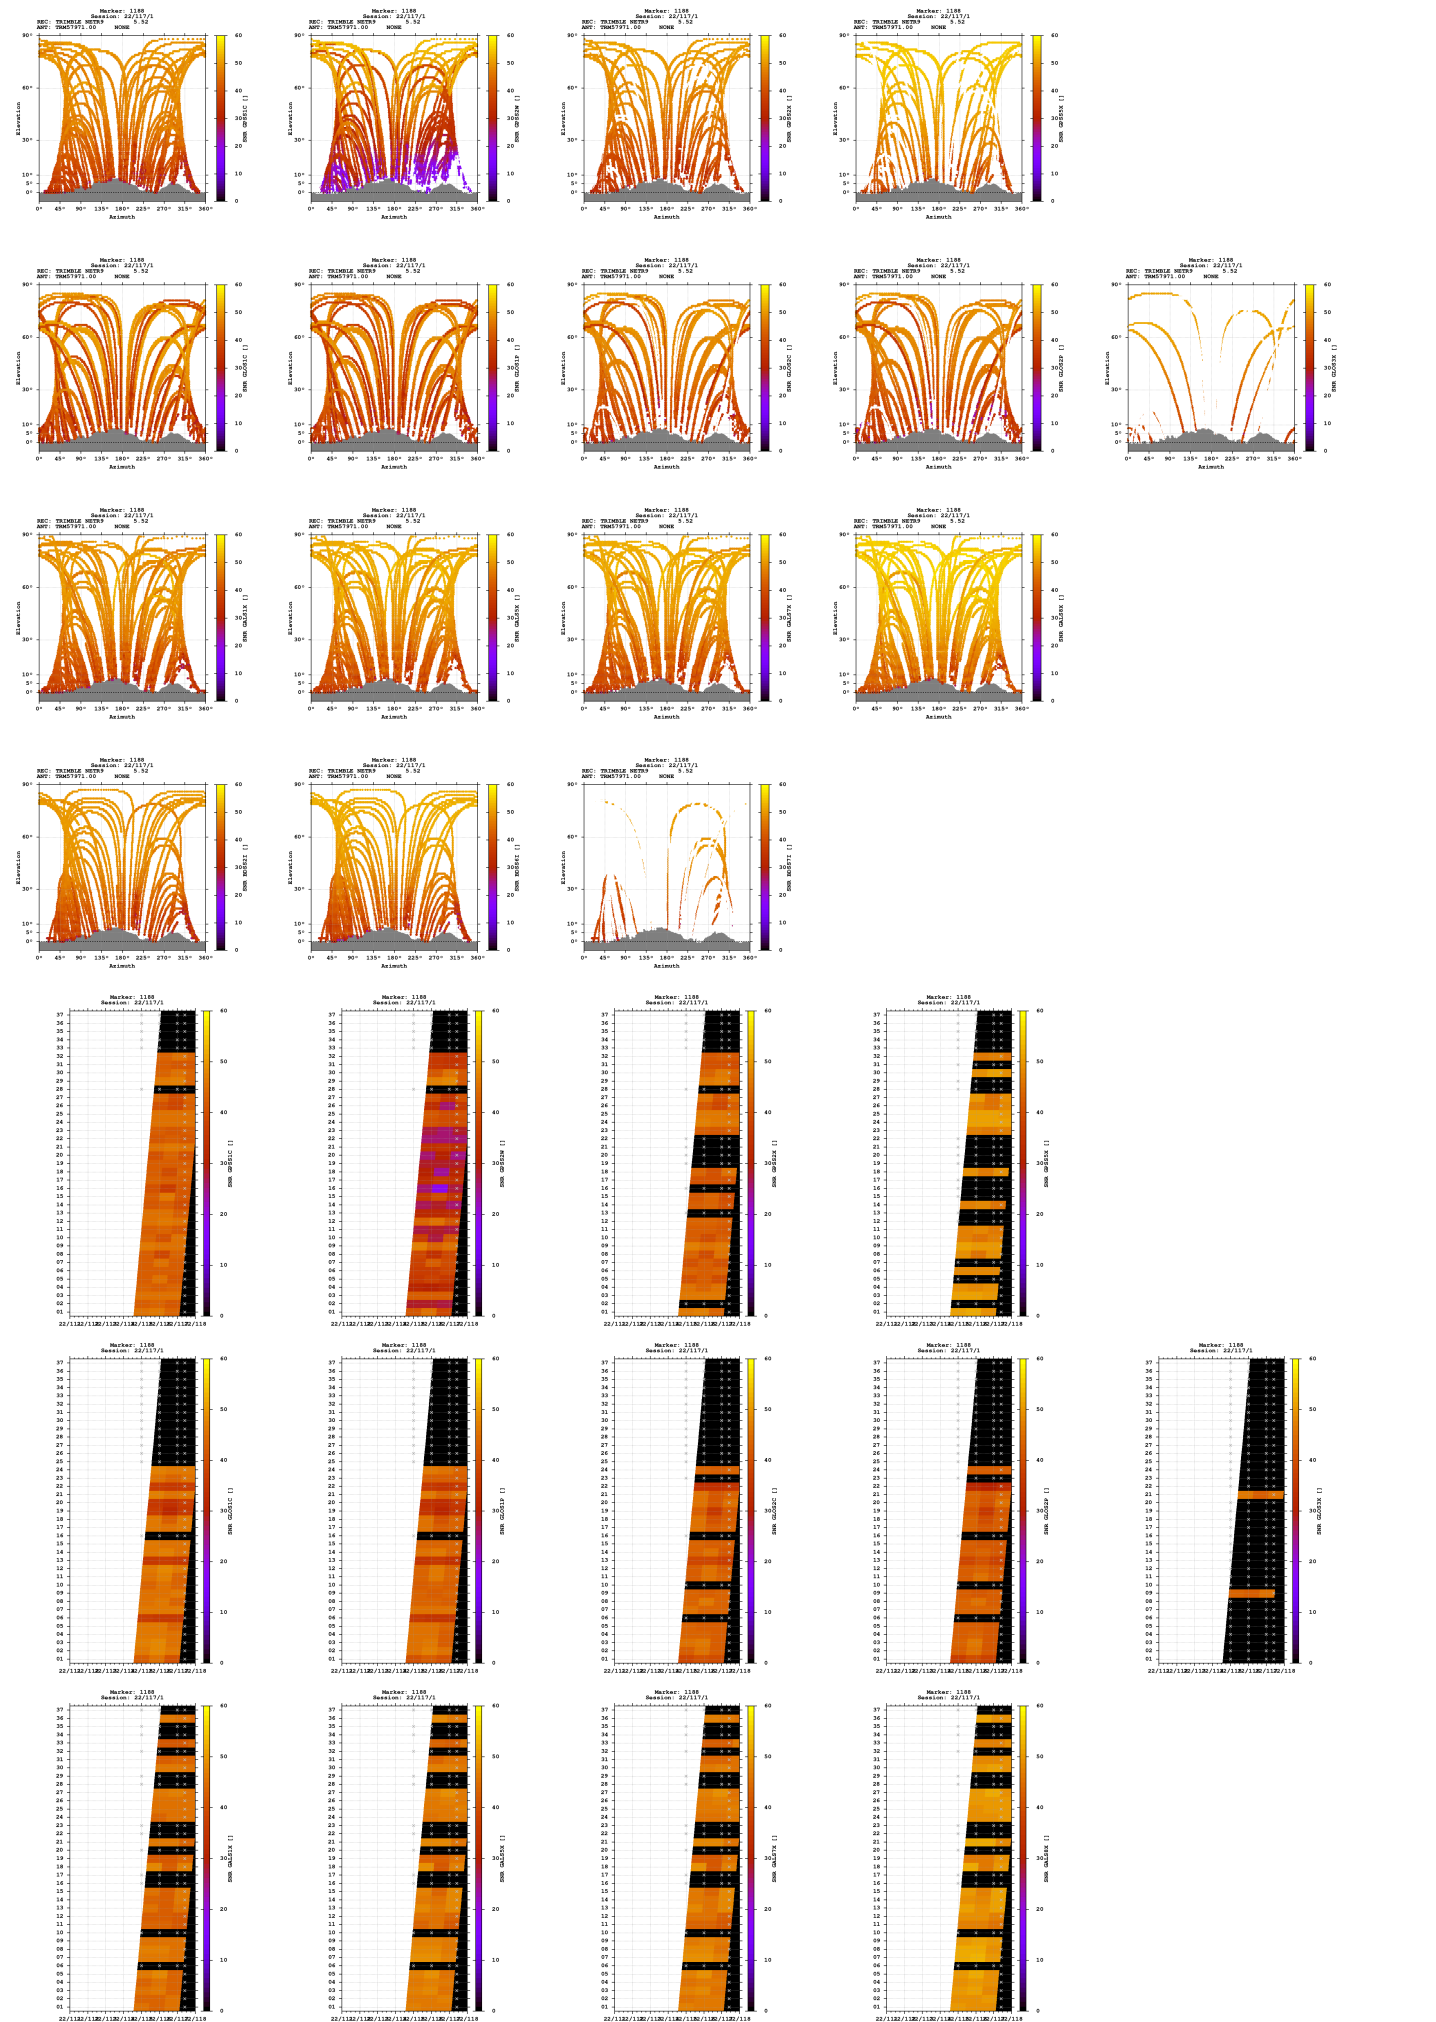

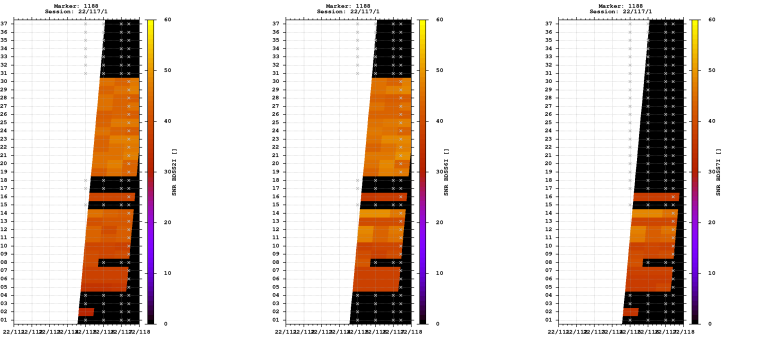



Estimates

2022-04-27 09:52:30	GPS	4332201.6642	593222.1555	4629456.8151	46.826231699	7.797200363	1217.7069
2022-04-27 09:52:30	GLO	4332201.7048	593221.3442	4629457.1810	46.826234409	7.797189758	1217.9259
2022-04-27 09:52:30	GAL	4332201.3039	593221.8238	4629456.4608	46.826232156	7.797196698	1217.1734
2022-04-27 09:52:30	BDS	4332198.2145	593222.1842	4629457.2777	46.826256938	7.797206867	1215.7084

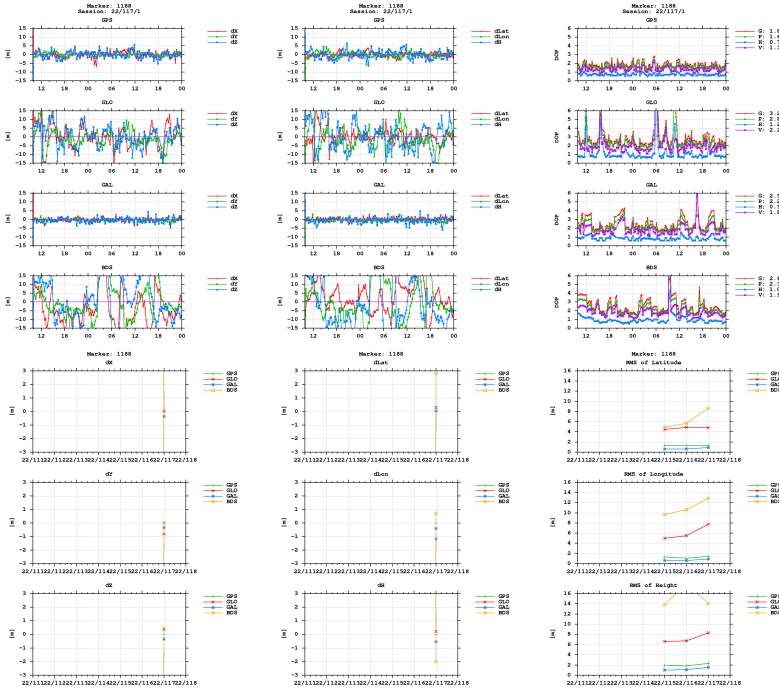

BNC

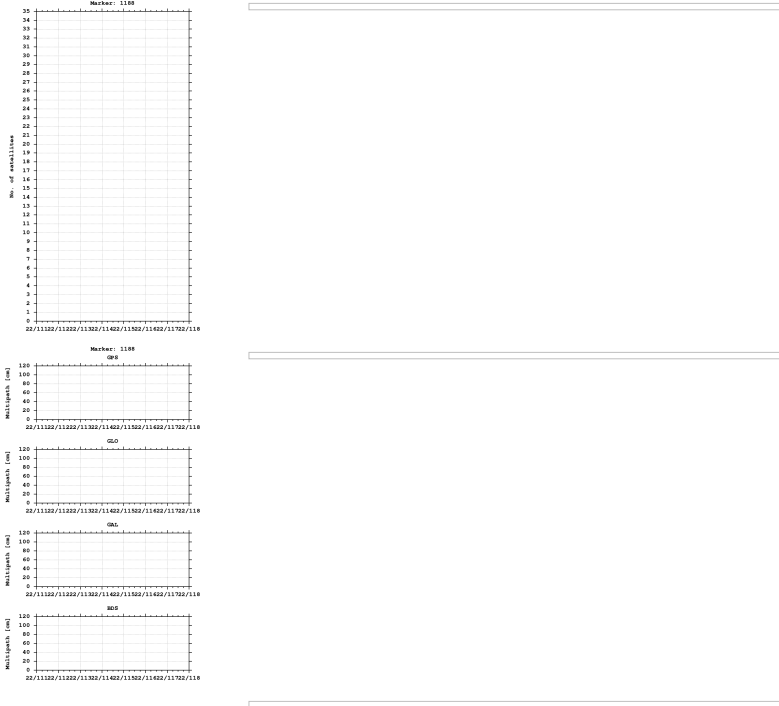

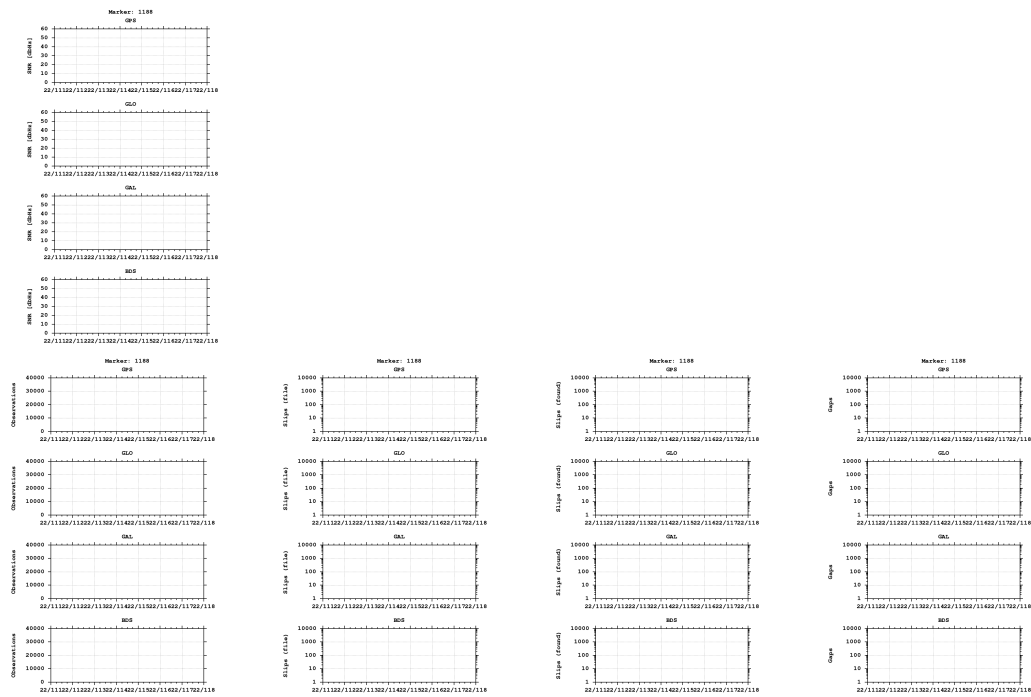

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 514 TRM57971.00 NONE 514

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)