


GNSS observation file monitoring for 0515


Last RINEX file: 05151151.22O
RINEX version: 3.02
Marker: 1147
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

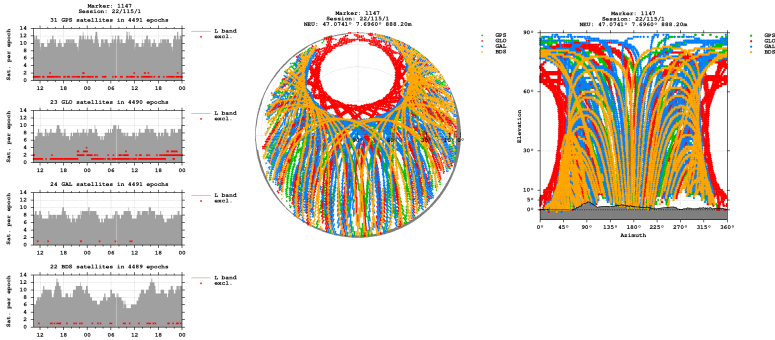


Bands

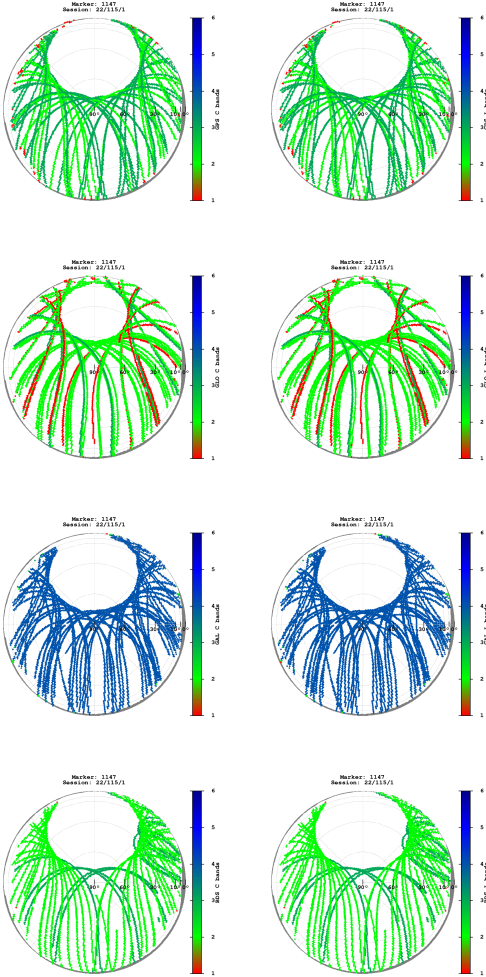

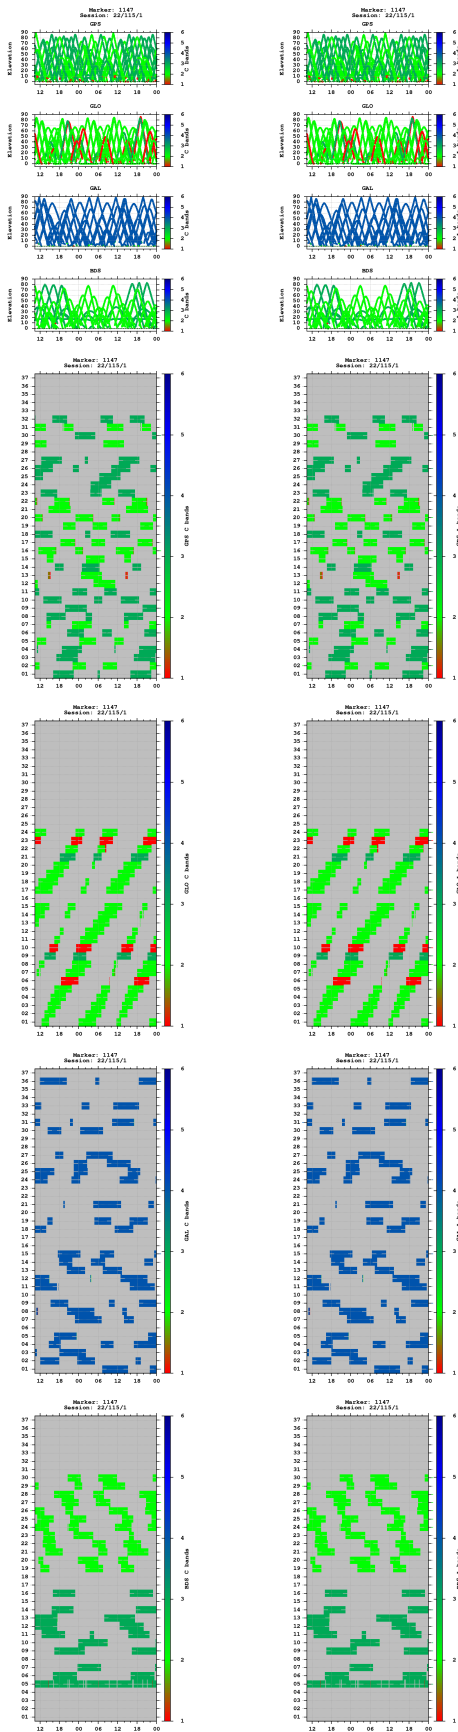



Multipath

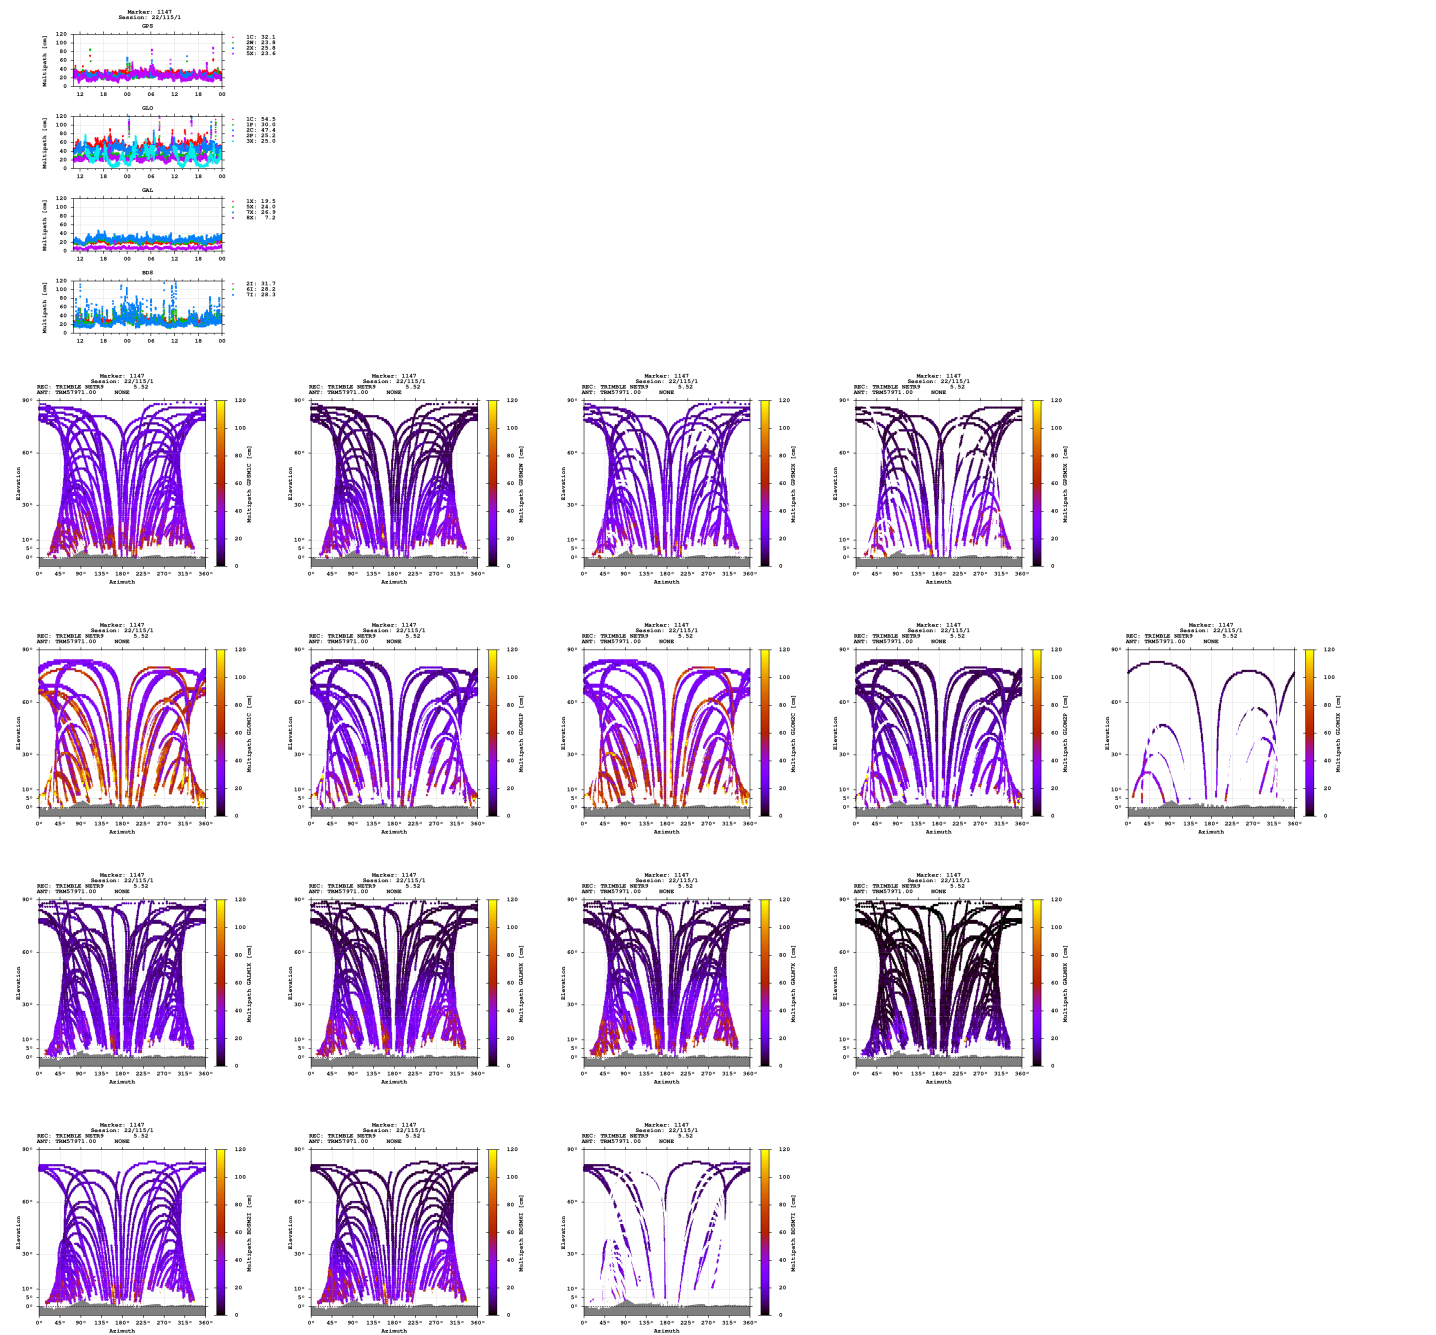

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

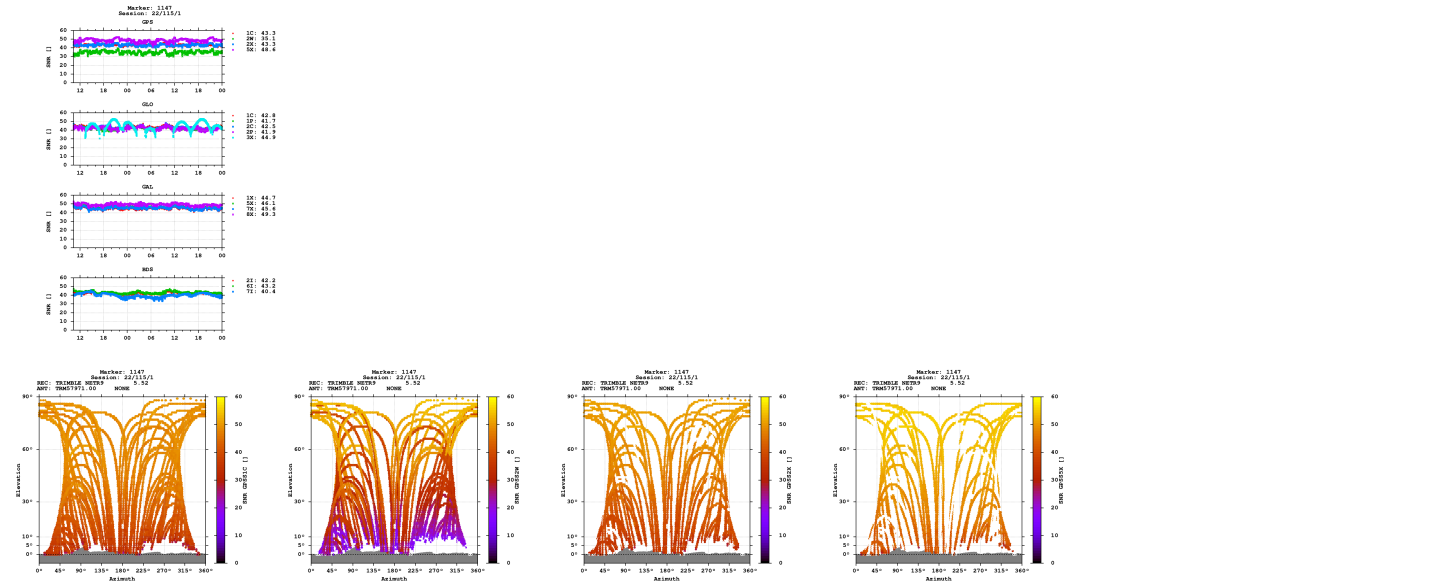

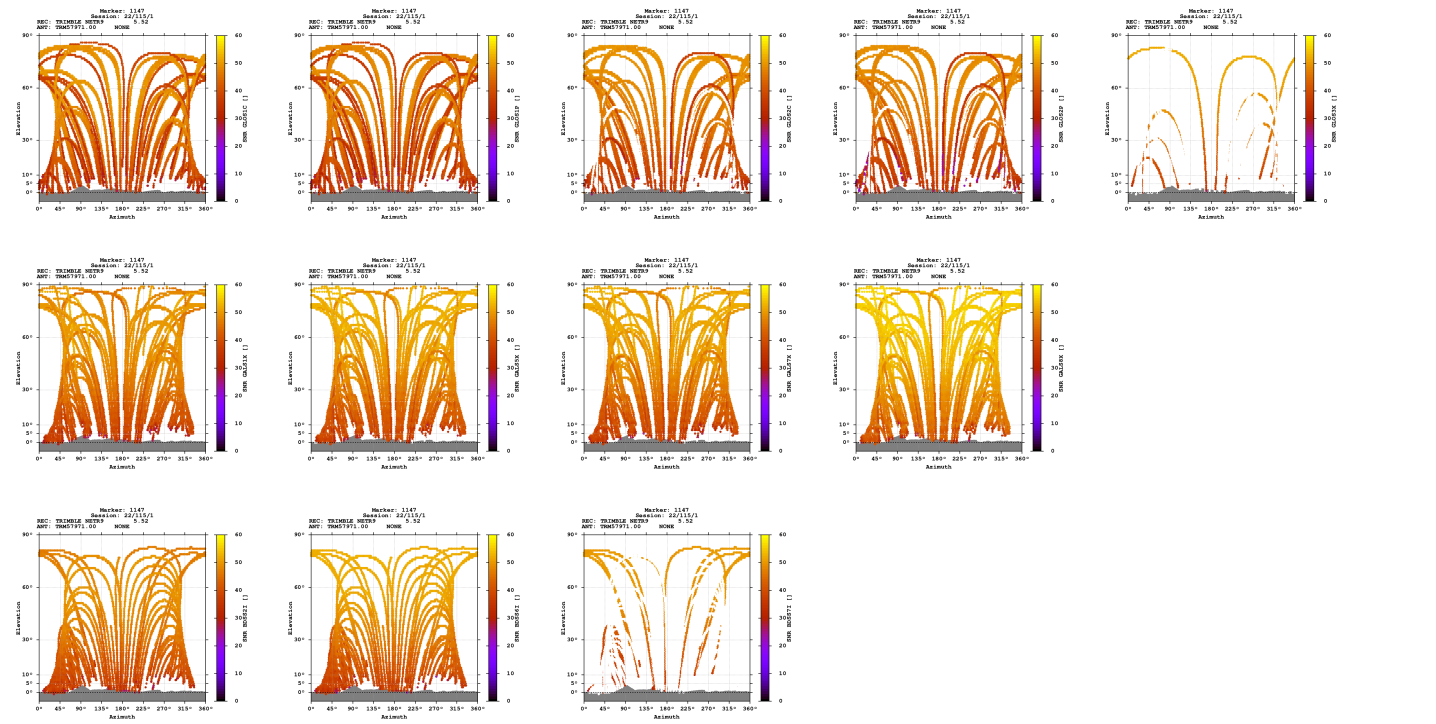

Estimates

2022-04-25 10:25:30	GPS	4313060.9027	582839.9177	4648030.2139	47.074110231	7.695971486	888.2023
2022-04-25 10:25:30	GLO	4313061.6146	582839.6175	4648030.5663	47.074108008	7.695966314	888.9135
2022-04-25 10:25:30	GAL	4313061.0038	582839.7289	4648030.1347	47.074109252	7.695968845	888.1953
2022-04-25 10:25:30	BDS	4313059.9236	582838.5379	4648030.7949	47.074121397	7.695955211	887.8410

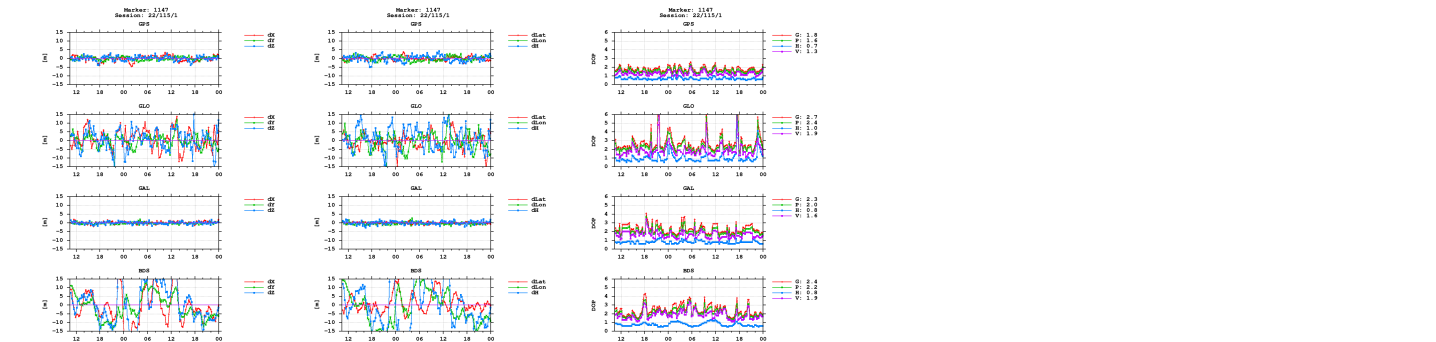

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)