


GNSS observation file monitoring for 0515


Last RINEX file: 05151161.220
RINEX version: 3.02
Marker: 1147
Receiver: 515 TRIMBLE NETR9 5.52
Antenna: 515 TRM57971.00 NONE

Epochs

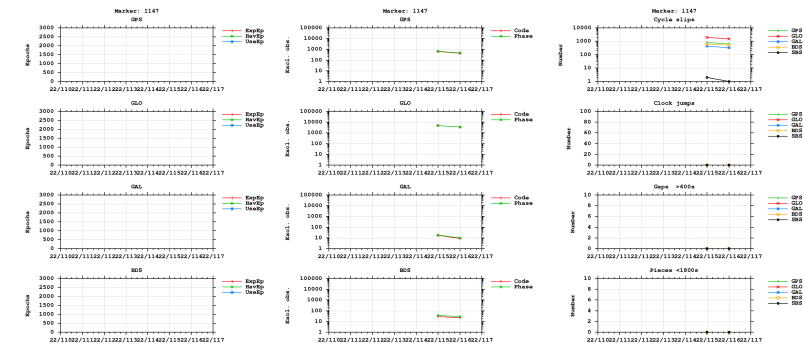



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

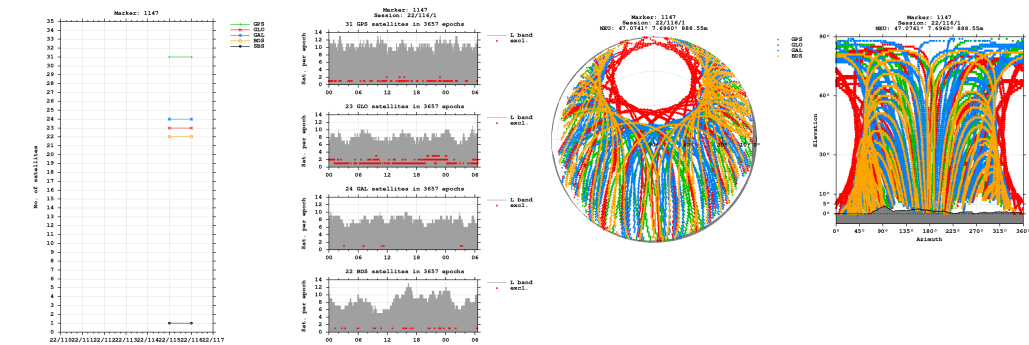


Bands

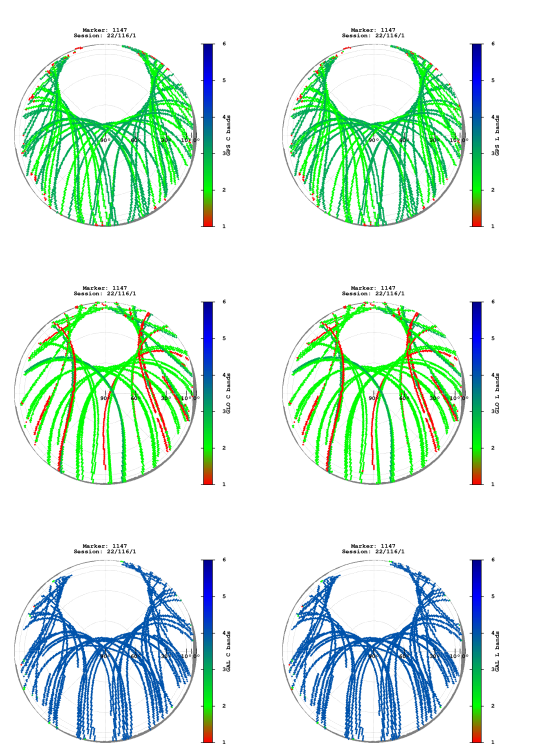


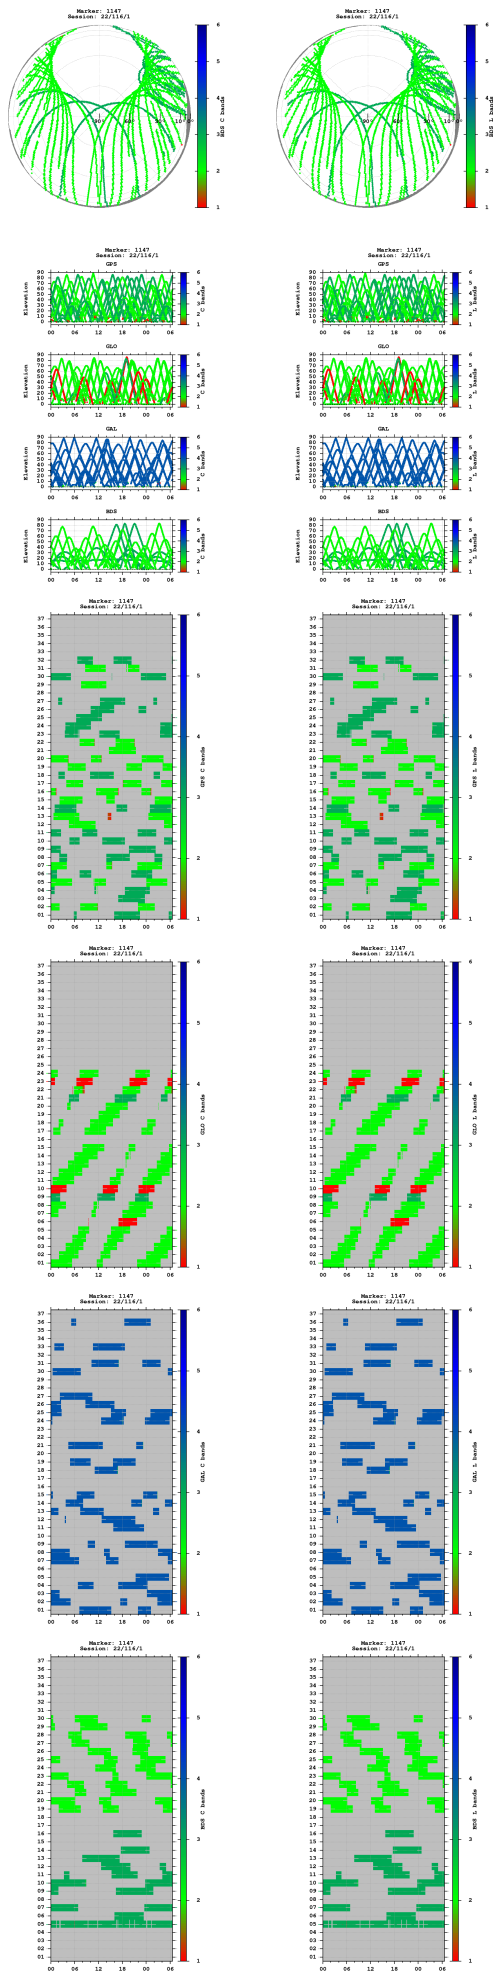


Observations

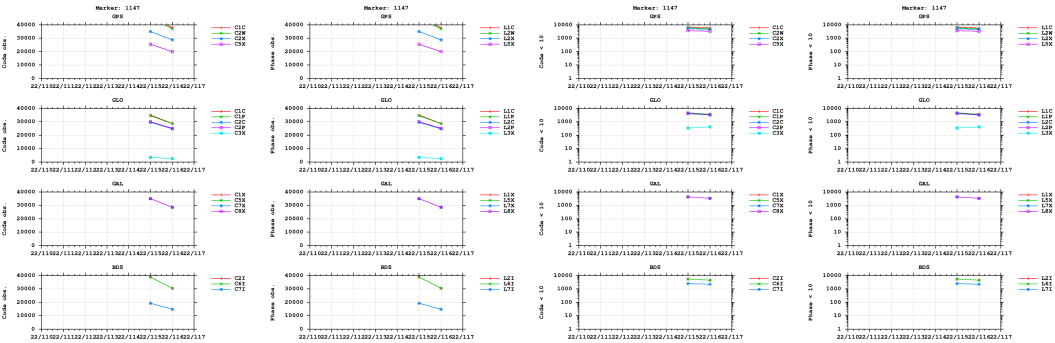


Multipath

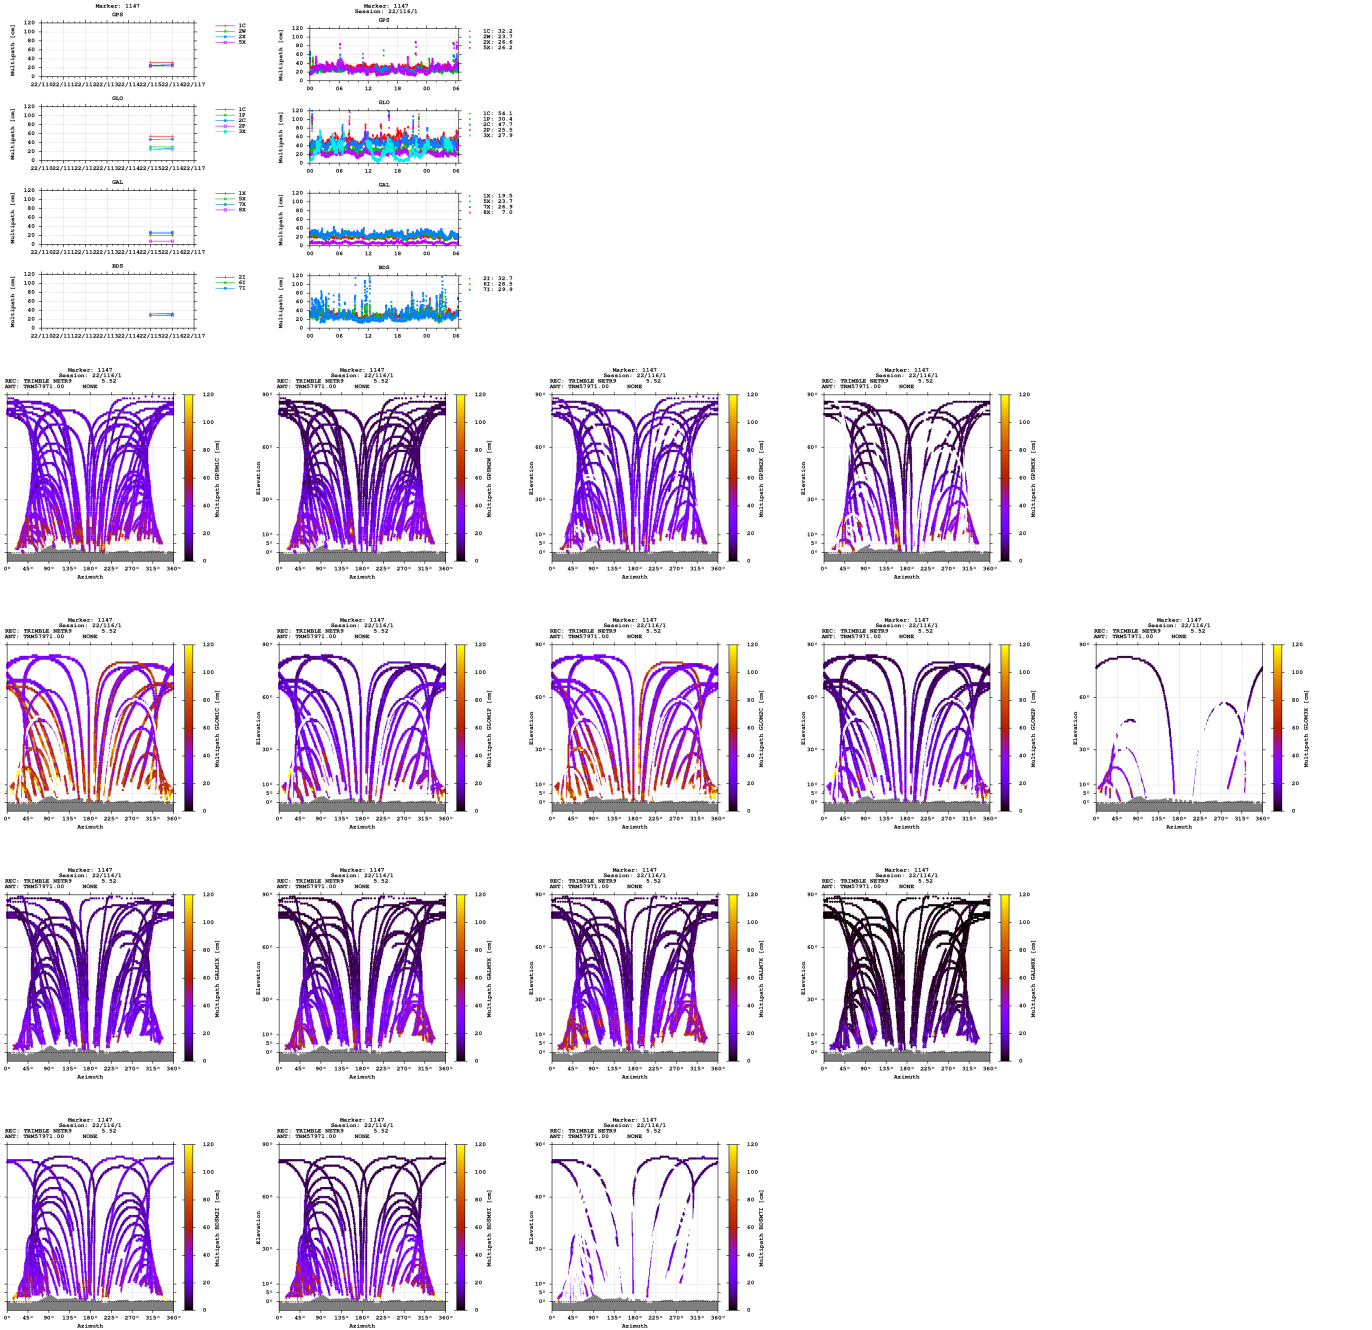


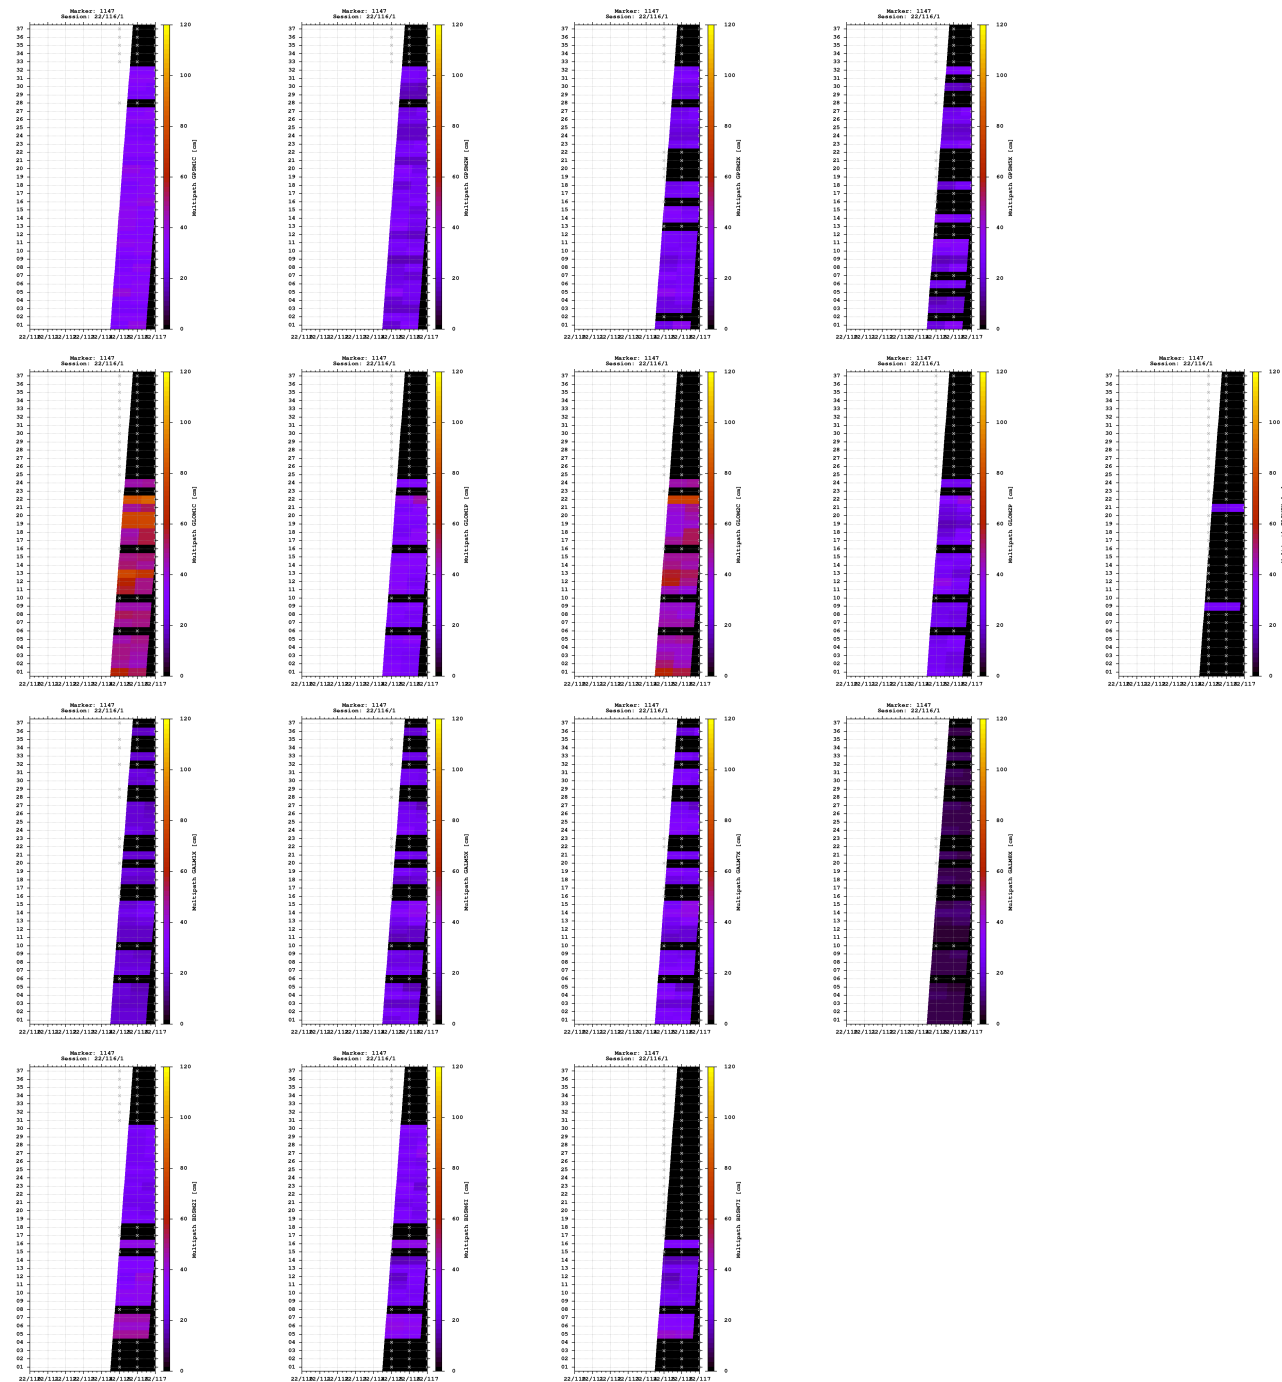


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

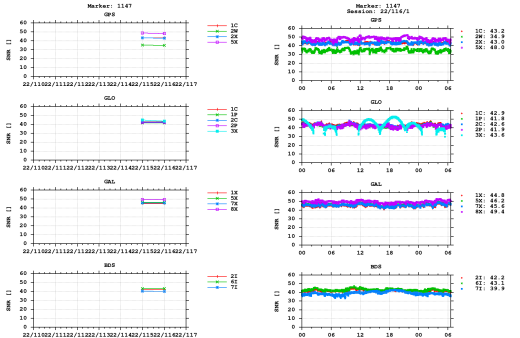


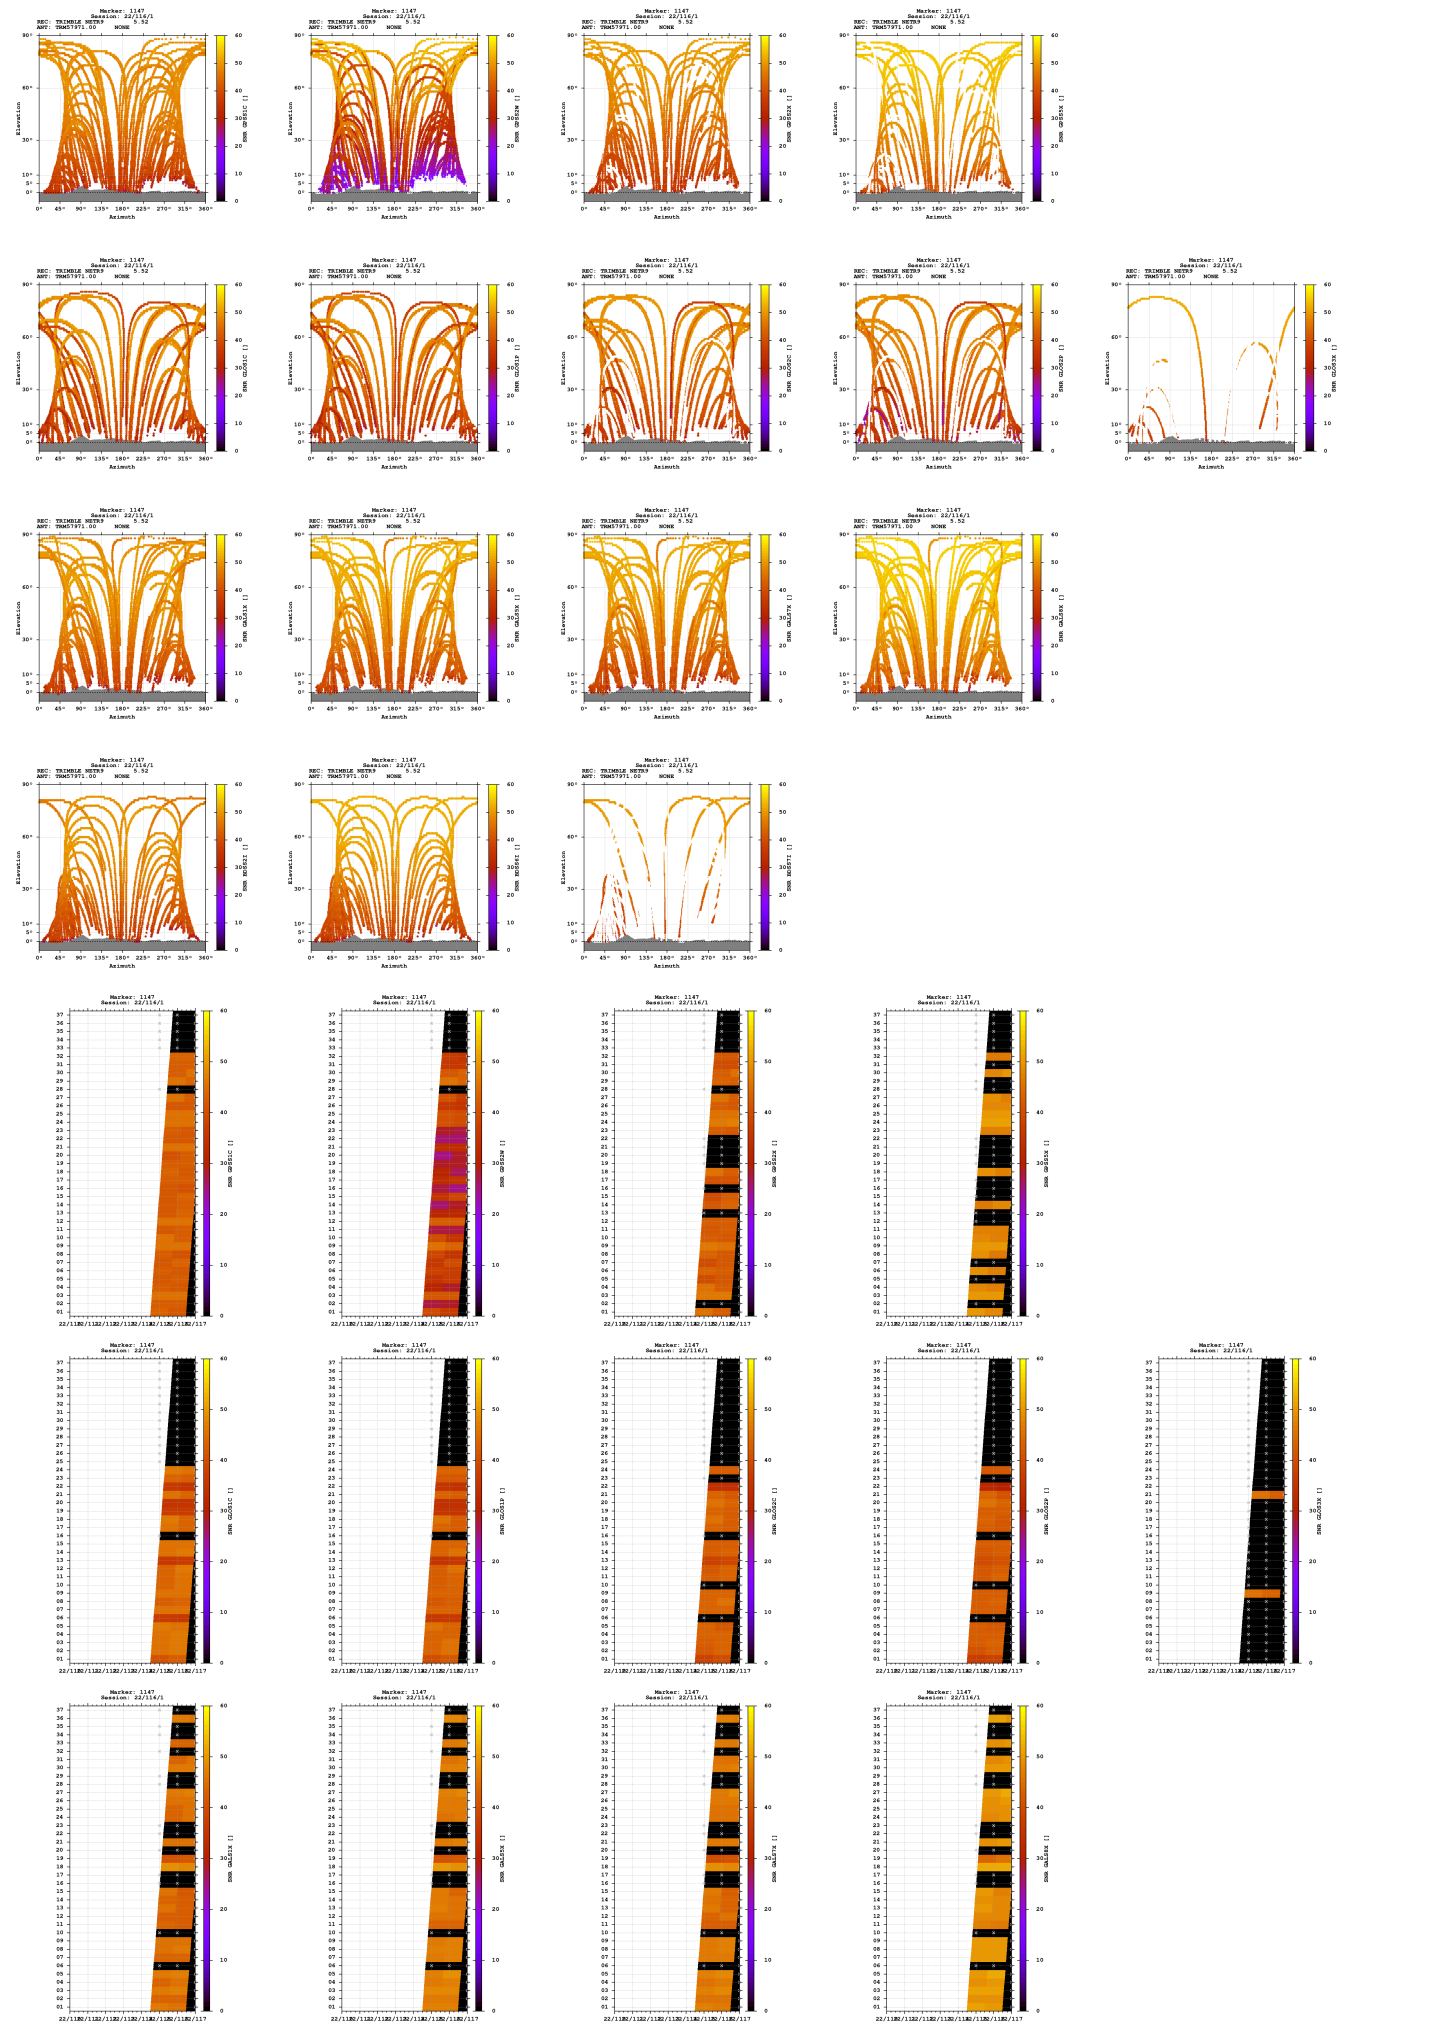

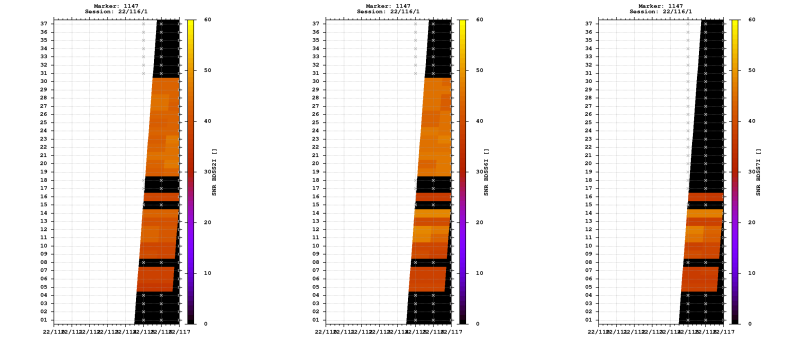


Estimates

2022-04-25 10:25:30	GPS	4313061.0729	582839.9312	4648030.5234	47.074111005	7.695971362	888.5450
2022-04-25 10:25:30	GLO	4313061.8531	582839.5496	4648030.9975	47.074109153	7.695965009	889.3839
2022-04-25 10:25:30	GAL	4313060.9990	582839.7690	4648030.0500	47.074108730	7.695969377	888.1337
2022-04-25 10:25:30	BDS	4313058.5855	582841.0490	4648030.8756	47.074128409	7.695990330	887.2261

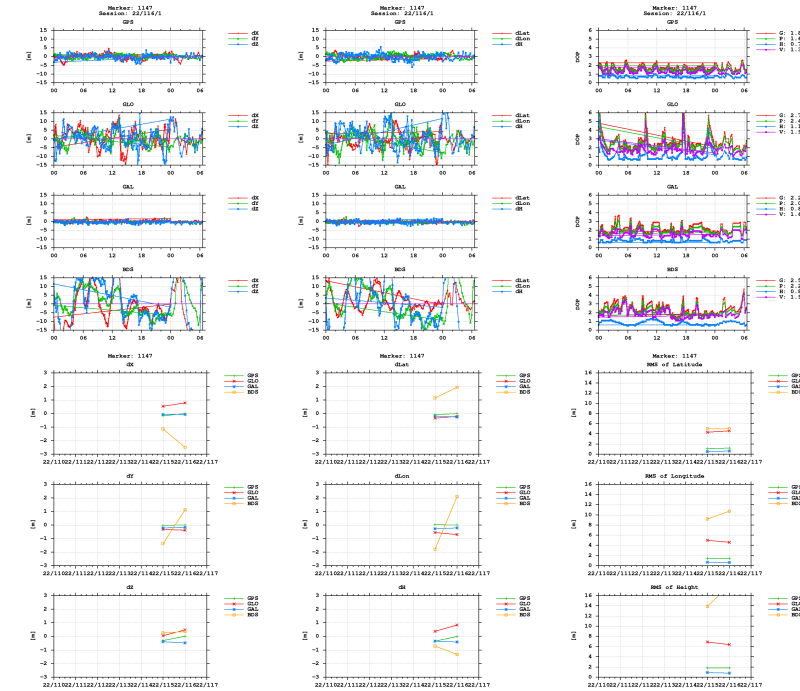

BNC



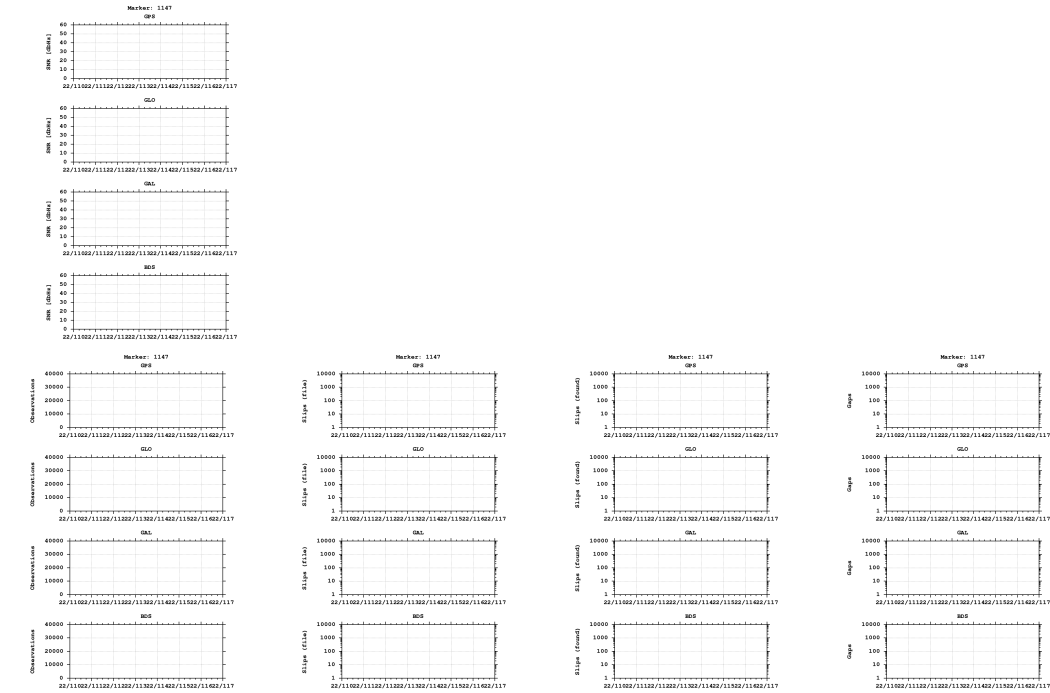

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)