

GNSS observation file monitoring for 0515

Last RINEX file: 05151171.220


RINEX version: 3.02

Marker: 1129

Receiver: 515 TRIMBLE NETR9 5.52


Antenna: 515 TRM57971.00 NONE

Epochs

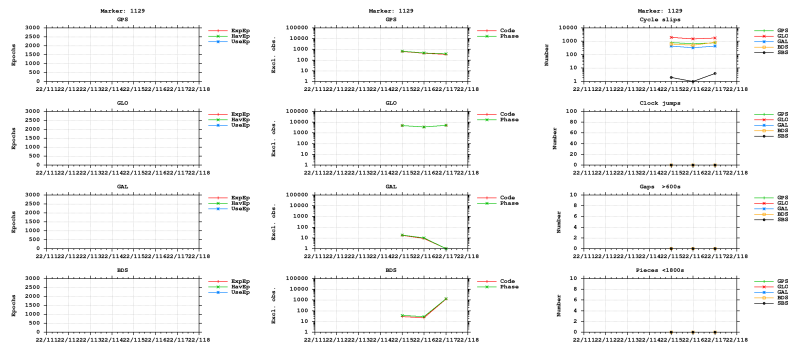



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

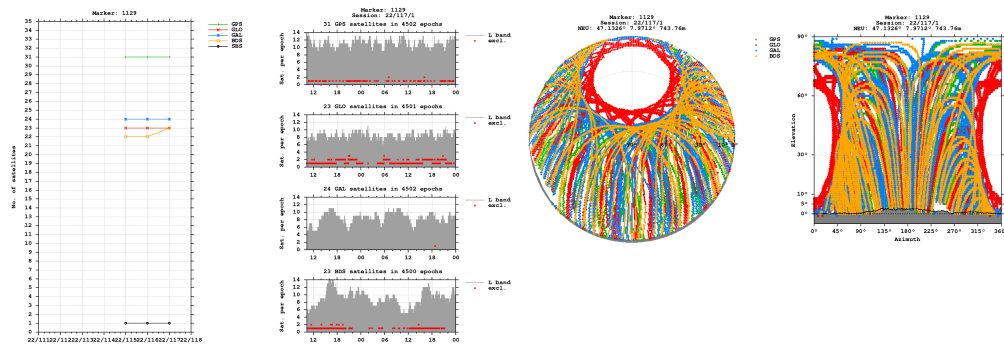


Bands


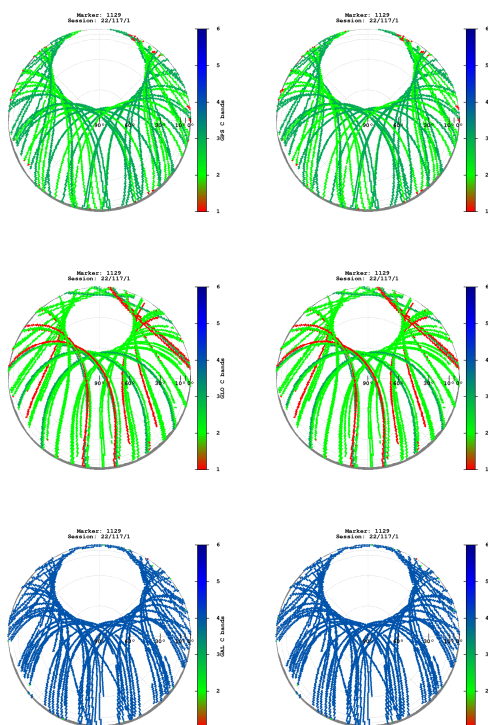


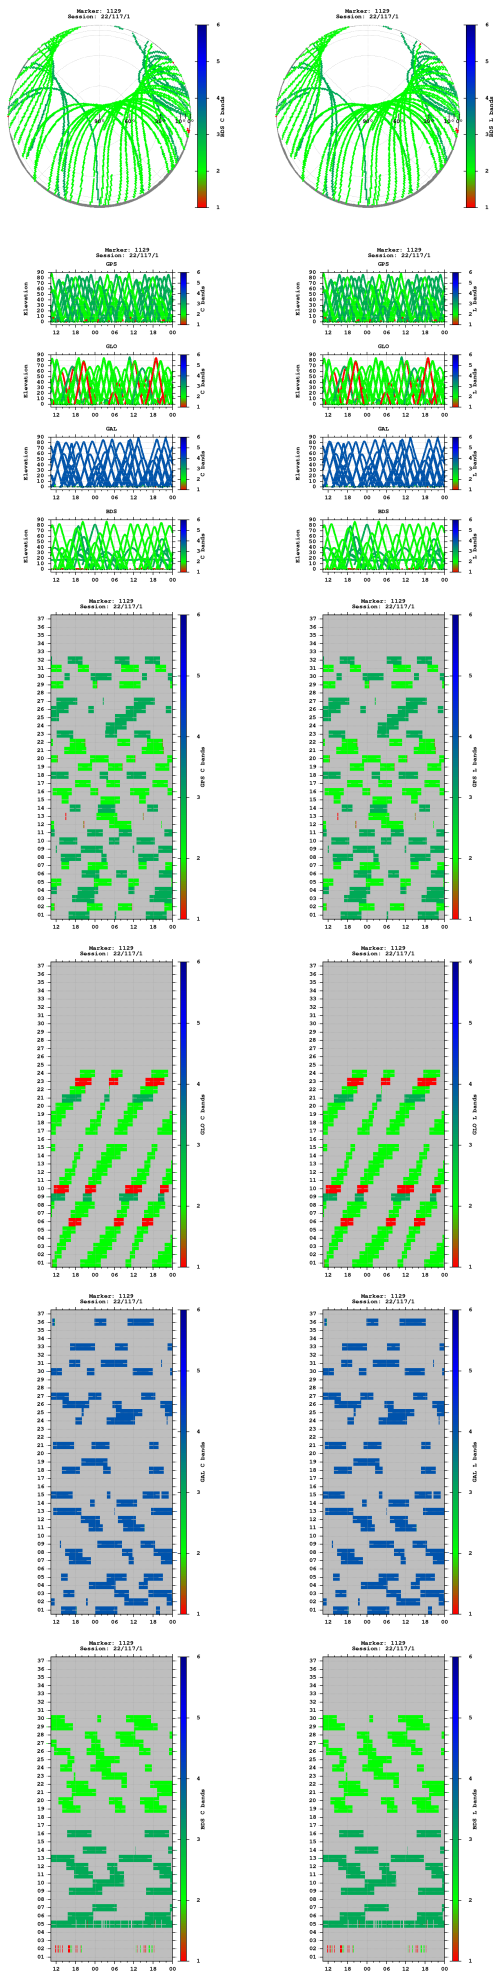


Observations

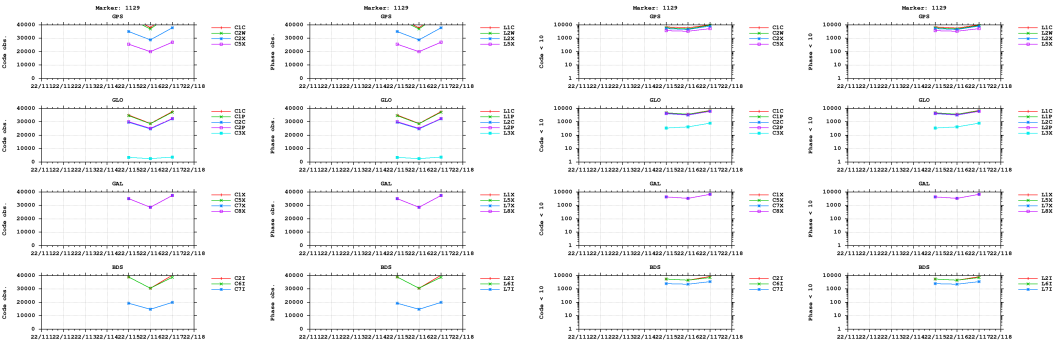



Multipath

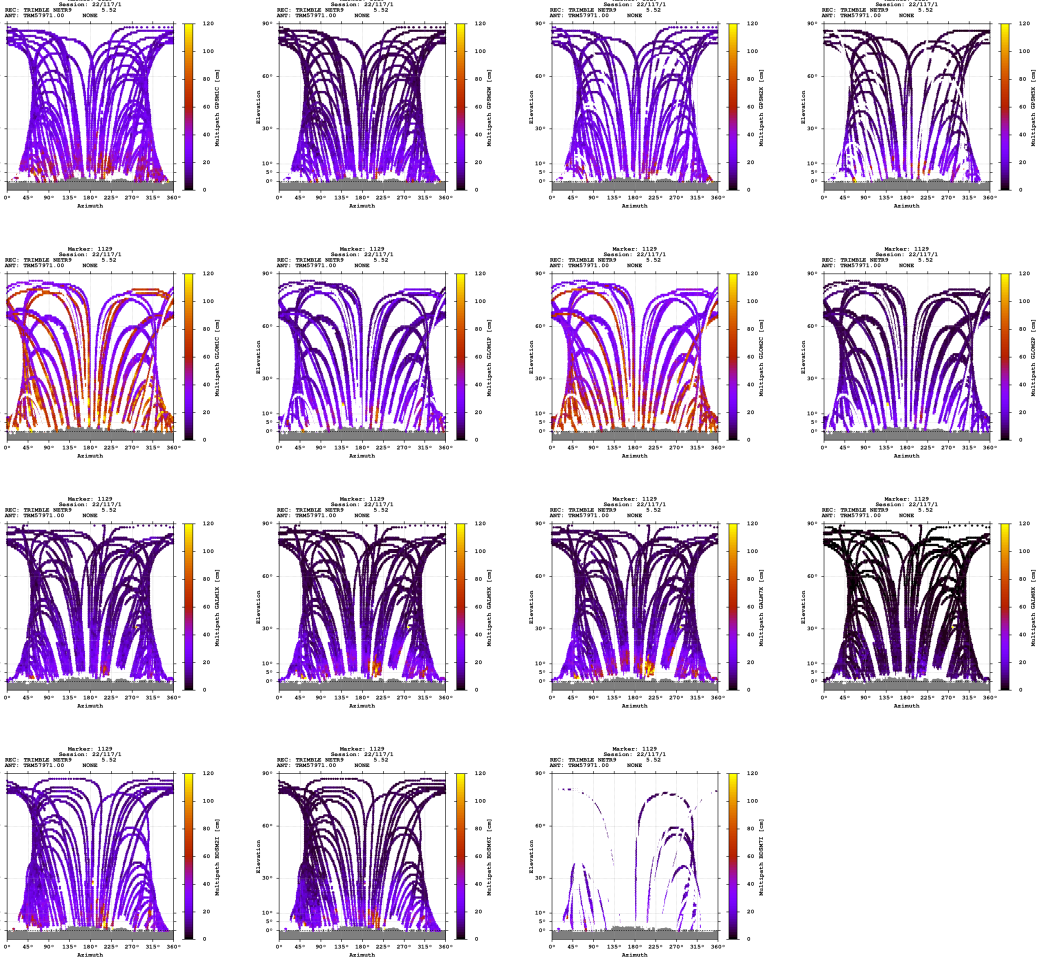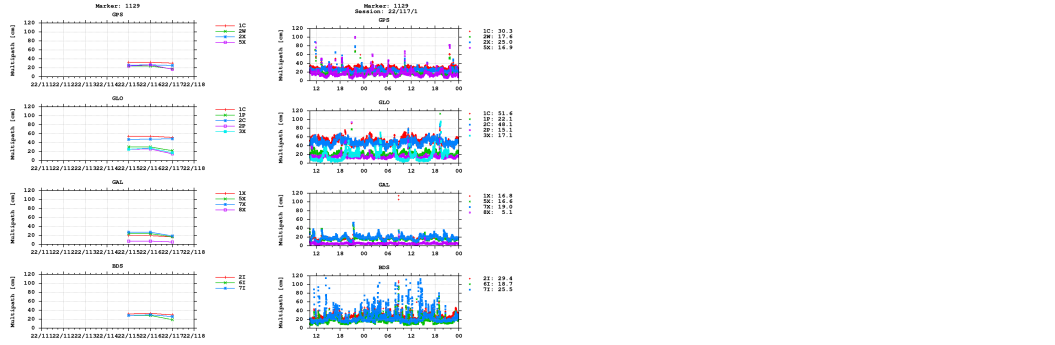


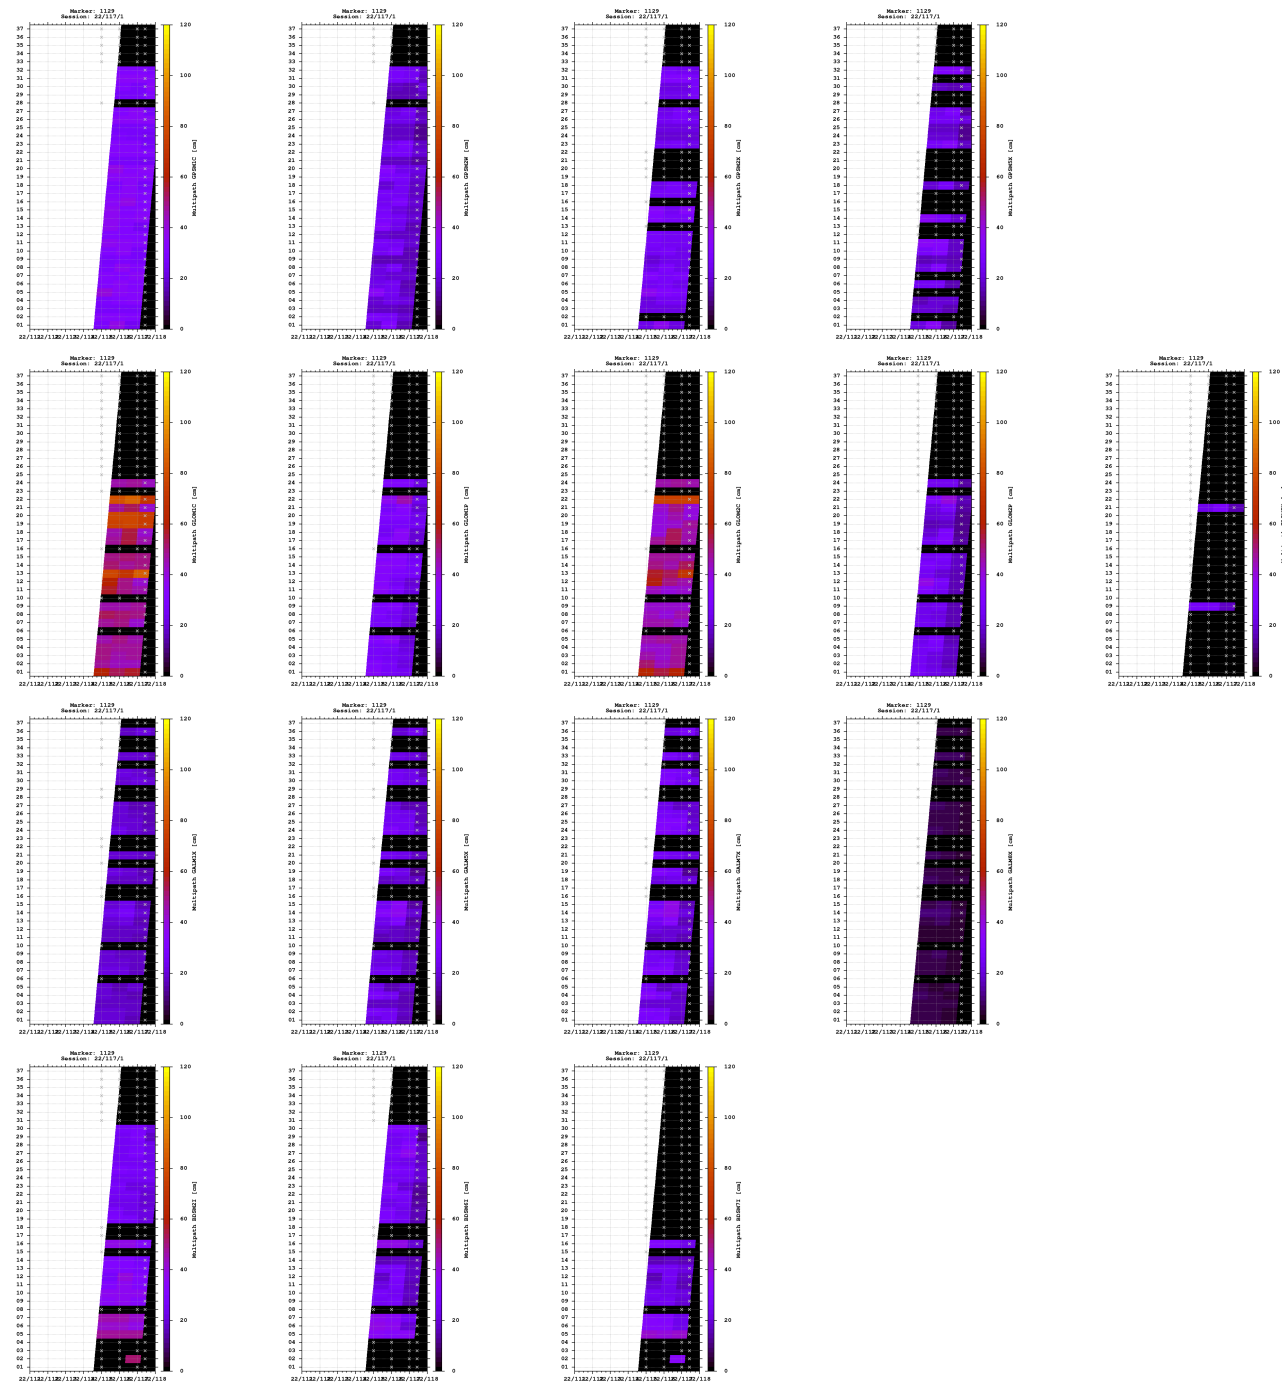


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

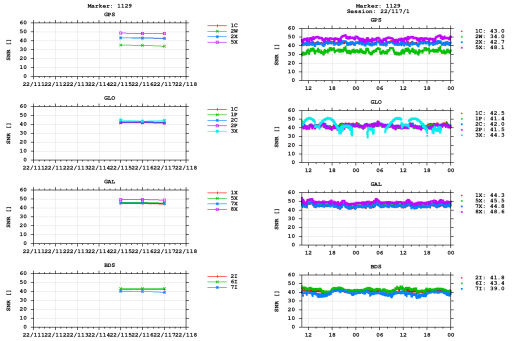


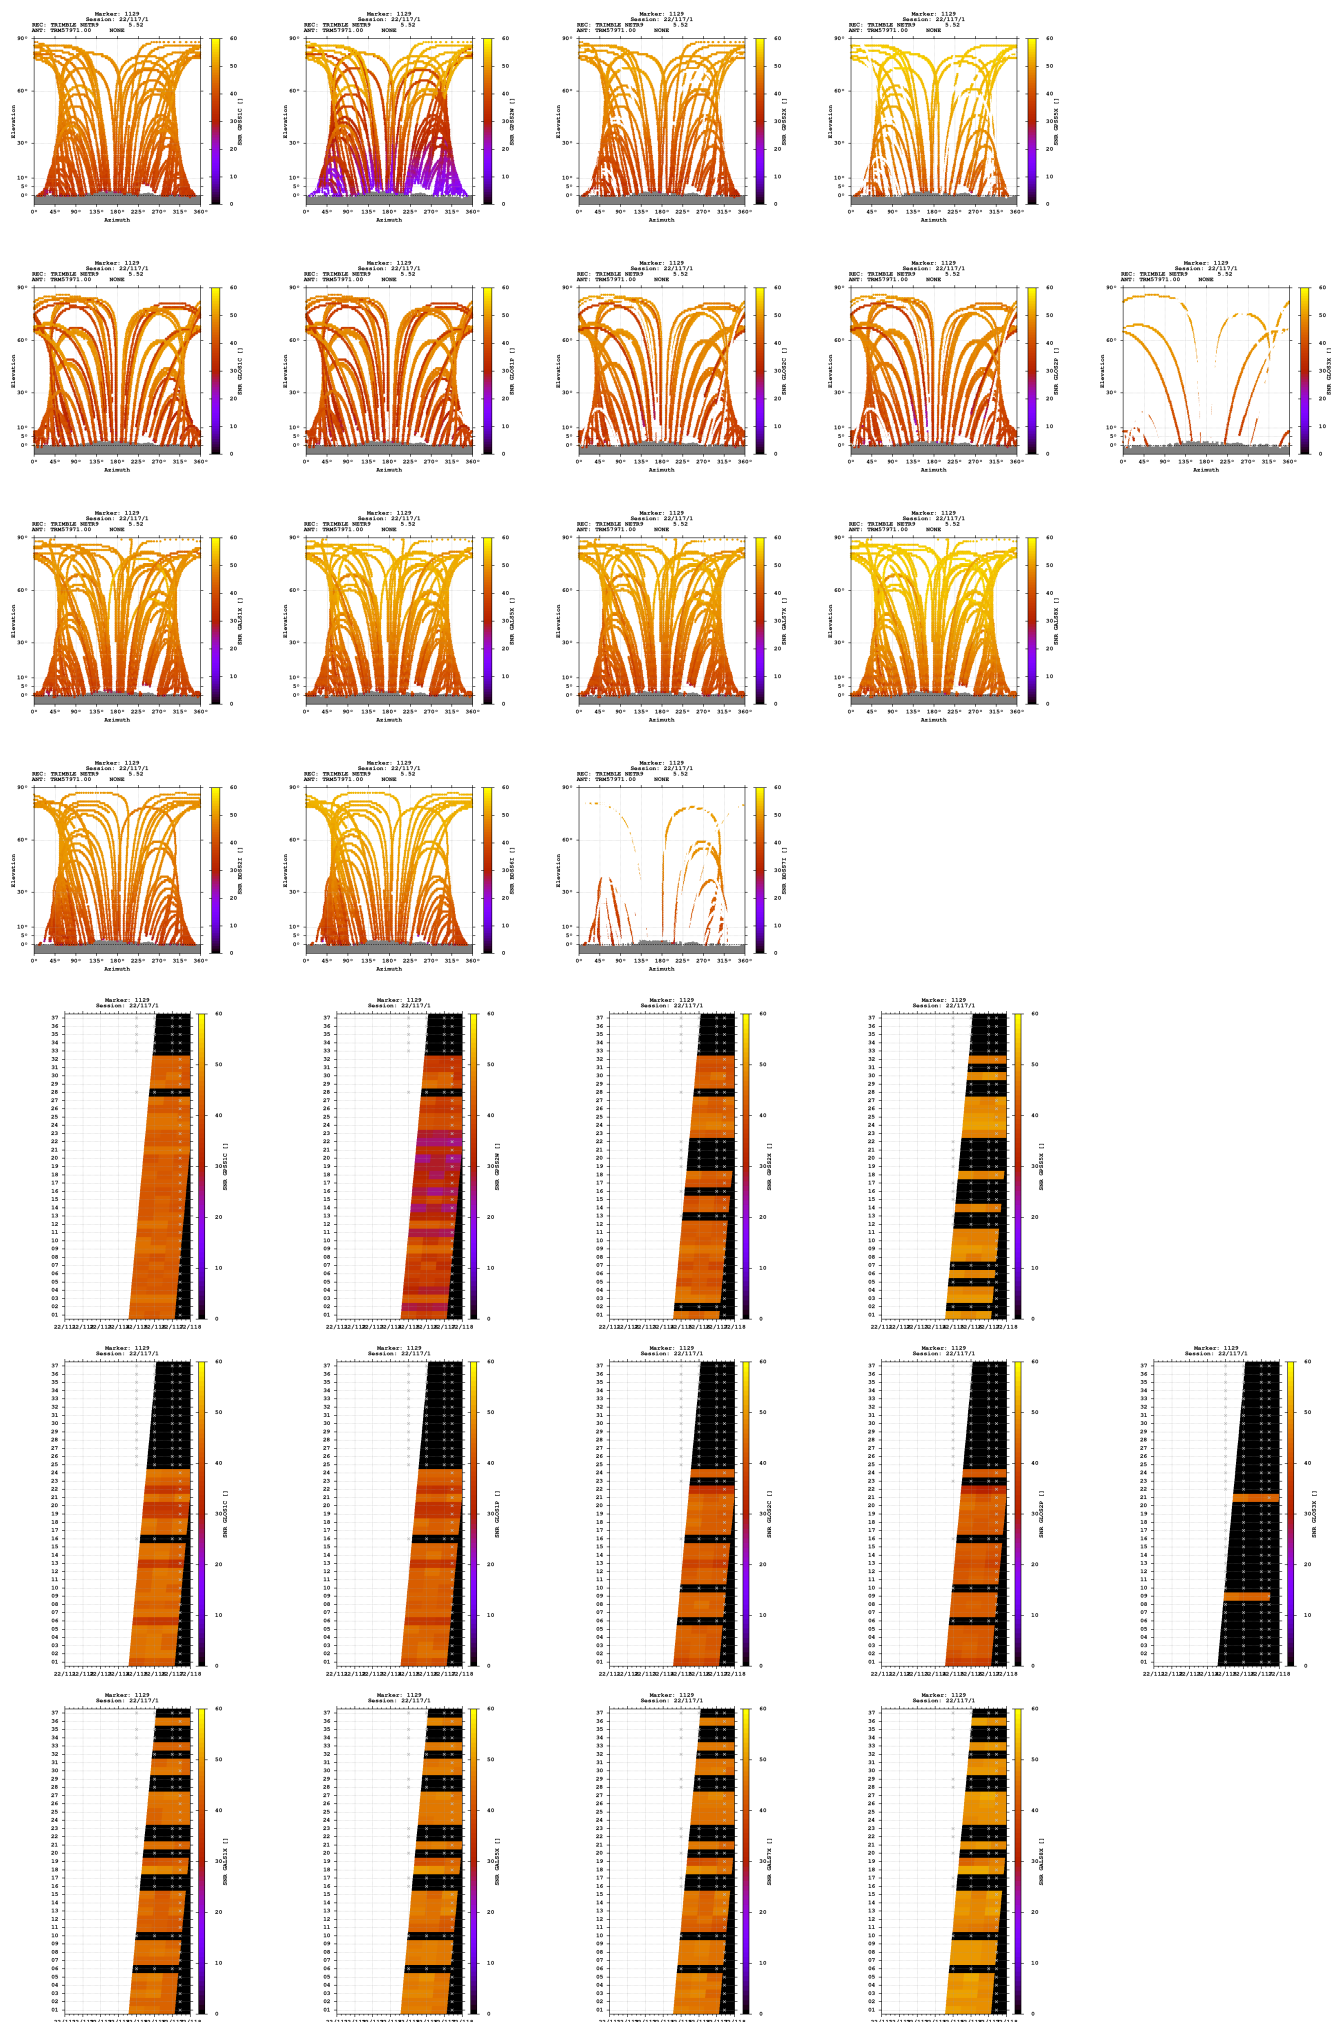

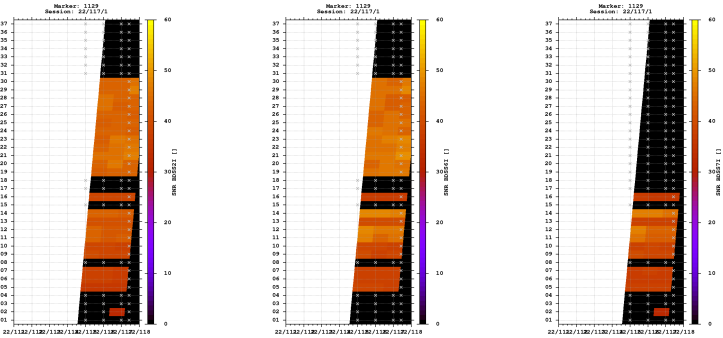



Estimates

2022-04-27 10:23:00	GPS	4305398.1608	602875.9889	4652349.0848	47.132573961	7.971179853	743.7577
2022-04-27 10:23:00	GLO	4305397.5413	602875.0577	4652349.2145	47.132579650	7.971168831	743.3475
2022-04-27 10:23:00	GAL	4305398.0742	602875.6617	4652348.9927	47.132574262	7.971175741	743.6009
2022-04-27 10:23:00	BDS	4305394.6382	602875.8624	4652349.3551	47.132598727	7.971184640	741.5705

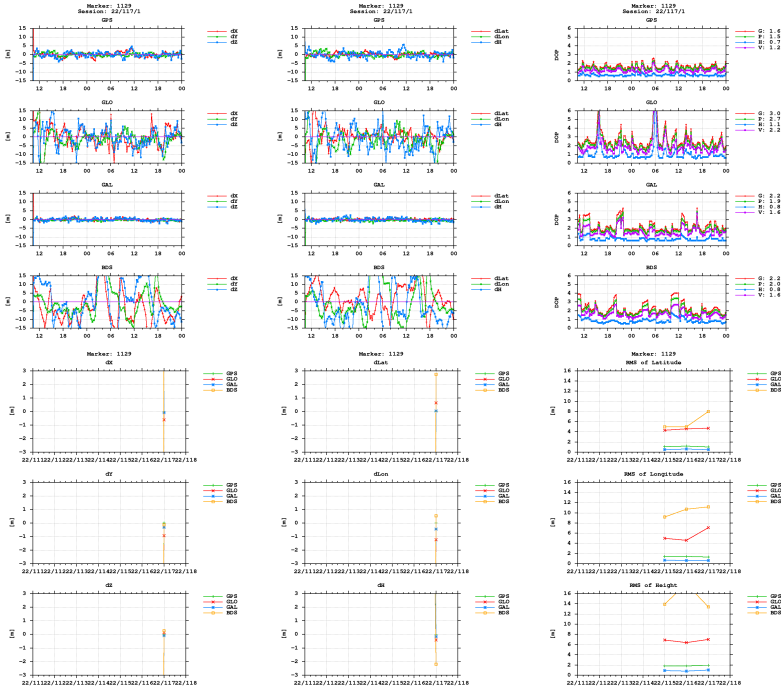

BNC

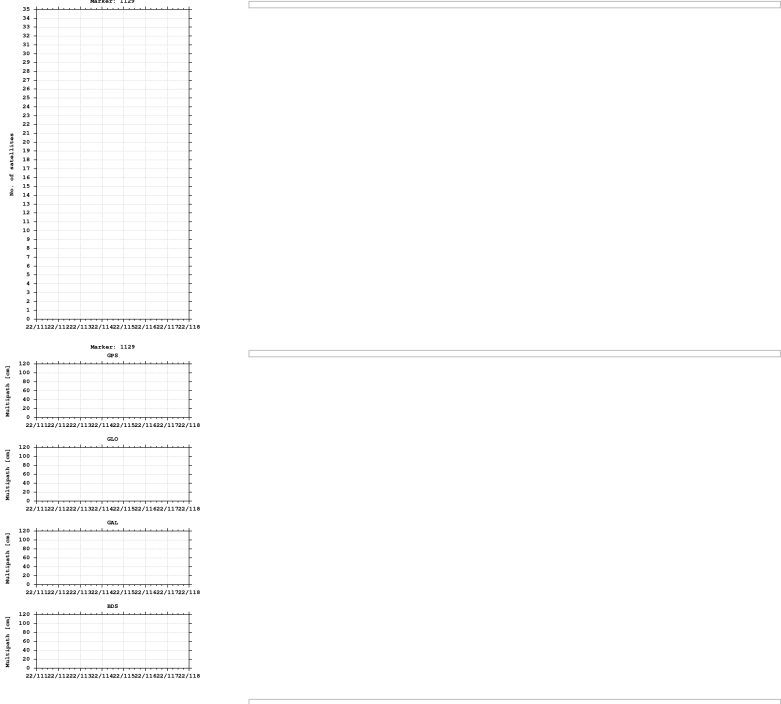

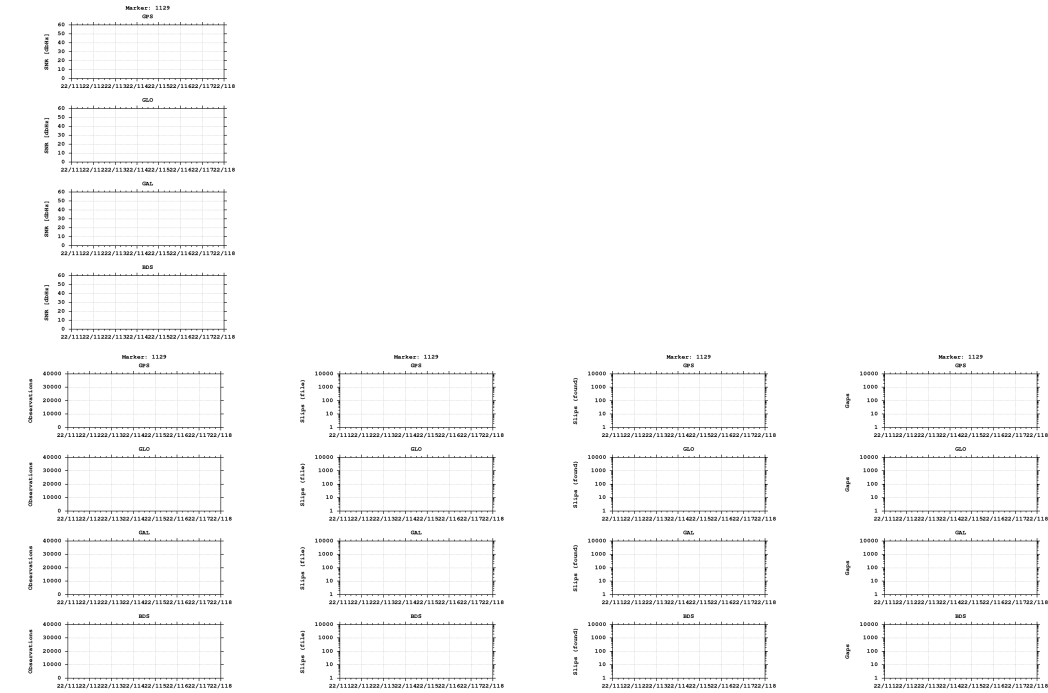

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)