

GNSS observation file monitoring for 0515

Last RINEX file: 05151181.220

RINEX version: 3.02

Marker: 1129

Receiver: 515

Antenna: 515


TRIMBLE NETR9

5.52

TRM57971.00


NONE

Epochs

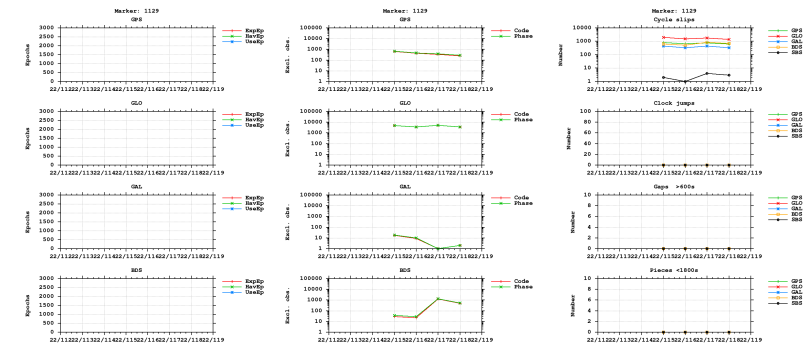



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

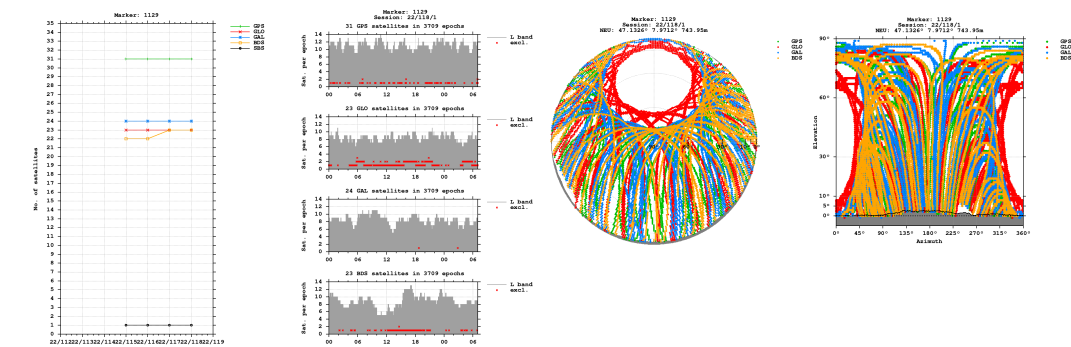


Bands

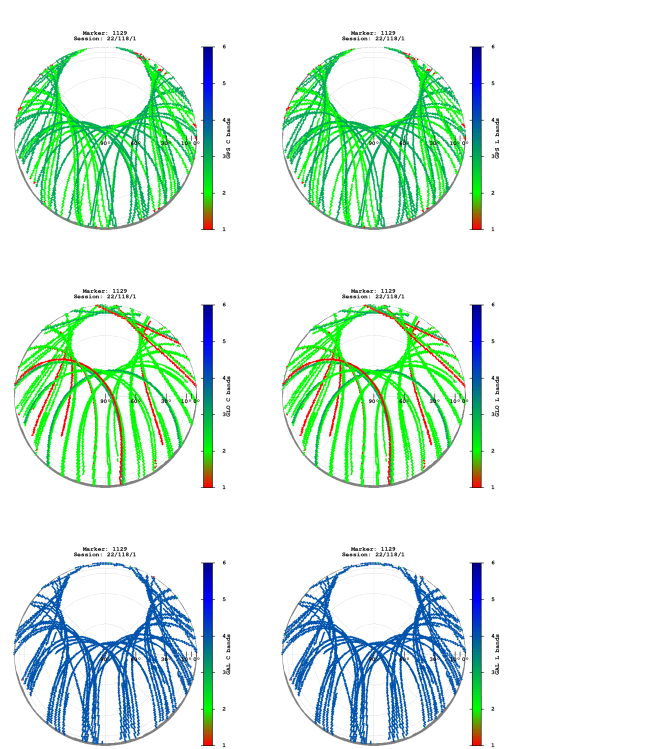


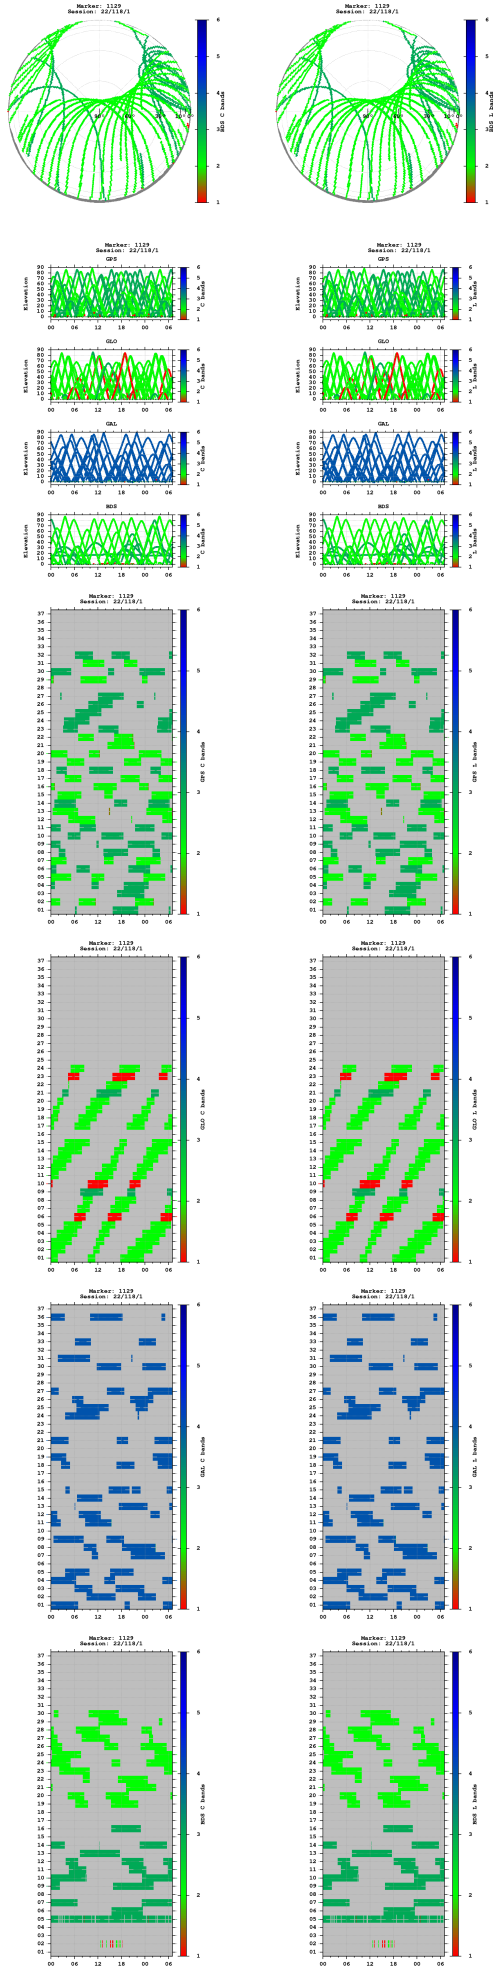


Observations

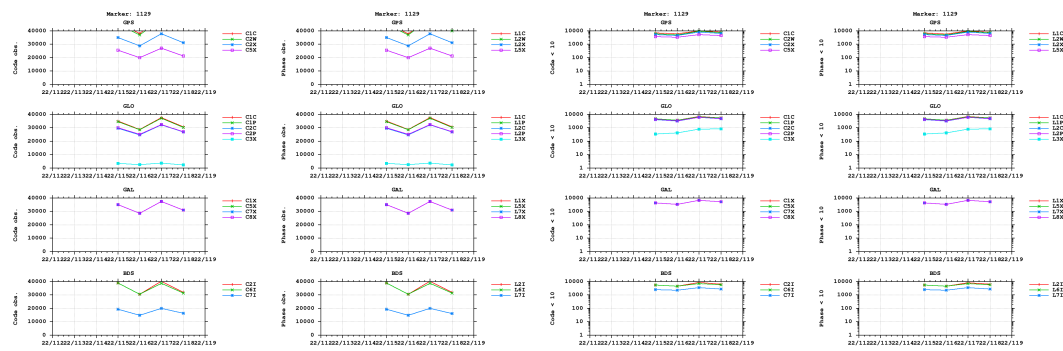


Multipath

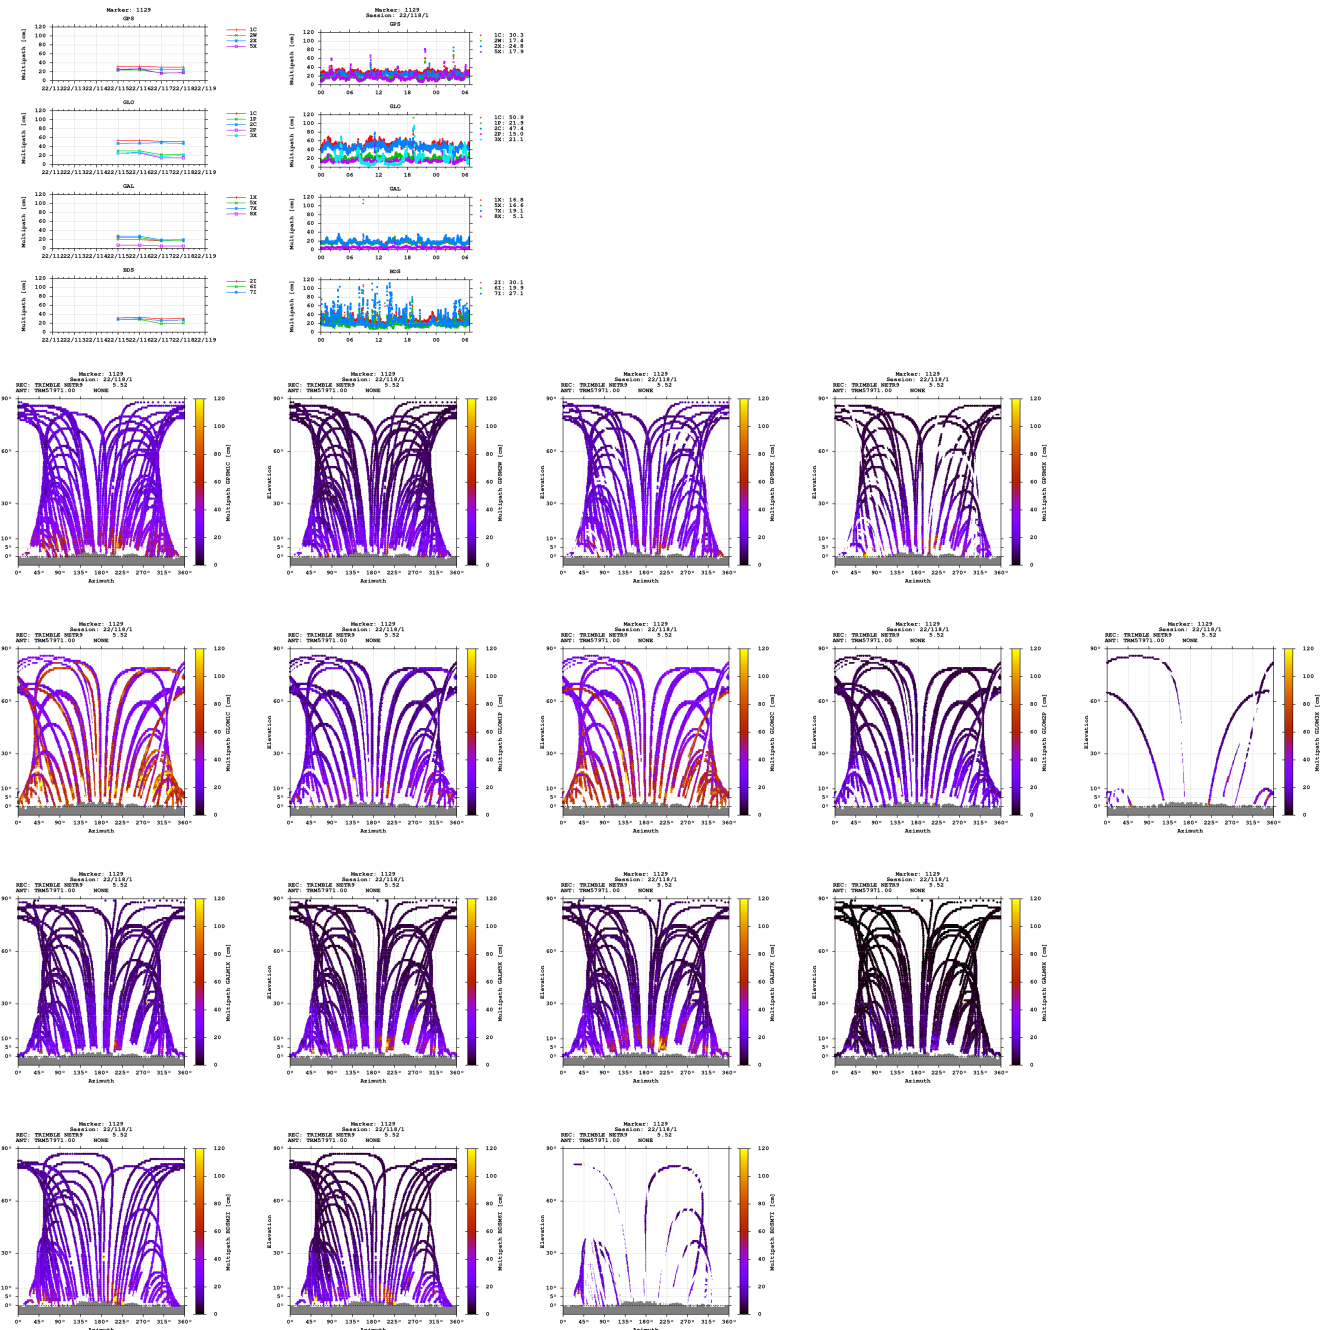


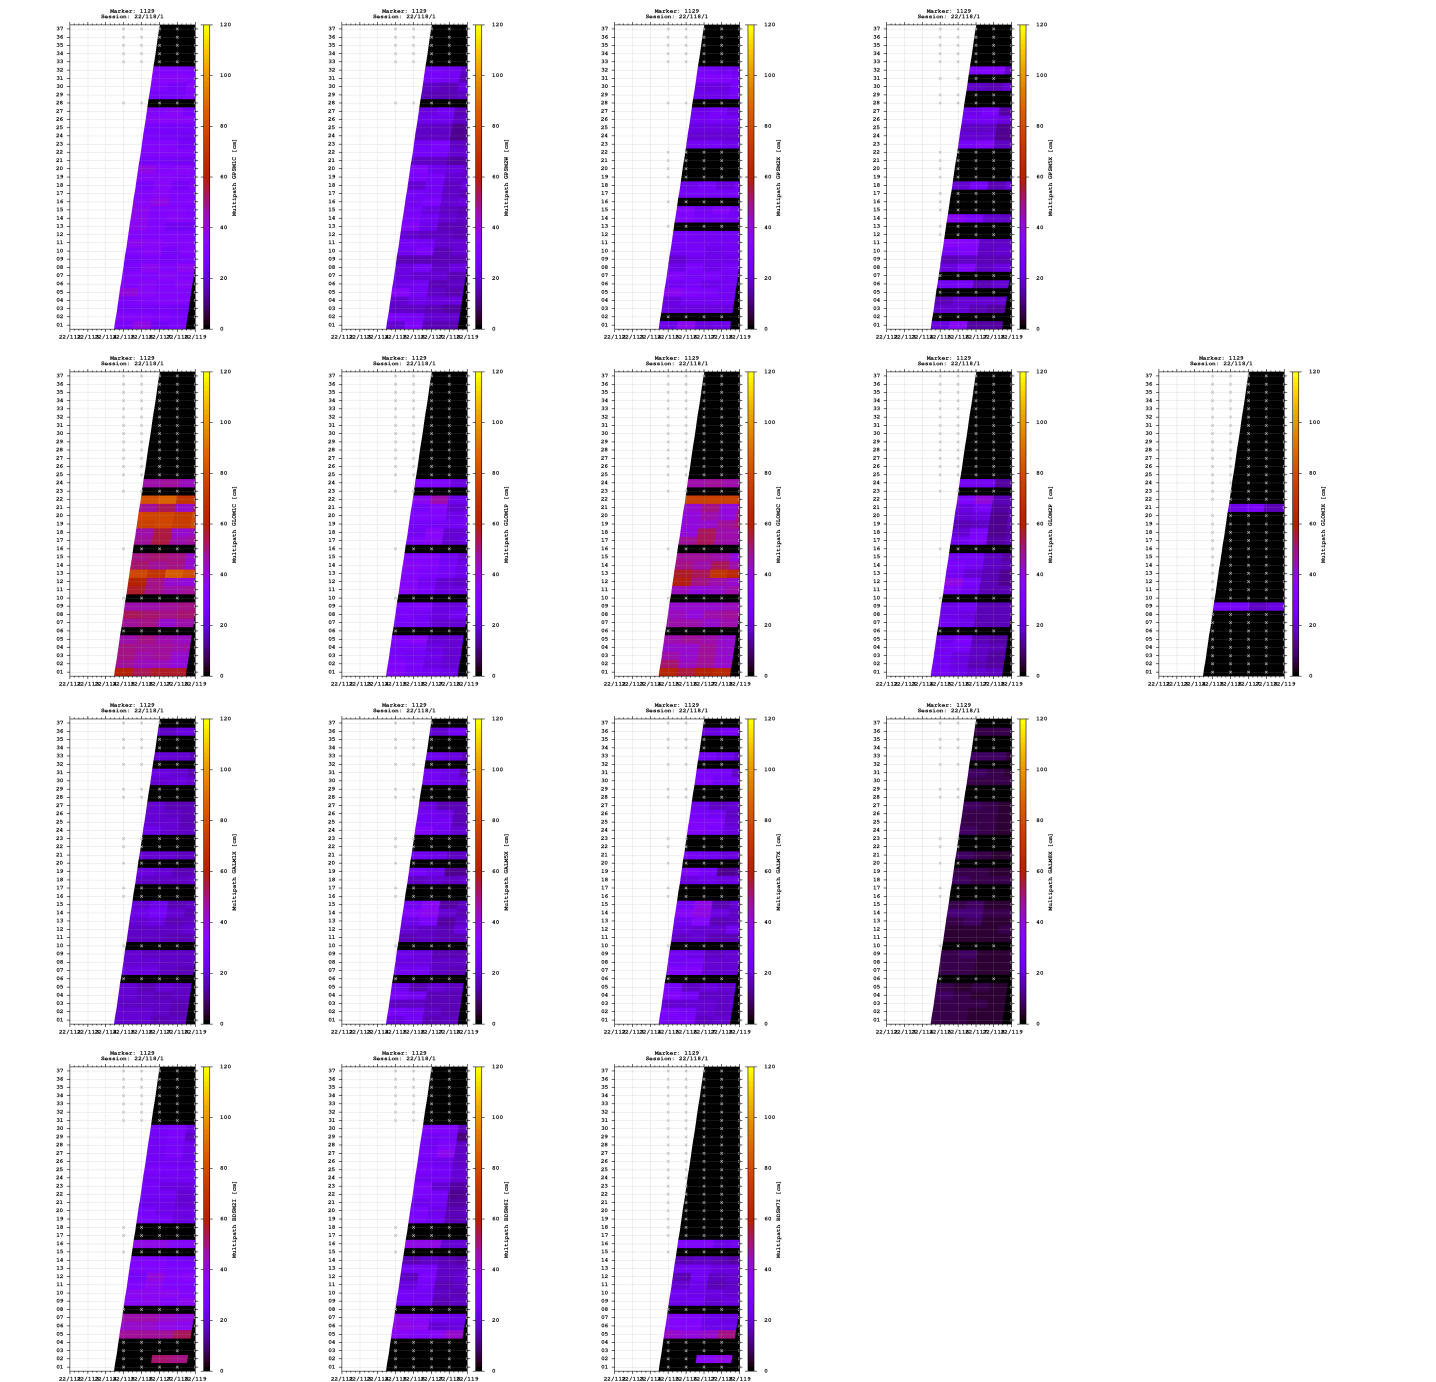


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

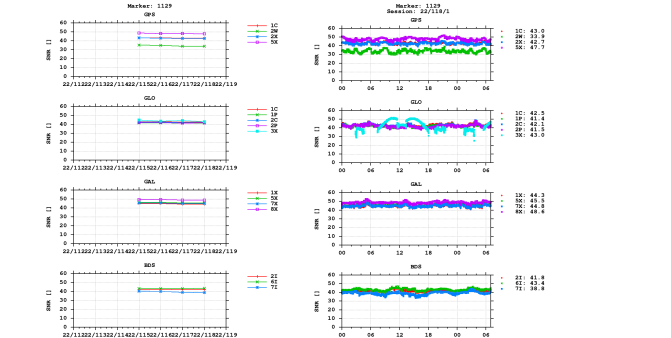


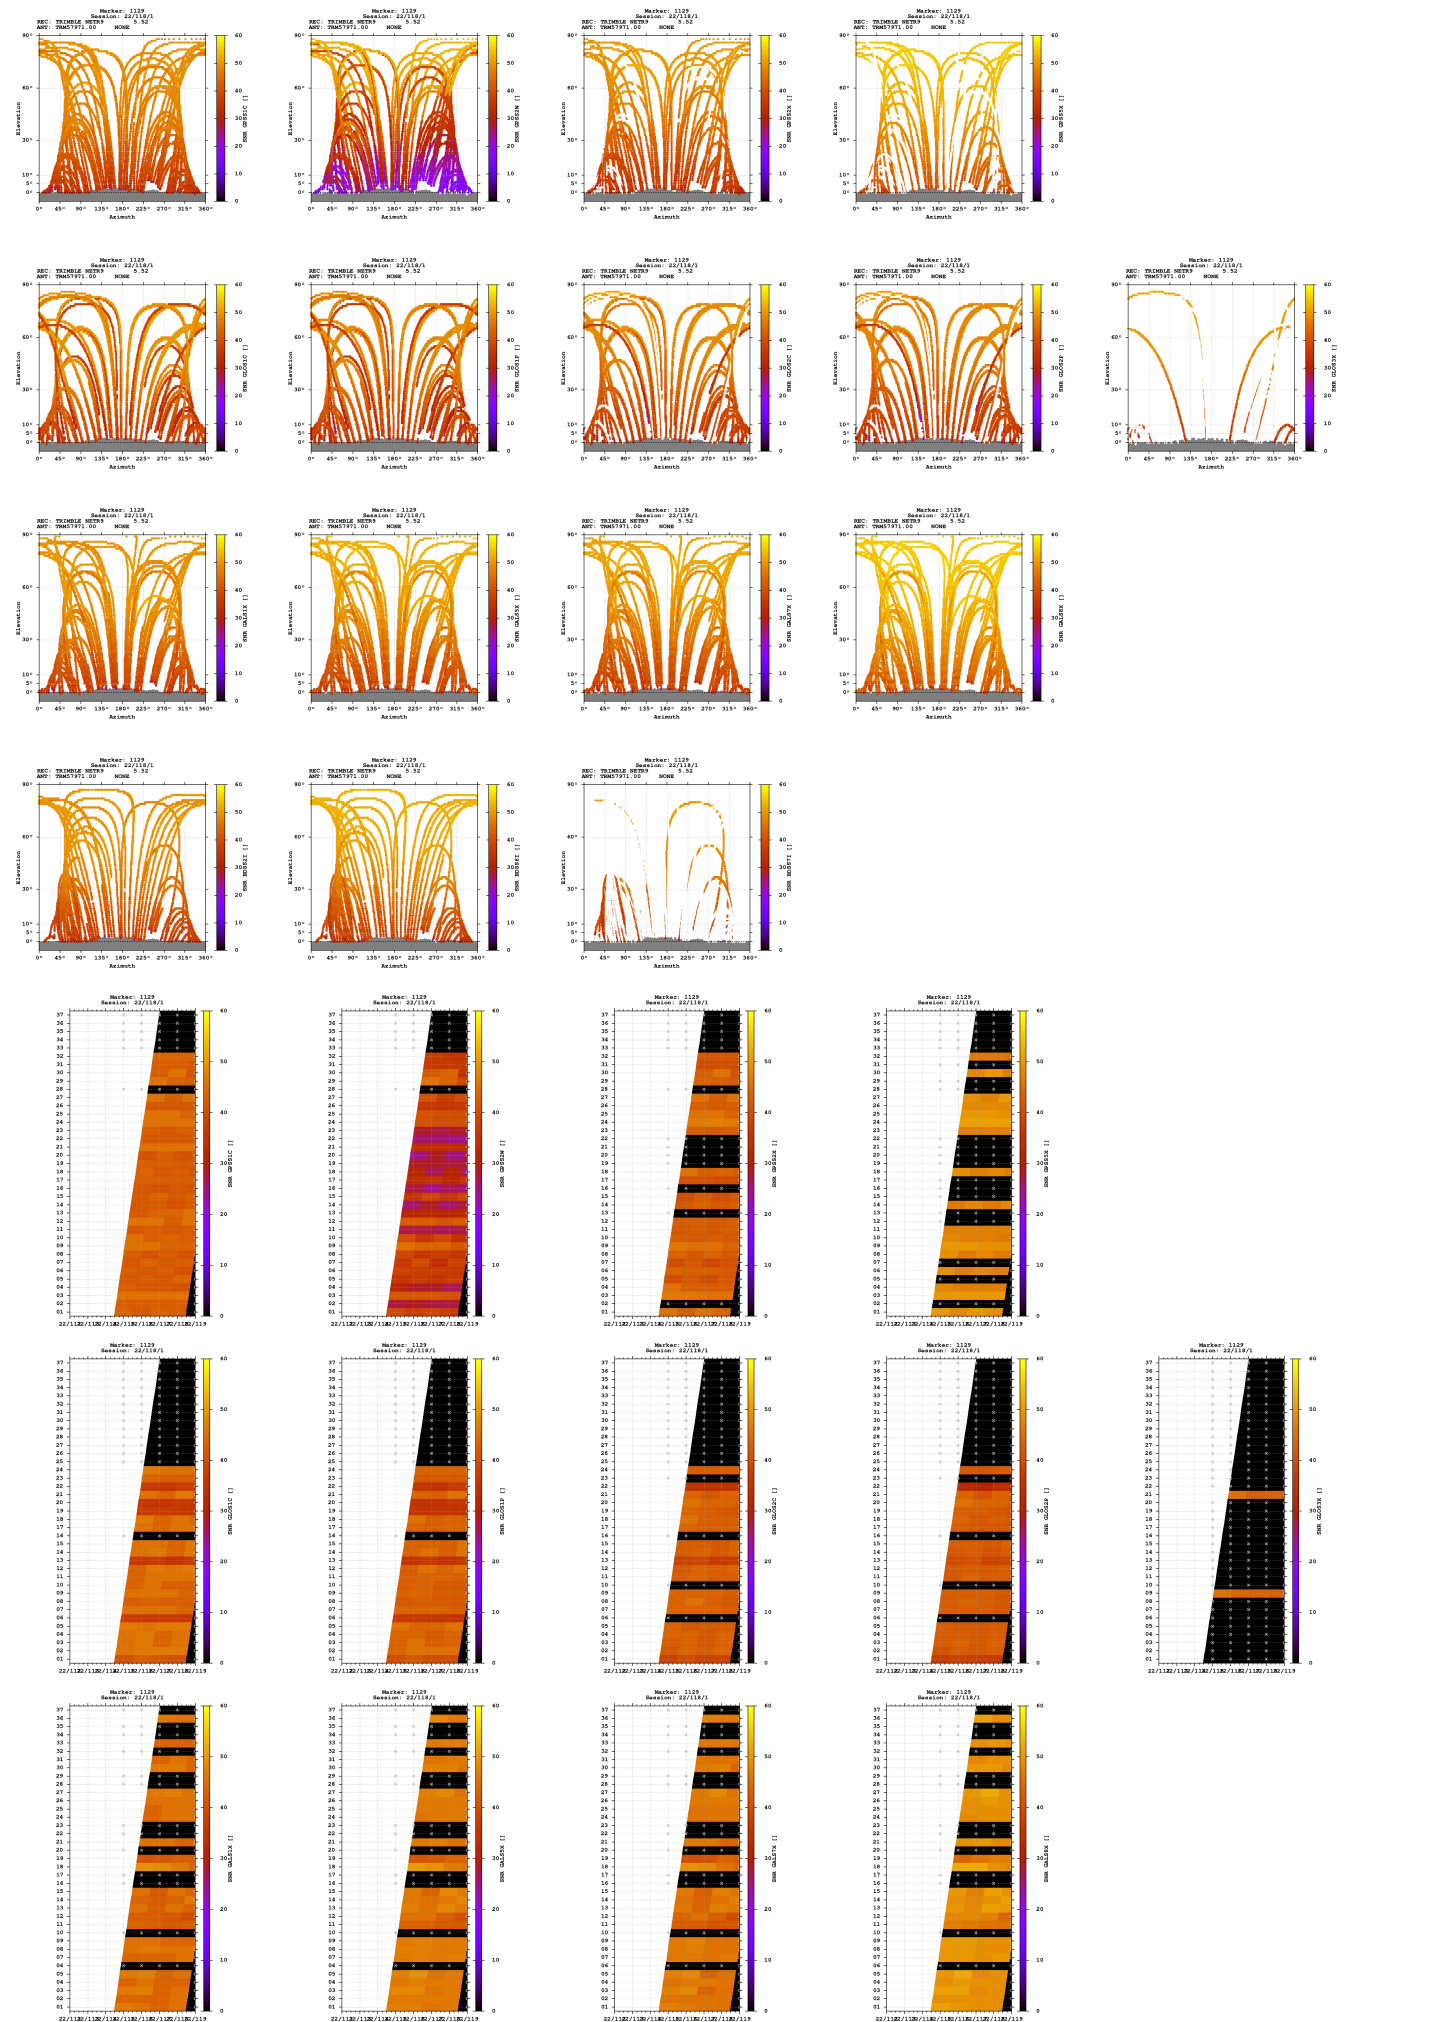

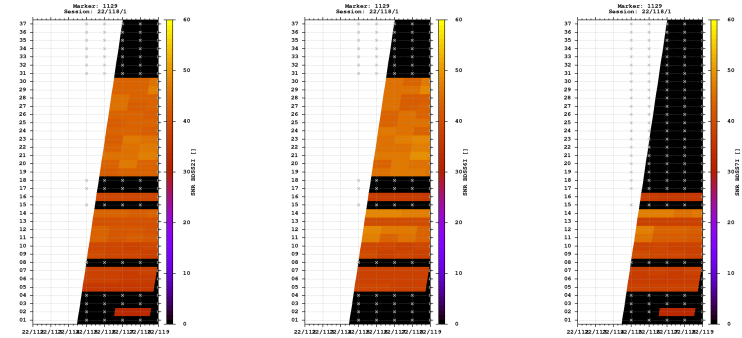



Estimates

2022-04-27 10:23:00	GPS	4305398.2907	602875.9138	4652349.2337	47.132574093	7.971178635	743.9472
2022-04-27 10:23:00	GLO	4305397.4623	602875.4431	4652348.3158	47.132574315	7.971174006	742.6719
2022-04-27 10:23:00	GAL	4305398.0713	602875.6305	4652349.0054	47.132574387	7.971175338	743.6053
2022-04-27 10:23:00	BDS	4305398.9393	602878.3098	4652351.4010	47.132580929	7.971208722	746.1987

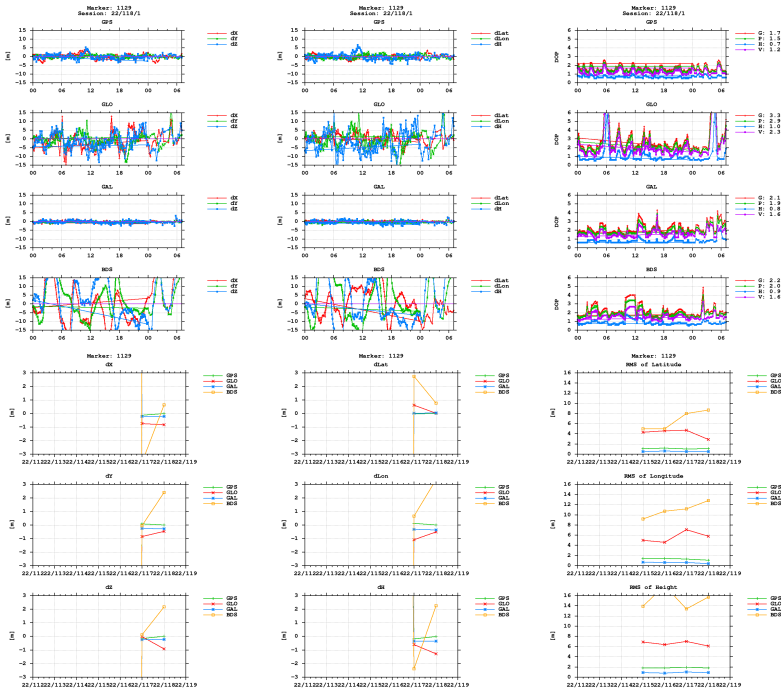

BNC

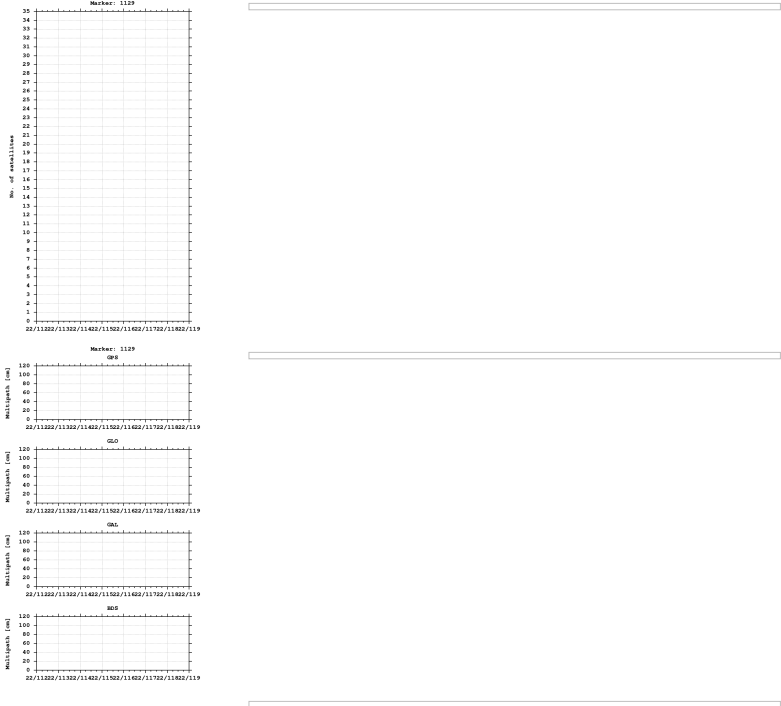

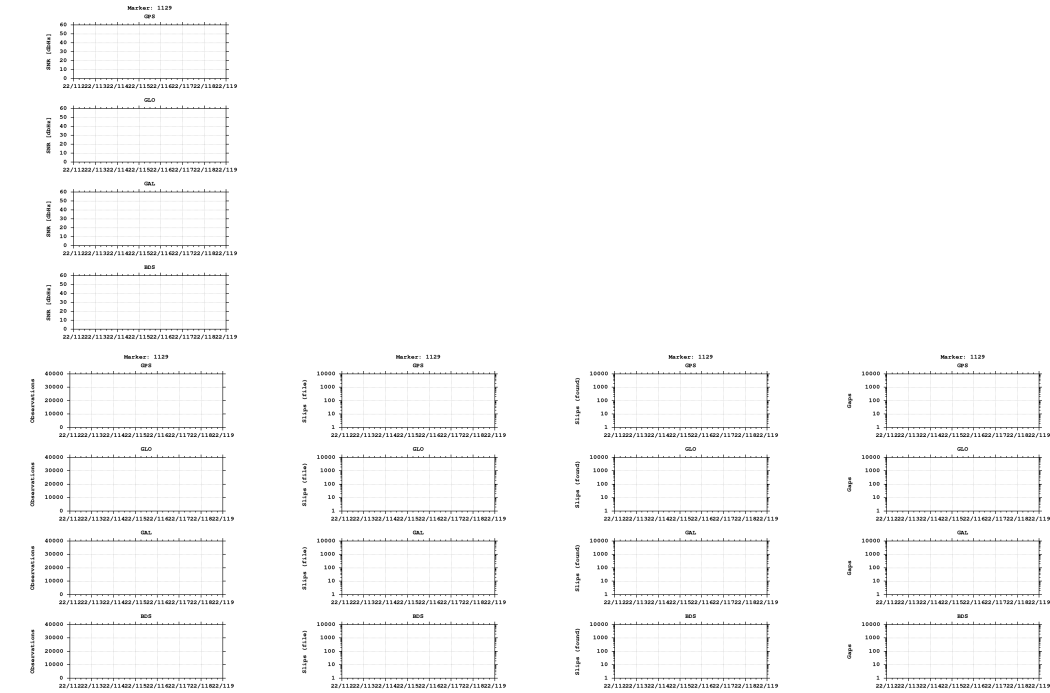

Equipment

2022-04-25 00:00:00 TRIMBLE NETR9 5.52 515 TRM57971.00 NONE 515

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)