


GNSS observation file monitoring for 0517


Last RINEX file: 05171191.220
RINEX version: 3.02
Marker: 1109
Receiver: 517 TRIMBLE NETR9 5.52
Antenna: 517 TRM57971.00 NONE

Epochs

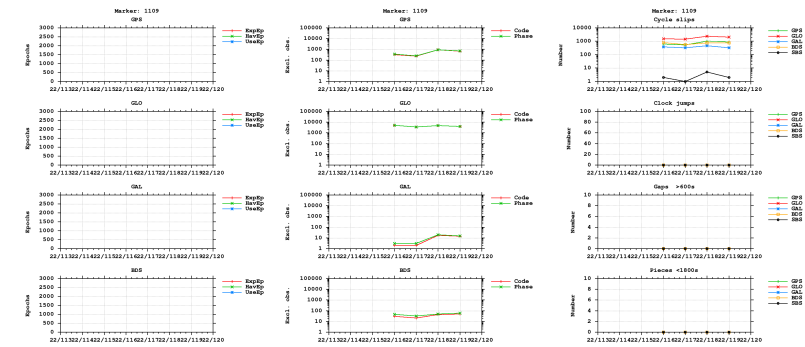



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

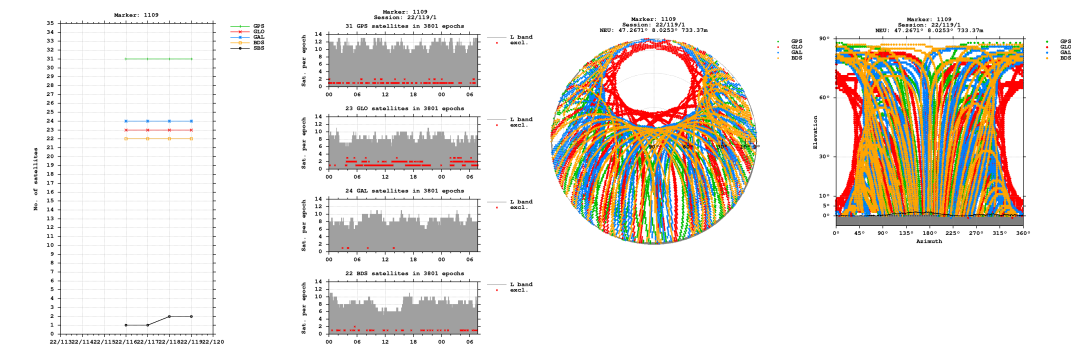


Bands

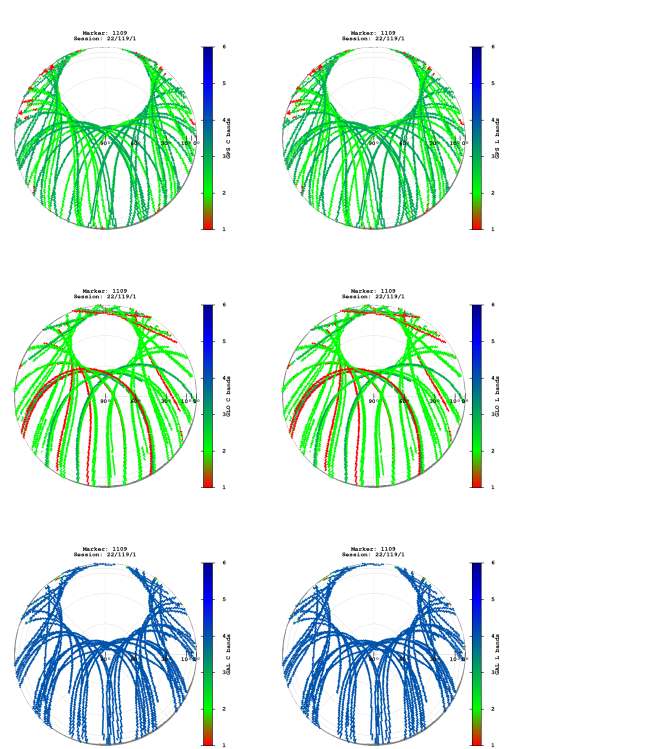


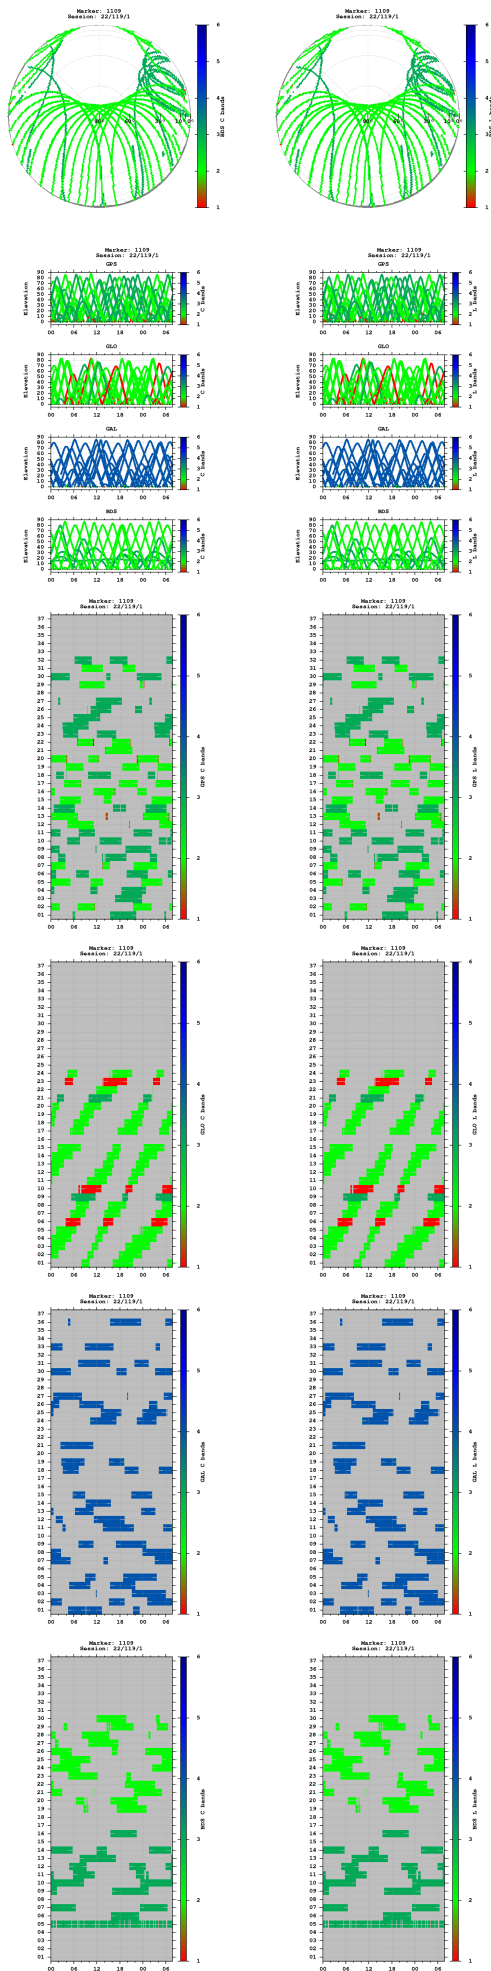


Observations

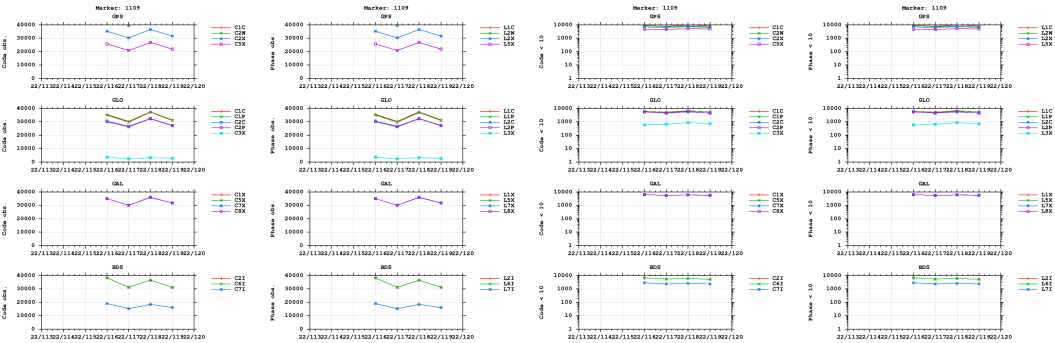



Multipath

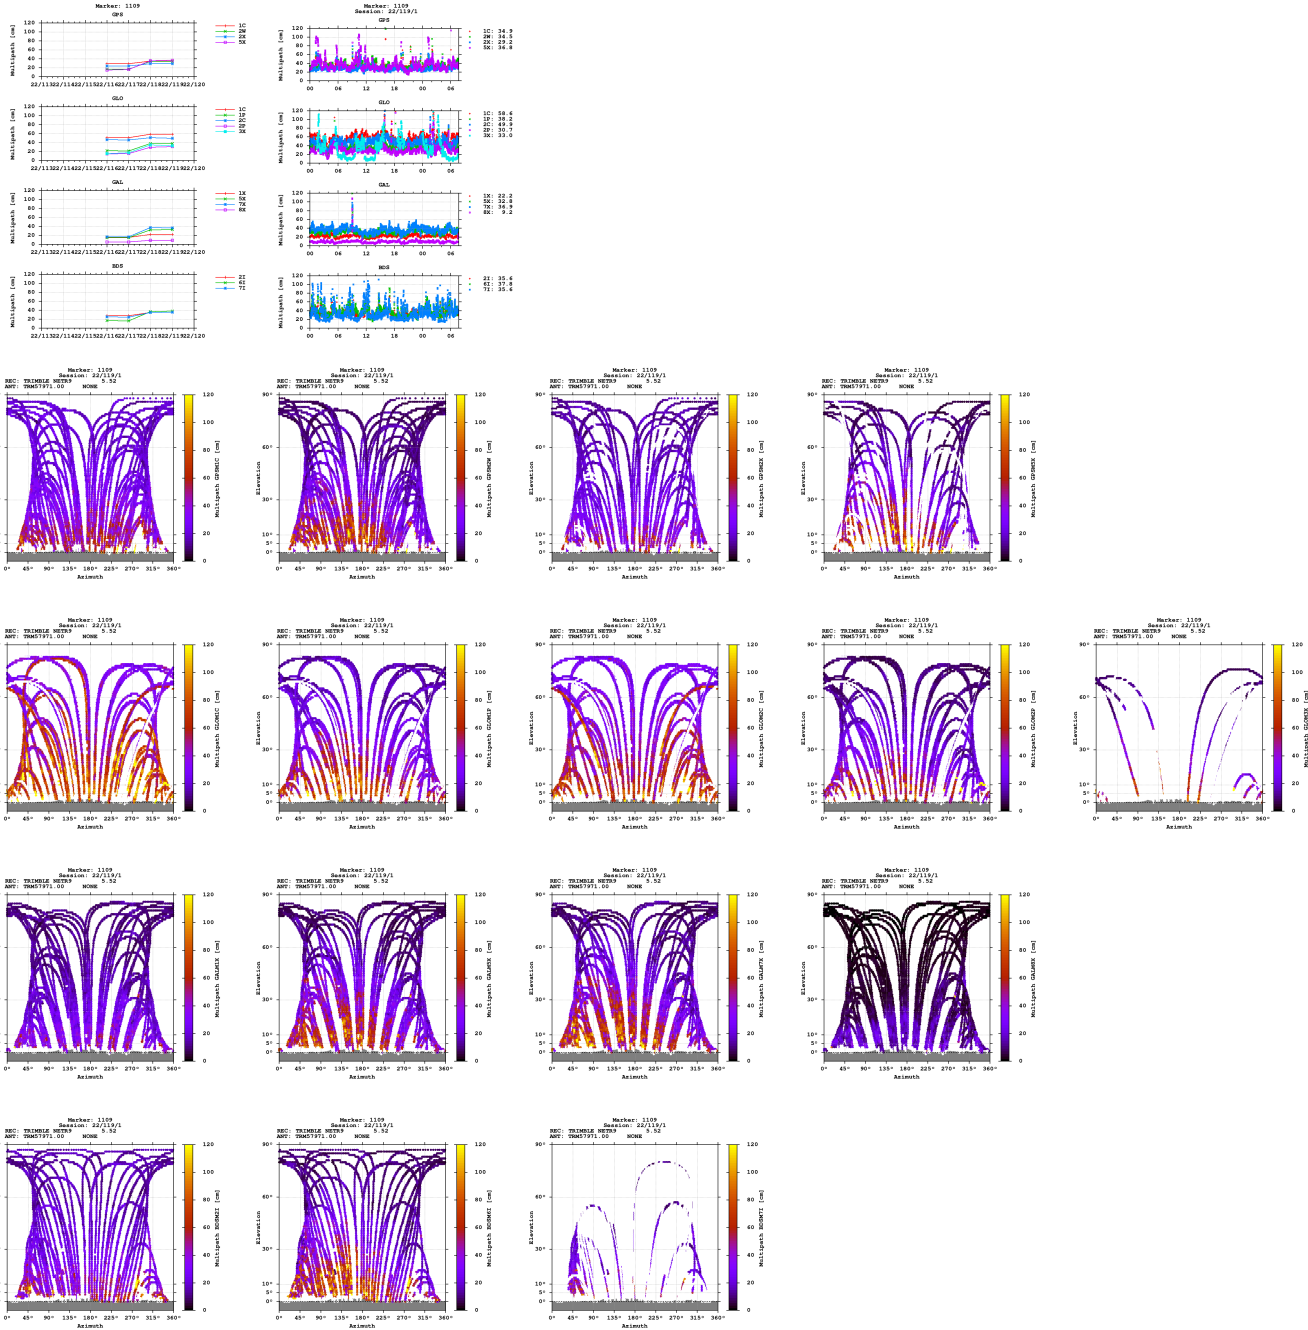


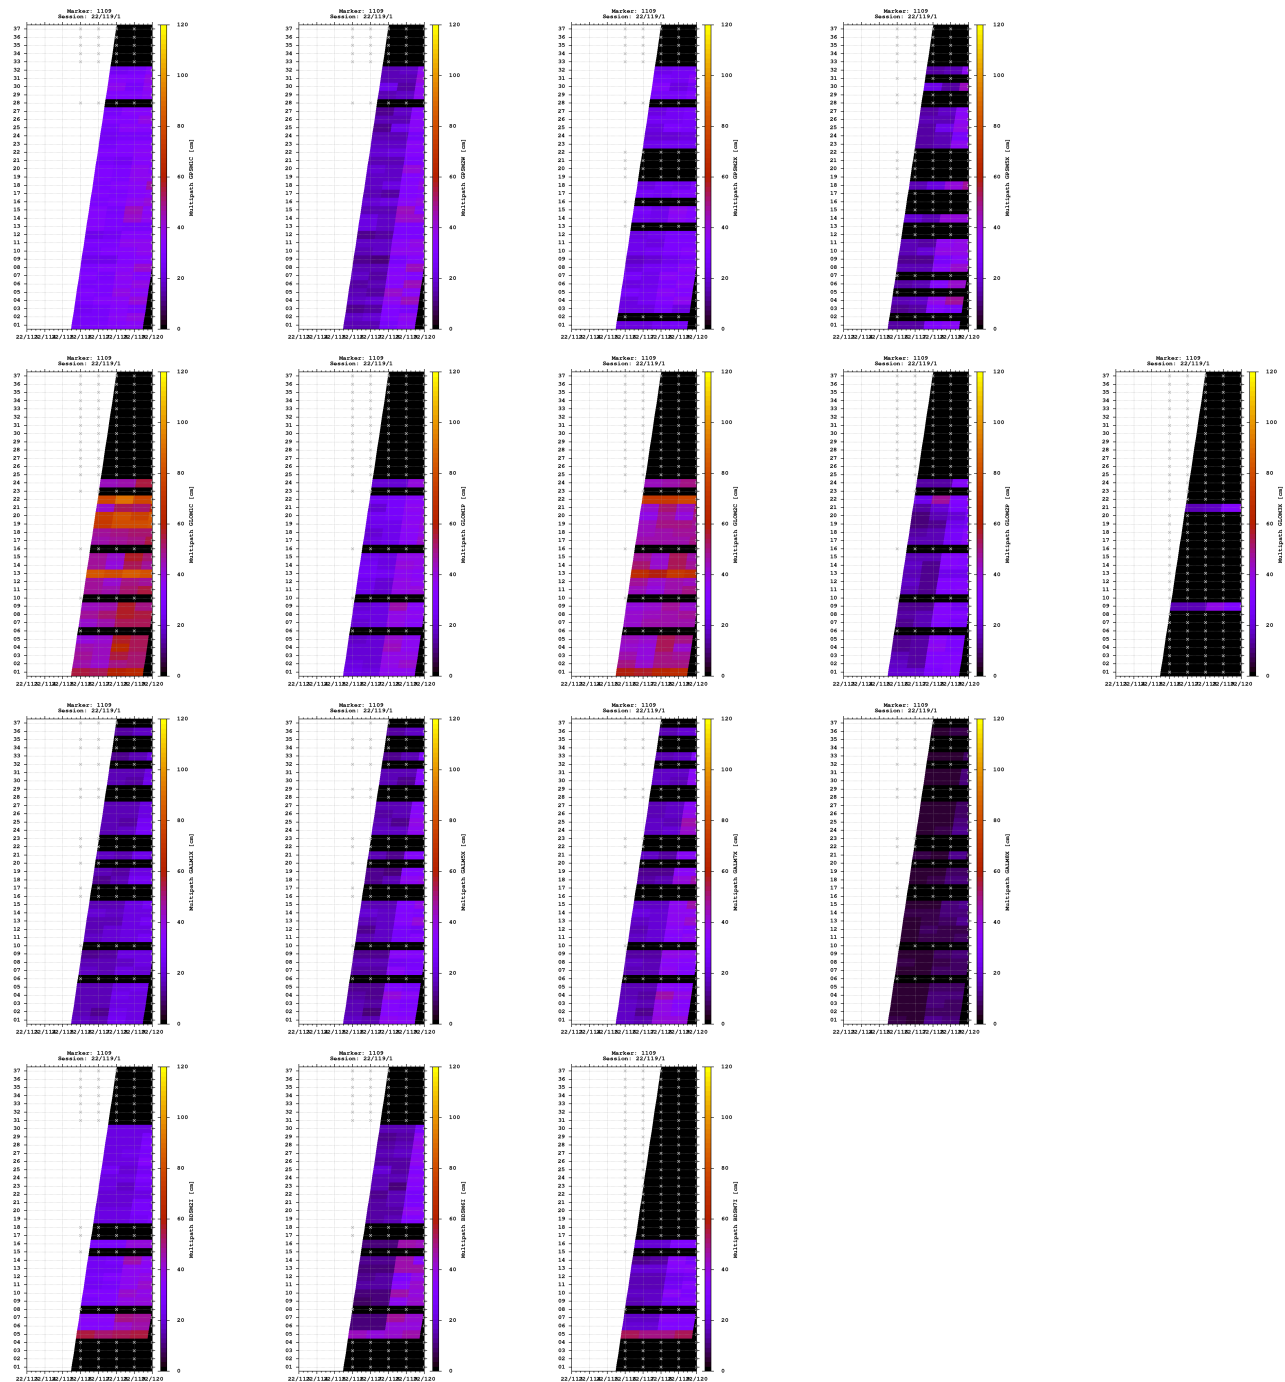


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

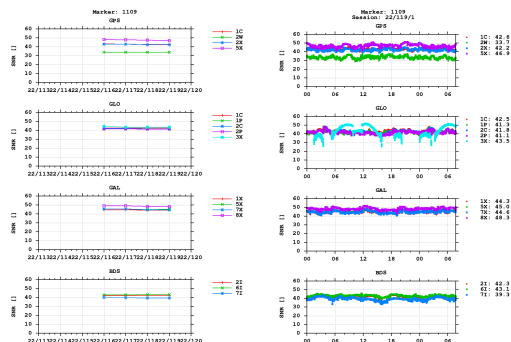


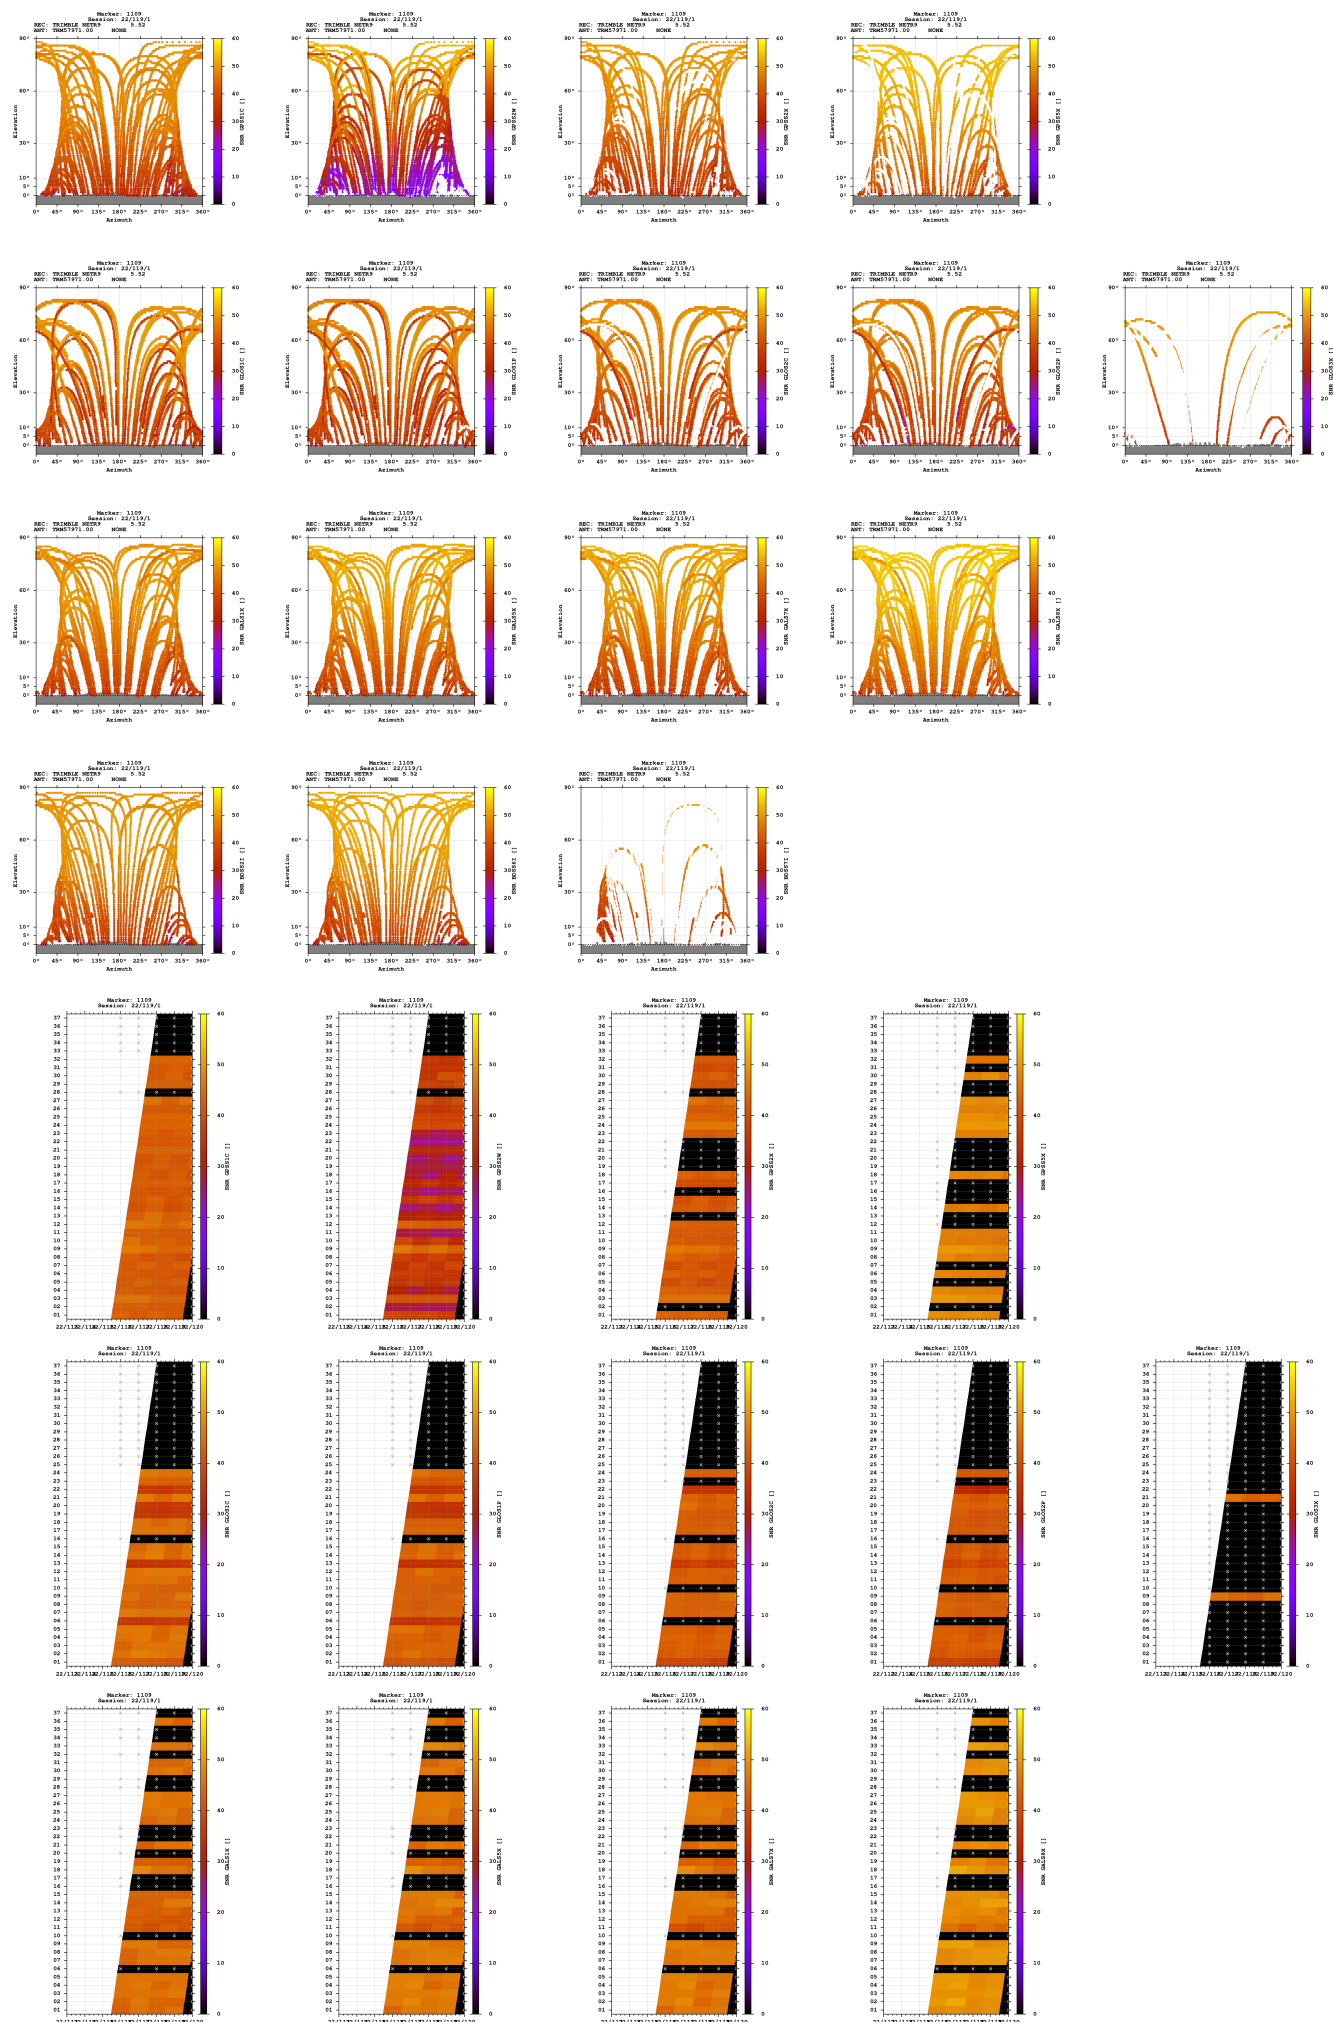

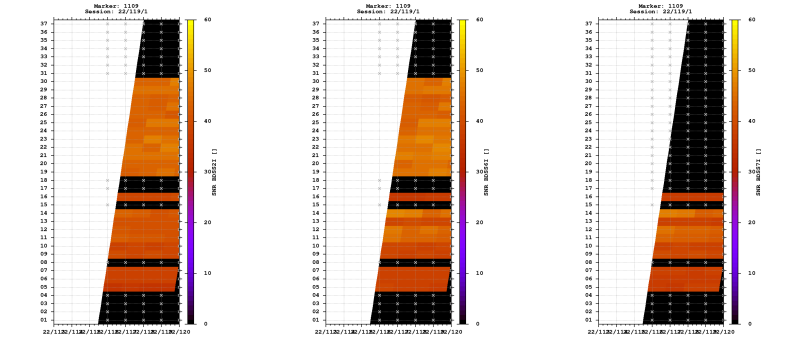


Estimates

2022-04-28 11:02:00	GPS	4293952.2126	605409.0493	4662504.5671	47.267103219	8.025297084	733.3696
2022-04-28 11:02:00	GLO	4293951.5896	605409.4787	4662503.4227	47.267099915	8.025303852	732.1511
2022-04-28 11:02:00	GAL	4293952.1395	605409.0284	4662504.1035	47.267100888	8.025296945	732.9779
2022-04-28 11:02:00	BDS	4293952.3658	605409.5862	4662505.7231	47.267108778	8.025303826	734.3725

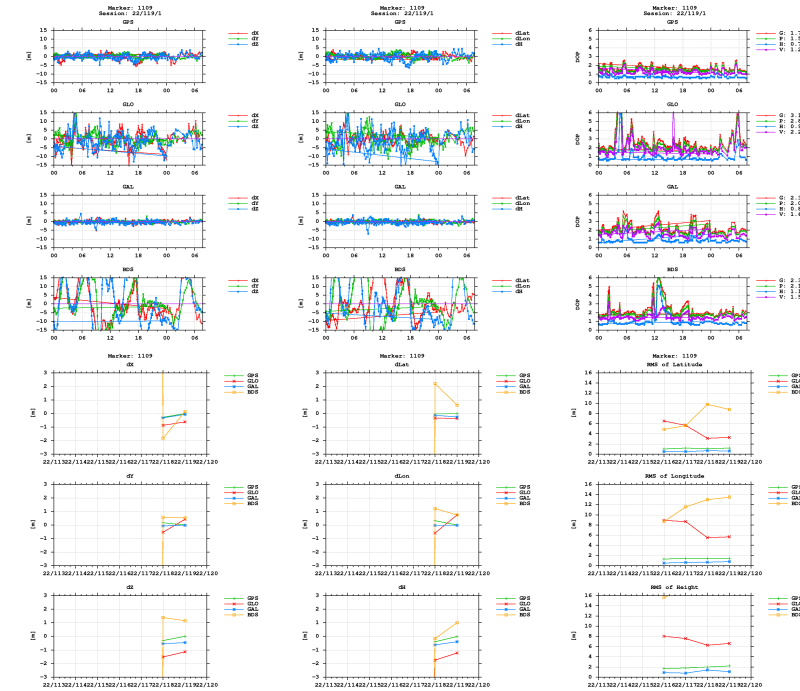

BNC



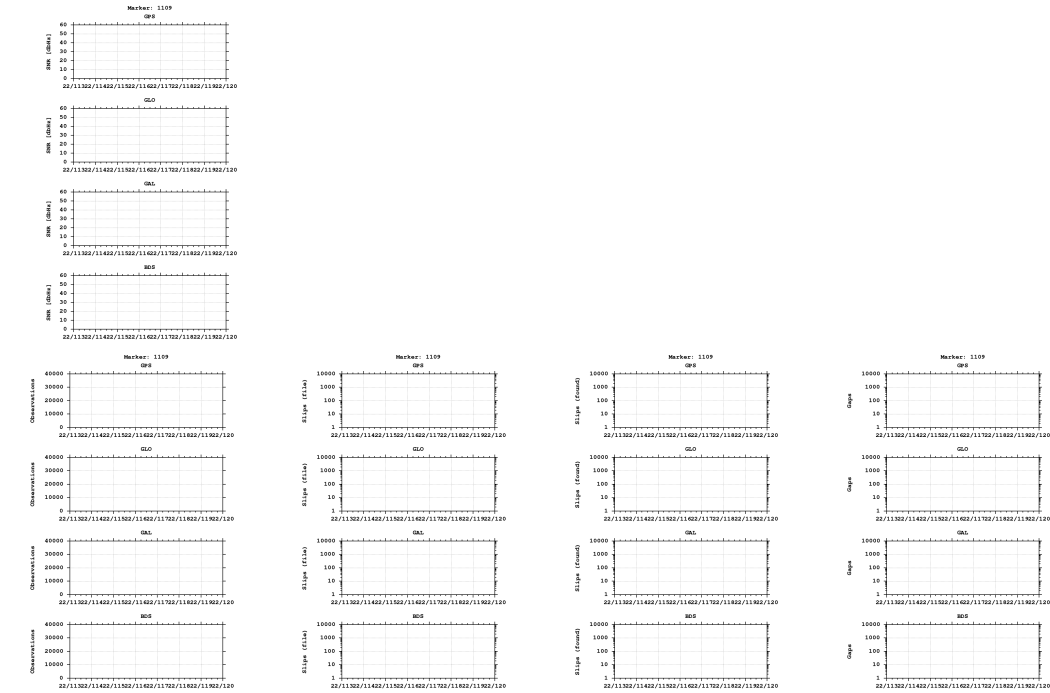

Equipment

2022-04-26 00:00:00 TRIMBLE NETR9 5.52 517 TRM57971.00 NONE 517

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)