


GNSS observation file monitoring for 0518


Last RINEX file: 05181161.22O
RINEX version: 3.02
Marker: 1128
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE


- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

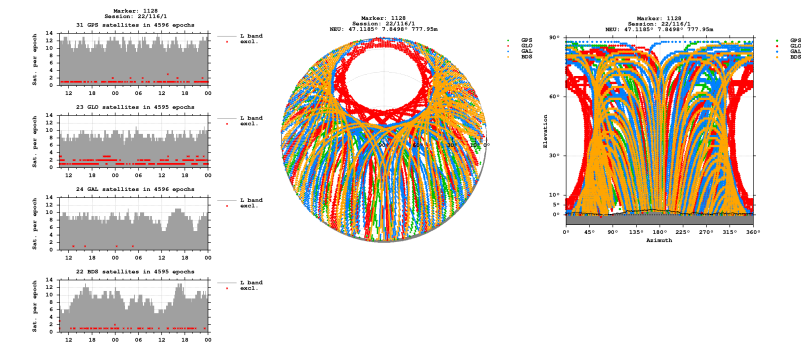


Bands

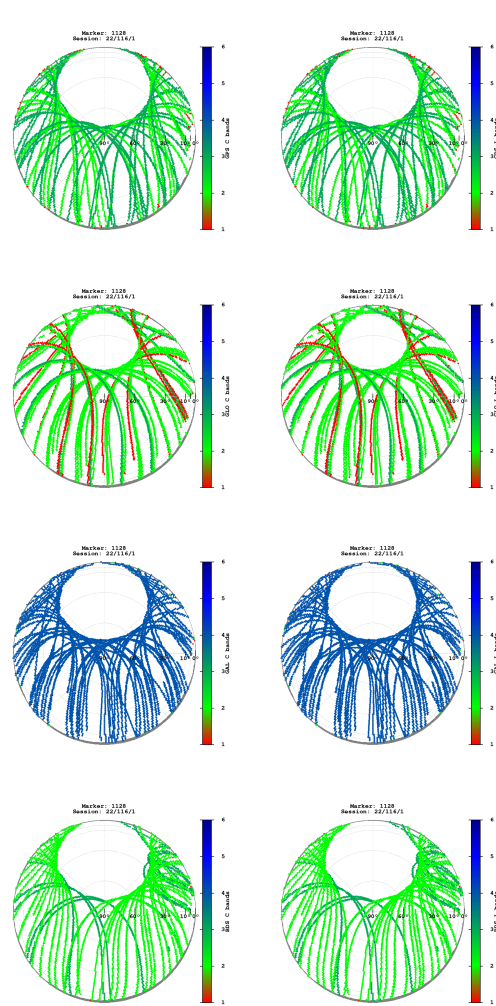

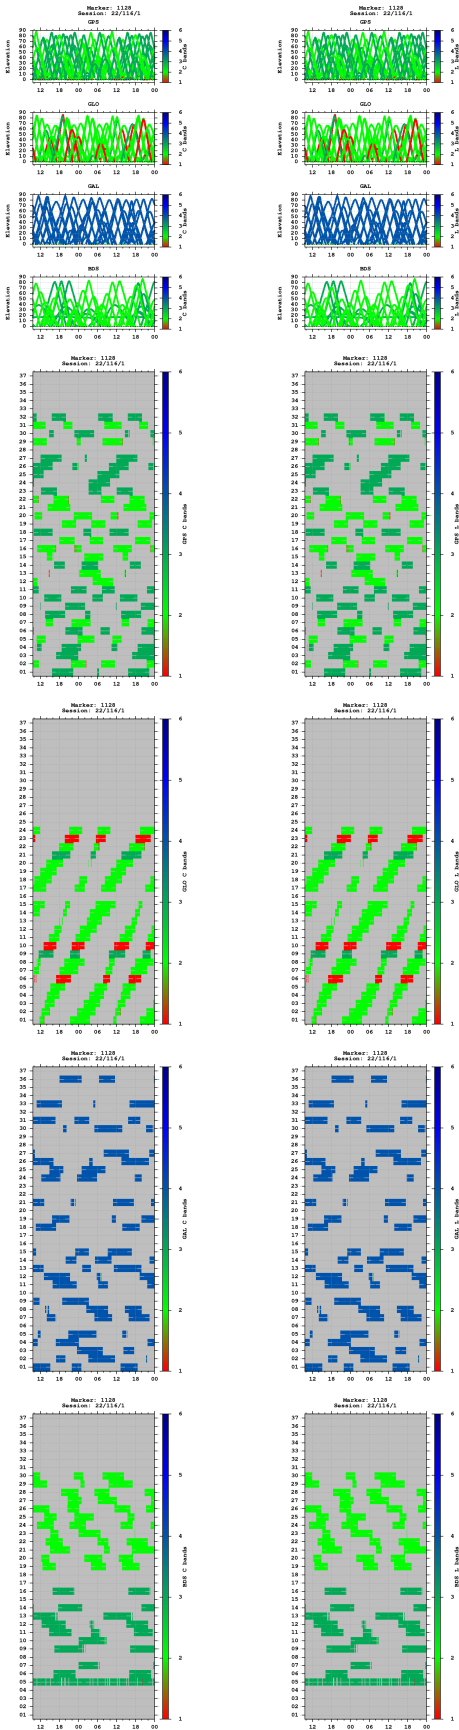



Multipath

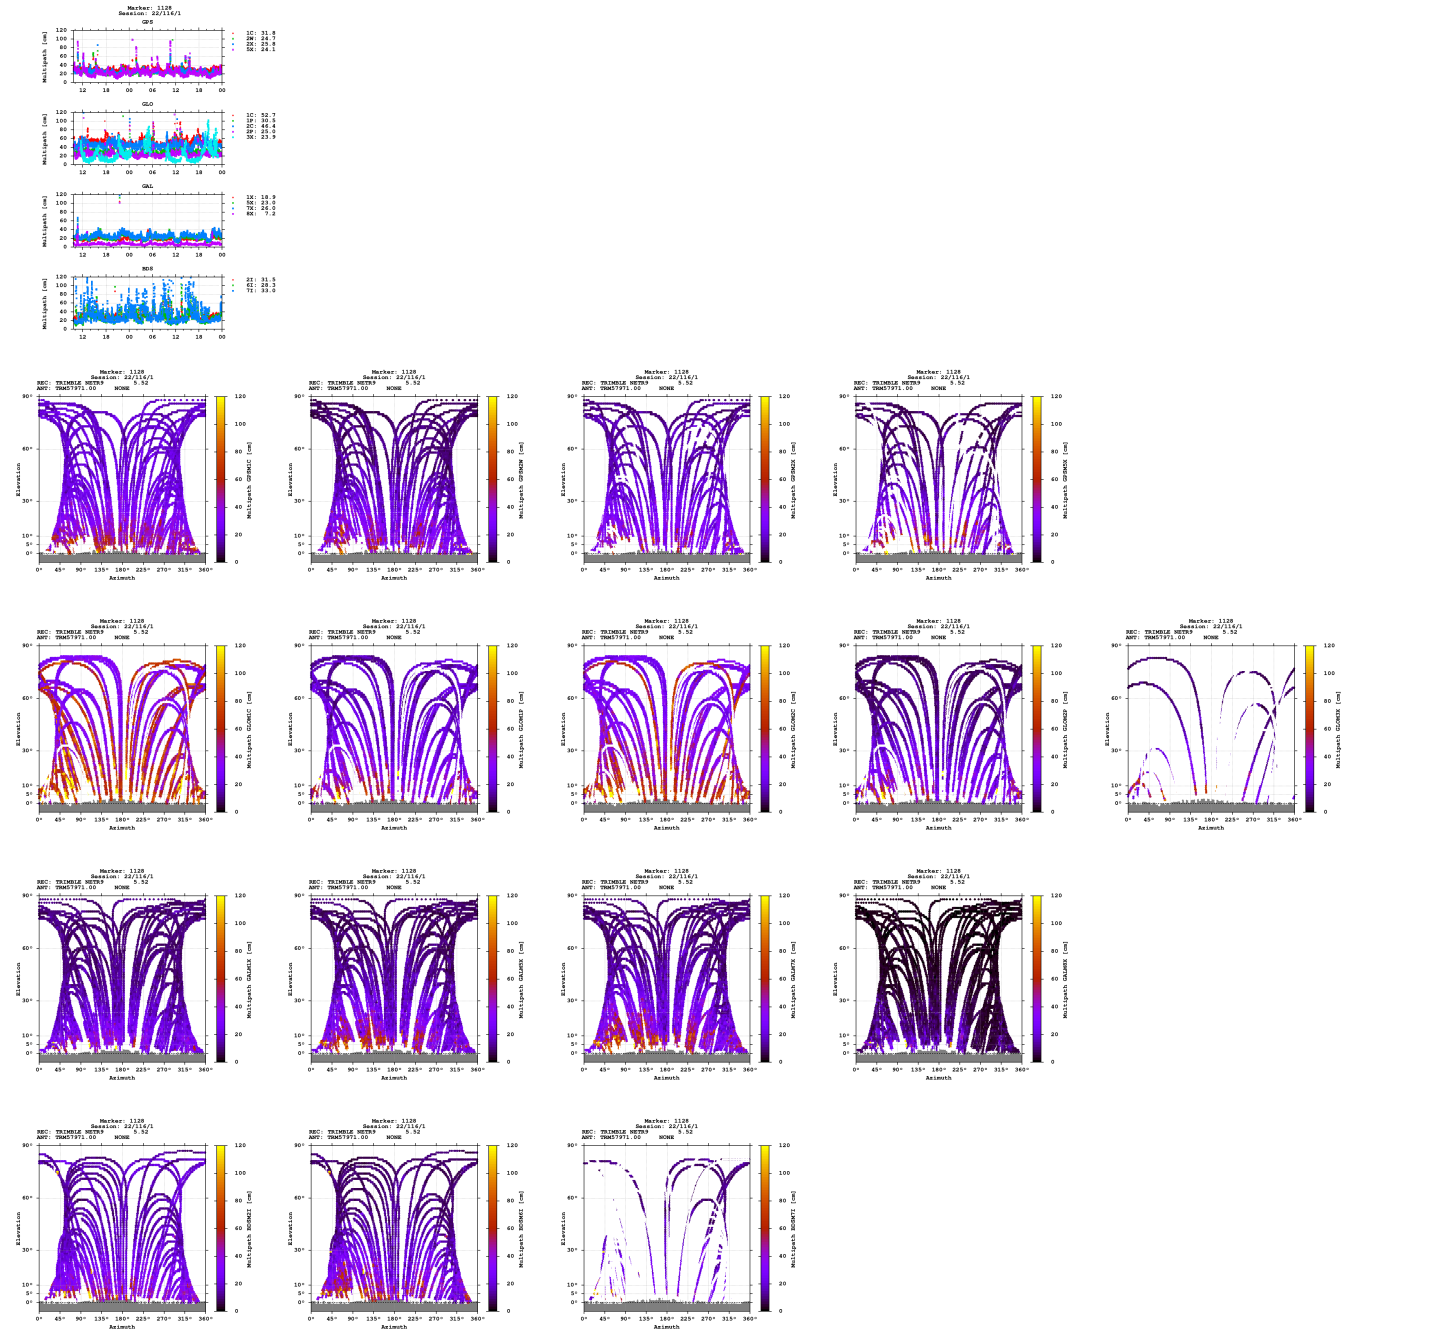

- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.


Signal-to-noise ratio

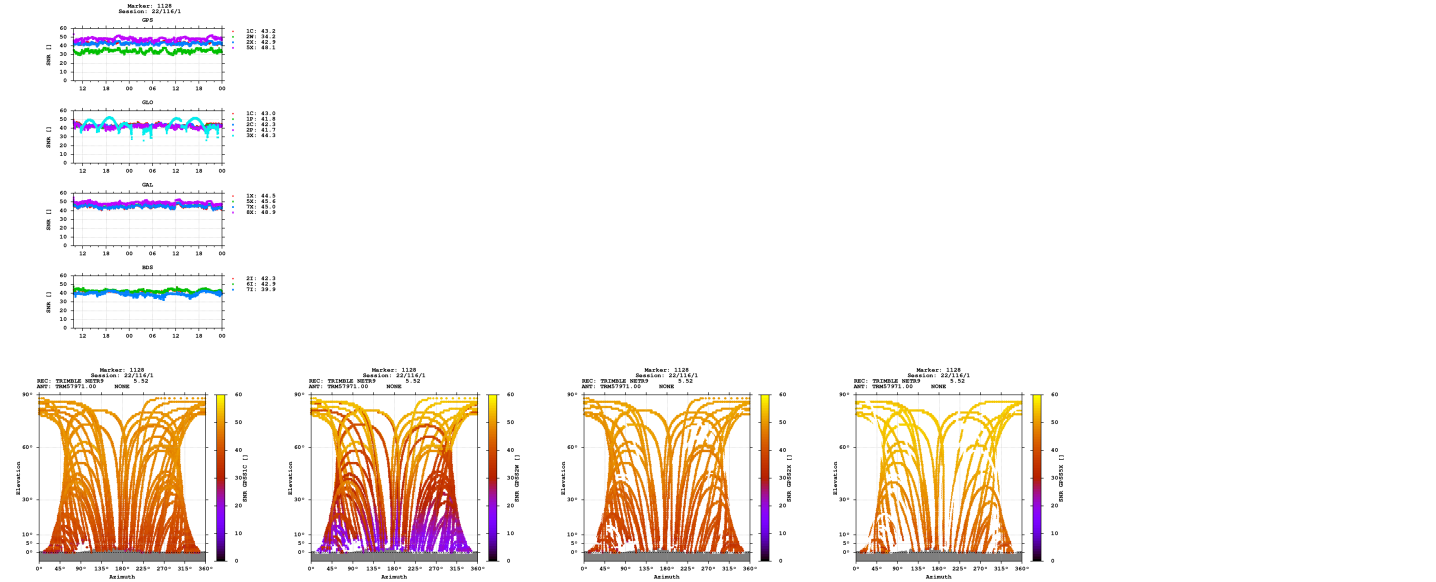

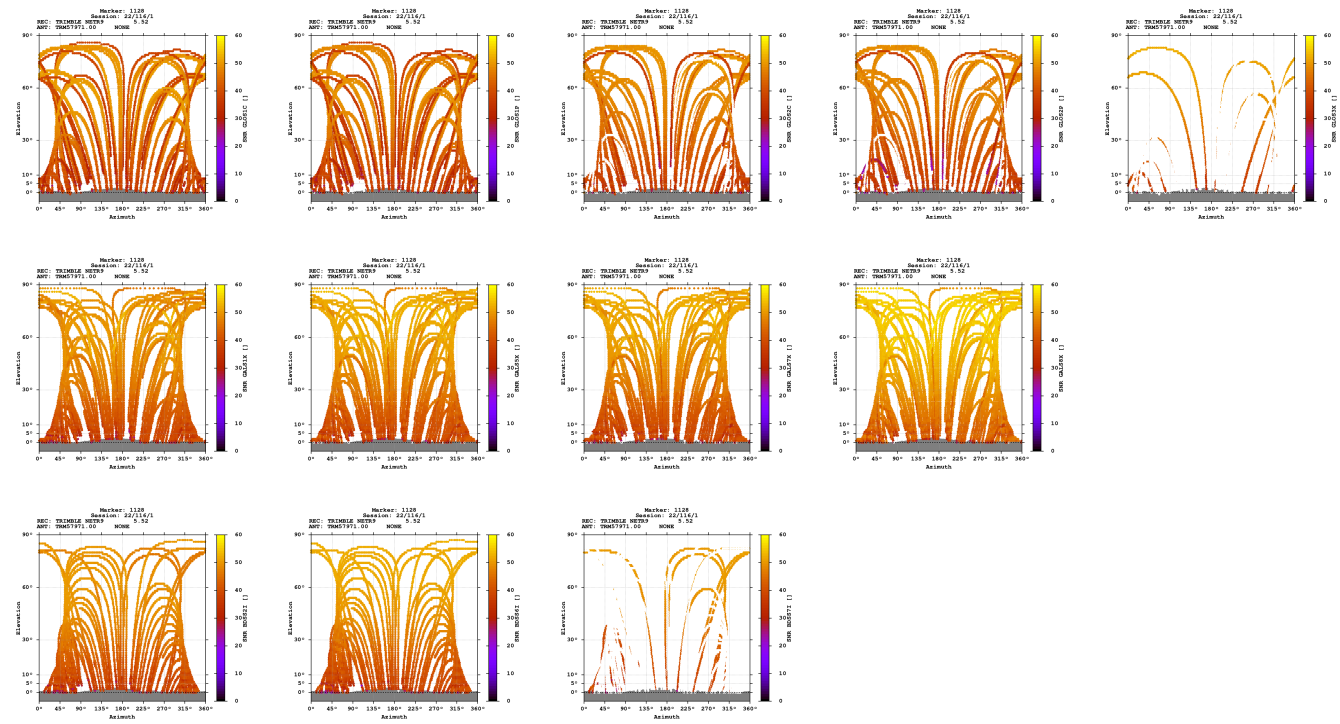

Estimates

2022-04-26 09:39:00	GPS	4307825.3273	593916.9509	4651308.4848	47.118487423	7.849843340	777.9487
2022-04-26 09:39:00	GLO	4307825.5727	593916.4646	4651308.5484	47.118486648	7.849836551	778.1155
2022-04-26 09:39:00	GAL	4307825.2903	593916.6859	4651308.0880	47.118485474	7.849839948	777.6083
2022-04-26 09:39:00	BDS	4307823.2781	593916.0865	4651308.9582	47.118504476	7.849835745	776.8338

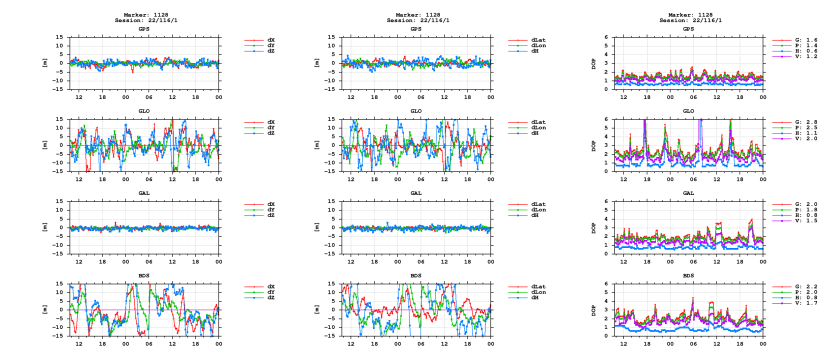

BNC

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)