


GNSS observation file monitoring for 0518


Last RINEX file: 05181171.220
RINEX version: 3.02
Marker: 1128
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

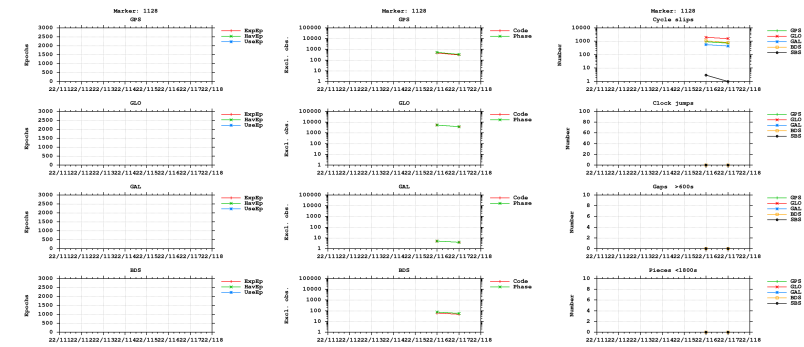



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

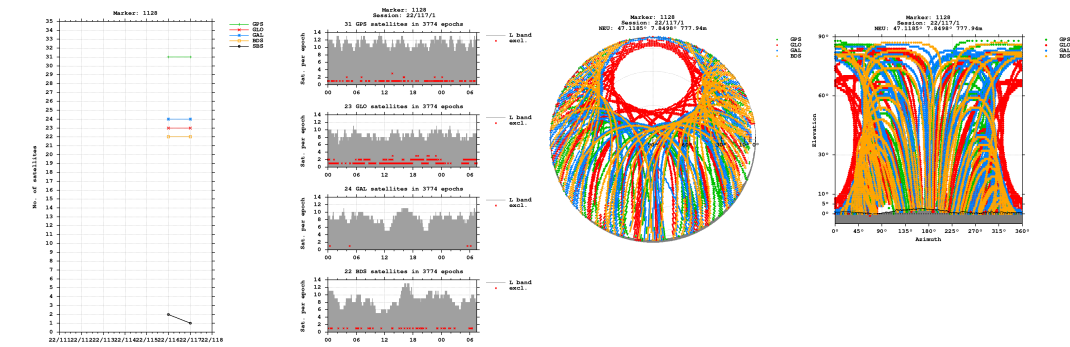


Bands

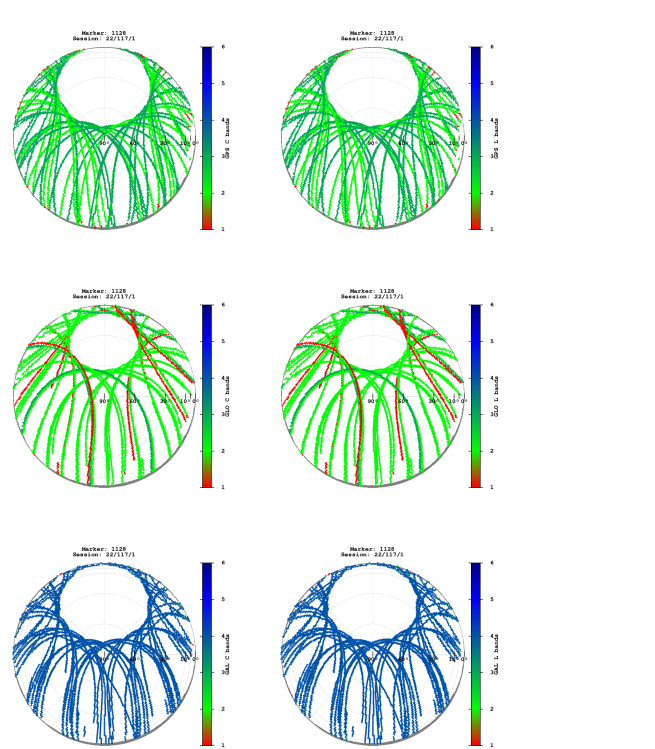


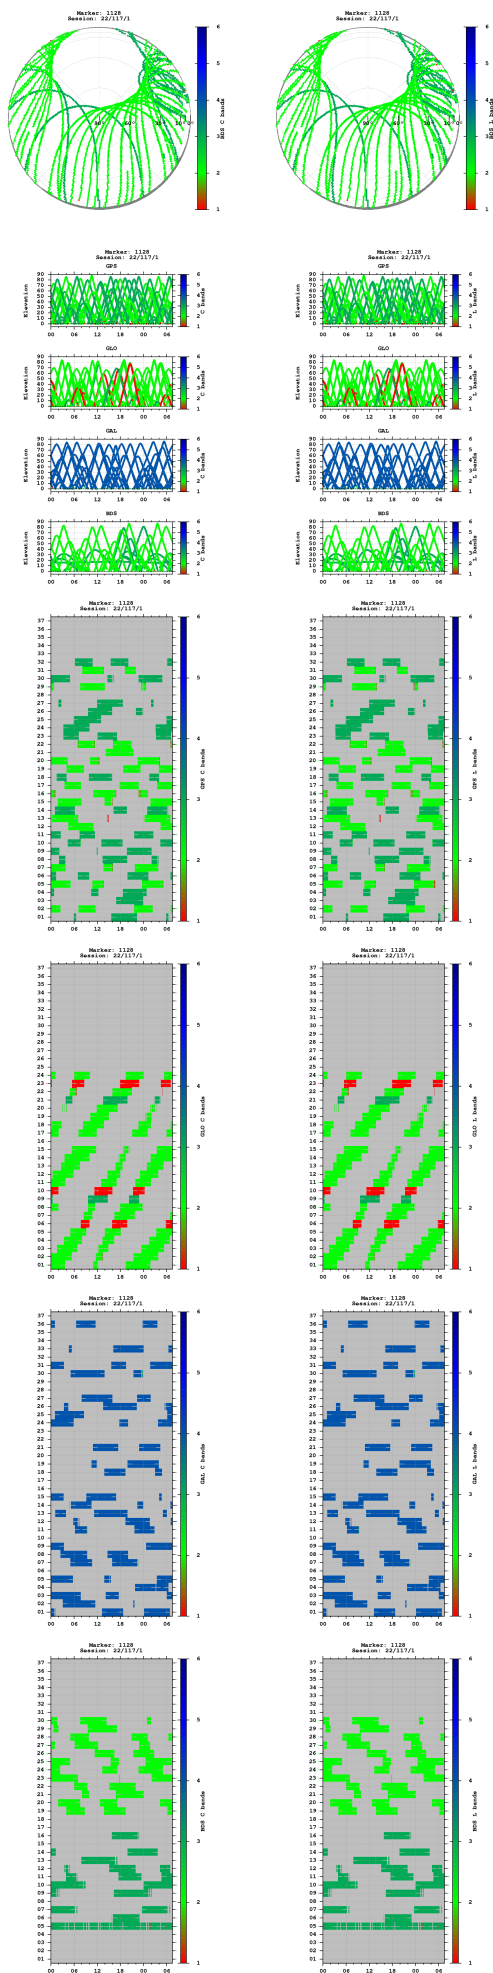


Observations

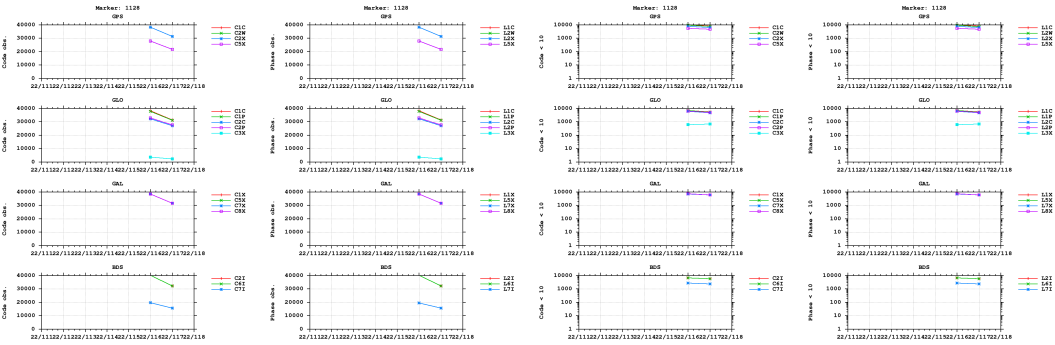



Multipath

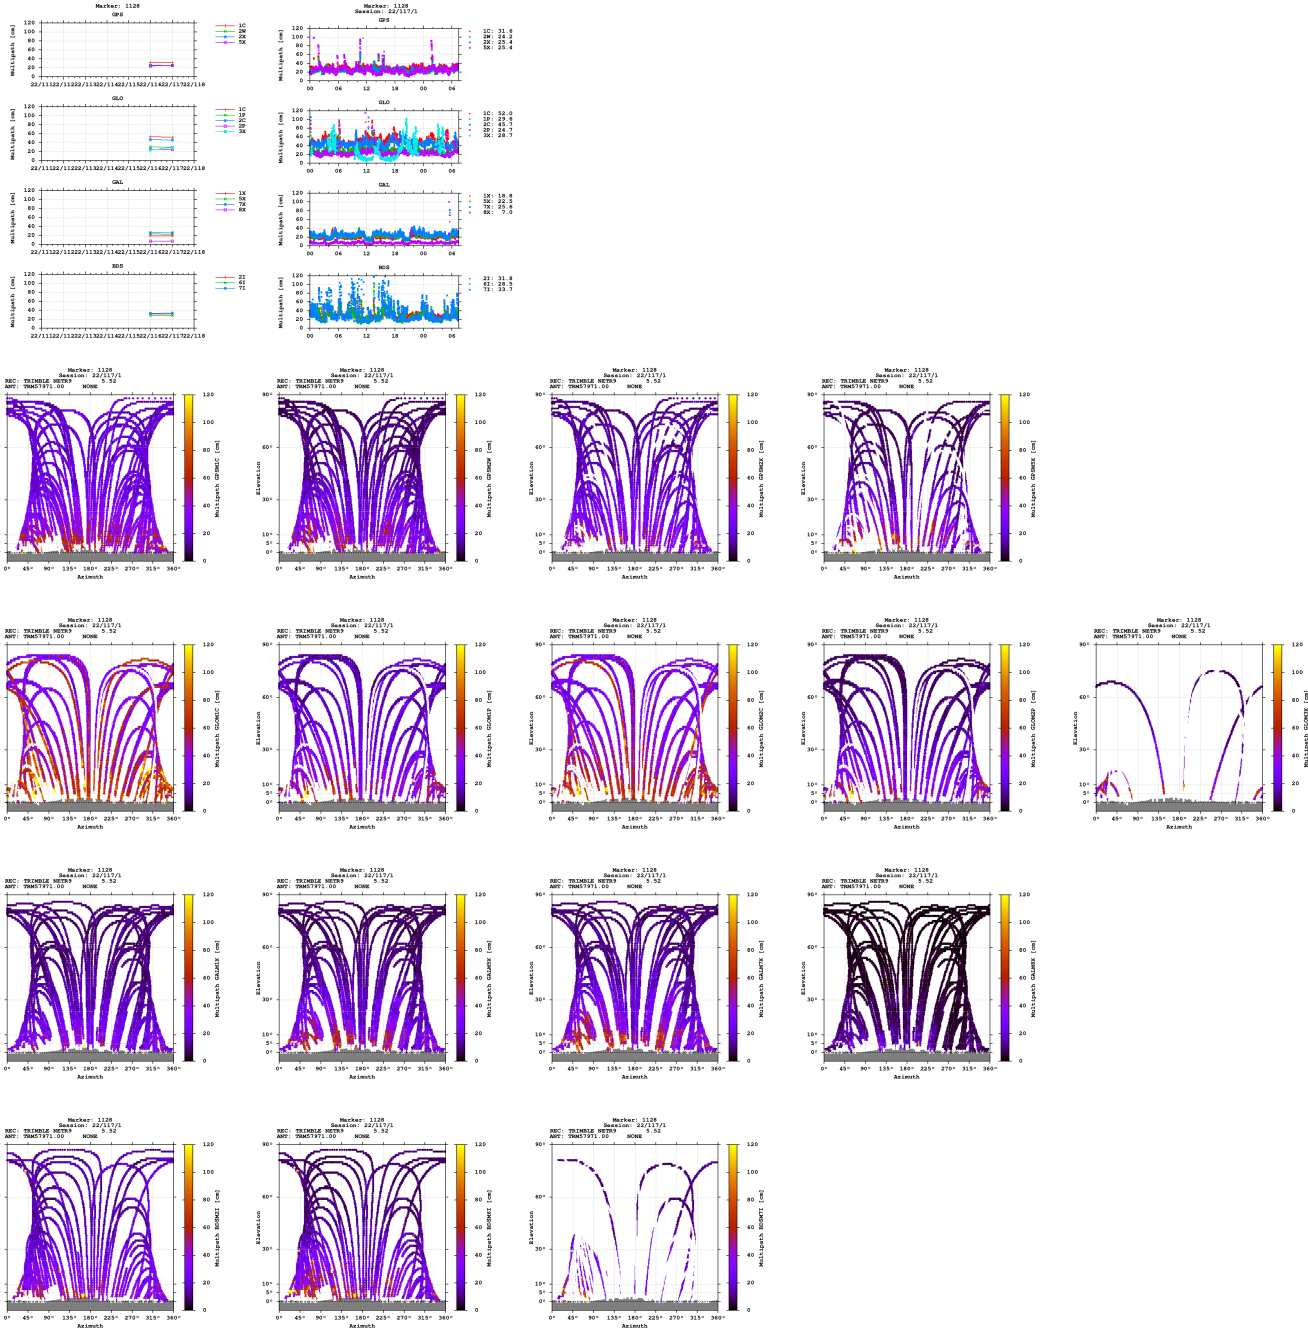


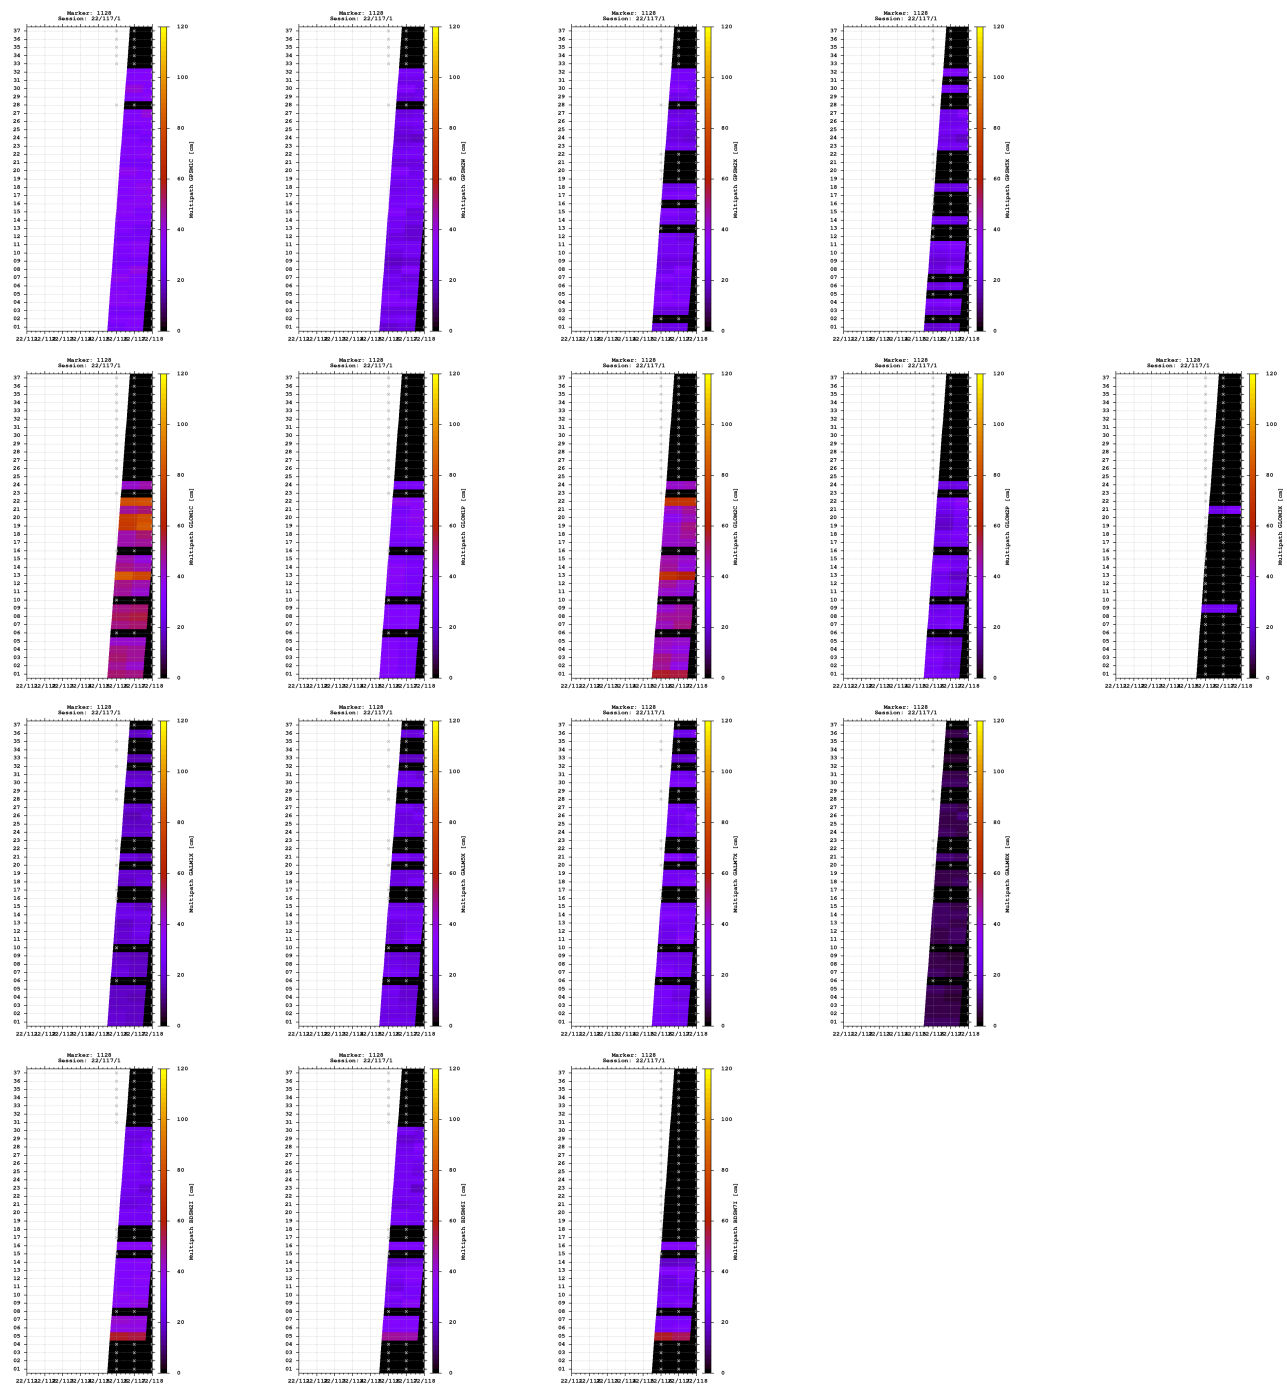


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

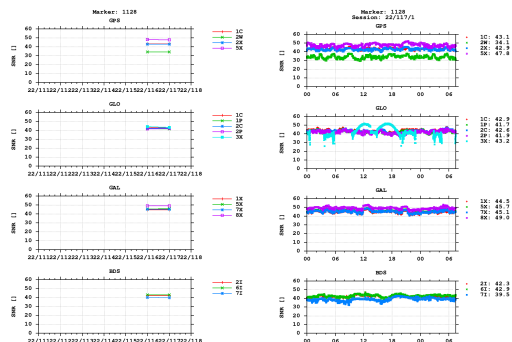


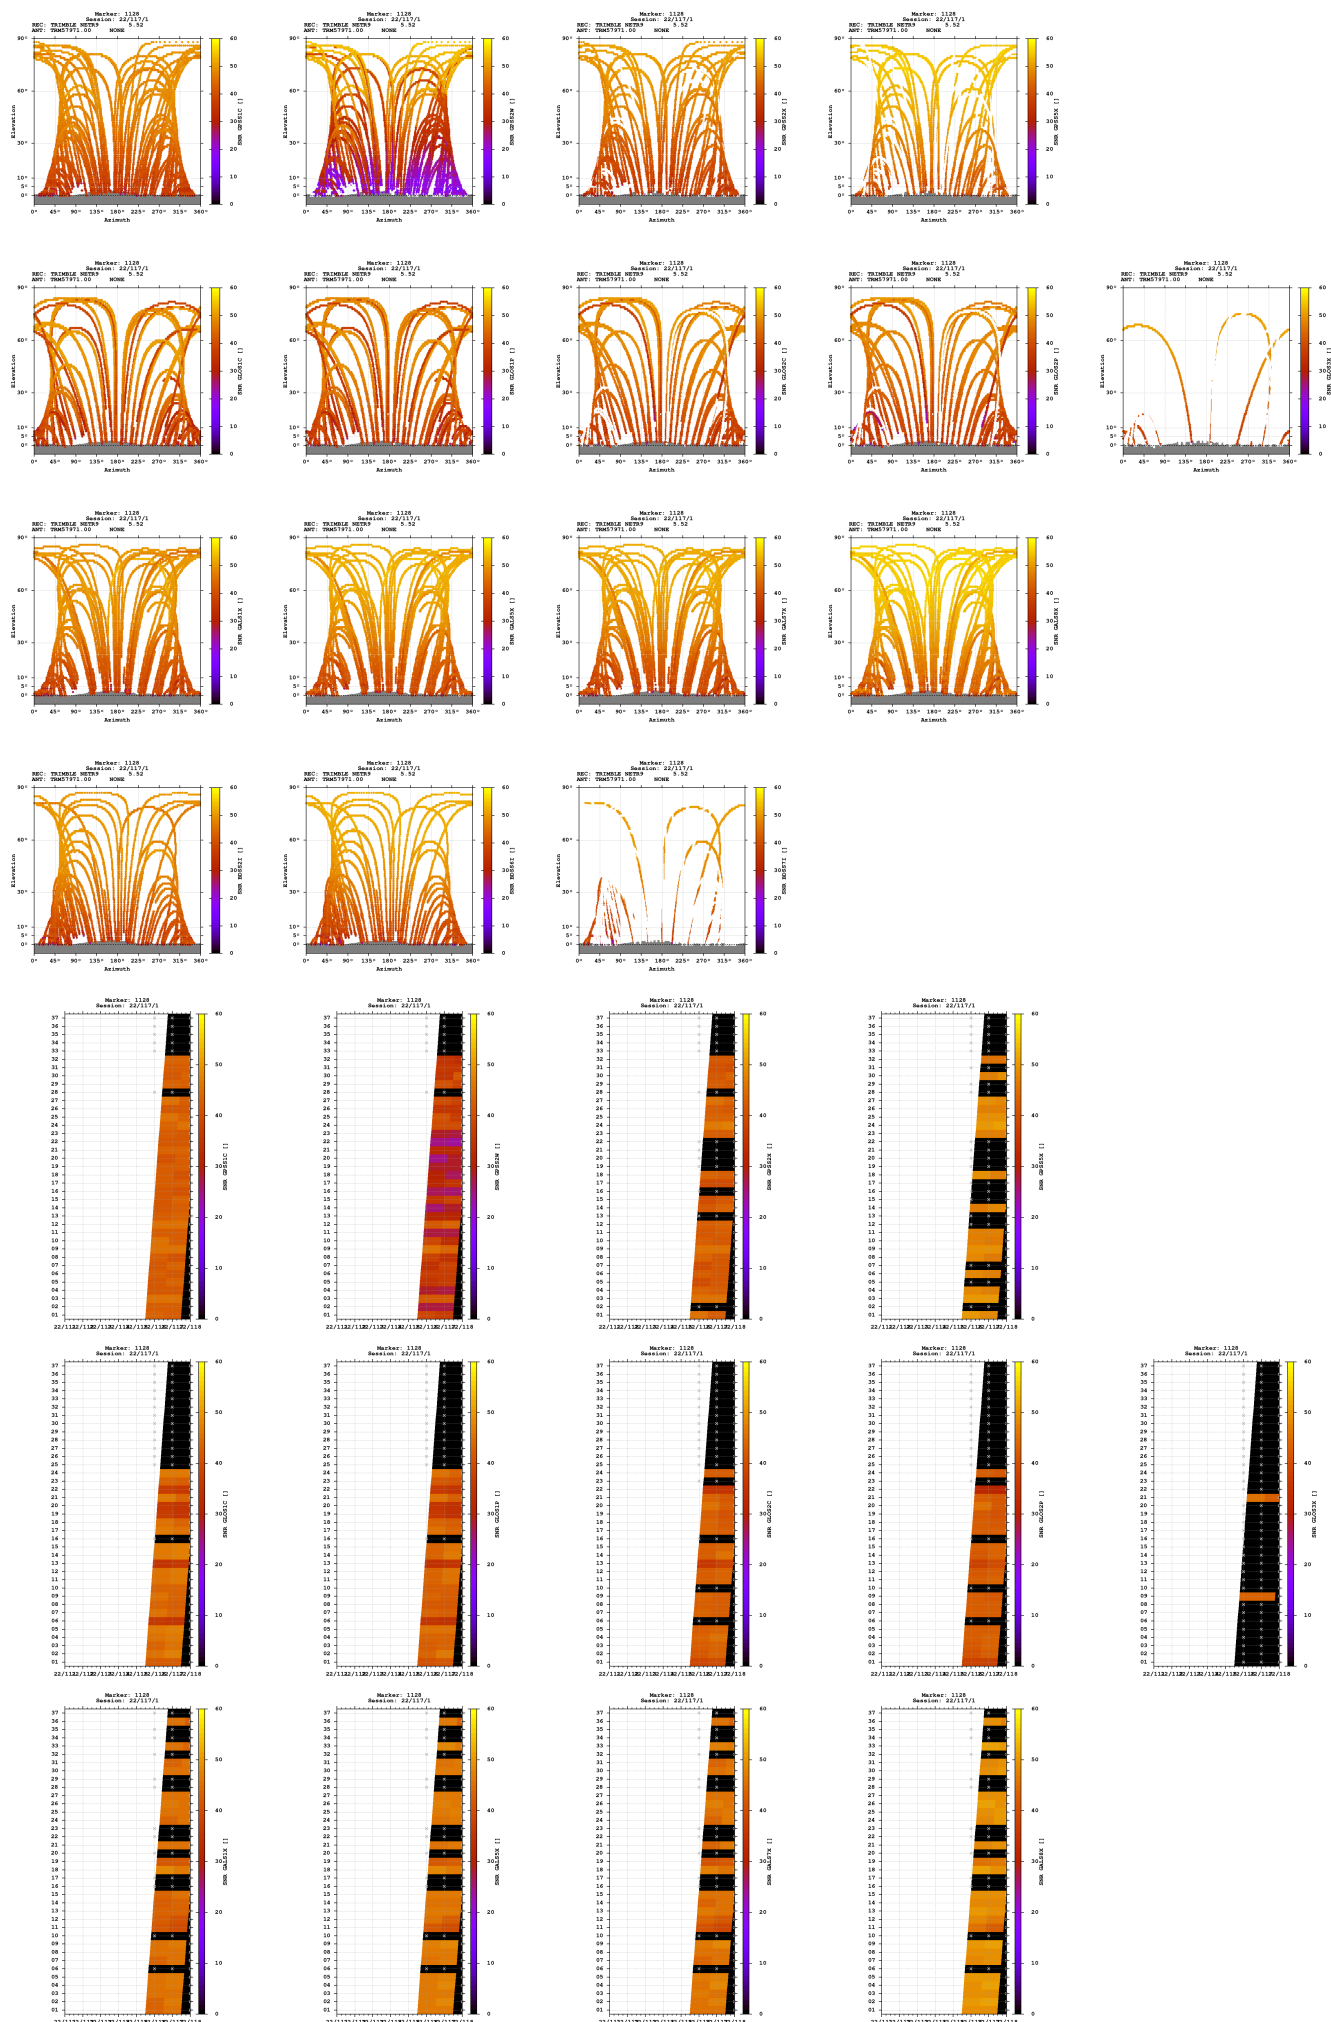

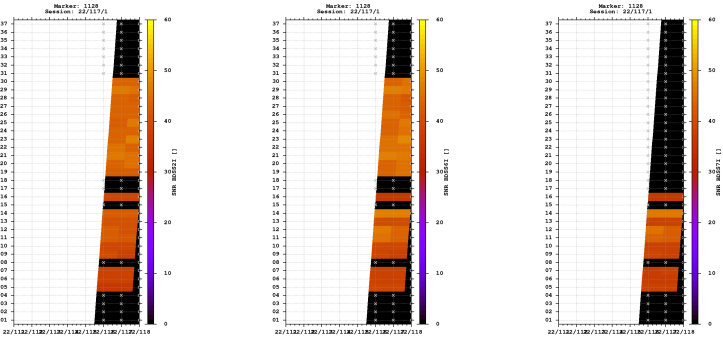



Estimates

2022-04-26 09:39:00	GPS	4307825.2825	593916.8327	4651308.5233	47.118488057	7.849841878	777.9357
2022-04-26 09:39:00	GLO	4307825.8271	593916.5979	4651309.4541	47.118490410	7.849837834	778.9631
2022-04-26 09:39:00	GAL	4307825.5204	593916.7388	4651308.2586	47.118484968	7.849840224	777.8934
2022-04-26 09:39:00	BDS	4307824.5677	593919.1481	4651309.6021	47.118497242	7.849873386	778.4595

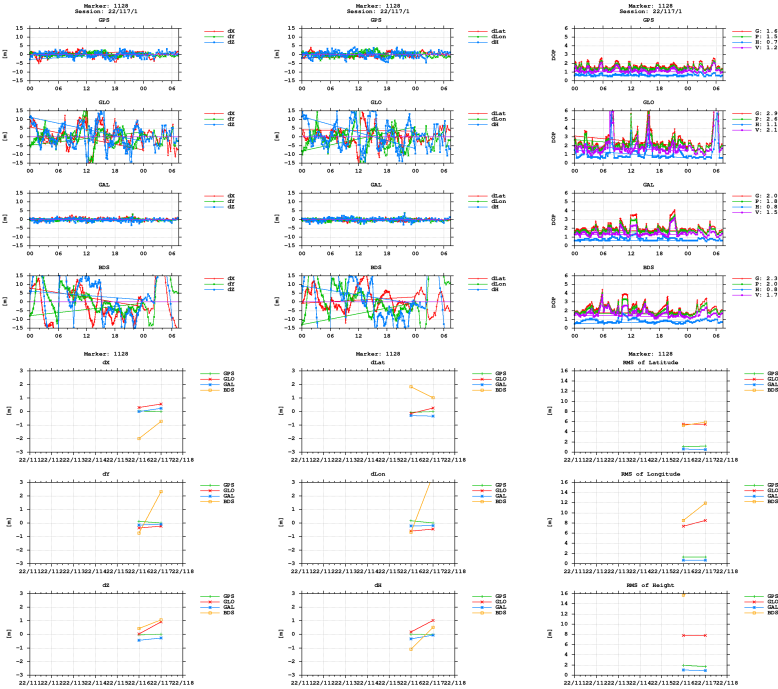

BNC

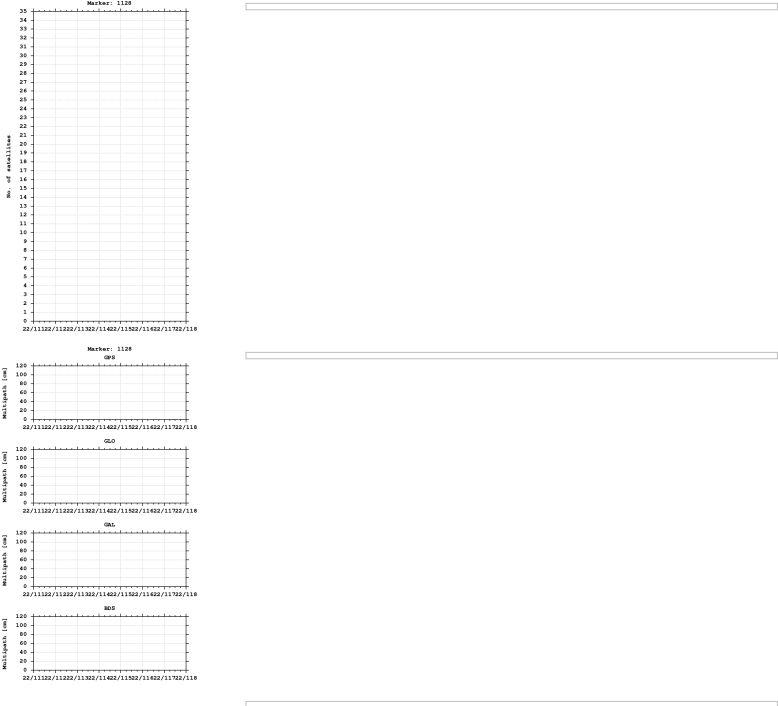

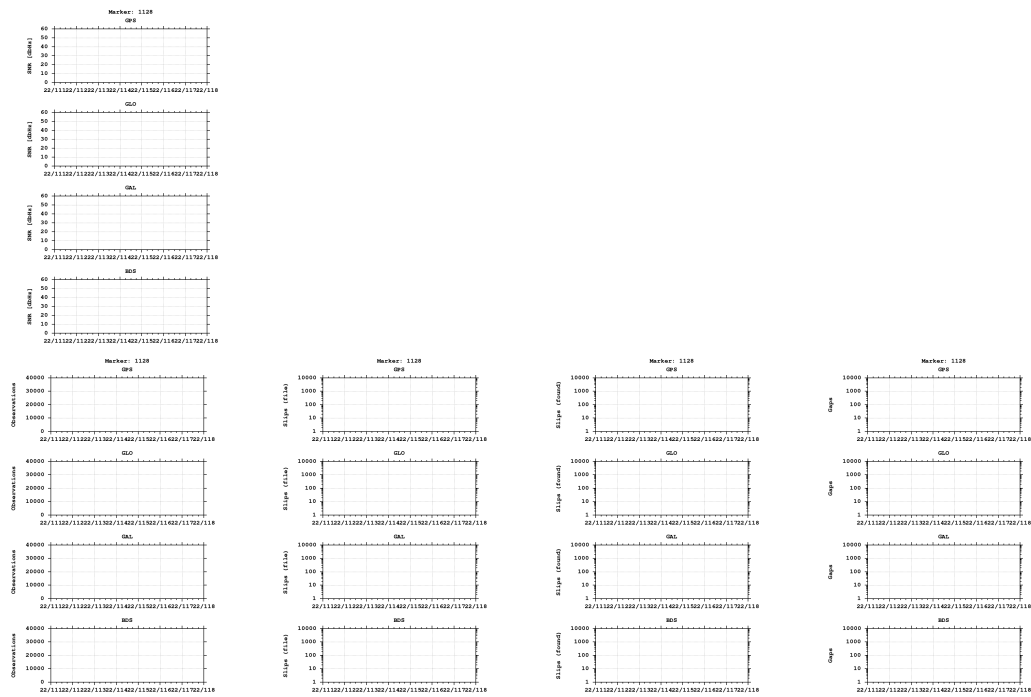

Equipment

2022-04-26 00:00:00	TRIMBLE NETR9	5.52	518	TRM57971.00	NONE	518
---------------------	---------------	------	-----	-------------	------	-----

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)