


GNSS observation file monitoring for 0518


Last RINEX file: 05181191.220
RINEX version: 3.02
Marker: 1129
Receiver: 518 TRIMBLE NETR9 5.52
Antenna: 518 TRM57971.00 NONE

Epochs

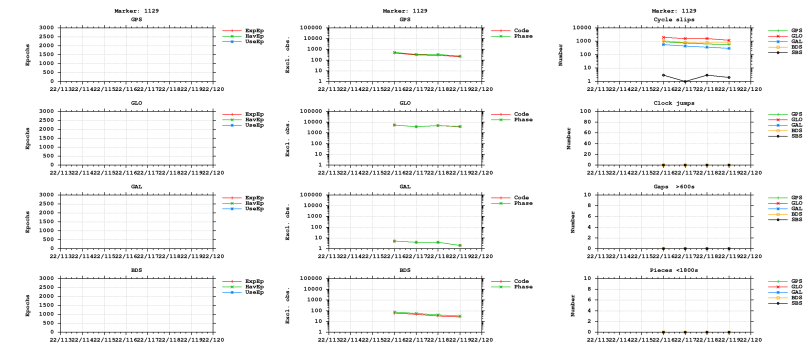



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

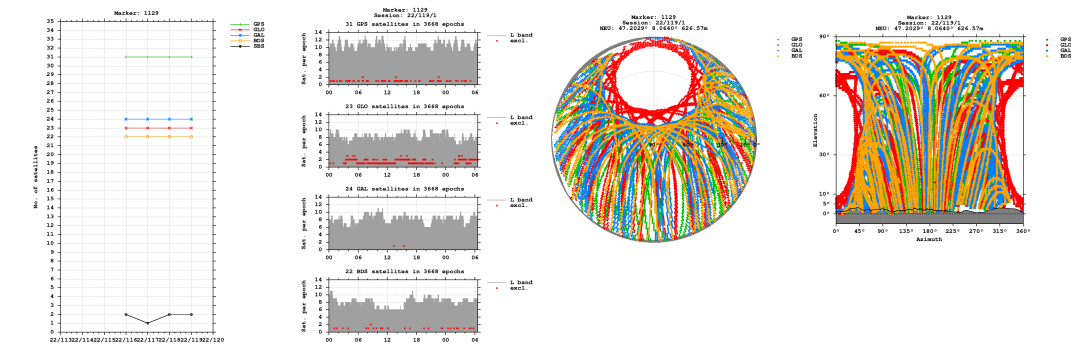


Bands

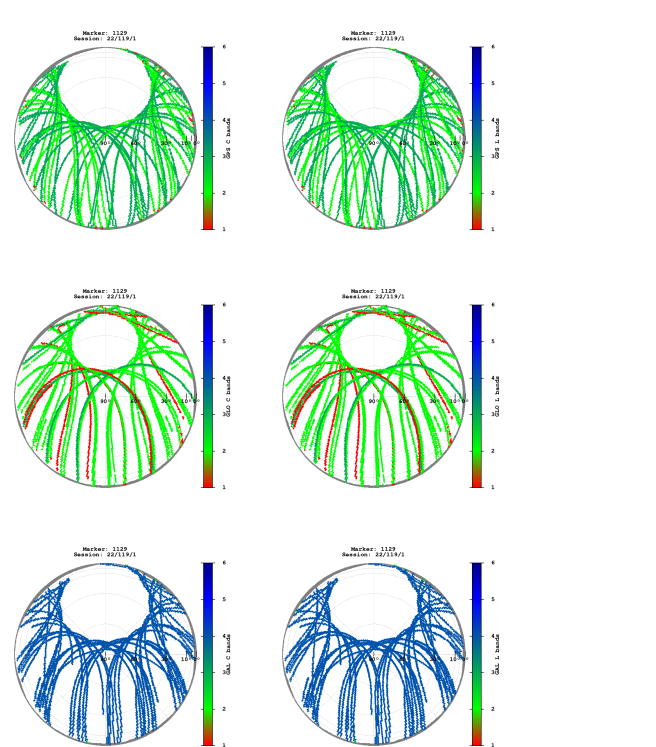


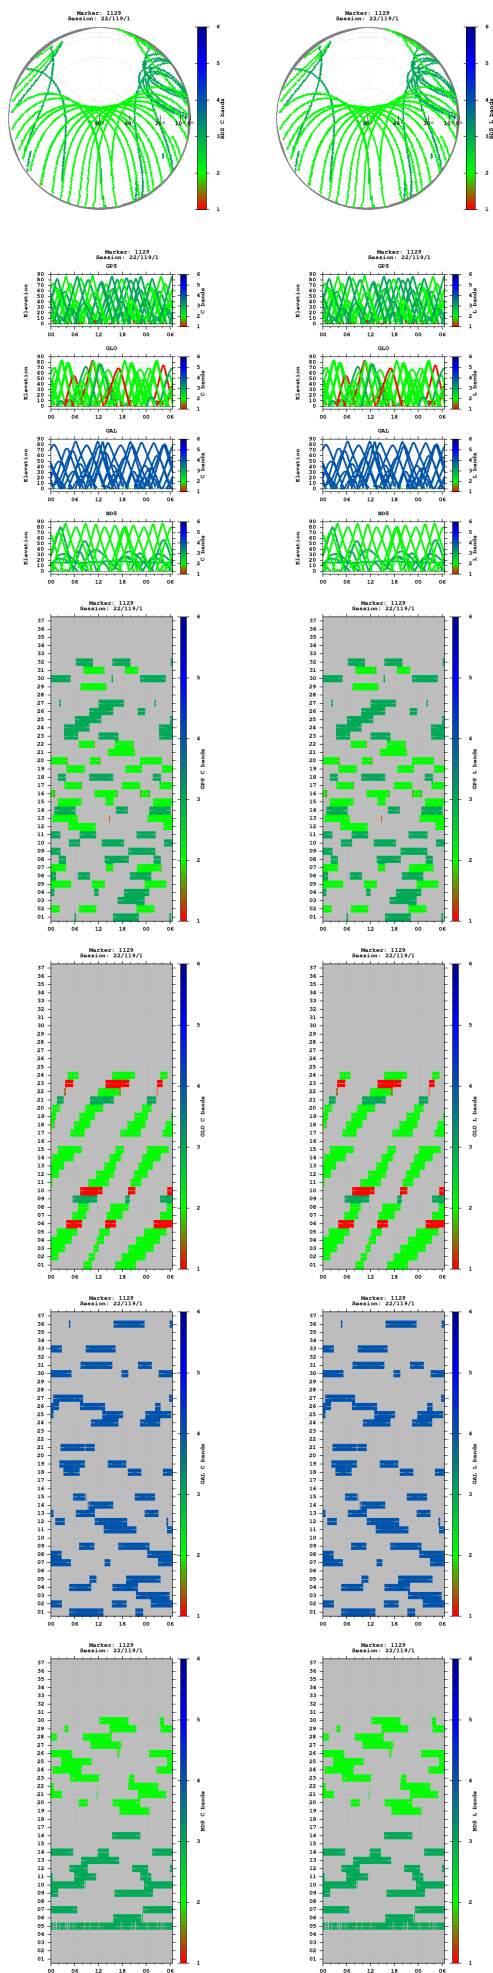


Observations

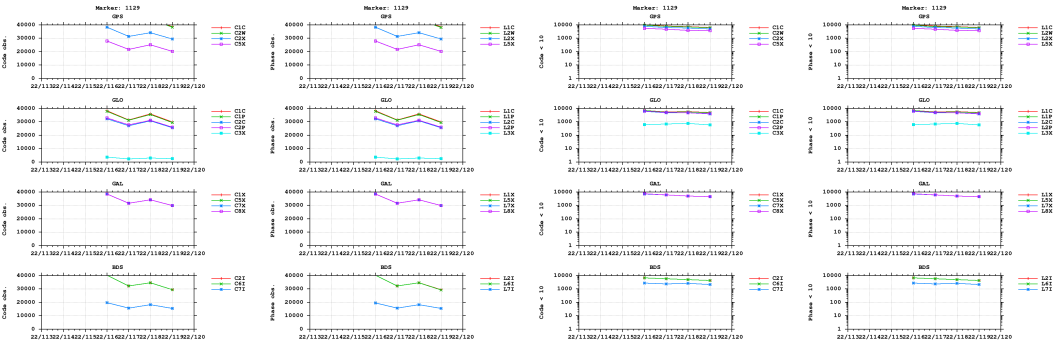


Multipath

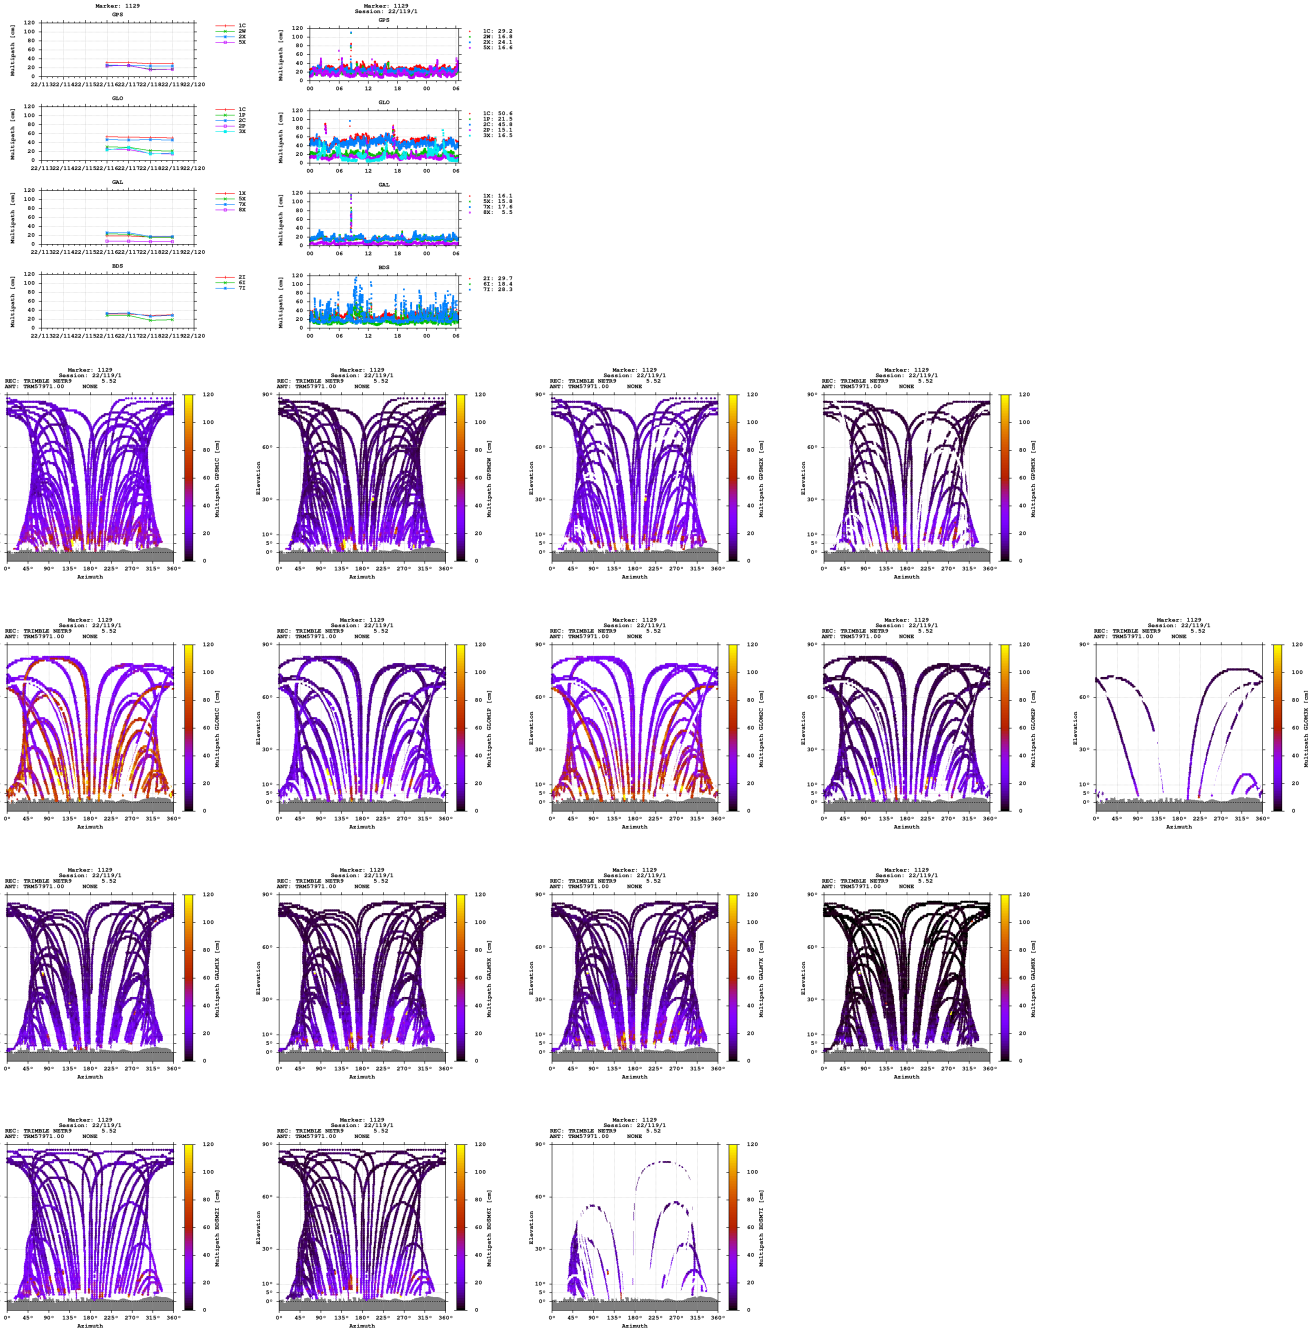


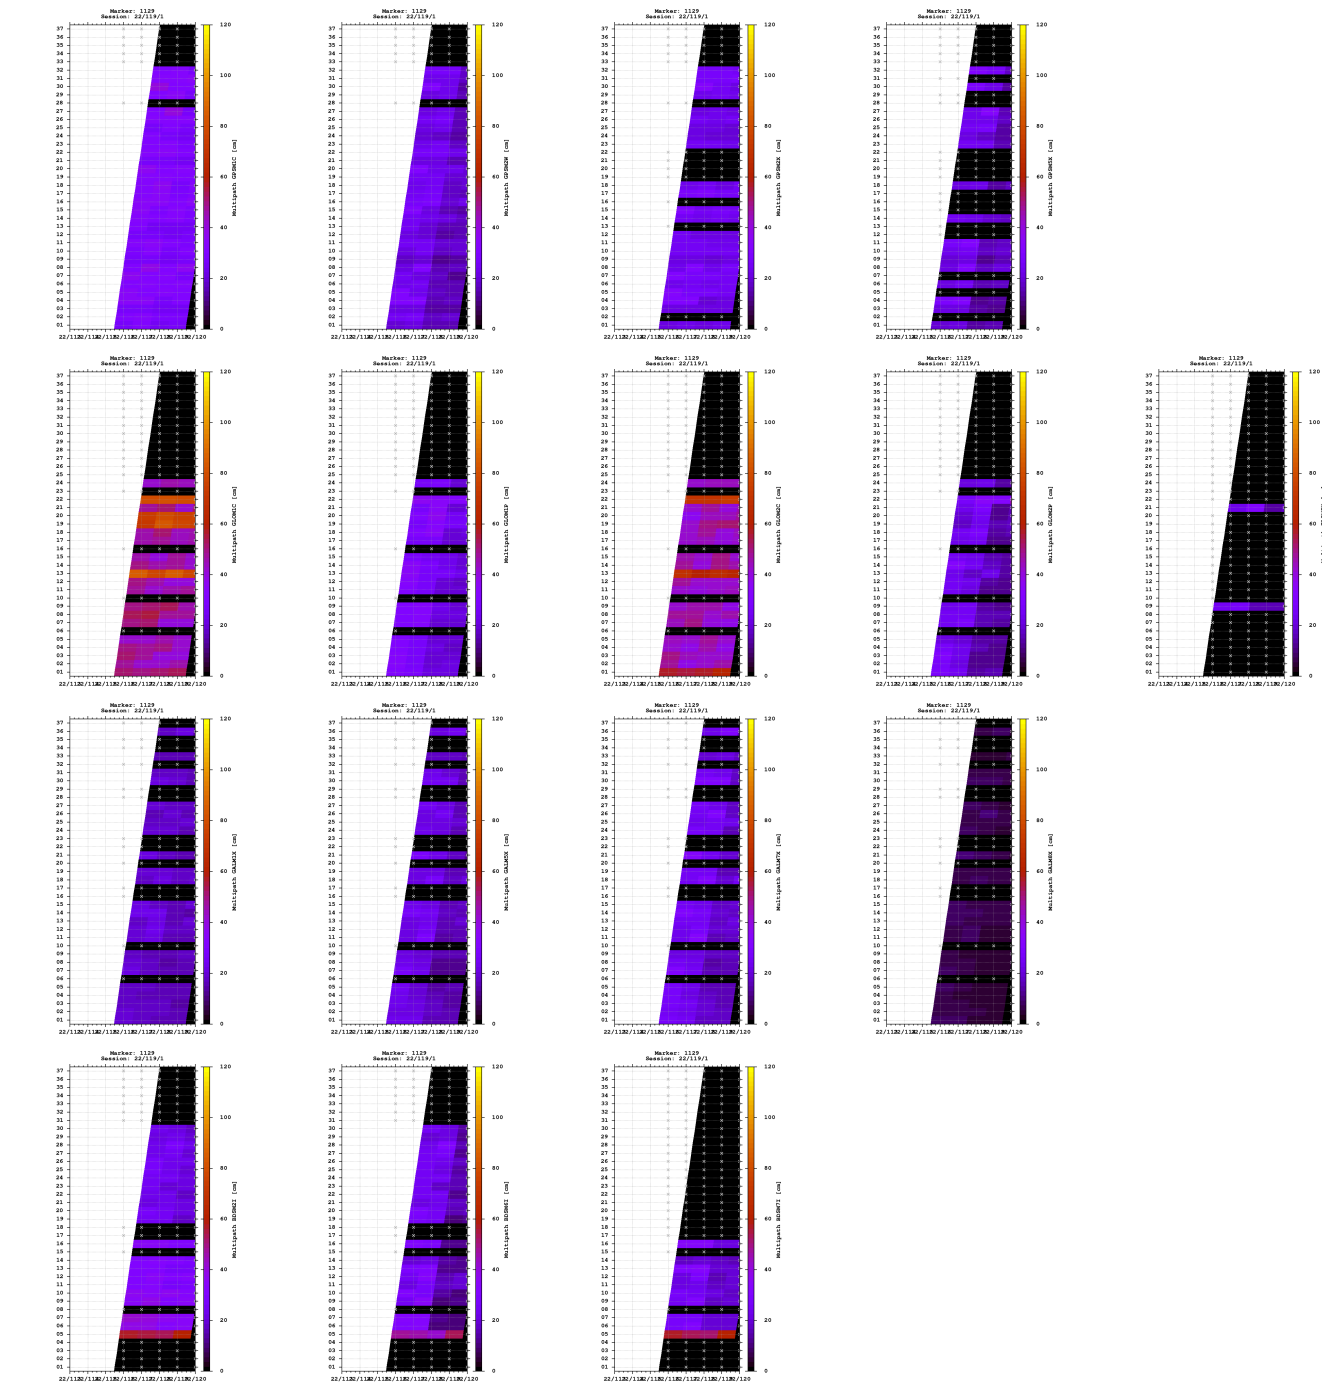


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

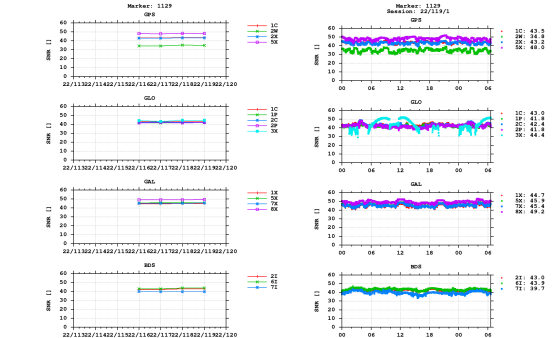


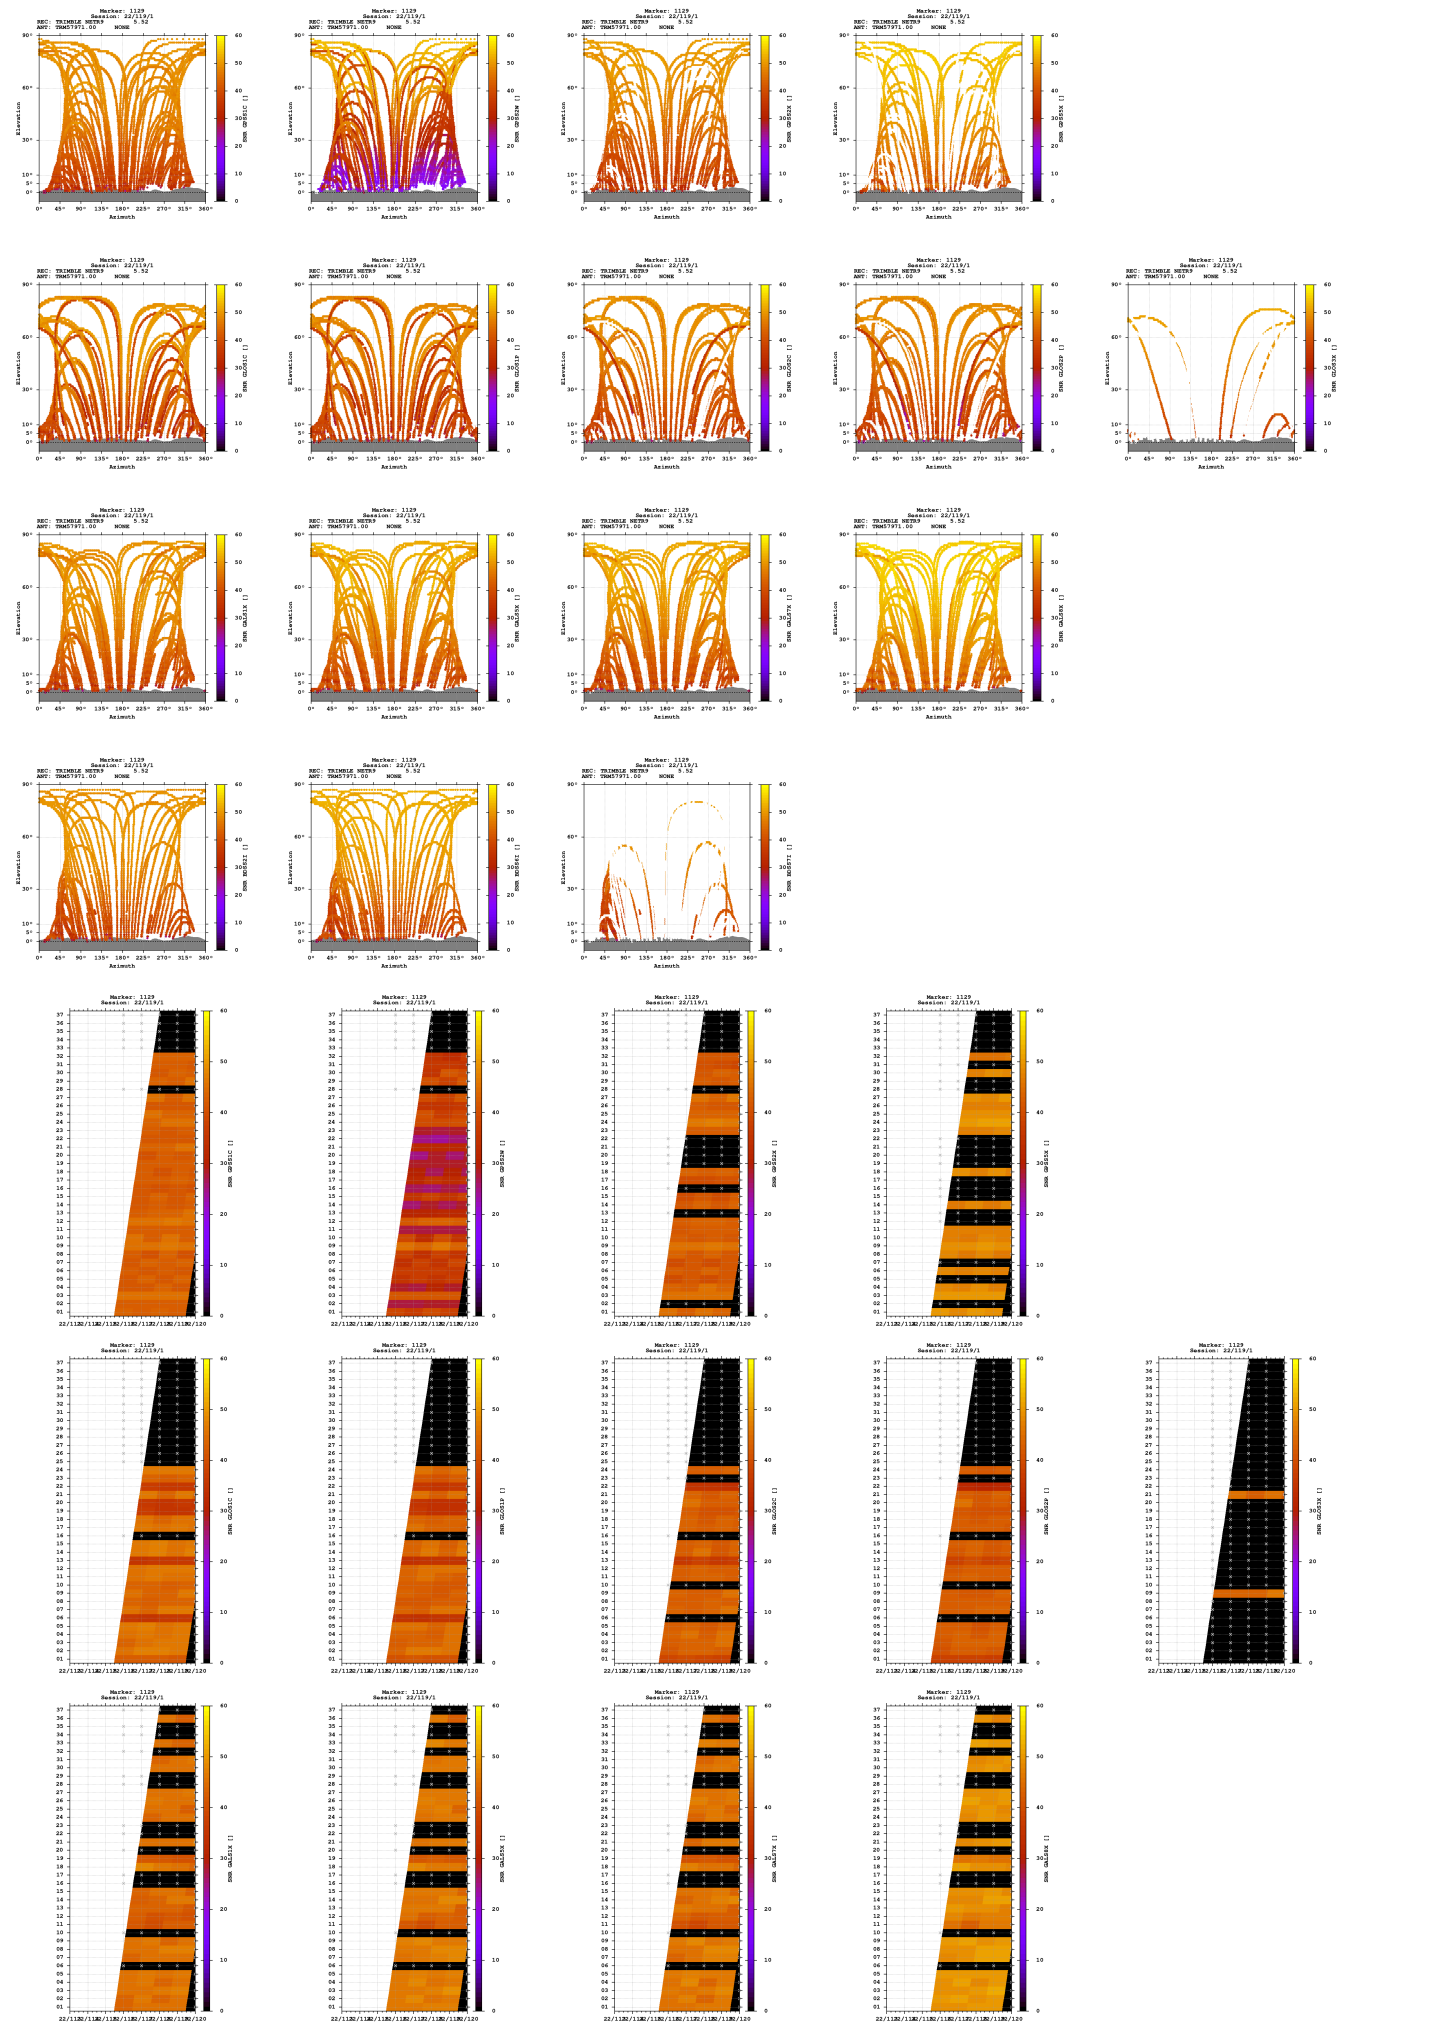

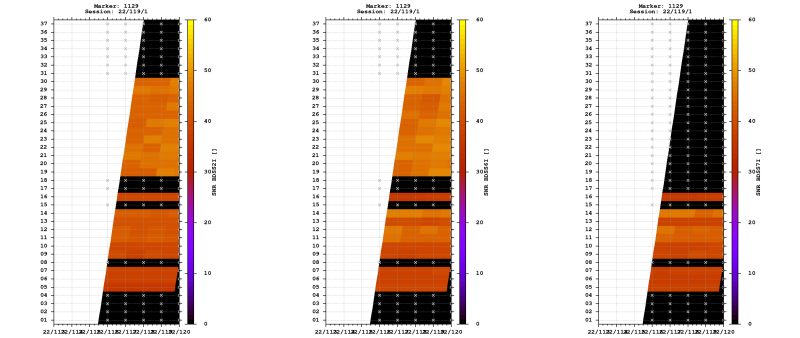


Estimates

2022-04-28 12:17:00	GPS	4298657.7915	609034.0802	4657580.6506	47.202920341	8.063998270	626.5700
2022-04-28 12:17:00	GLO	4298658.1269	609034.1747	4657580.4044	47.202916557	8.063998884	626.6240
2022-04-28 12:17:00	GAL	4298657.8595	609033.9866	4657580.4882	47.202918990	8.063996921	626.4877
2022-04-28 12:17:00	BDS	4298658.6018	609034.5284	4657582.4527	47.202925643	8.064002626	628.4802

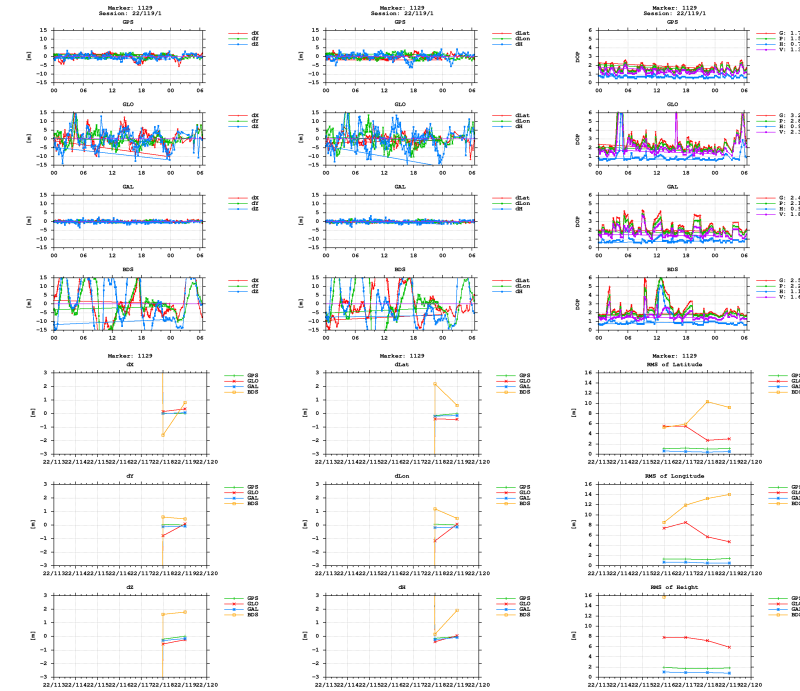

BNC



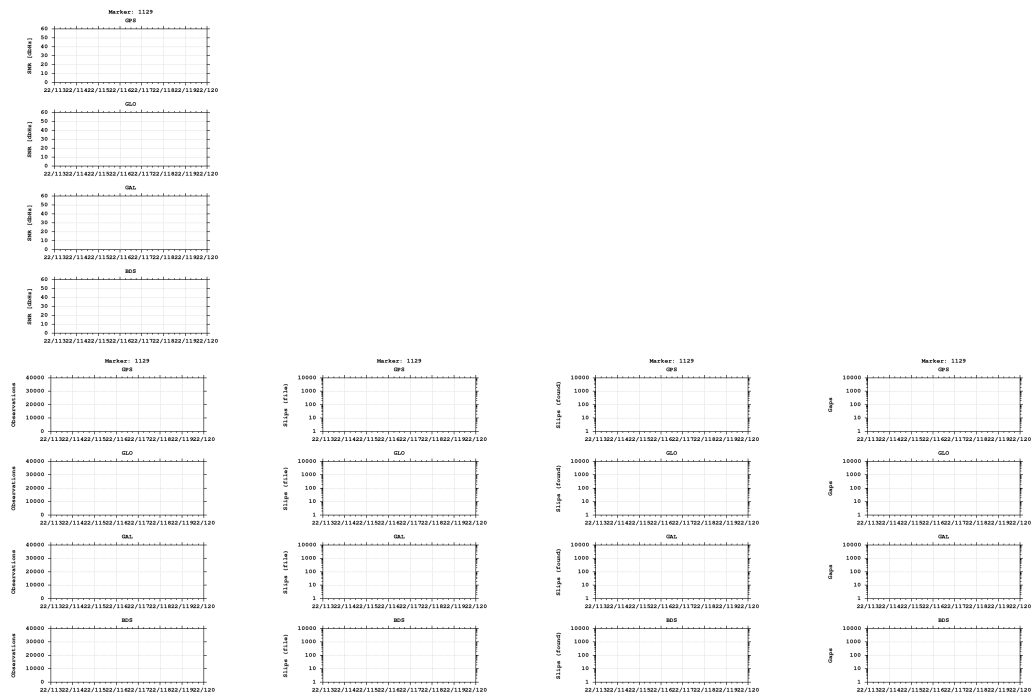

Equipment

2022-04-26 00:00:00 TRIMBLE NETR9 5.52 518 TRM57971.00 NONE 518

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)