


GNSS observation file monitoring for 0511


Last RINEX file: 05111301.220
RINEX version: 3.02
Marker: 1301
Receiver: 511 TRIMBLE NETR9 5.52
Antenna: 511 TRM57971.00 NONE

Epochs

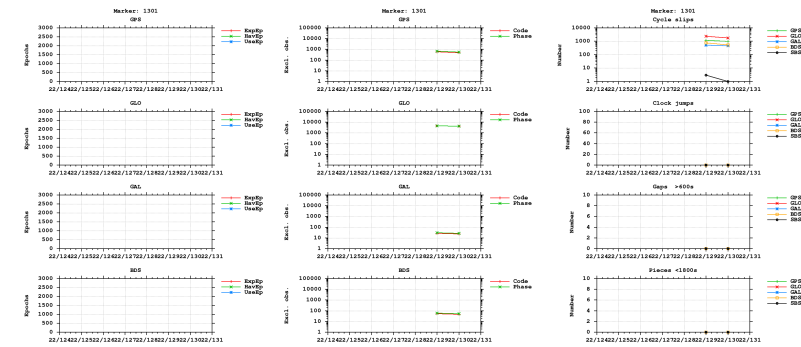



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

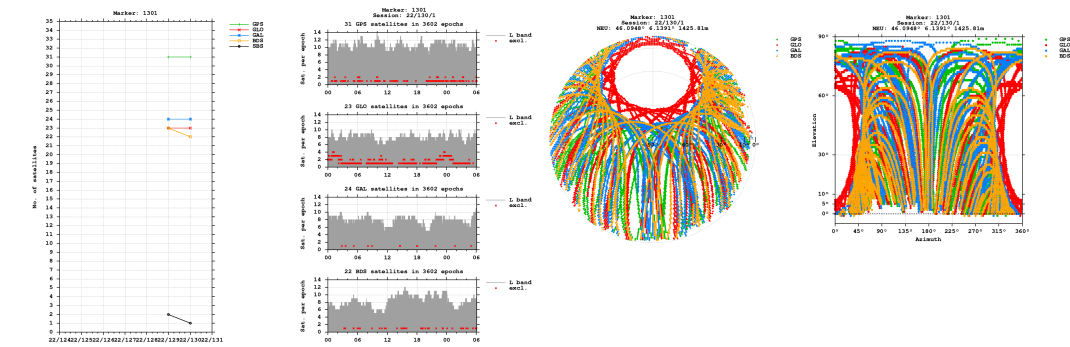


Bands

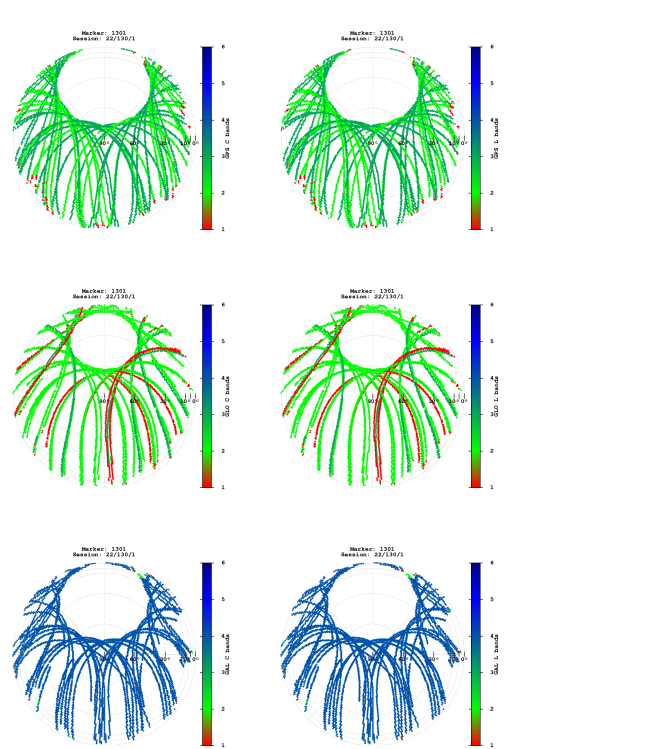


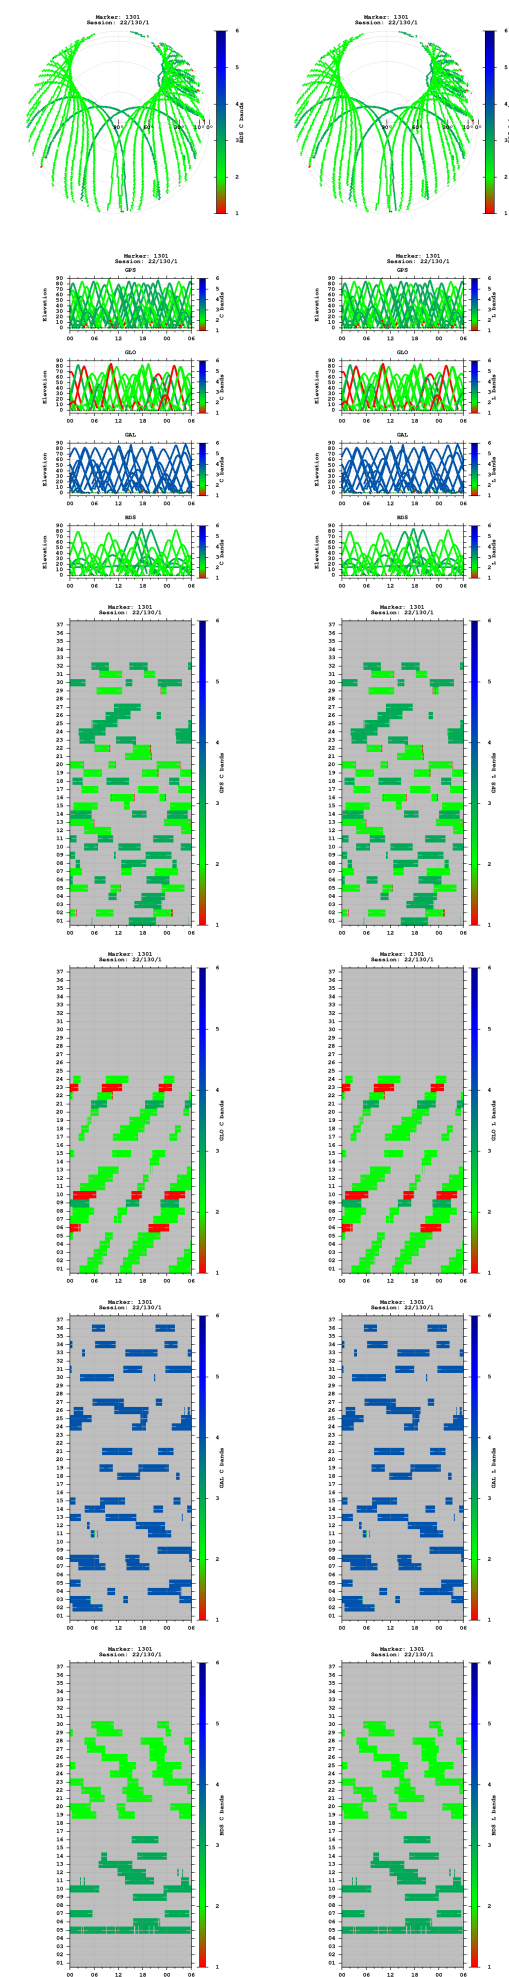


Observations

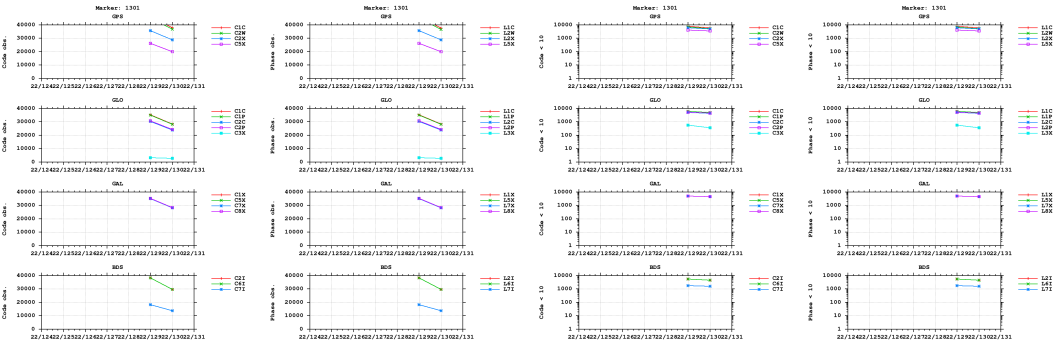


Multipath

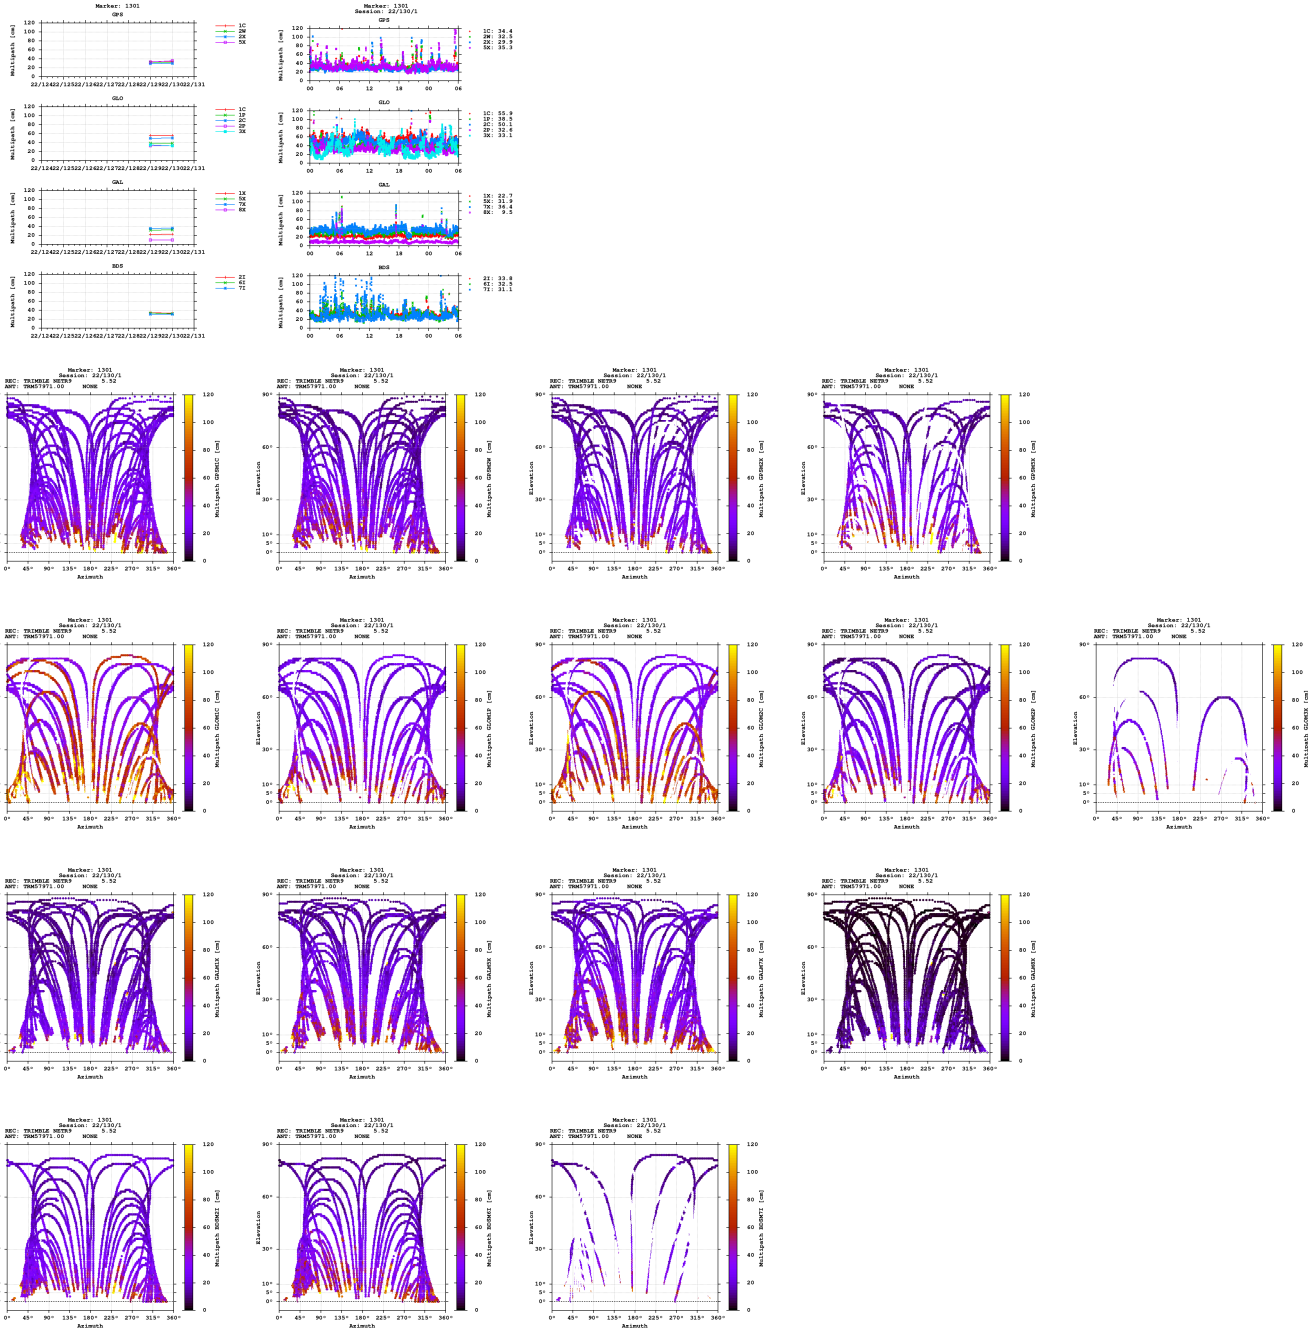


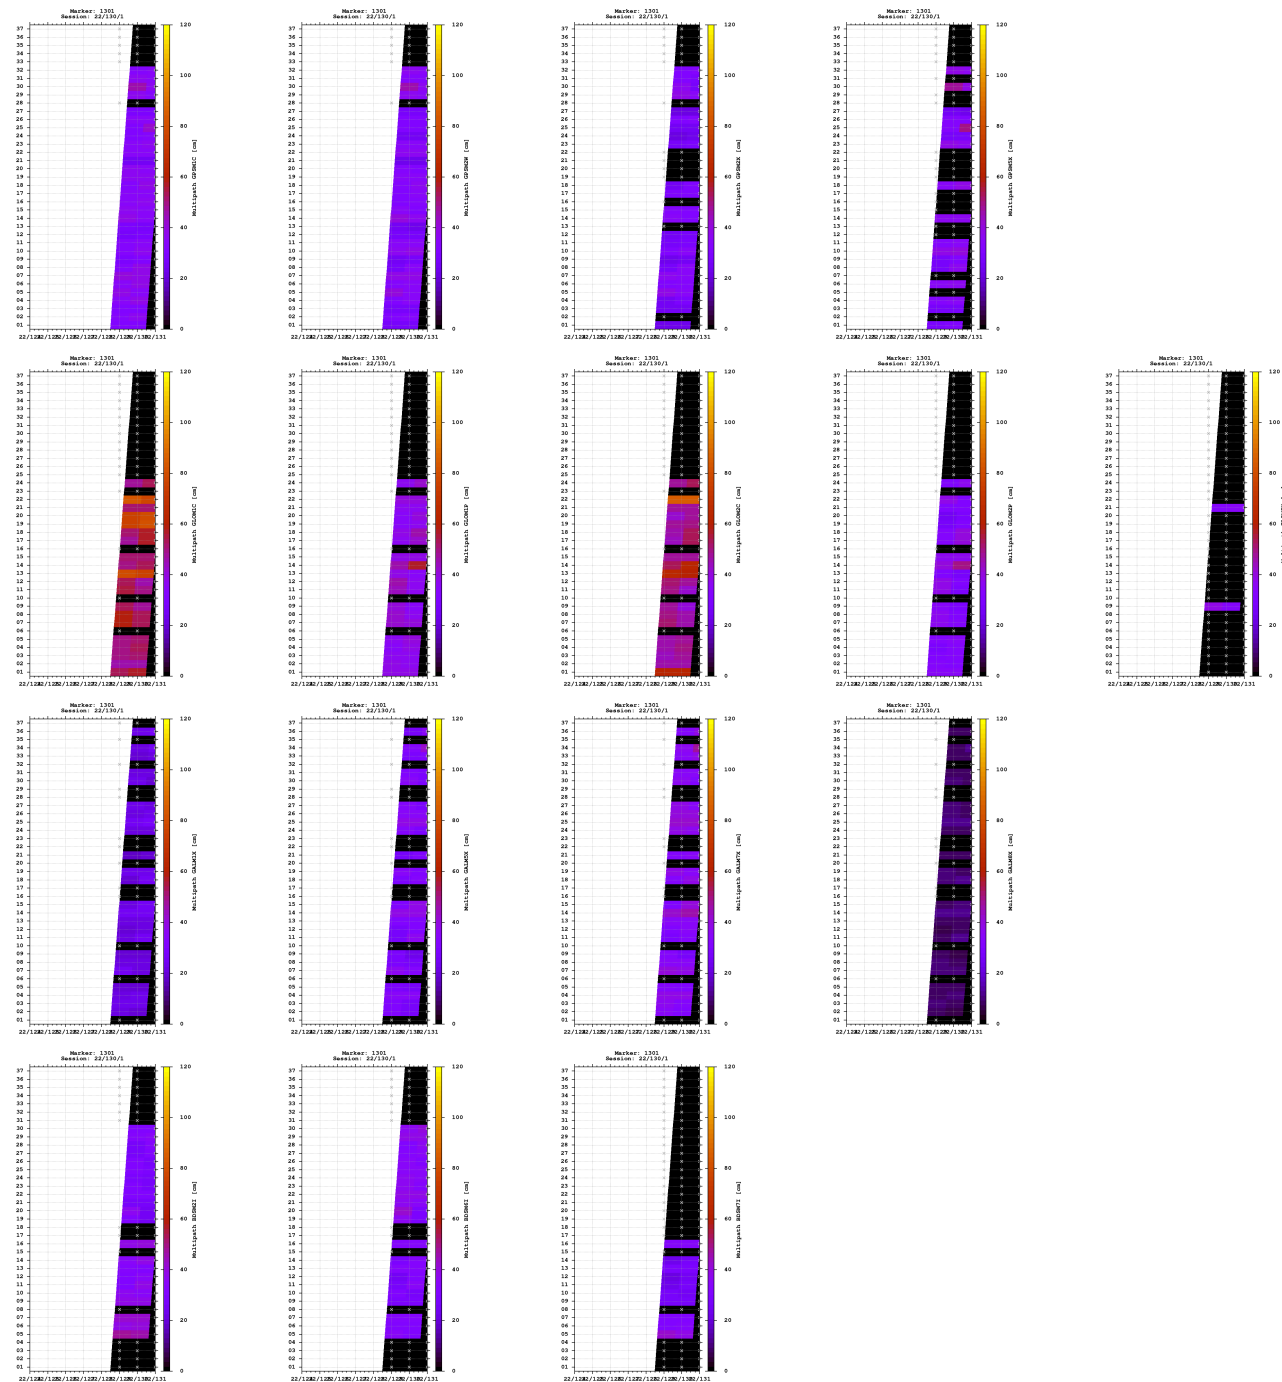


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

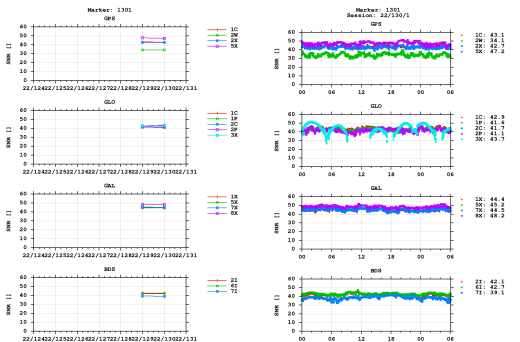


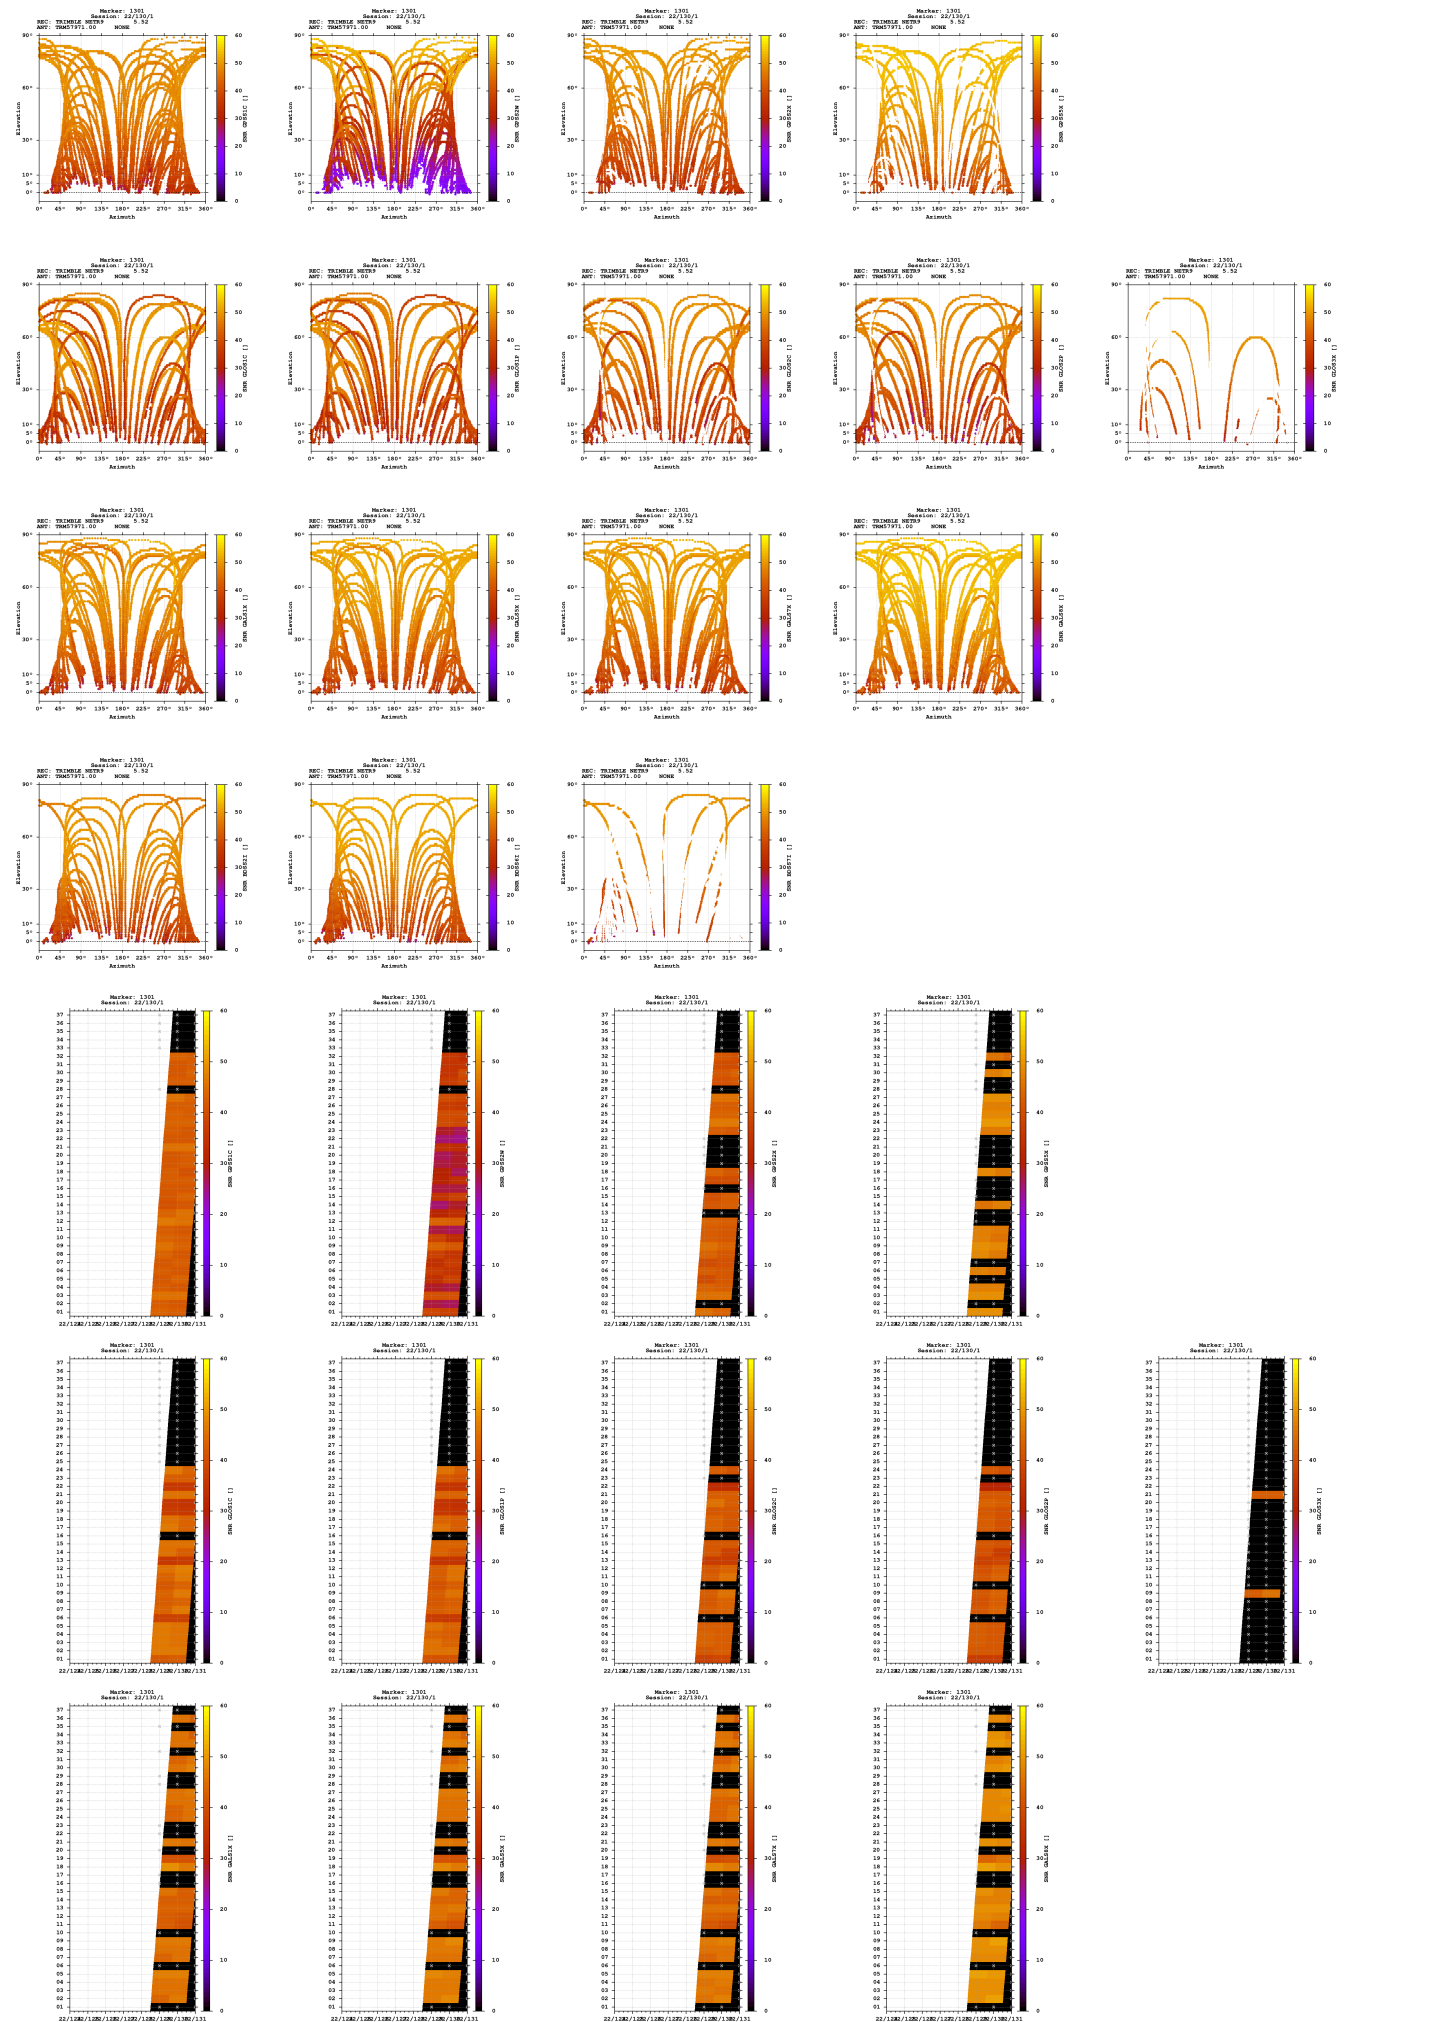

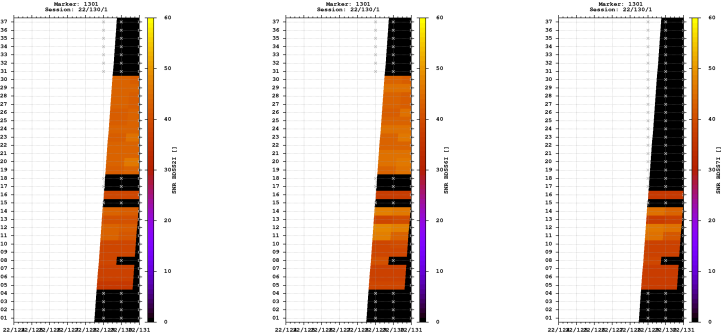



Estimates

2022-05-09 10:54:00	GPS	4406304.6679	473942.2948	4573591.1757	46.094836969	6.139133910	1425.8134
2022-05-09 10:54:00	GLO	4406303.9455	473941.7016	4573590.4139	46.094837283	6.139127282	1424.7225
2022-05-09 10:54:00	GAL	4406304.7942	473942.3491	4573590.9292	46.094834580	6.139134432	1425.7270
2022-05-09 10:54:00	BDS	4406302.7811	473942.6191	4573591.1653	46.094848836	6.139140687	1424.5291

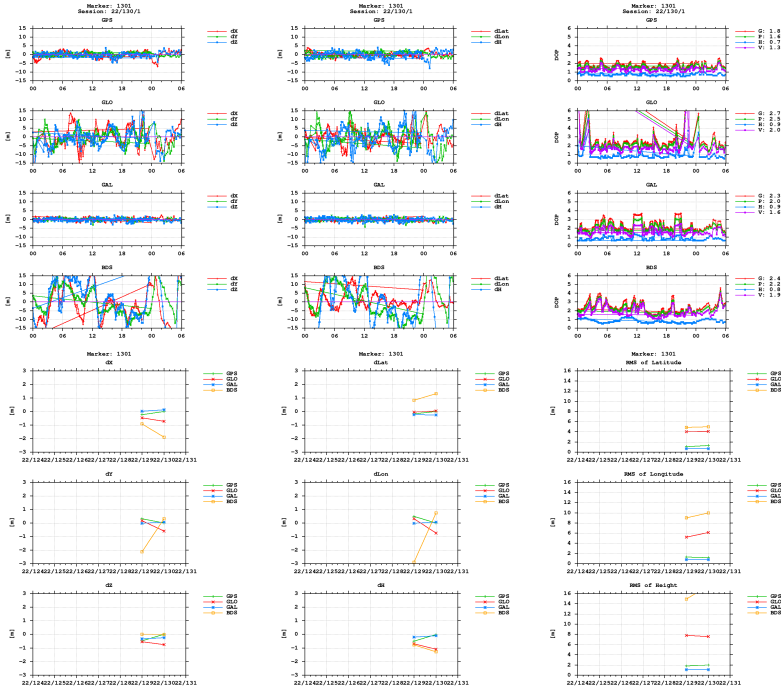

BNC

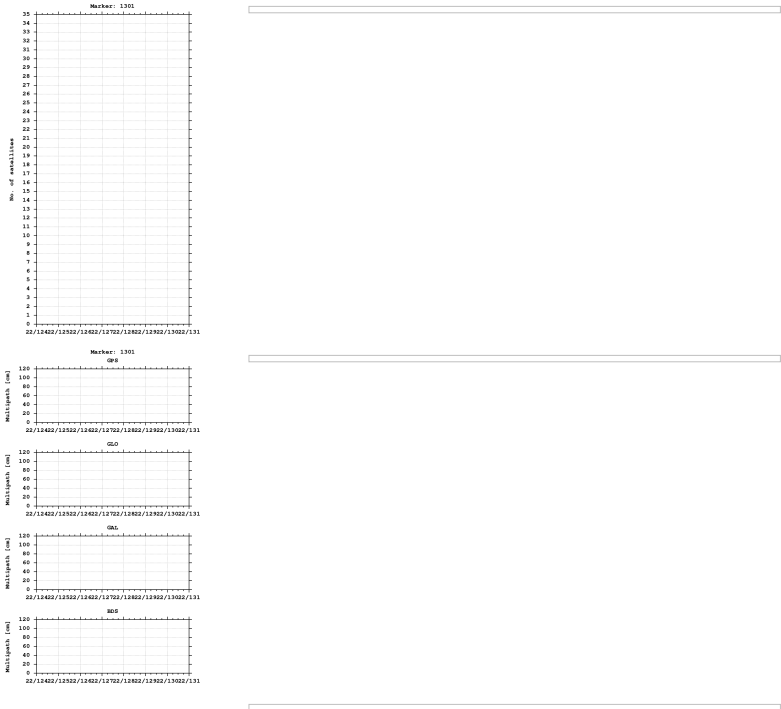

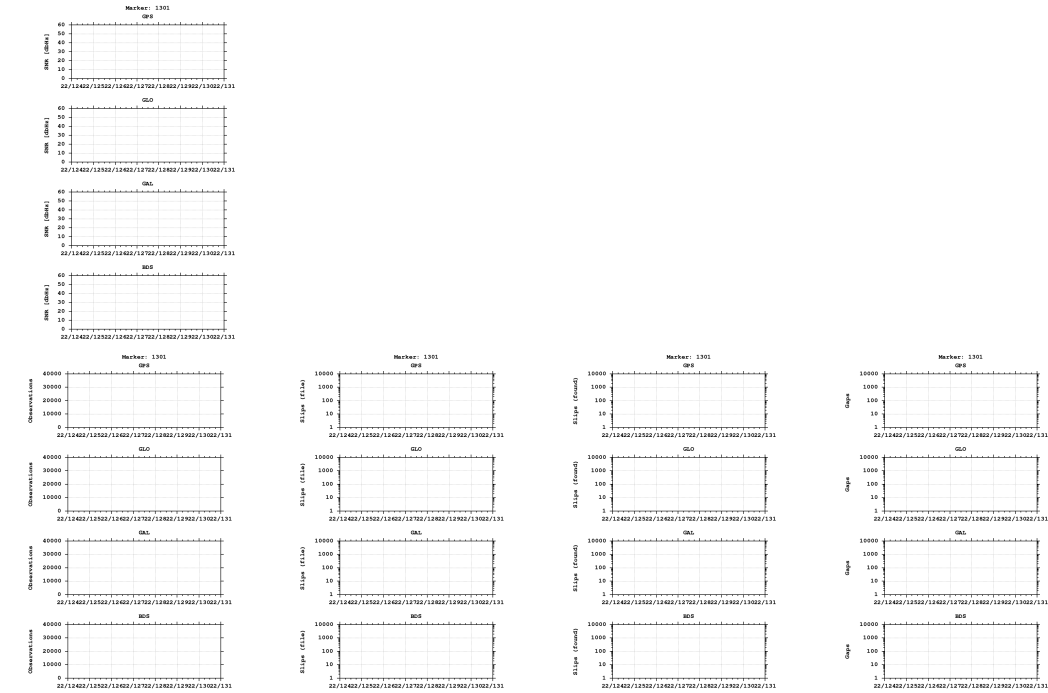

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)