

GNSS observation file monitoring for 0511

Last RINEX file: 05111311.220


RINEX version: 3.02

Marker: 1241

Receiver: 511 TRIMBLE NETR9 5.52


Antenna: 511 TRM57971.00 NONE

Epochs

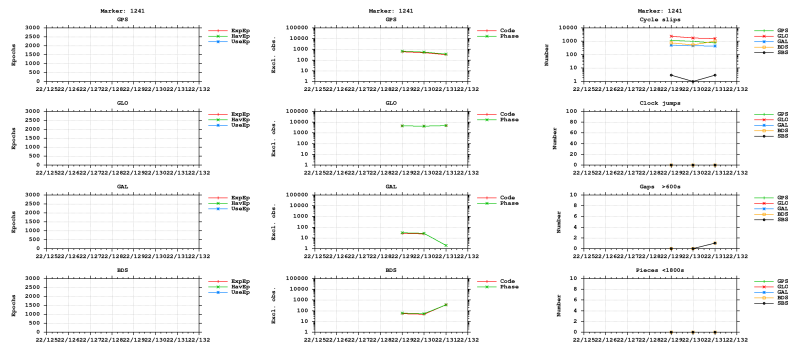



- "UseEp": The usable epoch is introduced if four or more satellites are observed with the minimum of two frequencies.
- Cycle slip detection algorithm is based on Melbourne-Wübbena and geometry-free LC.

Satellites

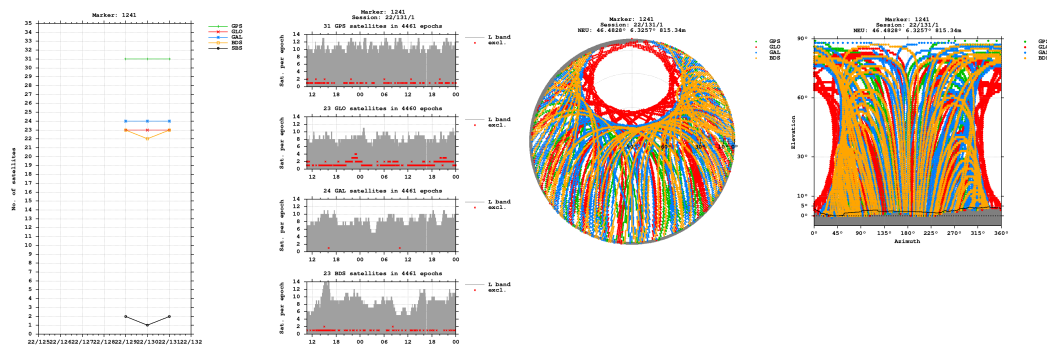


Bands

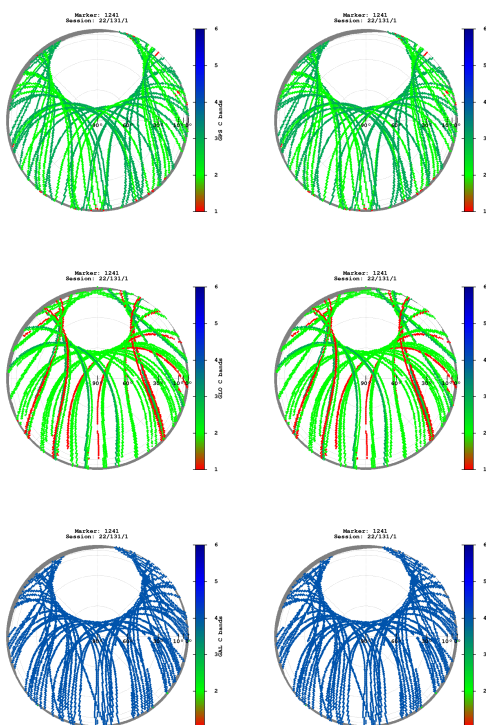


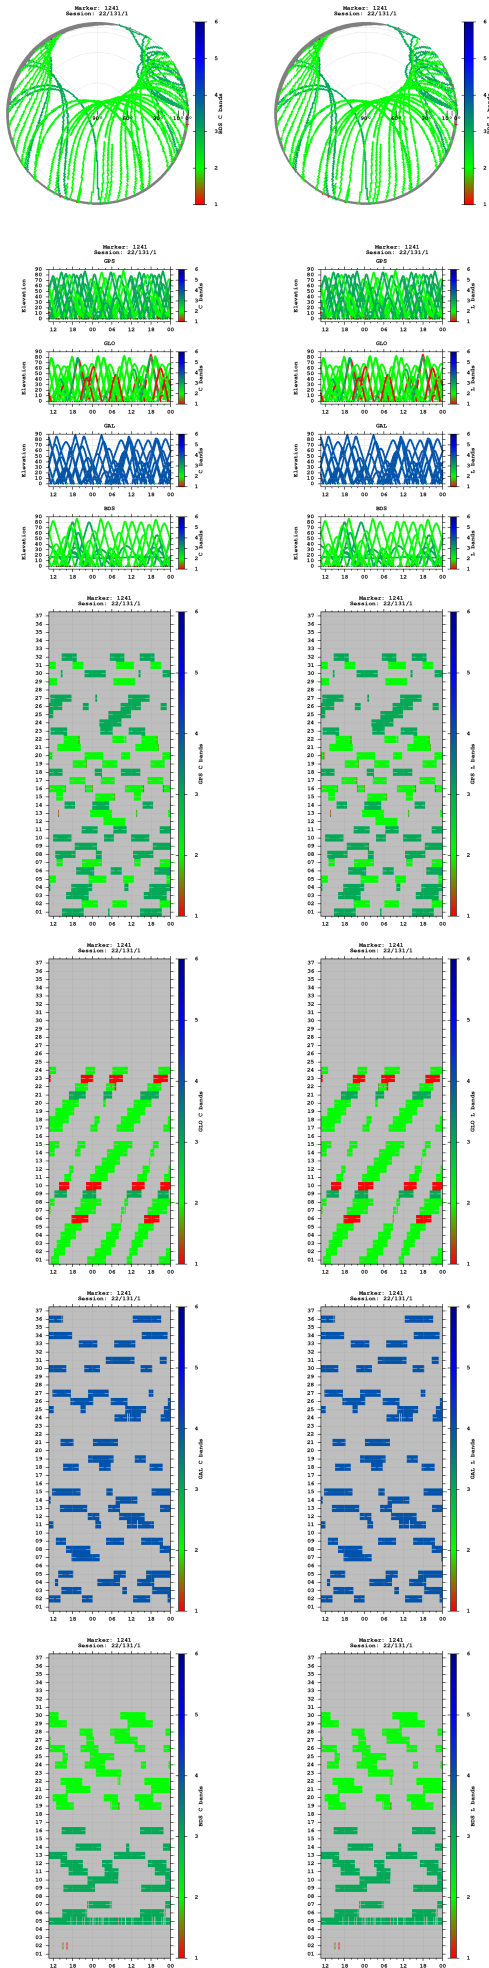


Observations

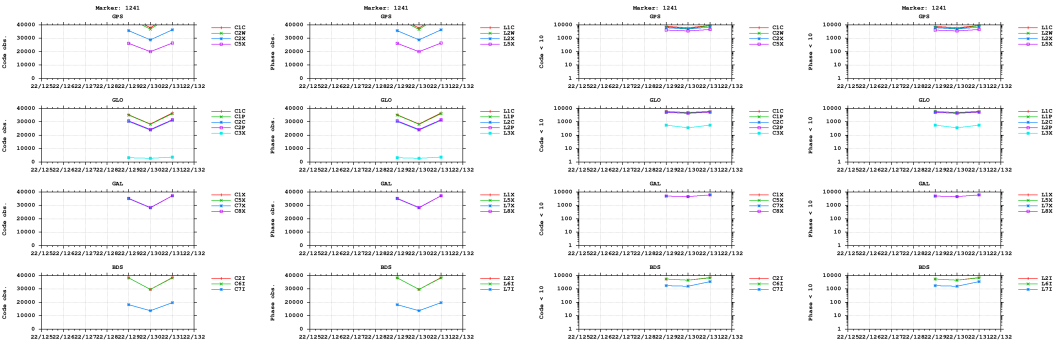


Multipath

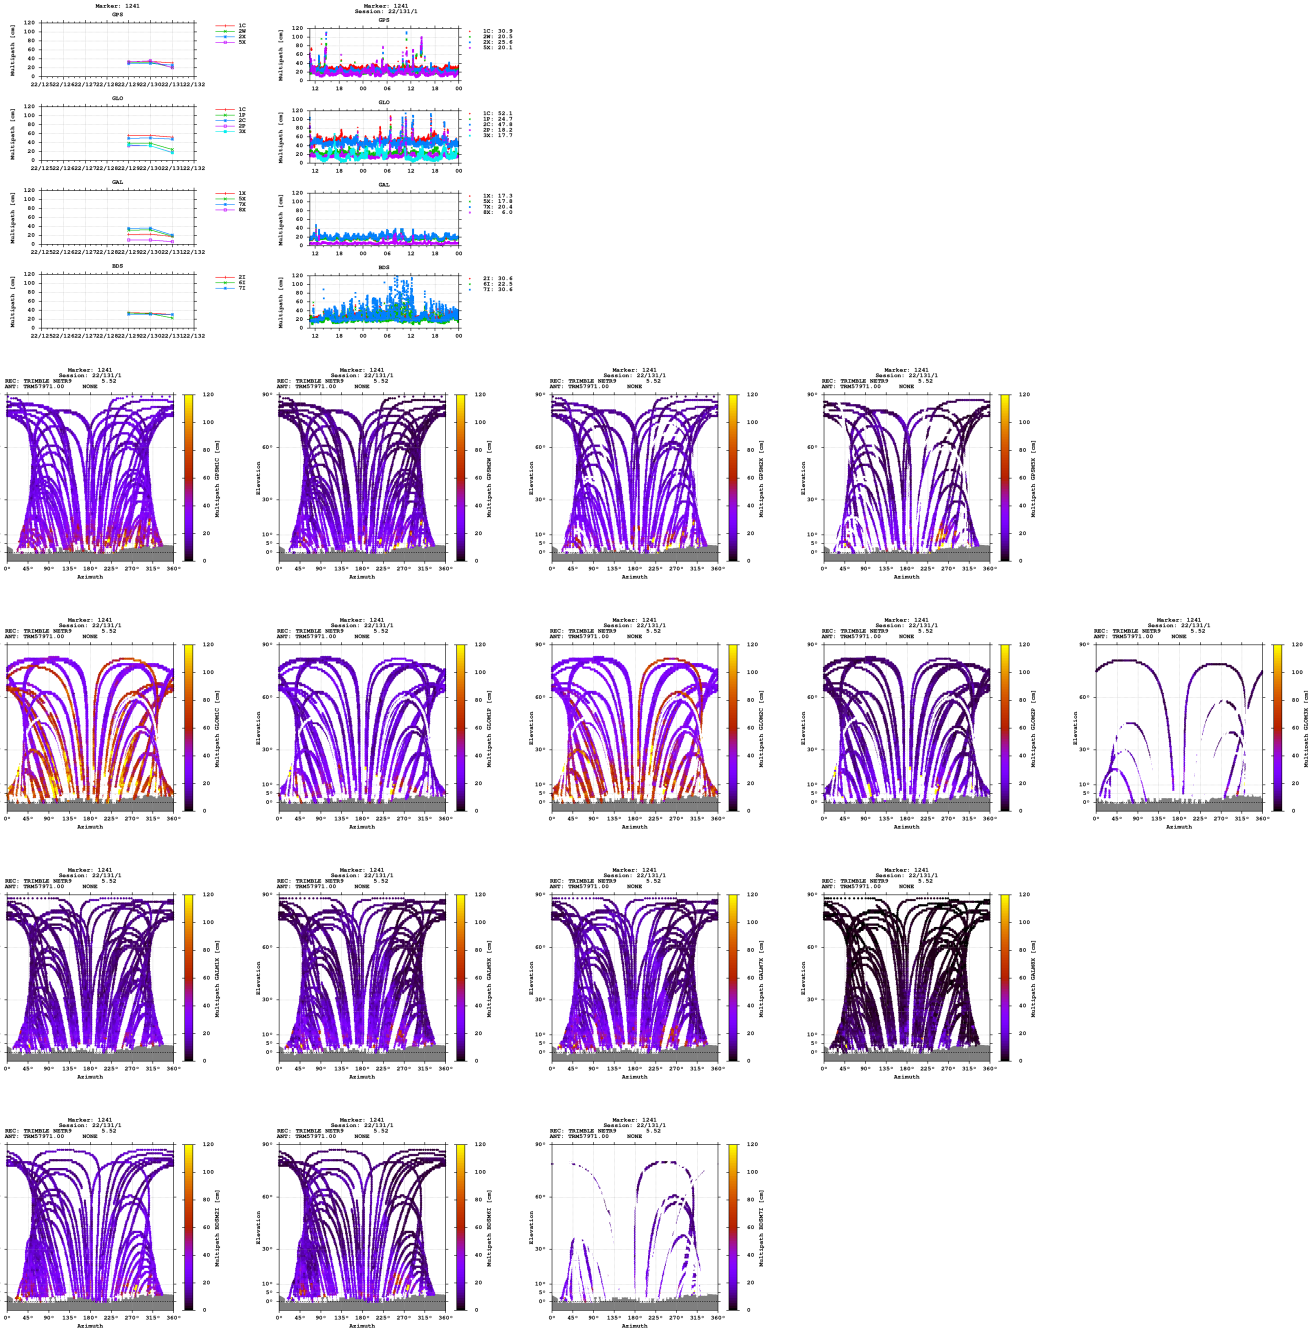


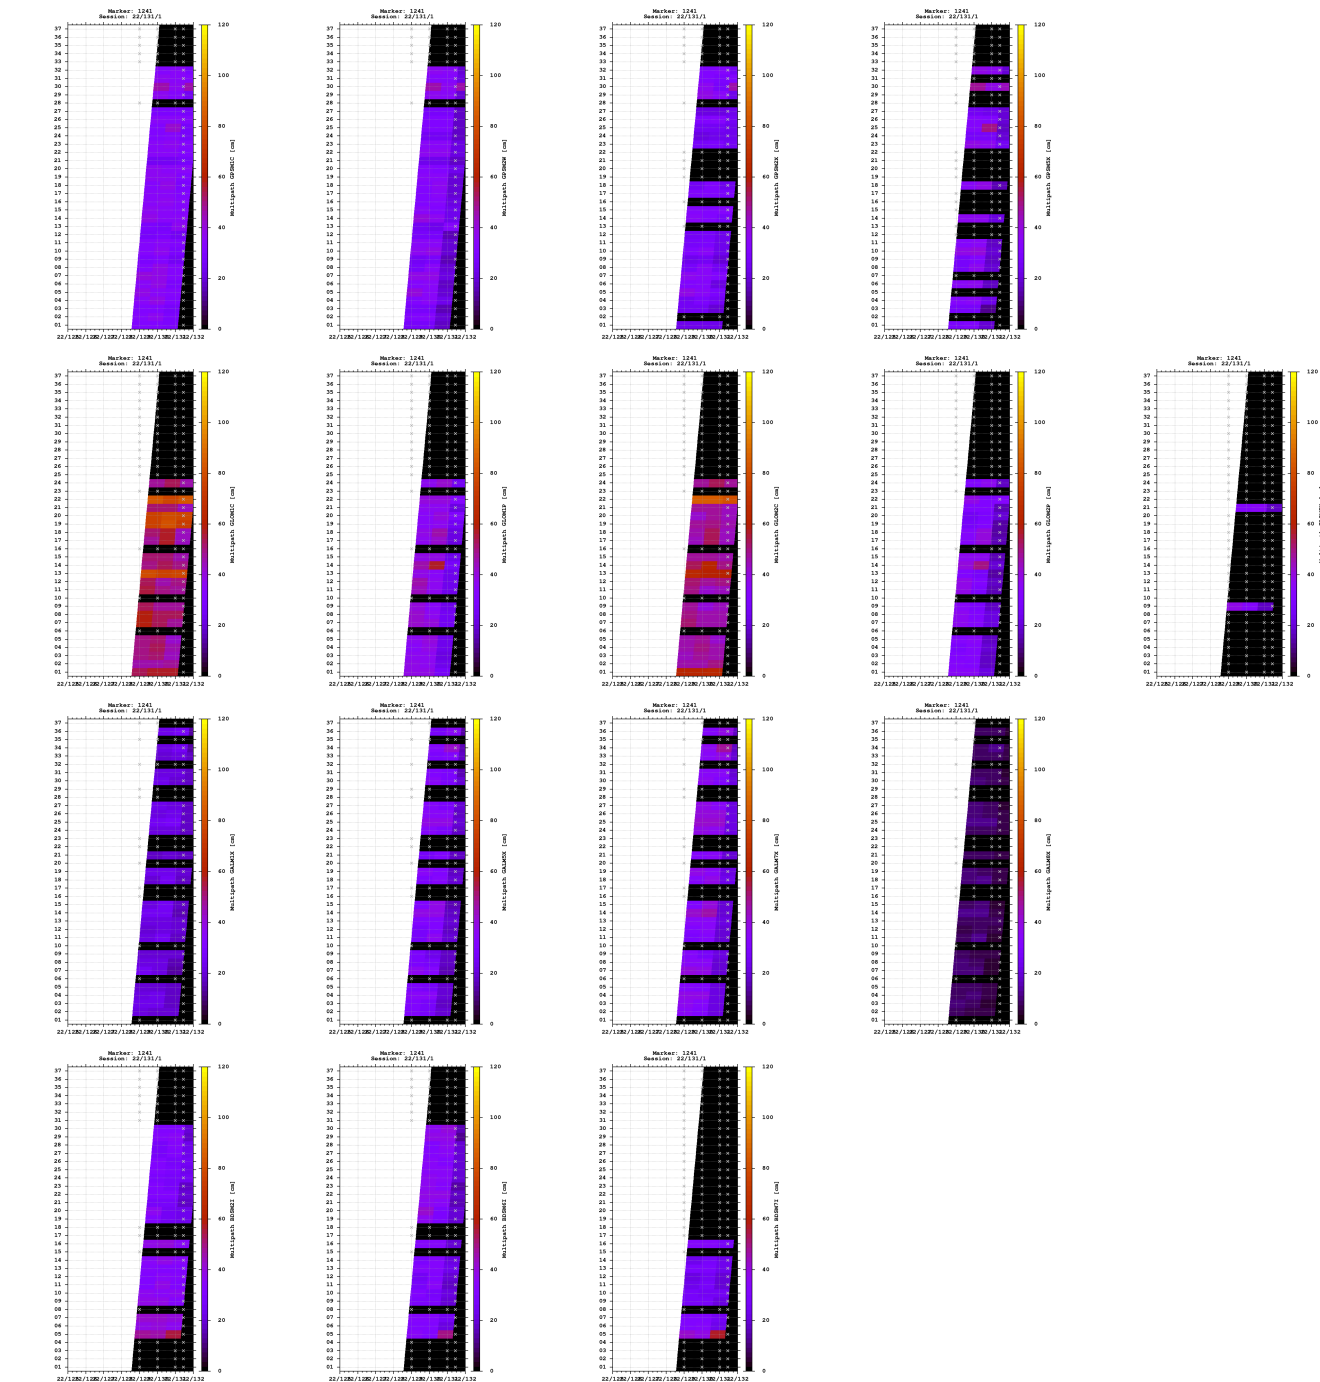


- The multipath is estimated as a standard deviation over a sequence of consecutive epochs.

Signal-to-noise ratio

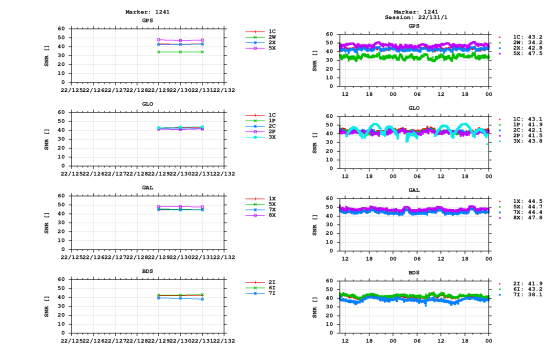


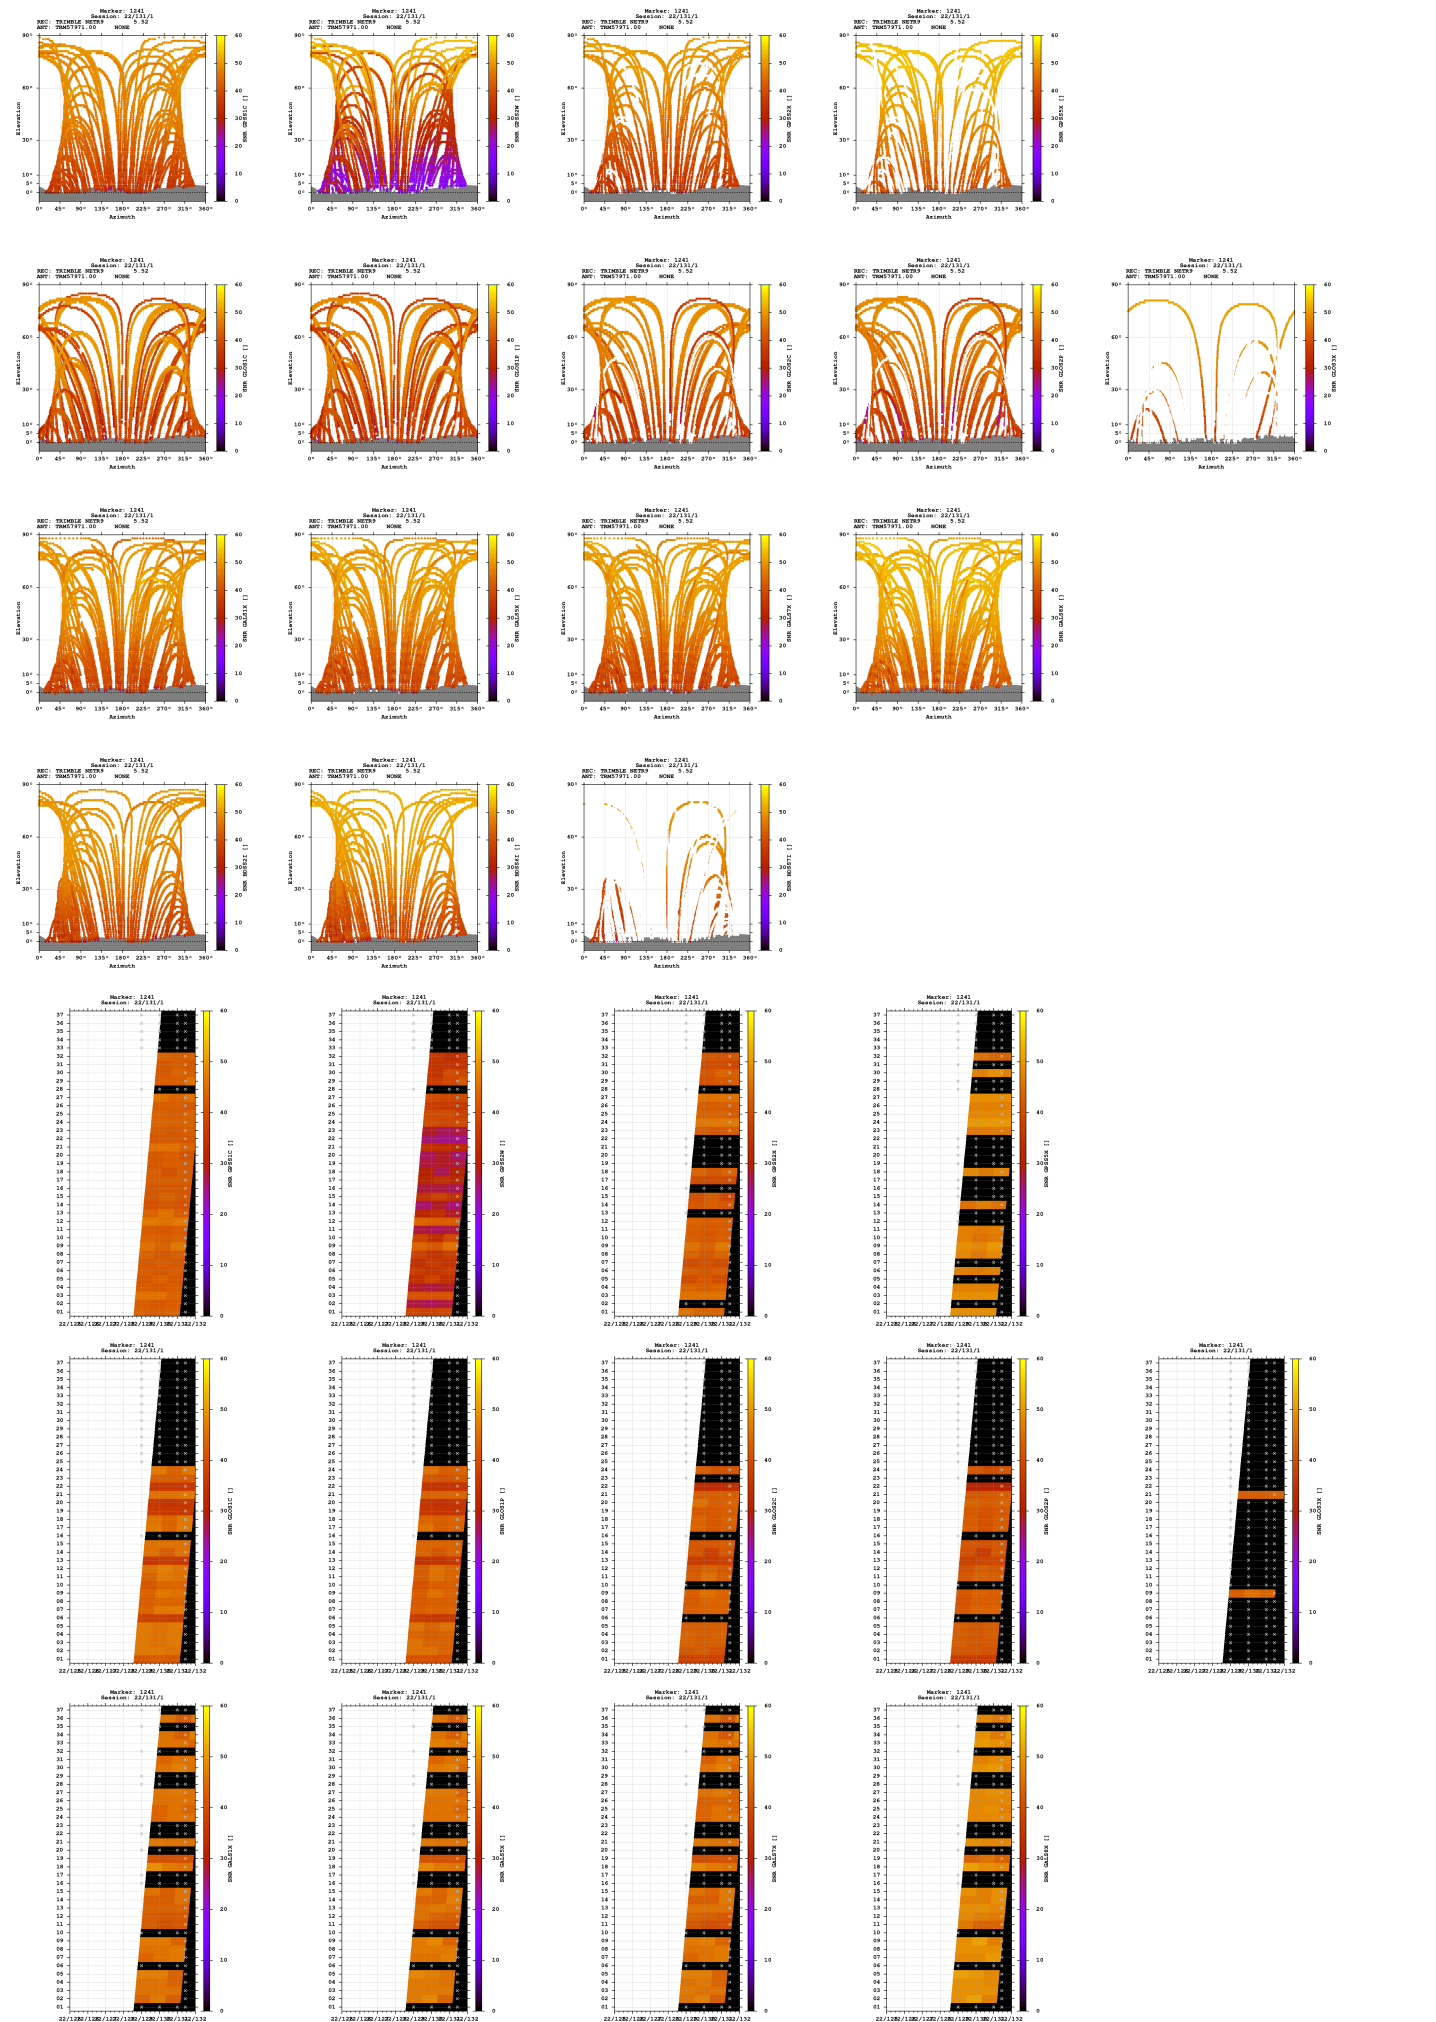

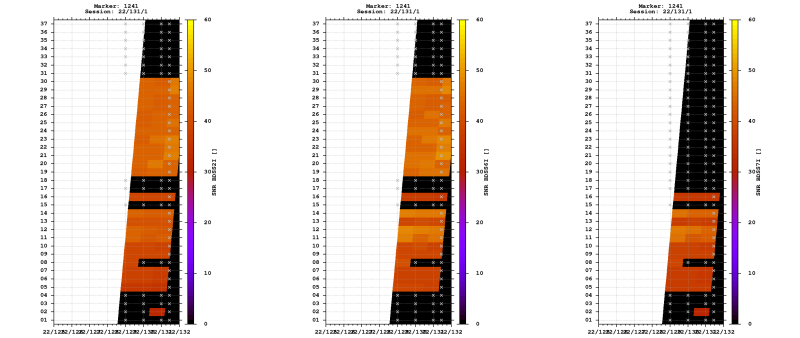


Estimates

2022-05-11 10:39:30	GPS	4373331.0755	484804.3336	4602955.6037	46.482803498	6.325679604	815.3385
2022-05-11 10:39:30	GLO	4373331.8954	484803.8697	4602956.1660	46.482801999	6.325672423	816.2722
2022-05-11 10:39:30	GAL	4373331.1749	484803.9790	4602955.4883	46.482802394	6.325674871	815.2960
2022-05-11 10:39:30	BDS	4373328.6306	484803.5609	4602956.3817	46.482824723	6.325673111	814.1708

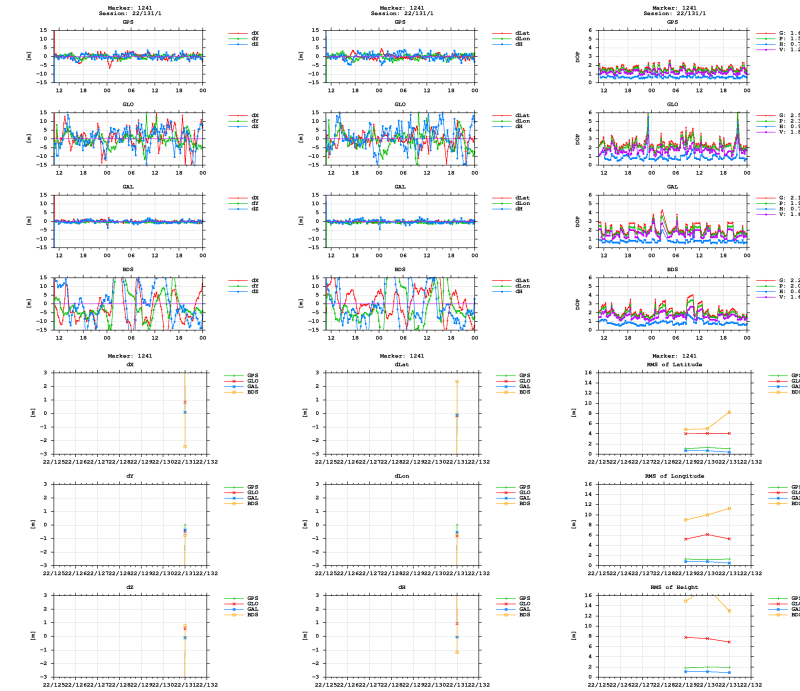

BNC



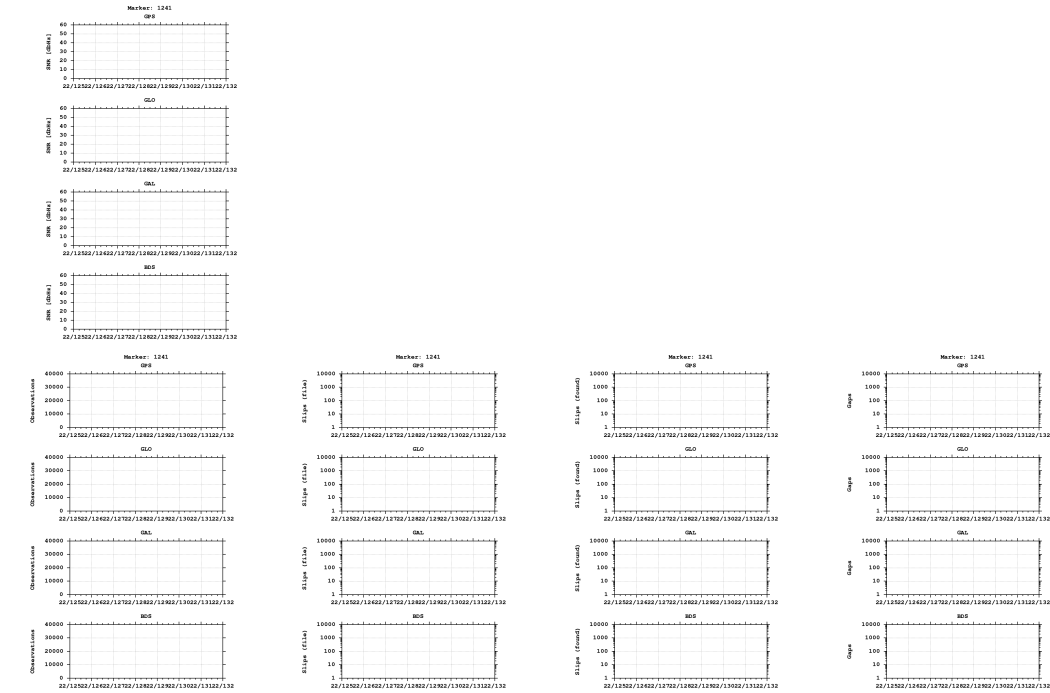

Equipment

2022-05-09 00:00:00 TRIMBLE NETR9 5.52 511 TRM57971.00 NONE 511

Program info

G-Nut/Anubis [2.3] compiled: Dec 30 2020 11:00:17 (\$Rev: 2843 \$)
BNC 2.13.0 (checkout 9163)